

540/25**SVOLGITORE
UNWINDER**

Svolgitore per bobina



Cable drum unwinder

**SCHEMA TECNICA**

Svolgitore da terra robusto, resistente e compatto che si presta a molteplici utilizzi, sia all'interno di cantieri civili che industriali.

Di facile impiego è ideale per lo svolgimento di una bobina.

Realizzato interamente in alluminio lo svolgitore risulta molto leggero e facile da movimentare, grazie anche ad un particolare accorgimento dei pannelli laterali del telaio.

Lo svolgitore è composto da due rampe antisdrucchio contrapposte, a ridotta inclinazione e con guide laterali per il contenimento della bobina, tenute insieme da due profili di chiusura.

Sui due profili laterali sono fissati i due rulli di scorrimento in acciaio, impernati su cuscinetti a sfera schermati.

I due rulli possono essere regolati in tre diverse posizioni in base al diametro della bobina, tramite dei semplici passaggi. Per spostare i rulli da una posizione all'altra utilizzare un piccolo cacciavite (Fig. 1).

Lo svolgitore è dotato di quattro piedini in gomma antisdrucchio che conferiscono maggior stabilità.

**DATA SHEET**

Robust, durable and compact ground unwinder that lends itself to multiple uses on both civil and industrial construction sites.

Easy to use, it is ideal for unwinding one reel.

Made entirely of aluminium, the unwinder is very light and manoeuvrable, thanks also to a special design of the frame side panels.

The unwinder consists of two opposing, low-slope, non-slip ramps with side guides for reel containment, held together by two closure profiles.

On the two side profiles are fixed the two steel sliding rollers, pivoted on shielded ball bearings.

The two rollers can be adjusted to three different positions according to the reel diameter, by simple steps. To move the rollers from one position to the other, use a small screwdriver (Fig.1).

The unwinder is equipped with four non-slip rubber feet that provide extra stability.

**CARATTERISTICHE TECNICHE**

- ✓ Per uso professionale
- ✓ Ingombro ridotto
- ✓ Diametro min-Max bobina: Ø 200÷700 mm
- ✓ Larghezza Max bobina: 670 mm
- ✓ Portata: 250 kg
- ✓ Peso: 10,5 kg

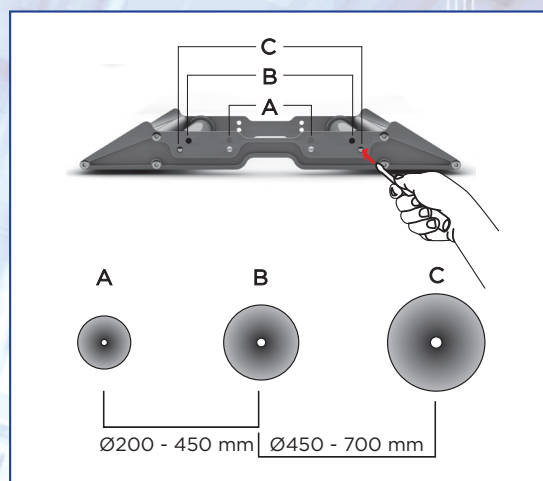
Fig. 1

I rulli possono essere regolati in base al diametro della bobina.

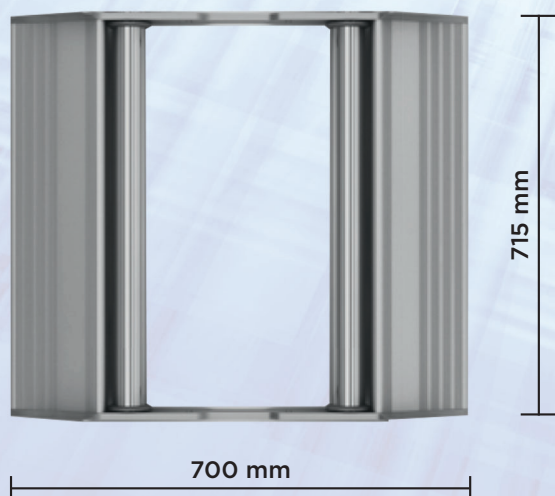
The rollers can be adjusted to three different position according to the reel diameter.

**TECHNICAL DATA**

- ✓ For professional use
- ✓ Small footprint
- ✓ Min-Max reel diameter: Ø 200÷700 mm
- ✓ Max reel width: 670 mm
- ✓ Max reel weight: 250 kg
- ✓ Weight: 10,5 kg

**DIMENSIONI**

LxPxH= 700x715x95 mm

**DIMENSIONS**

LxDxH= 700x715x95 mm

**art.****BARCODE****540/25**

1



10,5 kg