


MORSETTIERE EQUIPOTENZIALI

La gamma è composta da tre modelli in grado di derivare sezioni fino a 25 mm² e possibilità di connettere cavi principali con sezione sia circolare (50 mm²) che rettangolare (30x4 mm).

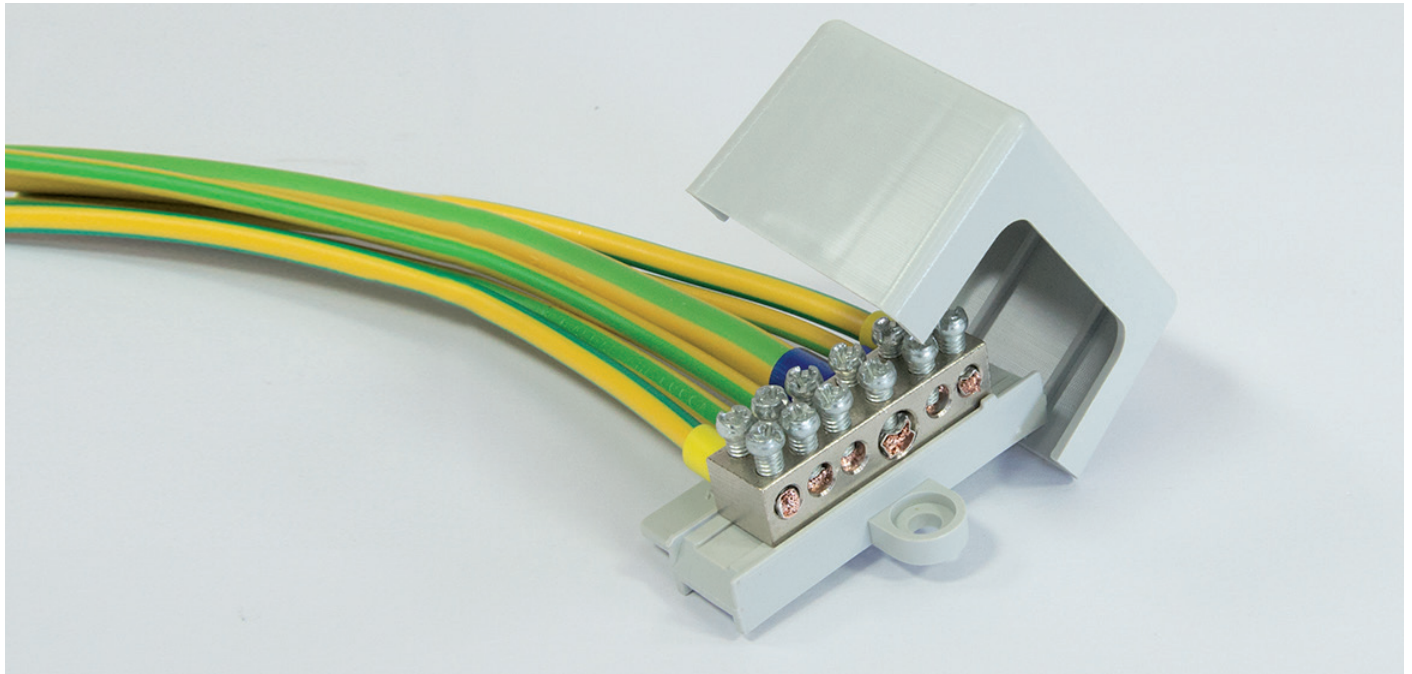

MATERIALI

- polipropilene - corpo isolante
- ottone CW 614 N / rame - corpo conduttore
- acciaio zincato - viti e piastrene

CARATTERISTICHE GENERALI

- temperatura massima di esercizio 90 °C
- coppia di serraggio viti 0,5 Nm

VANTAGGI

- protezione elevata contro scariche elettriche accidentali
- tenuta meccanica elevata grazie anche alle doppie viti di serraggio
- materiale involucro libero da alogeni
- versatilità applicazione con utilizzo di cavi o bandelle a differenti sezioni
- controllo rapido della connessione grazie ai coperchi rimovibili

CERTIFICAZIONI E NORME

- EN 60999-1:2000
- EN 60999-2:2004
- IEC 60364-4-41:2007
- EN 50164-1

EQUIPOTENTIAL TERMINAL BLOCKS

Product selection is made up of three models that allow shunted connections with section up to 25 mm² and to connect main wires with both round (50 mm²) and rectangular section (30x4 mm).

MATERIALS

- polypropylene - insulating case
- brass CW 614 N / copper - conductive case
- zinc-plated steel - screws and plates

GENERAL CHARACTERISTICS

- max .operating temperature 90 °C
- tightening torque screws 0.5 Nm



ADVANTAGES

- high protection against accidental electric discharge
- high mechanical strength thanks to double fixing screws
- halogen free casing
- operational flexibility using wires or straps with different sections
- fast connection check thanks to removable caps

CERTIFICATIONS AND REGULATIONS

- EN 60999-1:2000
- EN 60999-2:2004
- IEC 60364-4-41:2007
- EN 50164-1



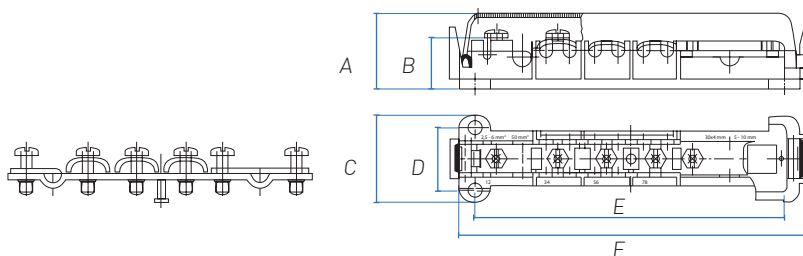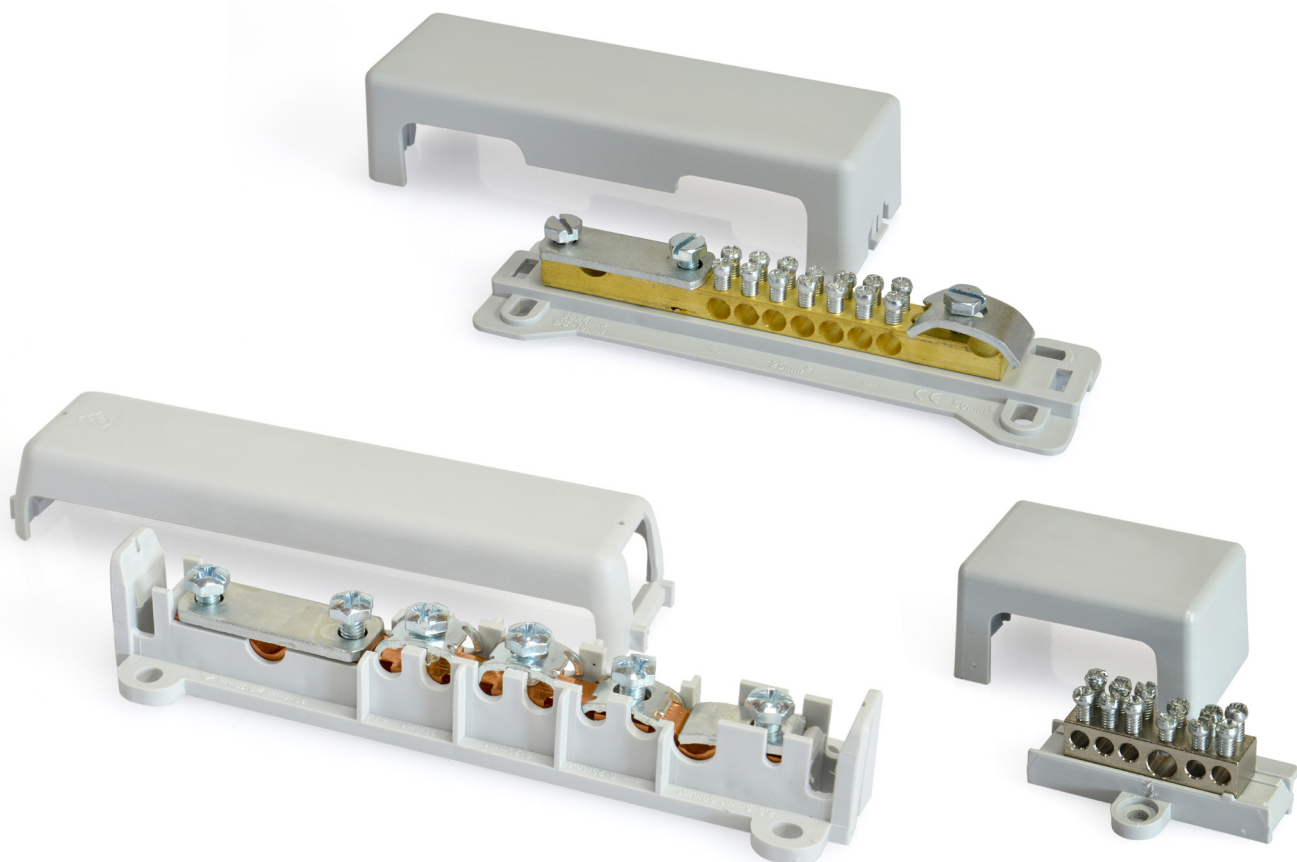

Codice Code	Descrizione Description	Materiale inserto Insert material	Numero fori /Ingressi N. holes /Inputs	Sezioni Sections		Conf. (pz) PHS (pcs)	Dimensione (mm) Size (mm)					
				Bandella Strap (mm)	Cavi Wires (mm ²)		A	B	C	D	E	F
CM-E0280	morsettiera equipotenziale in rame con coperchio equipotential terminal block in copper with cap	rame copper	1	[30x4]	ø (8-10)	1/10	38.5	26.1	44	32	158.5	184.5
			1		50							
			6		(6-25)							
			1		6							
CM-E0150	morsettiera equipotenziale a 7 fori con doppie viti equipotential terminal block 7 holes with double screws	ottone brass	1	[30x4]	ø (8-10)	1/10	40	-	45	-	-	184.5
			1		50							
			7		(6-25)							
CM-E0125	morsettiera equipotenziale a 6 fori con coperchio equipotential terminal block 6 holes with cap	ottone nichelato nickel-plated brass	1	(6-25)		1/10	31.5	-	41	-	-	64
			5	(1.5-6)								