

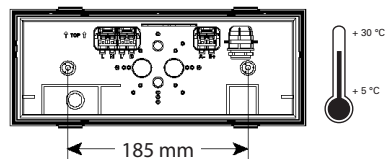



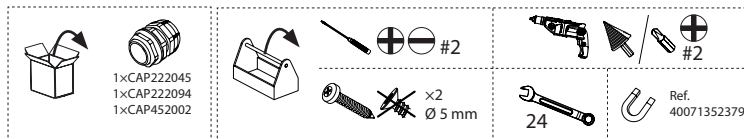






NexiTech LED IP65



1



2

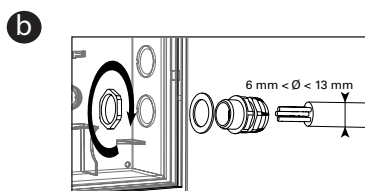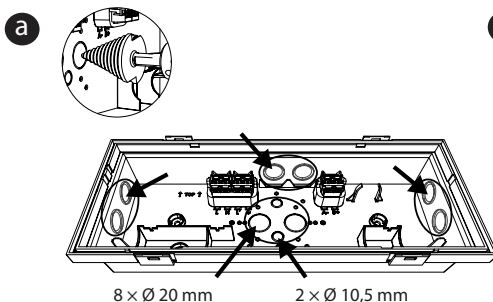


Powering Business Worldwide

3


x2 Ø 5 mm



#2



Vérifier que les rondelles fibres sont correctement placées pour assurer l'IP65.
Make sure the fiber washers are properly installed in order to insure IP65.
Um IP65 zu gewährleisten, überprüfen Sie die richtige Positionierung der Dichtscheiben.
Controllare che le rondelle in fibra siano posizionate correttamente per garantire IP65.

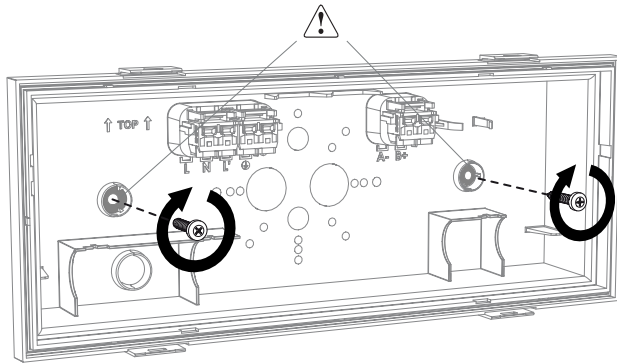

4


A Rigid or flexible wire
0,5<S<2,5 mm²

B If rigid wire
1,5<S<2,5 mm²


A FR Fil rigide ou souple
EN Rigid or flexible wire
DE Starre oder flexible Leitung
IT Cavo rigido o flessibile

B Si fil rigide
If rigid wire
WennstarreLeitung
Si cavo flessibile


In



Out



See LUM10312 / LUM10313

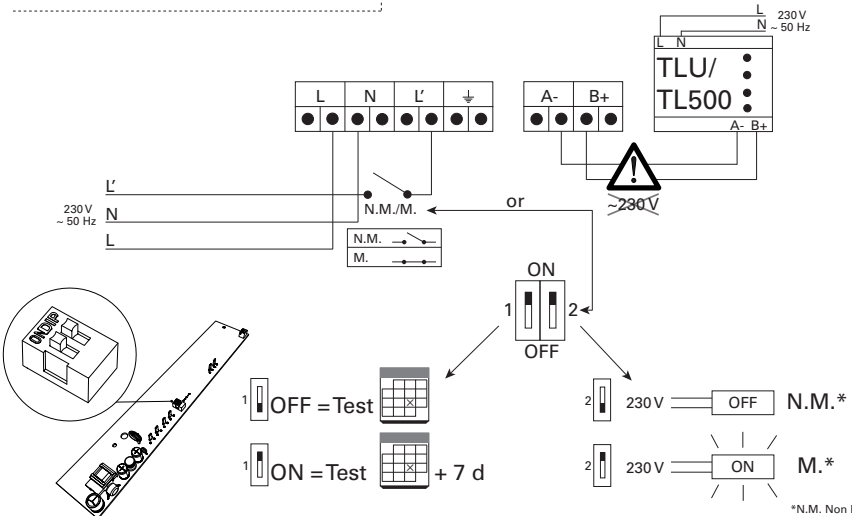

*N.M. Non Maintained
M. Maintained

5


Option




+




a




b




c




d



e




AASS/YWW/JJWW/AASS
ex./ex./B/es.: 1536
Date de fabrication/Manufacturing date/
Herstellungsdatum/ Data di fabbricazione





Date installation
jj/mm/aaaa
Installation date
dd/mm/yyyy
Installationsdatum
TT/MM/JJJJ
Data installazione
gg/mm/aaaa


6

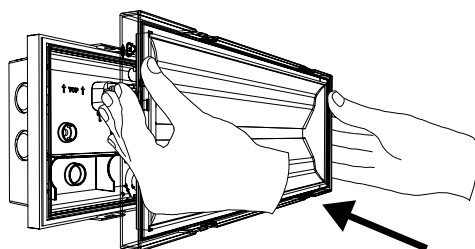




7




TEST



Vert/Green/Grün/Verde		OK
Vert/Green/Grün/Verde		Test
Vert-Jaune/Green-Yellow/ Grün-Gelb/Verde-Giallo		·))))) com/kom
Jaune/Yellow/Gelb/Giallo		2 s
Jaune/Yellow/Gelb/Giallo		0,5 s



Ref.
40071352379



NEXI-PICTO-D



NEXI-PICTO-R




NEXI-PICTO-L



NEXI-PICTO-U



Remplaçable
Replaceable
Auswechselbare
Sostituibile



N.M.

M.

EN




NEXITECHLED100LM1,5HIP65AT	NEXI100-AT-IP	IP 07	3,6 V/0,8 Ah Ni-Cd	1h30	100 lm	0,65 W				
NEXITECH LED 150LM 1H IP65 AT	NEXI150-AT-IP	IP 65	3,6 V/0,8 Ah Ni-Cd	1h	150 lm	0,65 W	2,4 W			
NEXITECHLED250LM1,5HIP65AT	NEXI250-AT-IP		7,2 V/1,7 Ah Ni-Cd	1h30	250 lm	2,25 W	3,6 W		EN 60598.1 EN 60598.2.2 EN 60598.2.22	EN62034
NEXITECHLED400LM1,5HIP65AT	NEXI400-AT-IP		7,2 V/1,7 Ah Ni-Cd	1h30	400 lm	2 W	3,2 W			

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

Cooper CSA Srl
Via San Bovo, 3
20090 Segrate (Mi) - ITALY
Technical Service
www.coopercsa.it/it/nexitechled
Tel. +39 02 959501
www.coopercsa.it
www.eaton.it

© 2018 Eaton
All Rights Reserved



ZNO2035300 C - 01/2018

Eaton is a registered trademark.

All trademarks are property
of their respective owners.



EAT•N

Powering Business Worldwide