






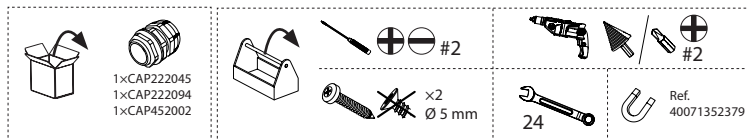





NexiTech LED IP65 CGLine+ + web-controller CGLine+



1




2

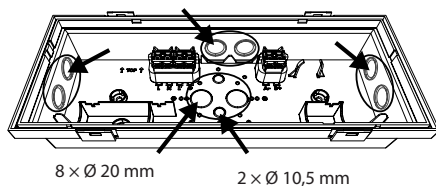

8 × Ø 20 mm

2 × Ø 10,5 mm

b



Powering Business Worldwide

3

x2 Ø 5 mm



#2




Vérifier que les rondelles fibres sont correctement placées pour assurer l'IP65.

Make sure the fiber washers are properly installed in order to insure IP65.

Um IP65 zu gewährleisten, überprüfen Sie die richtige Positionierung der Dichtscheiben.

Controllare che le rondelle in fibra siano posizionate correttamente per garantire IP65.

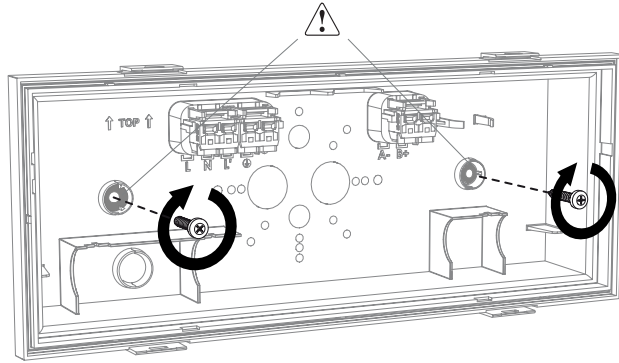

4

A Rigid or flexible wire
0,5 < S < 2,5 mm²

B If rigid wire
1,5 < S < 2,5 mm²


A

FR Fil rigide ou souple
EN Rigid or flexible wire
DE Starre oder flexible Leitung
IT Cavo rigido o flessibile


B

Si fil rigide
If rigid wire
Wenn starre Leitung
Si cavo flessibile

In



Out




Web-controller CGLine+
Ref. 40071361055

Web-controller
CGLine+



230 V
~ 50 Hz


L'
N
L



230 V L
~ 50 Hz



N.M./M. Non Maintenu/Non Maintained/Bereitschaftslicht/Non Permanente
M. Maintenu/Maintained/Dauerlicht/Permanente



Mode Cinéma/Cinema Mode/Kino-Betriebsart/Modalità cinema


NEXI150-CGL
NEXI150-3H-CGL

1 230 V~ 60 lm


ON 230 V~ 15 lm

5



Option

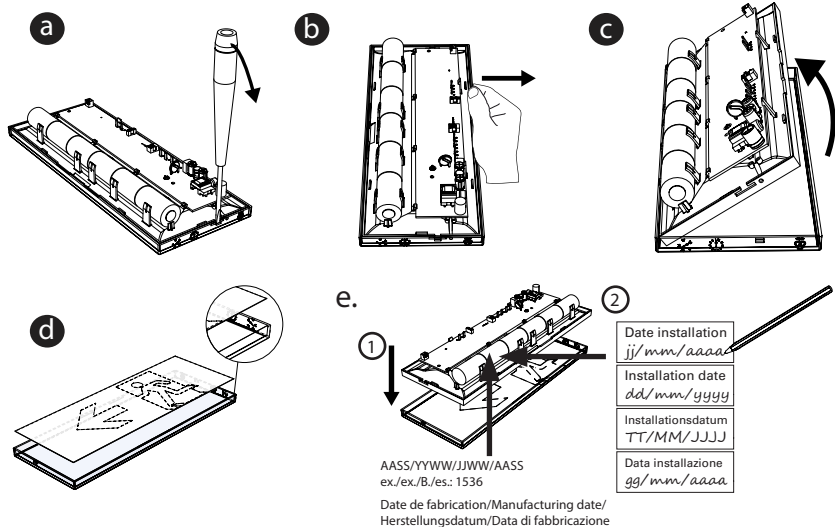


6

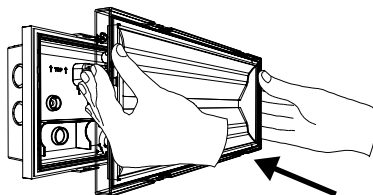




7

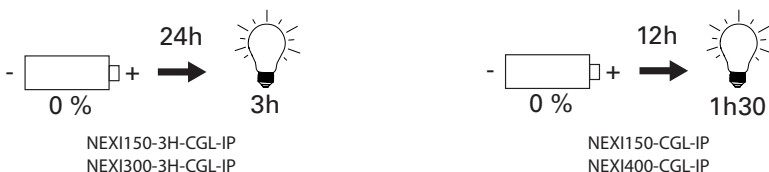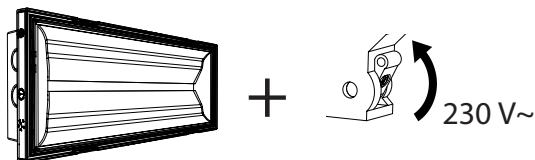


TEST



Vert/Green/Grün/Verde		OK
Vert/Green/Grün/Verde		Test
Vert-Jaune/Green-Yellow/ Grün-Gelb/Verde-Giallo		com/kom
Jaune/Yellow/Gelb/Giallo		
Jaune/Yellow/Gelb/Giallo		



Ref.
40071352379




M N.M. EN



NEXITECHLED150LM1H30IP65CGLINE+ NEXI150-CGL-IP
NEXITECHLED150LM3HIP65CGLINE+ NEXI150-3H-CGL-IP
NEXITECHLED300LM3HIP65CGLINE+ NEXI300-3H-CGL-IP
NEXITECHLED400LM1H30IP65CGLINE+ NEXI400-CGL-IP

IP65/IK07
7.2 V 1.7 Ah Ni-Cd
90 min 150 lm
180min 150 lm
180min 300 lm
90 min 400 lm

3.6 W
2.25 W
EN 60598.1
EN 60598.2.22
EN 1838/ISO30061
EN 62034



Remplaçable
Replaceable
Auswechselbare
Sostituibile


EAT•N

Powering Business Worldwide

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

Cooper CSA Srl
Via San Bovo, 3
20090 Segrate (Mi) - ITALY
Technical Service
www.coopercsa.it/it/nexitechled
Tel. +39 02 959501
www.coopercsa.it
www.eaton.it

© 2018 Eaton
All Rights Reserved



ZNO2034700 C - 01/2018

Eaton is a registered trademark.

All trademarks are property
of their respective owners.

