

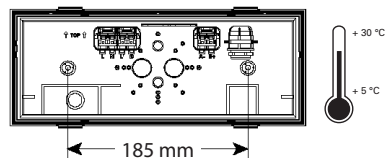





NexiTech LED 600 1,5h IP65 Auto Test




1

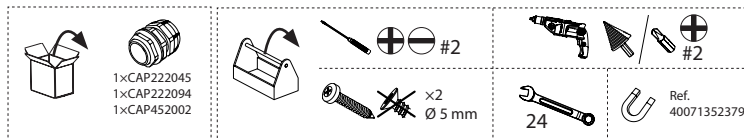


a




b





c



2




a

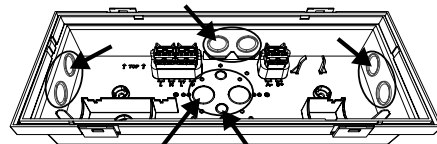

8 × Ø 20 mm

2 × Ø 10,5 mm

b



6 mm < Ø < 13 mm



Powering Business Worldwide

3

x2 Ø 5 mm



#2




Vérifier que les rondelles fibres sont correctement placées pour assurer l'IP65.

Make sure the fiber washers are properly installed in order to insure IP65.

Um IP65 zu gewährleisten, überprüfen Sie die richtige Positionierung der Dichtscheiben.

Controllare che le rondelle in fibra siano posizionate correttamente per garantire IP65.

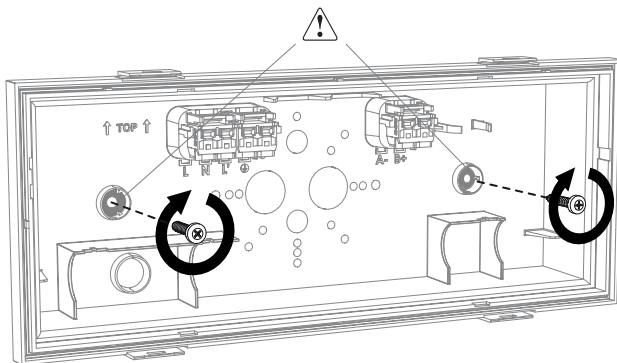

4


A Rigid or flexible wire
0,5<S<2,5 mm²

B If rigid wire
1,5<S<2,5 mm²


A FR Fil rigide ou souple
EN Rigid or flexible wire
DE Starre oder flexible Leitung
IT Cavo rigido o flessibile

B Si fil rigide
If rigid wire
WennstarreLeitung
Si cavo flessibile


In



Out



See LUM10312 / LUM10313

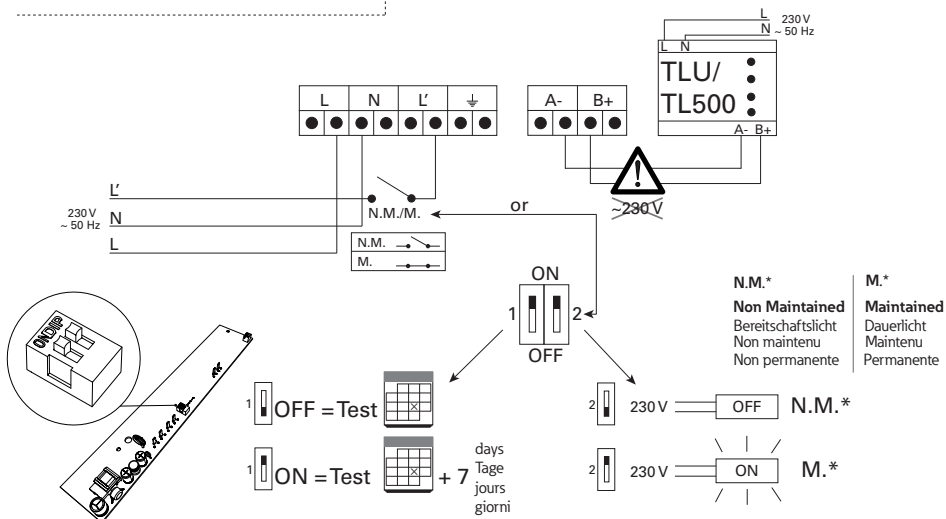

5




Option




+




a




b




c



d



e




AASS/YYWW/JJWW/AASS
ex./ex./B./es.: 1536
Date de fabrication/Manufacturing date/
Herstellungsdatum/ Data di fabbricazione



②

Date installation	jj/mm/aaaa
Installation date	dd/mm/yyyy
Installationsdatum	TT/MM/JJJJ
Data installazione	gg/mm/aaaa


6

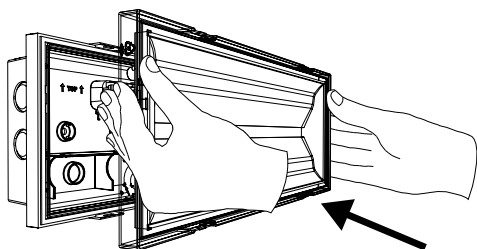

7




TEST




Vert/Green/Grün/Verde		OK
Vert/Green/Grün/Verde		Test
Vert-Jaune/Green-Yellow/ Grün-Gelb/Verde-Giallo		•))) com/kom
Jaune/Yellow/Gelb/Giallo	2 s	
Jaune/Yellow/Gelb/Giallo	0,5 s	

Autotest

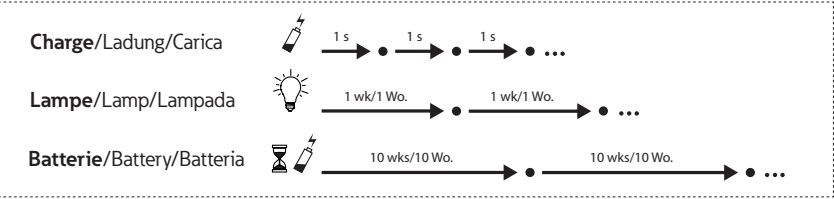



Test manuel / Manual test / Manueller Test / Test manuale

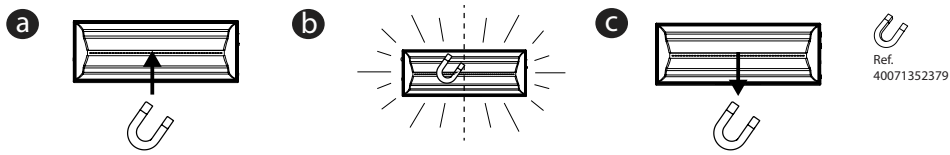

Initialisation de l'heure des tests et réinitialisation après configuration/

Initialization of Test Time and after changing the Product configuration/
Initialisierung des Test-Zeitpunktes und nach Änderungen der Produkt-Konfiguration/
Inizializzazione orario dei test in seguito al modifiche

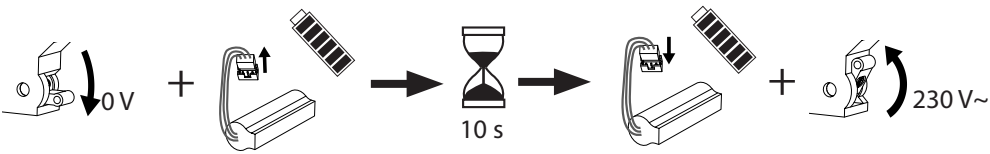



NEXITECH LED 600LM 1,5H IP65 AT

NEXI600-AT-IP



IP 65 / IK 07



7,2 V / 1,7 Ah Ni-Cd



1h30



600 lm



M.: 4,8 W
N.M.: 2,7 W


EN



EN 60598.1
EN 60598.2.22



Remplaçable
Replaceable
Auswechselbare
Sostituibile



NEXI-PICTO-D



NEXI-PICTO-R



NEXI-PICTO-L




NEXI-PICTO-U

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

Cooper CSA Srl
Via San Bovio, 3
20090 Segrate (Mi) - ITALY
Technical Service
www.coopercsa.it/it/nexitechled
Tel. +39 02 959501
www.coopercsa.it
www.eaton.it

© 2019 Eaton
All Rights Reserved



ZNO2045400 C - 03/2019

Eaton is a registered trademark.

All trademarks are property
of their respective owners.



EAT•N

Powering Business Worldwide