


Z-SV/UL-16



ATTENTION: To prevent electrical shock, disconnect from power source before installing or servicing.
ATTENTION: Avant le montage et la mise en service, couper l'alimentation secteur pour éviter toutes décharges.
ACHTUNG: Vor Installations- oder Servicearbeiten Stromversorgung unterbrechen, um Elektroschocks zu vermeiden.
ATTENZIONE: Per prevenire infortuni, togliere tensione prima dell'installazione o manutenzione.
ATENCIÓN: Desconéctese de la corriente eléctrica, antes de la instalación o del servicio, a fin de impedir sacudidas eléctricas.

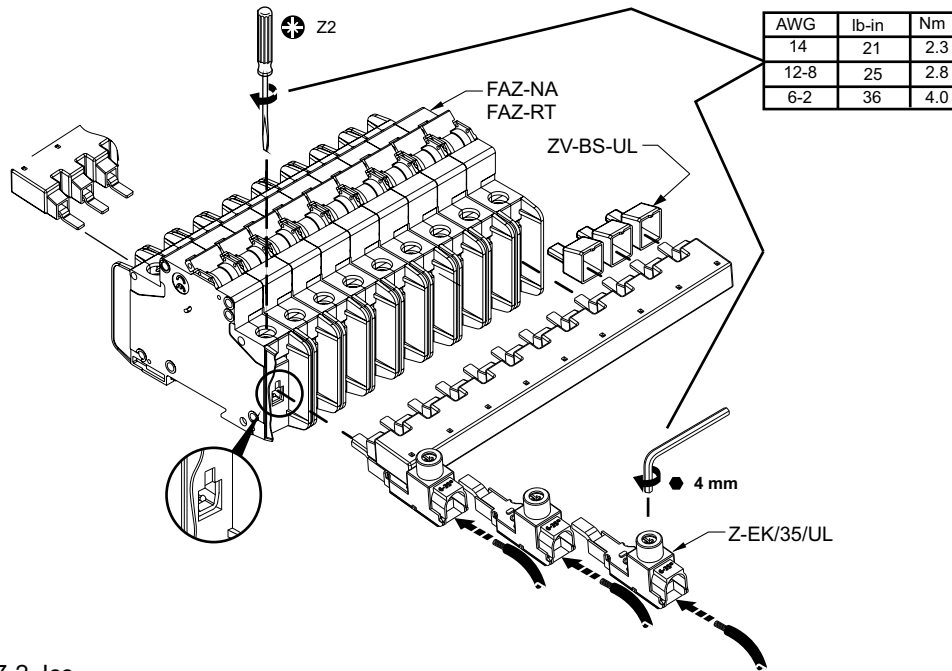

IEC/EN 60947-2 Icc

Ue HRC 315AgG 500VAC	Ue VAC	Z-SV/UL Icc Amps
Z-SV/UL	240/ 415	15000

Model	Terminals	FAZ-NA	FAZ-RT
Z-SV/UL-16/1P-1TE/6	6	-	-
Z-SV/UL-16/1P-1TE/12	12	-	-
Z-SV/UL-16/1P-1TE/18	18	-	-
Z-SV/UL-16/2P-2TE/6	-	3	-
Z-SV/UL-16/2P-2TE/12	-	6	-
Z-SV/UL-16/2P-2TE/18	-	9	-
Z-SV/UL-16/3P-3TE/6	-	-	2
Z-SV/UL-16/3P-3TE/12	-	-	4
Z-SV/UL-16/3P-3TE/18	-	-	6
Z-EK/35/UL	-	-	-
ZV-BS-UL	-	-	-

UL SCCR

Ue Z-SV/UL	FAZ In Amps	Ue VAC	Z-SV/UL SCCR RMS Sym Amps
FAZ-NA FAZ-RT	0.5-25	480Y/ 277	10000
	30-40	240	10000


Z-SV/UL-16







ATTENTION: Maximum of 3 commoning links allowed. Any combination of same pole configuration.
ATTENTION: 3 liaisons communes autorisées au maximum. Toute combinaison de configurations de polarité identiques.
ACHTUNG: Maximal 3 Schienenblöcke. Beliebige Kombination gleichpoliger Konfigurationen.
ATTENZIONE: Sono consentiti al massimo 3 pettini di collegamento in qualsiasi combinazione della stessa configurazione di poli.
ATENCION: Se permite un máximo de 3 enlaces comunes. Cualquier combinación del mismo tipo de configuración de polo



ATTENTION: Do not cut.
ATTENTION: Ne pas couper.
ACHTUNG: Nicht durchschneiden.
ATTENZIONE: Non tagliare.
ATENCION: No corte.

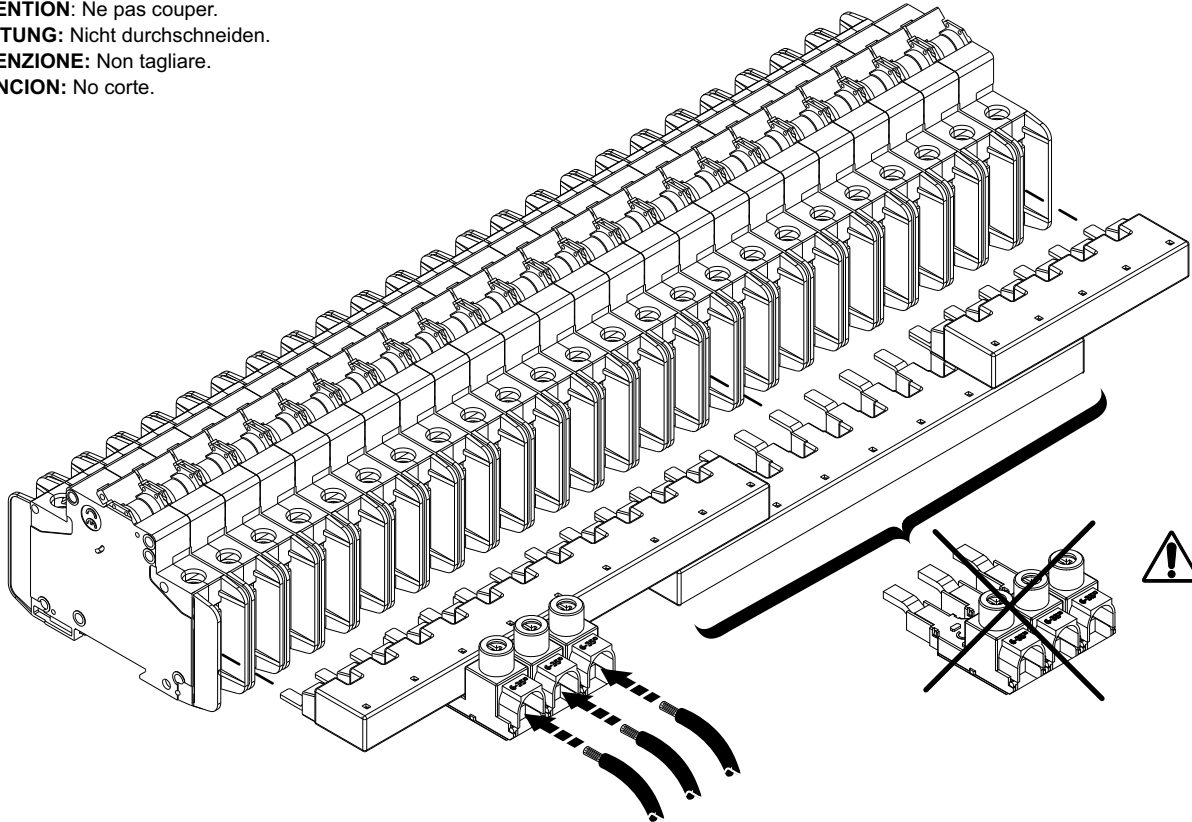

	UL489	EN/IEC 60947-2
U_e	480 V AC 96 V DC	240/415 V AC
f	50/60 Hz -----	50/60 Hz
U_{imp}	-----	9.5 kV
I_e	80 A @ 40°C	80 A @ 30°C
Cross section	-----	16 mm ²

	UL489	EN/IEC 60947-2
U_e	480 V AC 96 V DC	240/415V AC
f	50/60 Hz -----	50/60 Hz
U_{imp}	-----	9.5 kV
I_e	80 A @ 40°C	80 A @ 30°C
	#2-14 AWG 60/75°C Cu	2.5– 35 mm ² Cu
	0.56 in	14 mm

