Effective October 2017 Supersedes April 2016



Flush end photovoltaic fuse links



Product description

Eaton's Bussmann® series flush end photovoltaic fuse links are specifically designed to protect and isolate photovoltaic array combiners and disconnects.

These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Standard features

- · Compact design
- · Low power loss
- Global accreditations



Catalogue symbol

• PV-ratingAF(size)

Fuse size

• NH 2 and 3

Technical data

Volts: 1000 V d.c.
Amps: 160 to 400 A
Breaking capacity: 50 kA
Time constant: 1-3mS

• Class of operation: gPV and UL PV fuse links

Standards/Approvals

• IEC 60269-6

• UL 2579 (file number E335324)

· CSA listed

· RoHS compliant

Microswitches

- 170H0236
- 170H0238


Packaging


- Size 2: 2 per pack
- Size 3: 1 per pack

Table 1. Technical data

			Energy integrals I²t (A²S)		Watts loss (W)	
Catalogue number	Fuse size	Current rating (amps)	Pre- arcing	Total at 1000 V	0.8I _n	I _n
PV-160AF2	2	160	4600	37000	15	30
PV-200AF2	2	200	9500	76000	17	34
PV-250AF2	2	250	17000	136000	19	38
PV-315AF3	3	315	27000	240000	30	49
PV-355AF3	3	355	37000	350000	31	51
PV-400AF3	3	400	61500	550000	32	52


Dimensions - mm

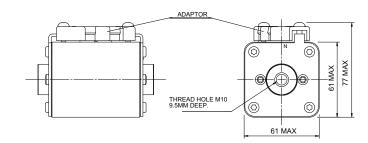





Size 2

Size 3

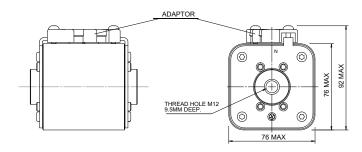




Time current-curve - Flush end

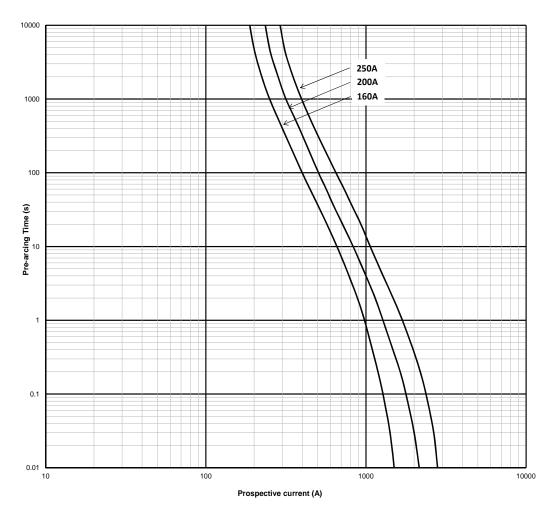

Size 2

Time current-curve

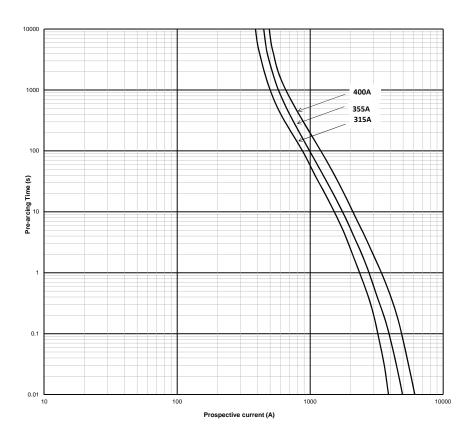


Size 3

Eaton EMEA Headquarters Route de la Longeraie 7 1110 Morges, Switzerland

Eaton Electrical Products Limited Melton Road
Burton-on-the-Wolds
Leicestershire, LE12 5TH
United Kingdom

© 2017 Eaton All Rights Reserved PDF Only Publication No. 10370 October 2017





Eaton is a registered trademark.

All other trademarks are property of their respective owners.

