

# SSD BS88 Offset blade tags fuse links



## Product description

Eaton's Bussmann® series SSD British Standard, size E1, fuse links are specifically designed for the protection of street lighting applications.

## Standard features

- Good peak let-through current limitation
- 1:1:6 Selective coordination ratio between "minor" and "major" fuse
- Power loss values well within the limits of IEC 60269-2

**Catalogue symbol:**

- SSD(Amps)

**Technical data:**

- Rated voltage: 240 V a.c.
- Rated current: 2 to 32 A
- Breaking capacity: 33 kA
- Breaking range and utilisation category: gG
- Size: E1

**Standards/Approvals:**

- BS88-2
- IEC 60269-2
- Suitable for use in RoHS compliant applications

**Fuse holders (ordered separately)**

- SC20H


**Packaging:**

- MOQ 20


**Table 1. Technical data**

Part number	Rated voltage	Rated Current (Amps)	Energy integrals $I^2t$ (A <sup>2</sup> S)		Watts loss W	Dimensions (mm)						Product Class	Weight
			Pre-arcing	Total at 415 V		A	B	D	E	F	N		
SSD2	240V a.c.	2	0.8	1	0.5	23	12	47	12.7	0.8	3.2	gG	10g
SSD4	240 V a.c.	4	5.5	8	1	23	12	47	12.7	0.8	3.2	gG	10g
SSD6	240 V a.c.	6	15	22	1.6	23	12	47	12.7	0.8	3.2	gG	10g
SSD10	240 V a.c.	10	28	42	1.2	23	12	47	12.7	0.8	3.2	gG	10g
SSD16	240 V a.c.	16	160	250	1.5	23	12	47	12.7	0.8	3.2	gG	10g
SSD20	240 V a.c.	20	290	450	1.7	23	12	47	12.7	0.8	3.2	gG	10g
SSD25	240 V a.c.	25	800	1300	1.8	23	12	47	12.7	0.8	3.2	gG	10g
SSD32	240 V a.c.	32	1600	2500	2.4	23	12	47	12.7	0.8	3.2	gG	10g

**Outline drawing**

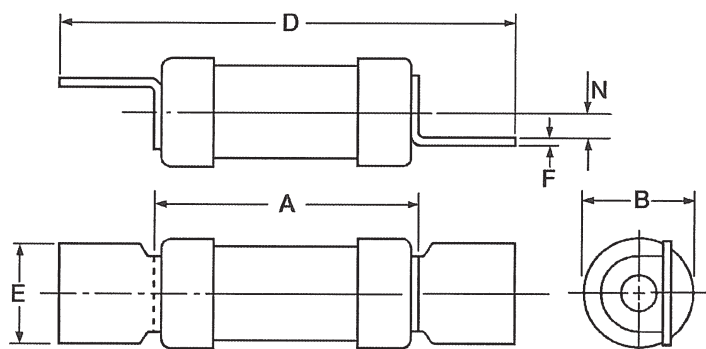

Time current curve

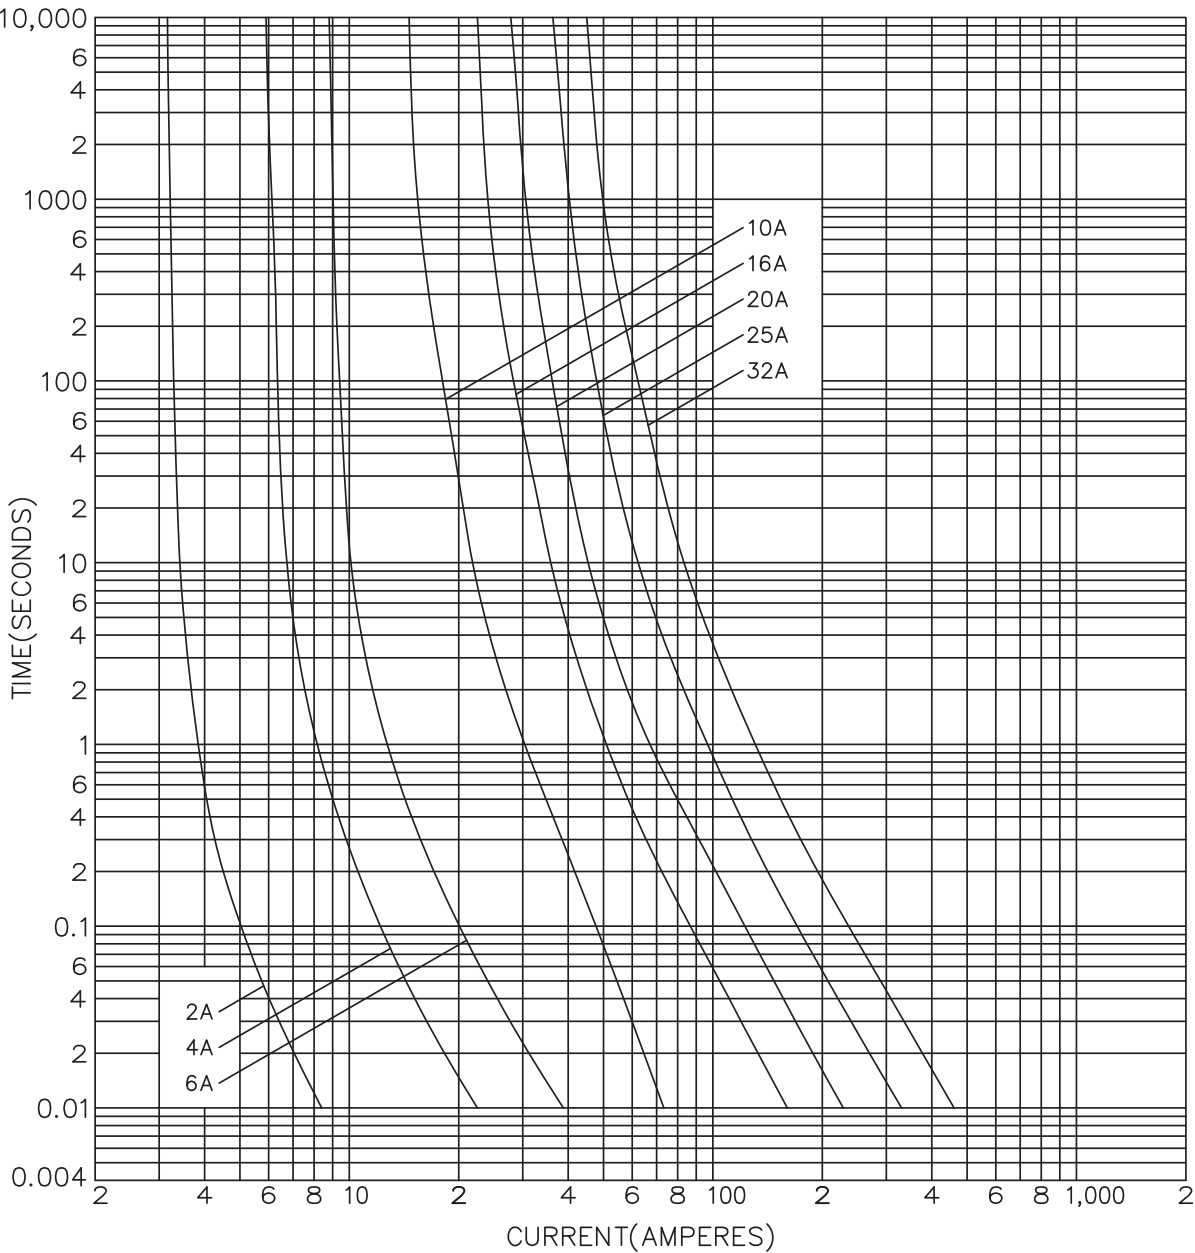

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton  
EMEA Headquarters  
Route de la Longeraie 7  
1110 Morges, Switzerland

Eaton Electrical Products Limited  
Melton Road  
Burton-on-the-Wolds  
Leicestershire, LE12 5TH  
United Kingdom

© 2017 Eaton  
All Rights Reserved  
PDF Only  
Publication No. 4105  
October 2017