

All-In-One xStorage ESS (Energy Storage Solution)

xStorage Hybrid Inverter Single-phase LFP Battery Solutions



Powering Business Worldwide

Advantages

- 3 Hybrid Inverters 3.6kW, 5kW & 6kW.
- CATL high performance LFP battery.
- 8KW PV input. 6KW charging and 6KW AC output.
- Modular design. The energy storage system can be expanded by multiple 5.12kWh units, up to 25kWh.
- 6KW 1phase backup output, on/off grid switching time is less than 20ms.
- EMS included. It is suitable for various applications.



CATL LFP Battery Stable and safe Module, pack, system, triple protection



Modular design Plug and play Mobile APP Monitoring



Supporting 200% oversized PV power
On & OFF Grid parallel system

Battery Model	XSTHSBP-5.1-16S-100A-F (Battery 5.12kWh with BMS & HF)	
Physical		
Battery type	LFP (LiFePO4)	
System Weight	54KG	
Dimensions in mm (W x H x D)	540*490*240	
IP Protection	IP65	
Warranty	5 Years Product Warranty, 10 Years Performance	
Electrical		
Energy Capacity	5.12kwh	
Usable Capacity	4.6kwh	
Depth of Discharge (DoD)	90%	
Rated Voltage	51.2V	
Operating Voltage Range	44.8-56.5V	
Internal Resistance	<20mΩ	
Cycle Life	10000cycle	
Operation		
Max. Charge/Discharge Current	50A/80A	
Rated DC power	4096W	
Max. Charge/Discharge Power	2825W/4096W	
Operating Temperature Range	-10 to 50 charging -10 to 50 discharging	
Humidity	0~95% (No condensation)	
BMS		
Modules connection	Max.5	
Capacity	100-500Ah	
Power Consumption	<2W	
Communication	CAN & RS485	
Monitoring Parameters	System voltage, current, cell voltage, cell temperature, PCBA temperature measurement	
Certificate		
Safety (Cell)	Pack: IEC/EN 62619;UN38.3 Cell: IEC/EN 62619;UN38.3;UL1973	

Hybrid Inverter Model	XTHS1P-3.68K		XSTHS1P-5K		XSTHS1P-6K	
PV String Input						
Max. Continuous PV Input Power	4800W		6500W		7500W	
Max. DC Voltage	580V					
Nominal Voltage	400V					
MPPT Voltage Range	80V-560V					
Start Voltage 1	150V					
Number of MPPT	2					
Strings Per MPPT	1					
Max. Input Current Per MPPT	15A					
Max. Short-circuit Current Per MPPT	18A					
AC Output (Grid)						
Nominal AC Output Power	3680W		5000W		6000W	
Max. AC Apparent Power	7360VA (from grid)		7360VA (from grid)		7360VA (from grid)	
Max. AC Output Power	3680W		5000W		6000W	
Nominal AC Voltage	230Vac P/N; 2*120V L1/L2(Norway)					
AC Grid Frequency Range	50 / 60Hz±5Hz					
Nominal Output Current	16A		22A2		25A	
Max. Output Current	20.48A		28.16A		32A	
Power Factor (cos)	0.8leading-0.8lagging*					
THDi	<3%					
Battery Input						
Battery Type	LFP (LiFePO4)					
Nominal Battery Voltage	51.2V		51.2V		51.2V	
Charging Voltage Range	40-60V					
Max. Charging Current	50A		100A		100A	
Max. Discharging Current	80A		100A		100A	
Battery Capacity	100/200/300/400/500Ah					
Charging Rate for Li-ion Battery	discharge rate is 0.8C, charge rate is 0.5C					
AC Output (Backup)						
Nominal AC Output Power	3680W		4600W		4600W	
Max. AC Output Power	4000VA		5000VA / 4600VA**		5000VA	
Peak Output Apparent Power	6900VA 10sec		6900VA 10sec		6900VA 10sec	
Max. Output Current	16A		20A		20A	
Nominal Output Voltage	230V					
Nominal Output Frequency	50/60Hz					
Output THDv (@Linear Load)	<3% (Linear Load)					
Efficiency						
Max. PV Efficiency	97.60%					
Euro. PV Efficiency	97.00%					
Protection						
DC Switch	Bipolar DC Switch (125A/Pole)					
Anti-islanding Protection	Yes					
Output Over Current Protection	Yes					
DC Reverse Polarity Protection	Yes					
String Fault Detection	Yes					
AC/DC Surge Protection	AC Type III; DC Type II					
Insulation Detection	Yes					
AC Short Circuit Protection	Yes					


* 0.95leading-0.95lagging for Germany. 1. Minimum voltage for inverter to start power output. *2. Maximum output current is 21.7A for Australia and 20A for Germany and South Africa

** Ratings for Germany, South Africa


General Specifications	
Dimensions W x H x D	540*590*240mm
Weight	32kg
Operating Temperature Range	-25 ~ +60 (derating from +45)
Noise (dB)	<35dB
System Consumption	Standby By PV 8.6W -Standby during the night 11W
Cooling Type	Natural Convection
Max. Operation Altitude	2000m
Operation Humidity	0~95% (No Condensation)
IP Class	IP65
Topology	Battery Isolation
Communication	RS485/CAN2.0/WIFI/4G
Display	LCD/APP
Certification	
Certificate	CE
Environment	RoHS, REACH
Grid Code Compliance	VDE0126-1; AS 4777.2; NRS 097; VDE-AR-N-4105; CEI0-21; G98; G99; C10/C11
Standard	IEC/EN 62109-1&2; IEC/EN61000-6-1; IEC/EN61000-6-2; EN61000-6-3; IEC/EN61000-6-4; IEC/EN61000-3-11; EN61000-3-12; IEC60529; IEC 60068; IEC61683; IEC62116; IEC61727; EN50549-1

Configurations


All installation can evolve if your needs or your usages change, you can add a battery when you want.

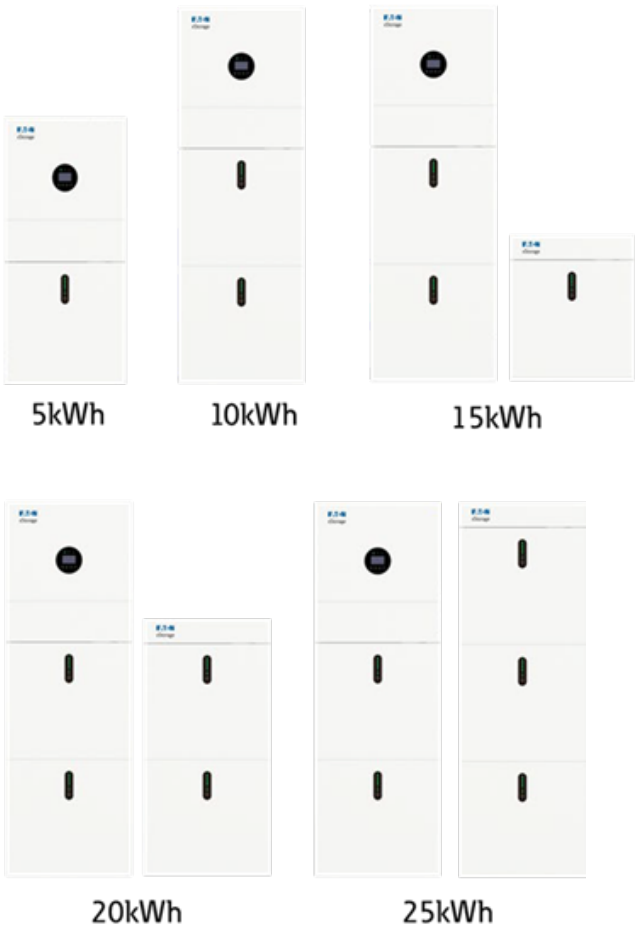

Features

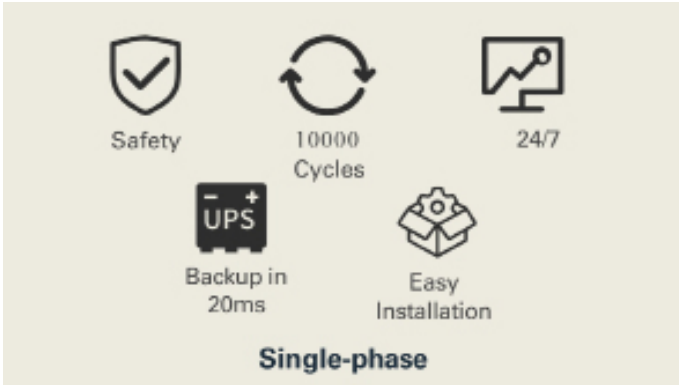


Dimensions

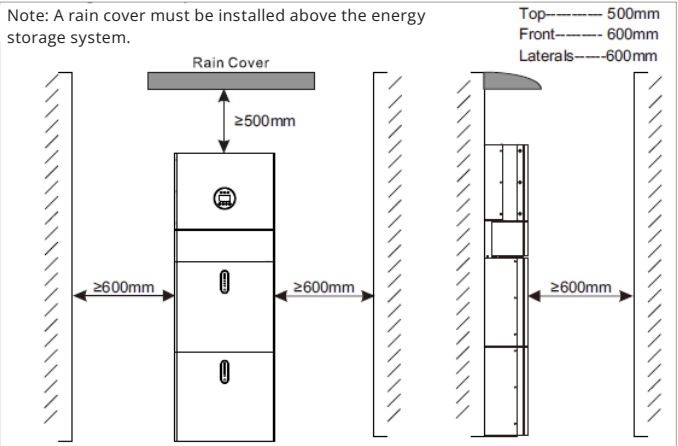


Mounting Steps


Step 1: Positioning and adjusting the bottom support

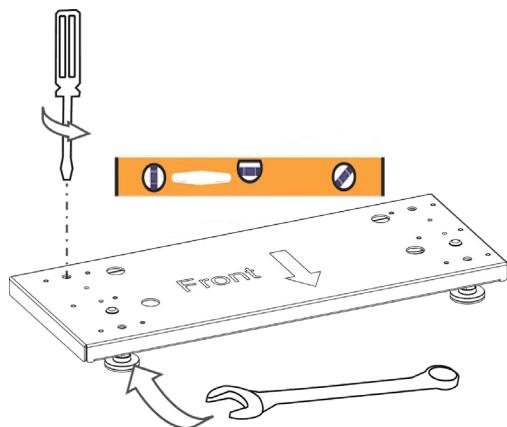


Step 2: Placing the Battery on the Bottom support

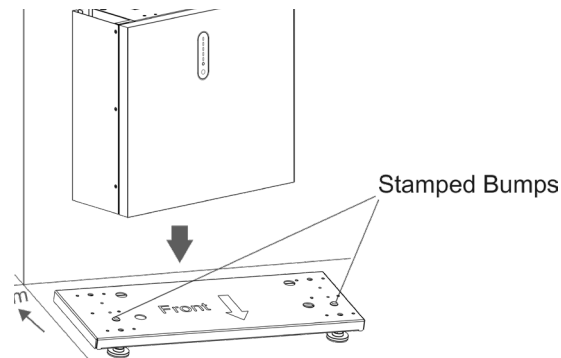


Step 3: Bracket battery pack mounting

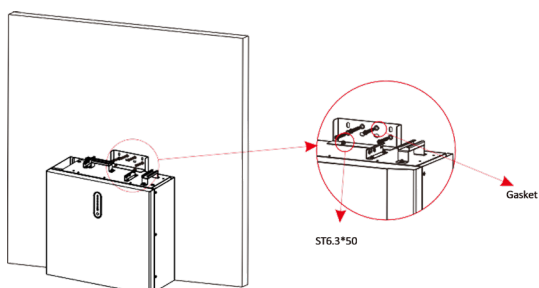


Step 4: Trace the Bracket Battery on the wall.

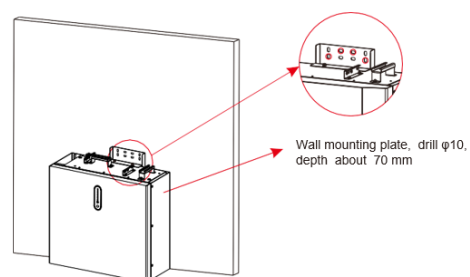


Step 5: Attached the battery pack on the wall.

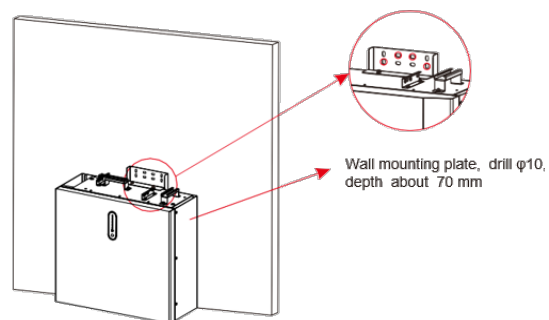


Step 6: Add the 2nd battery pack*

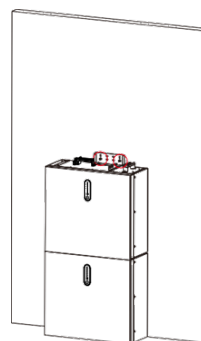


Step 7: Inverter Assembly

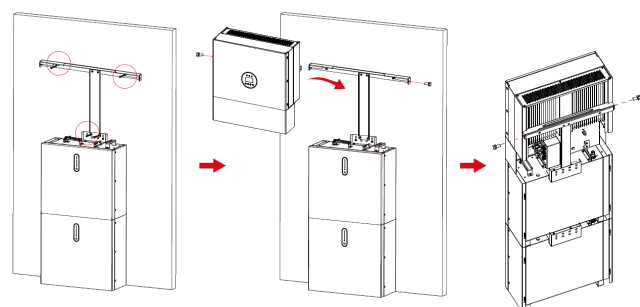

Step 8: Final Assembly

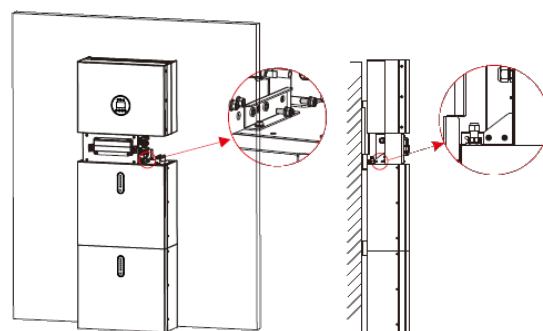

Capacity configurations and scalability

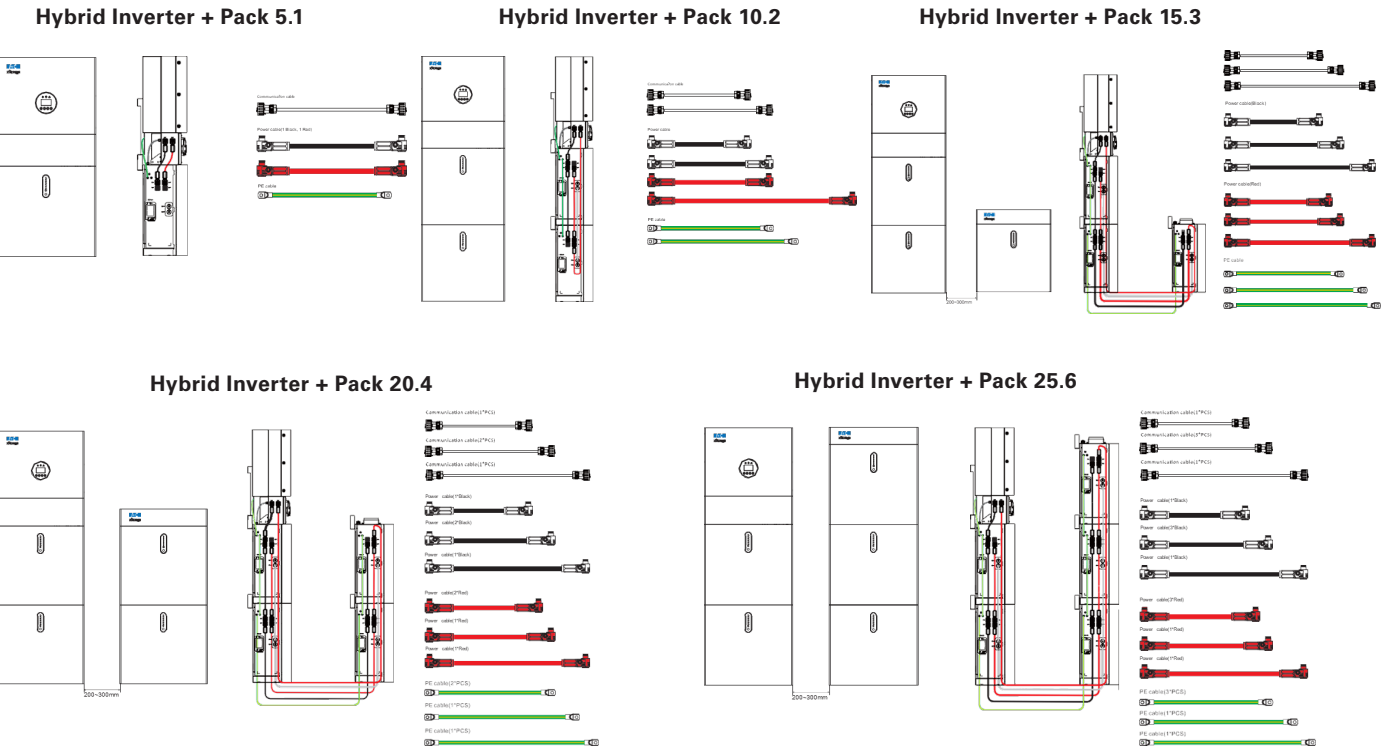

*Between 2 columns, plan to have 200 and 300mm. Add 600mm on both sides (Space inside walls)

Full Sizing and weight

Configurations	Description	Dimensions (mm) Width x Heigh x Depth	Weight (kg)	Width Space of reservation to install, 600mm on both sides. (Space inside walls)
XSTHS1P036BP05V1	XSTS 1P 3.6kW 5kWh V1	540 x 1130 x 270	94	1740
XSTHS1P036BP10V1	XSTS 1P 3.6kW 10kWh V1	540 x 1720 x 270	155	1740
XSTHS1P036BP15V1	XSTS 1P 3.6kW 15kWh V1	1380 x 1720 x 270	216	2580
XSTHS1P036BP20V1	XSTS 1P 3.6kW 20kWh V1	1380 x 1720 x 270	278	2580
XSTHS1P036BP25V1	XSTS 1P 3.6kW 25kWh V1	1380 x 1720 x 270	336	2580
XSTHS1P050BP05V1	XSTS 1P 5kW 5kWh V1	540 x 1130 x 270	94	1740
XSTHS1P050BP10V1	XSTS 1P 5kW 10kWh V1	540 x 1720 x 270	155	1740
XSTHS1P050BP15V1	XSTS 1P 5kW 15kWh V1	1380 x 1720 x 270	216	2580
XSTHS1P050BP20V1	XSTS 1P 5kW 20kWh V1	1380 x 1720 x 270	278	2580
XSTHS1P050BP25V1	XSTS 1P 5kW 25kWh V1	1380 x 1720 x 270	336	2580
XSTHS1P060BP05V1	XSTS 1P 6kW 5kWh V1	540 x 1130 x 270	94	1740
XSTHS1P060BP10V1	XSTS 1P 6kW 10kWh V1	540 x 1720 x 270	155	1740
XSTHS1P060BP15V1	XSTS 1P 6kW 15kWh V1	1380 x 1720 x 270	216	2580
XSTHS1P060BP20V1	XSTS 1P 6kW 20kWh V1	1380 x 1720 x 270	278	2580
XSTHS1P060BP25V1	XSTS 1P 6kW 25kWh V1	1380 x 1720 x 270	336	2580

Note: The above configurations are given as an indication to obtain the dimensions of the solution to be installed. The item codes cannot be ordered as is. To be able to order the products or obtain more information on these configurations, please contact your sales representative

xStorage Solar Monitoring

From the latest hardware devices to functional software, Eaton is the right choice for everyone. It meets the requirements of device manufacturers, investors, project developers, EPCs and factory owners etc. Additionally, custom needs can be easily covered by Eaton's modular design. Solar software consists of different products: business and homeowner oriented. Both products are available through a web portal and apps.

Monitoring for Business (a web app and a mobile app), fulfills the needs of technical professionals, making PV plant management easy, effective, and efficient. Besides visualizing real-time data and analyzing performance indexes, i.e., PR, the product enables comparison among different plants, and comparison between plant's actual generation and weather-based simulation. The expanded performance analysis gives extra meaningful messages for plant management.



Monitoring for homeowners (a web app and a mobile app), follow and visualize production, consumption of the installation, the % of self-consumption and self-generation in real time locally and remotely from the site. Energy management has never been easier.



