CBG370S/WP

Eaton's Cooper Call Points



Two versions of intelligent addressable callpoints are available in this range, the CBG370S which can be either surface or flush mounted and the CBG370WP, a weatherproof version.

Both the CBG370S and the CBG370WP are compatible with our intelligent addressable fire systems.

These intelligent addressable callpoints are attractively designed, simple to install and are supplied as standard with a frangible glass element and a test key for ease of maintenance.

A comprehensive range of accessories are available to maximise the functionality of the callpoint for particular applications.

Features

- Soft addressed
- Integral short circuit isolator
- Single address
- Fast fit clip on front cover
- High visibility status LED
- Wide range of accessories
- Heavy duty terminals
- Two models available:
  - Internal
  - Weatherproof

Benefits

- Quick and simple to install
- Single tool for test and access
- Robust construction
- IP65 version available
- Easy to maintain/service

Powering Business Worldwide


Technical specification

Code	CBG370S	CBG370WP
Description	Surface / Flush Mounting Call Point	Weatherproof Call Point
Standards	EN54 Pt11	EN54 Pt11
Specification		
Operating Voltage	17V dc to 32V dc	17V dc to 32V dc
Quiescent Current	< 250µA	< 250µA
Environmental		
Operating Temperature	-10°C to +55°C	-10°C to +55°C
Humidity (non-condensing)	0 to 93% RH	0 to 93% RH
Physical		
Construction	PC/ABS	PC/ABS
Colour	Red	Red
Dimensions (H x W x D)	87mm x 87mm x 57mm (36mm flush)	87mm x 87mm x 59mm
Weight	0.2kg	0.2kg
Ingress Protection	IP42	IP65
Compatibility		
Suitable for Use With	Intelligent Addressable Fire Systems	Intelligent Addressable Fire Systems

Installation

1. Surface call point has standard rear BESA fixing facilities. In addition, back box can accept top or bottom surface entry cables. Surface call point can also be flush mounted
2. Call point has test facility via special test key to prevent unauthorised operation.
3. Insertion of test key for test purposes and for cover removal is at bottom of call point to facilitate ease of access when mounted next to door architrave.
4. Test key is dual function, used to test call point operation by simulating activation and also to allow removal of clip on cover to gain access to element.
5. Element is held in place by clip on self locking cover which can only be removed by use of a special tool (call point test key).
6. Separate loop in and loop out terminals are provided for all connections including screen continuity on intelligent addressable call points.
7. Surface/flush call points are IP42, weatherproof is IP65.


Standard Connections

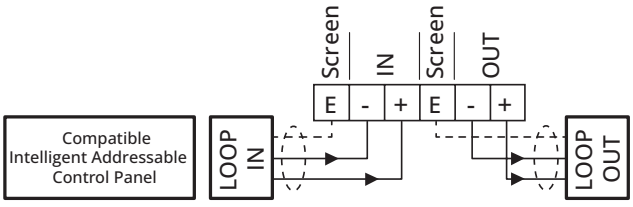

WARNING:
Do **not** use high voltage testers if **any** equipment is connected to the system.

Screen (Earth) must be continuous along entire length of loop.

Dimensions



Description	H (mm)	W(mm)	D (mm)
Flush Mounted	87	87	36
Surface Mounted	87	87	57
Weatherproof	87	87	59

User Interface

1. To enable quick and simple installation, call points use a fast fit self locking clip on front cover which is very simple to fit, but once in place, can only be removed by use of a special key (supplied).
2. Call point is triggered by pressing against the element.

Catalogue Numbers

Description	Code
Surface/Flush Call Point	CBG370S
Weatherproof Call Point	CBG370WP
Protective Hinged Cover	CXPC
Spacer Plates (order in multiples of 10)	MBGSP
Recessing Bezels (order in multiples of 10)	MBGBEZ
Resettable Element Kit (order in multiples of 10)	MBGREKIT
Spare Break Glasses (order in multiples of 5)	UBSG
Call Point Keys (order in multiples of 10)	MFBGKEY3

Powering Business Worldwide

Eaton Electrical Products Ltd
Llantarnam Park,
Cwmbran, NP44 3AW,
United Kingdom
www.eaton.com

©2025 Eaton Corporation
All rights reserved.
March 2025
DS0084-A

Information is believed to be accurate, however no representation or warranty is given and Eaton assumes no liability with respect to the accuracy of such information. The information provided in this document is subject to change without notice.