

P Switch-disconnectors and T Rotary cam switches



Powering Business Worldwide

Eaton's Switch-disconnectors data is available in EPLAN



EPLAN is one of the world's leading design software solutions for machine, plant and panel builders.

You will find in EPLAN all the Eaton's Switch-disconnectors data you need to safely and efficiently build your panel:

- Product images
- Schematic symbols
- 2D DXF Images
- Weights, dimensions, cable size, torque settings, catalogue data, electrical parameters
- List of accessories
- 3D Intelligent step files:
 - Wiring connection points
 - Drill hole patterns
 - Mounting faces



Safe switching, isolating and control

The high-performance, robust and compact T Rotary Cam Switches and P Switch-disconnectors are used in machine building, industrial and engineering applications. They provide ultimate safe disconnection and endurance with positive mechanical contact breaking and excellent making & breaking capabilities. Their IP65 degree of protection enables use in harsh environments, and with essential global approvals the T & P range is a perfect switching, isolating and control solution.

P & T switches are available in an extensive range of complete pre-built switch/handle and enclosure combinations ex-stock to suit the specific requirements of our customers. This saves valuable time in the customer's assembly process as well as reducing packaging waste and order administration.

T rotary cam switches are suitable for a wide range of industrial and machine control applications: change-over and step switches, star-delta and reversing switches, etc. Several thousand switching types are available as standard, and customised circuits can also be produced to meet specific customers' needs, contact buletechnical@eaton.com for further information.



Table of contents

P Switch-disconnectors overview	6
T Rotary cam switches overview	10
Flush mounting switch-disconnectors	16 - 46
Description	16
Range overview	17
On-Off switch-disconnectors	18
Main switch-disconnectors	24
Changeover switch-disconnectors	28
Coding switch-disconnectors	32
Manual/auto switch-disconnectors	33
Multi speed switch-disconnectors	34
Reversing switch-disconnectors	35
Selector switch-disconnectors	37
Star delta switch-disconnectors	38
Step switch-disconnectors	39
Step switch-disconnectors for heating	43
Universal control switch-disconnectors	44
Accessories	45
Centre mounting switch-disconnectors	47 - 67
Description	47
Range overview	48
On-Off switch-disconnectors	49
Changeover switch-disconnectors	52
Coding switch-disconnectors	55
Control switch-disconnectors	56
Group switch-disconnectors	57
Manual/auto switch-disconnectors	58
Multi speed switch-disconnectors	59
Reversing switch-disconnectors	60
Reversing star delta switch-disconnectors	61
Selector switch-disconnectors	62
Step switch-disconnectors	63
Step switch-disconnectors for heating	67
Rear mounting switch-disconnectors	68 - 94
Description	68
Range overview	69
On-Off switch-disconnectors	70
Main switch-disconnectors	73
Main switch-disconnectors with 400 mm metal extension shaft	77
Changeover switch-disconnectors	81
Manual/auto switch-disconnectors	83
Multi speed switch-disconnectors	84
Reversing switch-disconnectors	85
Selector switch-disconnectors	86

Rear mounting switch-disconnectors	68 - 94
Star delta switch-disconnectors	87
Step switch-disconnectors	88
Universal switch-disconnectors for heating	90
Accessories	91
Service distribution board mounting switch-disconnectors	95 - 113
Description	95
Range overview	96
On-Off switch-disconnectors	97
Changeover switch-disconnectors	101
Coding switch-disconnectors	103
Manual/auto switch-disconnectors	104
Multi speed switch-disconnectors	105
Reversing switch-disconnectors	106
Selector switch-disconnectors	107
Star delta switch-disconnectors	108
Step switch-disconnectors	109
Step switch-disconnectors for heating	111
Universal control switch-disconnectors	112
Accessories	113
Enclosed switch-disconnectors	114 - 152
Description	114
Range overview	115
On-Off switch-disconnectors	116
Main switch-disconnectors	124
Changeover switch-disconnectors	135
Coding switch-disconnectors	139
Manual/auto switch-disconnectors	140
Multi speed switch-disconnectors	141
Reversing switch-disconnectors	142
Safety switch-disconnectors	143
Selector switch-disconnectors	146
Star delta switch-disconnectors	147
Step switch-disconnectors	148
Step switch-disconnectors for heating	149
Universal control switch-disconnectors	150
Accessories	151
Universal accessories	153
Non standard cam switches and switch-disconnectors	164
Standards	178
Characteristic curves	182
Technical data	183
Dimensions	194
Index	209

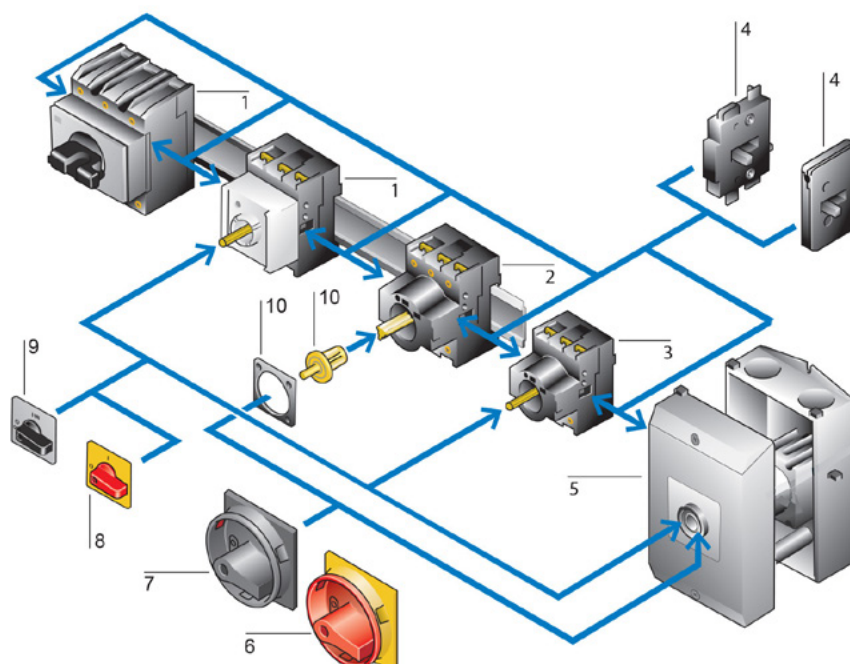
P Switch-disconnectors - Overview

Range overview by switch-disconnectors type and mounting forms

	P1			P3			P5			
Rated current (Amps)	25	32	40	63	80	100	125	160	250	315
Rated voltage (V a.c.)	690	690	690	690	690	690	690	690	690	690
Max motor rating AC-23A, 400/415 V, 50/60 Hz	13 kW	15 kW	15 kW	37 kW		50 kW	45 kW	55 kW	90 kW	110 kW
Switch-disconnectors type										
Main switches maintenance/manual override switches	✓	✓	✓	✓		✓	✓	✓	✓	✓
On-Off switches	✓	✓	✓	✓		✓	✓	✓	✓	✓
Safety switches with warning labels	✓	✓		✓		✓				
Switches with interlocks type										
With cylinder lock SVA	✓	✓								
With padlocking feature SVC	✓	✓								
On-Off switch without emergency stop function	✓	✓								
Mounting forms										
'E' Flush mounting	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
'EA/SVB' Flush mounting main switch	✓	✓	✓	✓	✓	✓				
'EZ' Centre mounting	✓	✓	✓							
'Z' Rear mounting	✓	✓	✓	✓	✓	✓				
'V/SVB' Rear mounting main switches	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
'M4/SVB' Rear mounting main switches with extension shaft	✓	✓	✓	✓	✓	✓				
'IVS' Service distribution board mounting	✓	✓	✓	✓	✓	✓				
'I' Surface mounting switch-disconnector fitted in Ci-K Enclosure	✓	✓	✓	✓	✓	✓				
'MBS' Surface mounting switch-disconnector fitted in Ci-K Enclosure, with pre-assembled EMC screen	✓	✓	✓	✓						
'SE' Surface mounting fitted in steel enclosures	✓	✓	✓	✓		✓				

System overview

P1 and P3 Switch-disconnectors

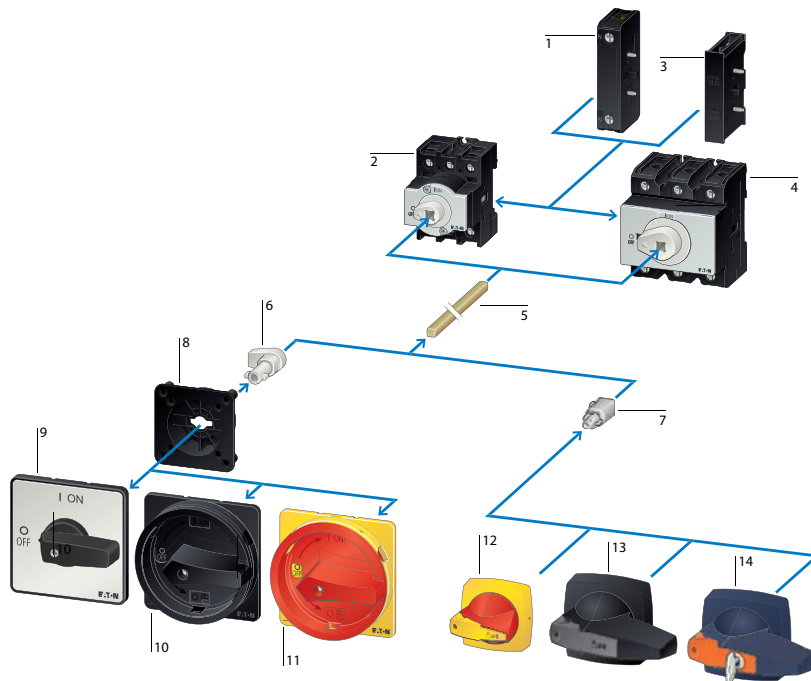


1. Service distribution board mounting
2. Rear mounting
3. Flush mounting
4. Neutral conductors, auxiliary contacts
5. Surface mounting
6. Main switch (kit) for use as emergency switching off device
7. Main switch (kit)
8. Thumb grip for use as emergency switching off device
9. Thumb grip
10. Coupling drive

P Switch-disconnectors - Overview

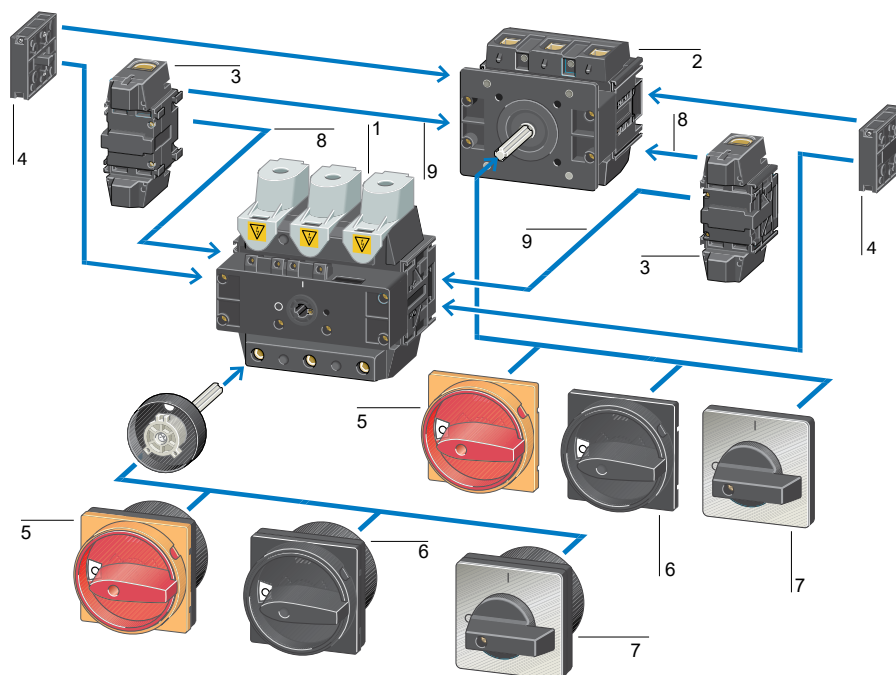
System overview

P1 and P3 Switch-disconnectors with metal shaft



1. Neutral conductor
2. P1 rear mounting switch
3. Auxiliary contact
4. P3 rear mounting switch
5. Metal shaft
6. Shaft adaptor
7. Shaft adaptor
8. Centring Adaptor
9. Thumb grip
10. Main switch (kit) black
11. Main switch kit for use as emergency switching off device (red)
12. Thumb grip kit for use as emergency switching off device (red)
13. K-Line padlock handles
14. K-Line cylinder lock handles

P5 Switch-disconnectors



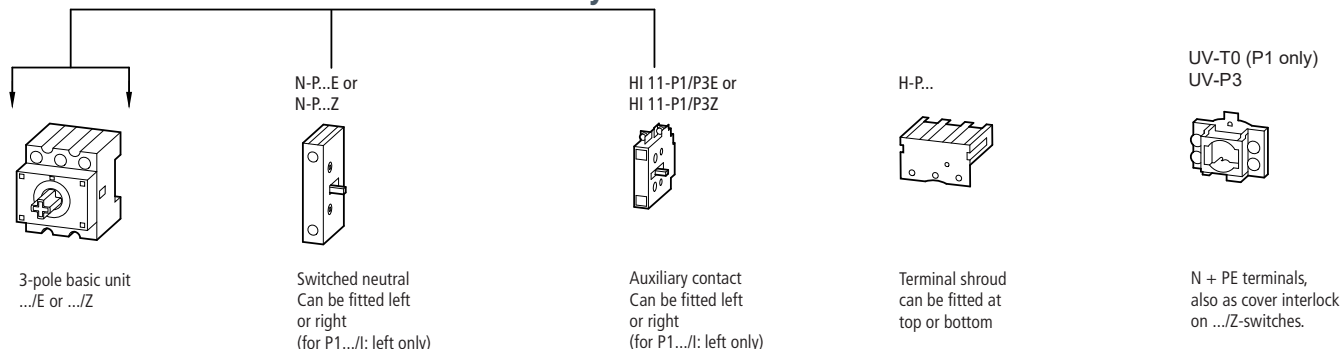
1. Rear mounting
2. Flush mounting
3. Neutral conductors
4. Auxiliary contacts
5. Main switch (kit) for use as emergency switching off device
6. Main switch (kit)
7. Thumb grip
8. Ground terminal
9. Neutral terminal

P Switch-disconnectors - Overview

P1 and P3 Key to part numbers

P	Switch size	-	Rated uninterrupted current	/	Mounting form	-	Part number suffix	/	Accessories
	P1 or P3	-		/		-		/	

P1 and P3 add-on function due to modular system



Catalogue number system

Flush mounting 'E' and 'EA'

P	-	Rated current (Amps)	/	Mounting form, switch type, handle type	/	Accessories
P1		25 (P1 only)		EA/SVB : Flush mounting, main switch with red/yellow handle		
		32 (P1 only)		EA/SVB-SW : Flush mounting, main switch with black handle		
		40 (P1 only)		E : Flush mounting with black thumb grip and front plate		
P3		63 (P3 only)		E-RT : Flush mounting with red thumb grip		
		100 (P3 only)				
P5		125 (P5 only)				
		160 (P5 only)				
		250 (P5 only)				
		315 (P5 only)				

Centre mounting 'EZ' P1 switch-disconnectors

P	-	Rated current (Amps)	/	Switch type, mounting form, handle type	/	Nb of poles
P1		25 (P1 only)		EZ : Centre mounting, ON-OFF switch with black thumb grip and front plate		N : 3-pole + Neutral
		32 (P1 only)				
		40 (P1 only)				

Surface mounting 'I' P1 and P3 switch-disconnectors fitted in Ci-K Enclosures

P	-	Rated current (Amps)	/	Mounting form	Ci-K Enclosure size (H x W mm)	H	/	Type of switch, handle	/	Accessories
P1		25 (P1 only)		I : Surface mounting in Ci-K Enclosure	1 (131 x 80 mm)	H : Hard knockouts		SVB : Main switch with red/yellow handle		
		32 (P1 only)			2 (181 x 100 mm)			SVB-SW : Main switch with black handle		
		40 (P1 only)			3 (222 x 120 mm)			MBS/SVB : Main switch with red/yellow handle and pre-assembled EMC screen		
					4 (240 x 160 mm)			MBS/SVB-SW : Main switch with black handle and pre-assembled EMC screen		
P3		63 (P3 only)			5 (280 x 200 mm)			SVA(S) : Panic switch with SVA cylinder lock		
								SVC(S) : Panic switch with SVC padlock		
								SVA(A) : ON-OFF switch with SVA cylinder lock		
								S : ON-OFF switch with key operation lock mechanism ST-0		

P Switch-disconnectors - Overview

Catalogue number system

Surface mounting 'SE' P1 and P3 switch-disconnectors fitted in steel enclosure

P	-	Rated current (Amps)	/	Steel enclosure type	/	Switch type, handle type	/	Accessories
P1		25 (P1 only)		SE1 (P1 only)		SVB : Main switch with red/yellow handle		
		32 (P1 only)		SE3 (P3 only)		SVB-SW : Main switch with black handle		
		40 (P1 only)						
P3		63 (P3 only)				(Blank) Switch with ON-OFF function		
		100 (P3 only)						

Service distribution board mounting 'IVS' P1, P3 and P5 switch-disconnectors

P	-	Rated current (Amps)	/	Mounting form, switch type, handle type
P1		25 (P1 only)		IVS : ON-OFF Service distribution board mounting switch with black thumb grip and front plate
		32 (P1 only)		IVS-RT : ON-OFF Service distribution board mounting switch with red thumb grip
		40 (P1 only)		
P3		63 (P3 only)		
		100 (P3 only)		

Rear mounting 'V/SVB', 'M4' and 'Z' P1, P3 and P5 switch-disconnectors

P	-	Rated current (Amps)	/	Mounting form, switch type, handle type	/	Accessories
P1		25 (P1 only)		V/SVB : Rear mounting, main switch with red/yellow handle		
		32 (P1 only)		V/SVB-SW : Rear mounting, main switch with black handle		
		40 (P1 only)		M4/SVB : Rear mounting, main switch with 400 mm extension shaft with red/yellow handle		
P3		63 (P3 only)		M4/SVB-SW : Rear mounting, main switch with 400 mm extension shaft with blank handle		
		100 (P3 only)				
P5		125 (P5 only)		M4/K2-P.. : Main switch with 400 mm extension shaft with K Line K2 handle, padlockable		
		160 (P5 only)		Z : ON-OFF switch with black thumb grip and front plate		
		250 (P5 only)		Z/SVA(A) : ON-OFF switch with black thumb grip and front plate and SVA cylinder locks		
		315 (P5 only)				

For any Switch-disconnectors that currently holds a North American (NA) approval, a NA style variant can be made available to order, please contact your local sales representative for more information.

T Rotary Cam switches - Overview

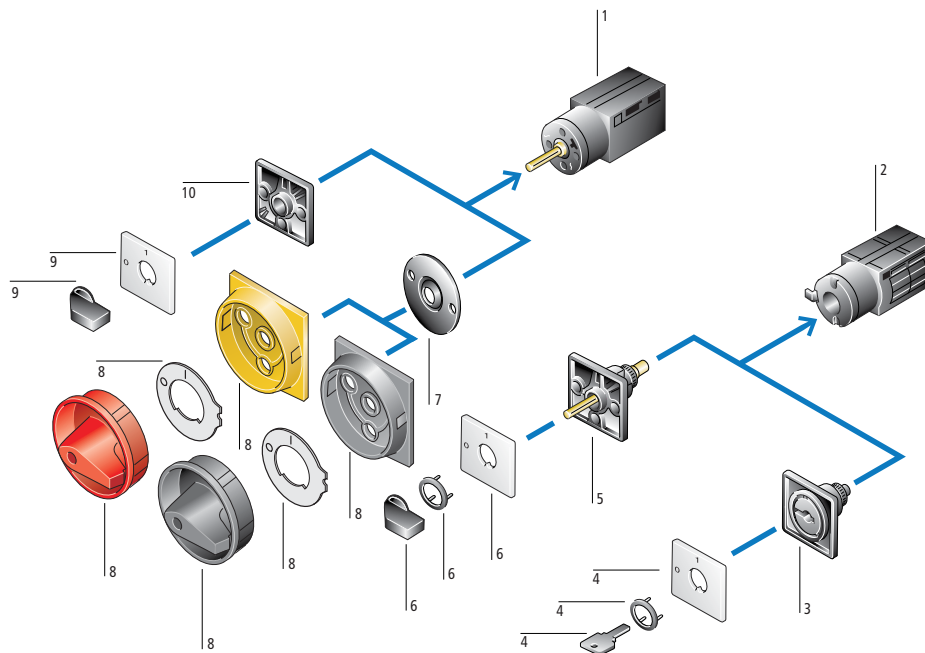
Range overview by switch-disconnectors type and mounting forms

	TM	T0	T3	T5B	T5	T6	T8
Rated current (Amps)	≤10	20	32	63	100	160	315
Rated voltage (V a.c.)	500 V	690 V	690 V	690 V	690 V	690 V	690 V
Max motor rating AC-23A 400/415 V 50/60 Hz	3.0 kW	6.5 kW	13 kW	22 kW	30 kW	55 kW	132 kW
Switch-disconnectors							
Main switches maintenance/manual override switches		✓	✓	✓	✓	✓	✓
On-Off switches	✓	✓	✓	✓	✓		
Changeover switches		✓	✓	✓	✓	✓	✓
Reversing switch with 0 position		✓	✓	✓			
Star-delta switches		✓	✓	✓			
Reversing star-delta switches		✓	✓	✓			
Multi-speed switch		✓	✓	✓			
Reversing multi-speed switches		✓	✓	✓			
Control switches							
Step switches	✓	✓	✓				
Control circuit isolators	✓						
On-Off switches		✓	✓				
Changeover switches	✓	✓	✓				
Manual/Auto switches	✓	✓	✓				
On switches		✓	✓				
Universal control switches		✓	✓				
Coding switches	✓	✓	✓				
Series switches		✓	✓				
Instrument selector switches		✓	✓				
Mini Cam Group switches	✓						
Mini Cam ON-OFF switches	✓						
Mini Cam Reversing switches	✓						
Switches with locking mechanism - Panic switch							
With cylinder lock SVA		✓					
With padlocking feature SVC		✓					
On-Off switch without emergency stop function		✓					
Mounting forms							
'E' Flush mounting	✓	✓	✓	✓	✓	✓	✓
'EA/SVB' Flush mounting main switch		✓	✓	✓	✓		
'EZ' Centre mounting	✓	✓	✓				
'I' Enclosed switch-disconnector fitted in Ci-K Enclosure		✓	✓	✓	✓	✓	✓
'IVS' Service distribution board mounting	✓	✓	✓	✓			
'MBS' Enclosed switch-disconnector fitted in Ci-K Enclosure, with pre-assembled EMC screen		✓					
'SE' Enclosed switch-disconnectors fitted in steel enclosures		✓	✓				
'V/SVB' Rear mounting main switches		✓	✓	✓	✓	✓	✓
'Z' Rear mounting		✓	✓	✓	✓		

T Rotary Cam switches - Overview

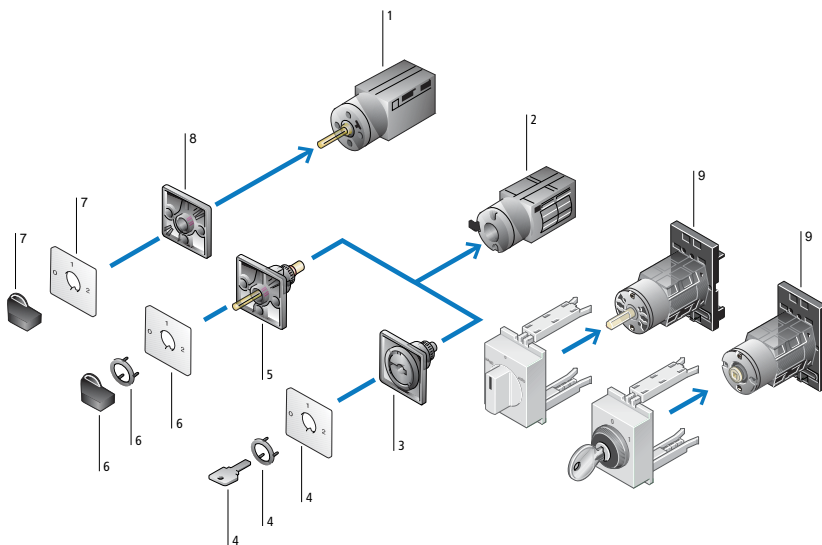
System overview

TM Switch-disconnectors



- 1. Flush mounting
- 2.Center mounting
- 3 and 4 . Key operation for center mounting
- 5 and 6. Standard switches for center mounting
- 7 and 8. Control circuit isolators
- 9 and 10. Standard switches for flush mounting

TM - Control switches

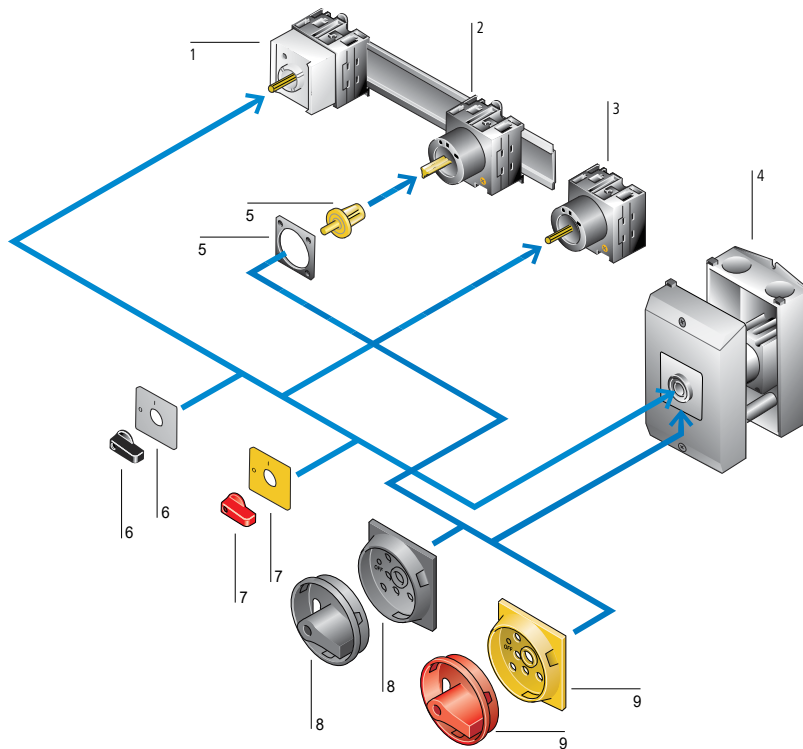


- 1. Flush mounting
- 2.Center mounting
- 3 and 4 . Key operation for center mounting
- 5 and 6. Standard switches for center mounting
- 7 and 8. Standard switches for flush mounting
- 9. Service distribution board mounting

T Rotary Cam switches - Overview


System overview

T0, T3, T5B, T5 Switch-disconnectors



1. Service distribution board mounting
2. Rear mounting
3. Flush mounting
4. Surface mounting
5. Coupling drive
6. Thumb grip
7. Thumb grip for use as emergency switching off device (not for Control switch)
8. Main switch kit (not for Control switch)
9. Main switch kit not for use as emergency switch-off (not for Control switch)

Circuit representation for all T versions



Switch from 0 to 1

Contact 1 – 2 open,
Contact 3 – 4 open,
Contact 5 – 6 open,
Contact 7 – 8 closed

Switch from 1 to START with automatic return to 1

Contact 1 – 2 open,
Contact 3 – 4 closed,
Contact 5 – 6 open,
Contact 7 – 8 remains closed

Switch from 1 to 0

Contact 1 – 2 open,
Contact 3 – 4 open,
Contact 5 – 6 open,
Contact 7 – 8 open

Switch from 0 to 2

Contact 1 – 2 closed,
Contact 3 – 4 open,
Contact 5 – 6 open,
Contact 7 – 8 closed

Switch from 2 to START with automatic return to 2

Contact 1 – 2 open,
Contact 3 – 4 open,
Contact 5 – 6 closes with early make,
Contact 7 – 8 opens with late break

Switch from 2 to 0

Contact 1 – 2 open,
Contact 3 – 4 open,
Contact 5 – 6 open,
Contact 7 – 8 open

T Rotary Cam switches - Overview

TM - Key to part numbers

The TM Mini cam switch is a particularly small switch for small space requirements. It is ideally suited for lower voltages and currents such as electronic controls. For greater safety the contacts are gold plated.

The TM switches have consecutive terminal markings starting with 1.

TM	-	Number of contact chambers	-	Contact sequence number	-	Mounting form	+	Accessories
TM	-	= contact units	-		-		+	

T0 and T3 Cam switches - Key to part numbers

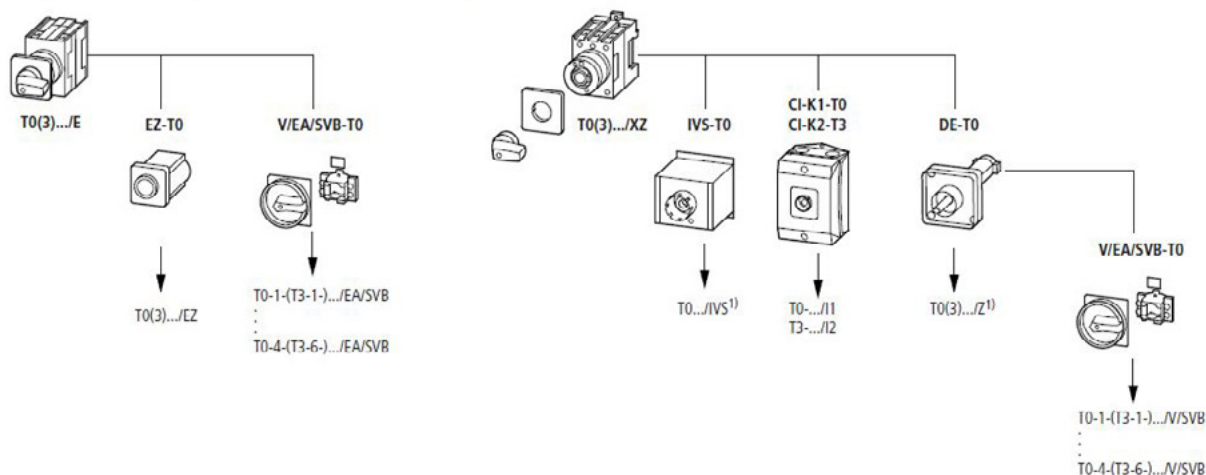
Cam switches can be used for many switching and control applications. For example ON-OFF switches, main switches, main/control switches, instrument switches.

The switches consist of a hand actuator, the switch unit and the mounting accessories.

The contact chambers (contact unit = BE) contains 1 or 2 contacts.

T	Switch size	-	Number of contact chambers	-	Contact sequence number	/	Mounting form
T0 or T3		-	= contact units	-		/	

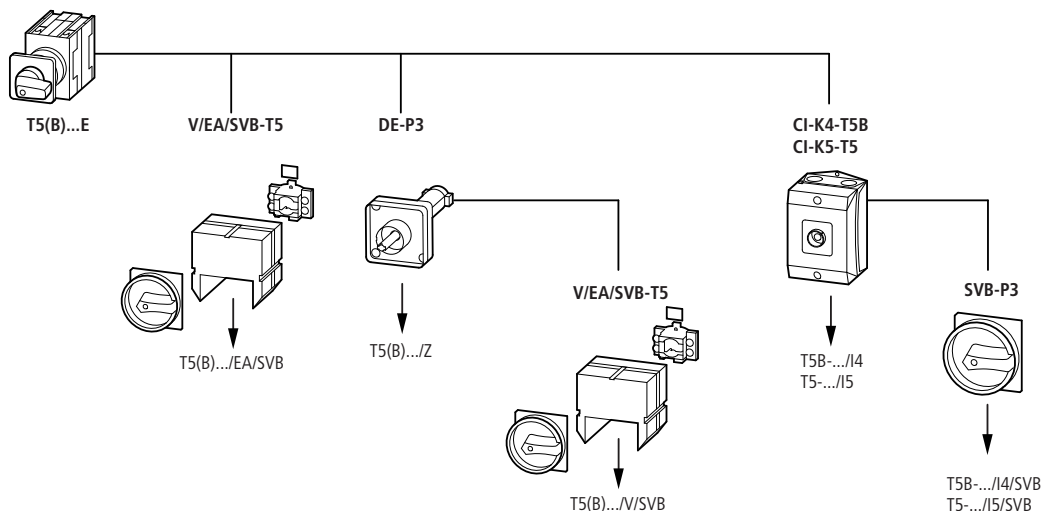
Using the modular system to convert the mounting form



T5(B) Cam switches - Key to part numbers

T	Switch size	-	Number of contact chambers	-	Contact sequence number	/	Mounting form
T5(B)		-	= contact units	-		/	

Using the modular system to convert the mounting form T5(B)



T Rotary Cam switches - Overview

Catalogue number system

Flush mounting 'E' and 'EA'

T	Switch size	- Number of contact units (contact chambers)	-	Contact sequence number	/	Mounting form, switch type, handle type	/	Accessories
T	M (10 A) 0 (20 A) 3 (32 A) 5B (63 A) 5 (100 A) 6 (160 A) 8 (315 A)	TM: Maximum 8 chambers / 16 contacts T0/T3: maximum 11 chambers / 22 contacts T5/TB: maximum 10 chambers / 20 contacts				EA/SVB : Flush mounting, main switch with red/yellow handle EA/SVB-SW : Flush mounting, main switch with black handle E : Flush mounting with black thumb grip and front plate E-RT : Flush mounting, ON-OFF switch with red thumb grip		

Centre mounting 'EZ'

T	Switch size	- Number of contact units (contact chambers)	-	Contact sequence number	/	Mounting form, switch type, handle type	/	Accessories
T	M (10 A) 0 (20 A) 3 (32 A)	TM: Maximum 8 chambers / 16 contacts T0/T3: maximum 11 chambers / 22 contacts				EZ : Centre mounting with black thumb grip and front plate		

Rear mounting 'V/SVB', 'M4' and 'Z' T switch-disconnectors

T	Switch size	- Number of contact units (contact chambers)	/	Number of contact units (contact chambers)	/	Accessories
T	0 (20 A) 3 (32 A) 5B (63 A) 5 (100 A) 6 (160 A) 8 (315 A)			V/SVB : Rear mounting, main switch with red/yellow handle V/SVB-SW : Rear mounting, main switch with black handle Z : ON-OFF switch with black thumb grip and front plate Z/SVA(A) : ON-OFF switch with black thumb grip and front plate and SVA cylinder locks		

Service distribution board mounting 'IVS' T0 switch-disconnectors

T	Switch size	/	Number of contact units (contact chambers)	/	Mounting form, switch type, handle type	/	Accessories
T	0 (20 A)		T0/T3: maximum 11 chambers / 22 contacts		IVS : ON-OFF Service distribution board mounting switch with black thumb grip and front plate IVS-RT : ON-OFF Service distribution board mounting switch with red thumb grip		

T Rotary Cam switches - Overview

Catalogue number system

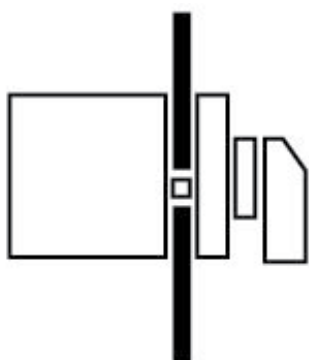
Enclosed 'I' switch-disconnectors fitted in Ci-K Enclosures

T	Switch size	-	Number of contact units (contact chambers)	/	Mounting form	Ci-K Enclosure size (H x W mm)	/	Type of switch, handle	/	Accessories
T	0 (20 A) 3 (32 A) 5B (63 A) 5 (100 A) 6 (160 A) 8 (315 A)		T0/T3: max 11 chambers / 22 contacts T5/TB: max 10 chambers / 20 contacts		I : Surface mounting in Ci-K Enclosure	1 (131 x 80 mm) 2 (181 x 100 mm) 3 (222 x 120 mm) 4 (240 x 160 mm) 5 (280 x 200 mm)		SVB : Main switch with red/yellow handle SVB-SW : Main switch with black handle MBS/SVB : Main switch with red/yellow handle and pre-assembled EMC screen MBS/SVB-SW : Main switch with black handle and pre-assembled EMC screen SVA(S) : Panic switch with SVA cylinder lock SVA(A) : ON-OFF switch with SVA cylinder lock SVC(S) : Panic switch with SVC padlock SI : Safety switch		

Enclosed 'SE' T0 and T3 switch-disconnectors fitted in steel enclosure

T	Switch size	-	Number of contact units (contact chambers)	-	Steel enclosure size	/	Type of switch, handle
T	0 (20 A) 3 (32 A)		T0/T3: max 11 chambers / 22 contacts		SE1 SE3		SVB : Main switch with red/yellow handle SVB-SW : Main switch with black handle (Blank) Switch with ON-OFF function

For any Switch-disconnectors that currently holds a North American (NA) approval, a NA style variant can be made available to order, please contact your local sales representative for more information.



Description

Flush mounting switch-disconnectors can be easily installed, using two-hole screw mounting, directly onto doors, panels, lids, enclosures in machinery, switchboard and switchgear.

Standards/Approvals

See details page 178

Technical data

- Voltage: 690 V a.c.
- Current: 10 A to 315 A
- Front IP65

Options

- With or without emergency switching off/emergency stop function
- With and without auxiliary contacts
- With red rotary handle and yellow locking collar and black rotary handle and locking collar
- 1-pole to 8-pole



P3 Flush mounting







T0 Flush mounting

Flush mounting - Range overview

Rated current	10 A	20 A	25 A	32 A	40 A	63 A	100 A	125 A	160 A	250 A	275 A	315 A		
On-Off switch-disconnectors	TM	T0	P1	P1	T3	P1	P3	T5B	P3	T5	P5	P5	P5	P5
Without auxiliary contacts	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
With auxiliary contacts		✓			✓			✓		✓				
Main switch-disconnectors		T0	P1	P1	T3	P1	P3	T5B	P3	T5	P5	P5	P5	P5
Without auxiliary contacts		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
With auxiliary contacts		✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Changeover switch-disconnectors	TM	T0			T3			T5B		T5		T6		T8
Without auxiliary contacts	✓	✓			✓			✓		✓			✓	✓
Coding switch-disconnectors	TM	T0												
Without auxiliary contacts	✓	✓												
Manual/auto switch-disconnectors	TM	T0												
Without auxiliary contacts	✓	✓												
Multi speed switch-disconnectors		T0			T3			T5B						
Without auxiliary contacts		✓			✓			✓						
Reversing switch-disconnectors	TM	T0			T3			T5B						
Without auxiliary contacts	✓	✓			✓			✓						
Selector switch-disconnectors		T0												
Without auxiliary contacts		✓												
Star-delta switch-disconnectors		T0			T3			T5B						
Without auxiliary contacts		✓			✓			✓						
Step switch-disconnectors	TM	T0												
Without auxiliary contacts	✓	✓												
Step switch-disconnectors for heating		T0												
Without auxiliary contacts		✓												
Universal switch-disconnectors		T0												
Without auxiliary contacts		✓												

Flush mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
On-Off switches 90°								
 F 056		1	10 A	TM-1-8290/E	070131	1	✓	X
		2	10 A	TM-1-8291/E	072504	1	✓	X
		3	10 A	TM-2-8292/E	074877	1	✓	X
		3+N	10 A	TM-2-8293/E	077250	1	✓	X
		6	10 A	TM-3-8256/E	079623	1	✓	X
Without auxiliary contacts								
 FS 908		1	20 A	T0-1-8200/E	067352	1	✓	X
			32 A	T3-1-8200/E	064208	1	✓	X
			63 A	T5B-1-8200/E	094281	1	✓	X
		2	20 A	T0-1-102/E	088709	1	✓	X
			32 A	T3-1-102/E	076073	1	✓	X
			63 A	T5B-1-102/E	094471	1	✓	X
		3	20 A	T0-2-1/E	024639	1	✓	X
			25 A	P1-25/E	038724	1	✓	X
			32 A	P1-32/E	079065	1	✓	X
			40 A	P1-40/E	199889	1	X	X
			63 A	P3-63/E	026861	1	✓	X
			80 A	P3-80/E	EP-400919	1	✓	X
			100 A	P3-100/E	067201	1	✓	X
			125 A	P5-125/E	280897	1	✓	X
			160 A	P5-160/E	280921	1	✓	X
			250 A	P5-250/E	280935	1	✓	X
			315 A	P5-315/E ⁽¹⁾	280949	1	✓	X
				3 + N	20 A	T0-2-8900/E	207398	1
	25 A	P1-25/E/N			076845	1	✓	X
	32 A	P1-32/E/N			093456	1	✓	X
	40 A	P1-40/E/N			199891	1	X	X
	63 A	P3-63/E/N			019894	1	✓	X
	80 A	P3-80/E/N			EP-400921	1	✓	X
	100 A	P3-100/E/N			031759	1	✓	X
		6			20 A	T0-3-8342/E	043624	1
			32 A	T3-3-8342/E	045225	1	✓	X
			63 A	T5B-3-8342/E	092310	1	✓	X
		8	20 A	T0-4-8344/E	014000	1	✓	X
			32 A	T3-4-8344/E	020593	1	✓	X
			63 A	T5B-3-8344/E	092064	1	✓	X







067352

Photo is representative

Flush mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
On-Off switches 30°								
 FS 415		1	20 A	T0-1-15401/E	038854	1	✓	X
		2	20 A	T0-1-15402/E	053092	1	✓	X
		3	20 A	T0-2-15403/E	067330	1	✓	X
		4	20 A	T0-2-15404/E	081568	1	✓	X
TM Switch-disconnector 90°/30° with Automatic (spring) return to 1								
 F 119		1	10 A	TM-1-8178/E	098608	1	✓	X



053092







098608

Photos are representative

Flush mounting - On-Off switch-disconnectors without auxiliary contacts



Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With Automatic (spring) return in START position								
		1	20 A	T0-1-15511/E	019875	1	✓	X
		2	20 A	T0-2-15512/E	034113	1	✓	X
		3	20 A	T0-3-15513/E	048351	1	✓	X
		2	20 A	T0-2-8177/E	015130	1	✓	X



019875

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Pole N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With locking mechanism - Key can only be withdrawn in position 0 (Pos A)								
		3	20 A	T0-2-1/E/SVA(A)	050976	1	✓	✓
		3	25 A	P1-25/E/SVA(A)	050965	1	✓	✓
		3	32 A	P1-32/E/SVA(A)	050970	1	✓	✓
With locking mechanism Key operation lock mechanism ST-0 Key can only be withdrawn in position 0 (Pos A)								
		2	20 A	T0-1-102/EZ/S	014933	1	✓	X



050976




014933

Photos are representative

Flush mounting - On-Off switch-disconnectors without auxiliary contacts




Without emergency switch off/emergency stop function

Front plate	Contact sequence	Pole N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Panic switch-disconnector fitted with a SVA Cylinder lock Supplied with two keys If the key is withdrawn in position 1 the switch can be switched off but not on again without the key								
 FS 908		3	20 A	T0-2-1/E/SVA(S)	050977	1	✓	✓
		3	25 A	P1-25/E/SA(S)	050966	1	✓	✓
		3	32 A	P1-32/E/SA(S)	044977	1	✓	✓



050966

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Number of poles	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Automatic (spring) return from position 1									
		1	20 A	1	T0-1-15321/E	086317	1	✓	X
FS 4721									
		2	20 A	2	T0-1-15322/E	010382	1	✓	X
		3	20 A	3	T0-2-15323/E	024620	1	✓	X
Automatic (spring) return in position 0 and 1									
		1	20 A		T0-1-15366/E	081572	1	✓	X
FS 456									







024620

Photos are representative

Flush mounting - On-Off switch-disconnectors without auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908	 1 0 2 0	1	20 A	T0-1-8200/E-RT	009474	1	✓	X
			32 A	T3-1-8200/E-RT	017025	1	✓	X
			63 A	T5B-1-8200/E-RT	094280	1	✓	X
			100 A	T5-1-8200/E-RT	097225	1	X	X
	 1 0 2 0 3 0 4 0	2	20 A	T0-1-102/E-RT	009046	1	✓	X
			32 A	T3-1-102/E-RT	016318	1	✓	X
			63 A	T5B-1-102/E-RT	094470	1	✓	X
	 1 0 2 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/E-RT	011082	1	✓	X
25 A			P1-25/E-RT	002388	1	✓	X	
32 A			P1-32/E-RT	003197	1	✓	X	
40 A			P1-40/E-RT	199902	1	X	X	
63 A			P3-63/E-RT	005743	1	✓	X	
80 A			P3-80/E-RT	EP-400932	1	✓	X	
100 A			P3-100/E-RT	007189	1	✓	X	
 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0	3 + N	20 A	T0-2-8900/E-RT	207399	1	✓	X	
Panic switch-disconnector fitted with a SVA Cylinder lock Supplied with two keys								
 FS 908 GE	 1 0 2 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/E/SVA(S)-RT	228291	1	✓	✓
		3	25 A	P1-25/E/SVA(S)-RT	050967	1	✓	✓
		3	32 A	P1-32/E/SVA(S)-RT	050971	1	✓	✓
Panic switch-disconnectors fitted with SVC Padlocking feature Supplied with two keys If the locking device is padlocked in position 1 the switch can be switched off but not on again without removing the padlock. Lockable with max 3 padlocks								
 FS 908 GE	 1 0 2 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/E/SVC(S)-RT	044973	1	✓	✓
		3	25 A	P1-25/E/SVC(S)-RT	044974	1	✓	✓
		3	32 A	P1-32/E/SVC(S)-RT	044975	1	✓	✓



207399



050967







044975

Photos are representative

Flush mounting - On-Off switch-disconnectors with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without emergency switch off/emergency stop function										
 FS 908		3	1	0	20 A	T0-2-15679/E	029387	1	✓	X
		3	2	1	20 A	T0-3-15683/E	016619	1	✓	X
					32 A	T3-3-15683/E	014377	1	✓	X
		3 + N	1	1	20 A	T0-3-8901/E	231938	1	✓	X
					32 A	T3-3-8901/E	231949	1	✓	X
		6	1	1	20 A	T0-4-15682/E	010405	1	✓	X
					32 A	T3-4-15682/E	023869	1	✓	X
					63 A	T5B-4-15682/E	207424	1	✓	X
					100 A	T5-4-15682/E	207412	1	✓	X



207412

Photo is representative

Flush mounting - Main switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
ION OFF FS 908	01	1	20 A	T0-1-8200/EA/SVB-SW	055483	1	✓	✓
	1020		32 A	T3-1-8200/EA/SVB-SW	068949	1	✓	✓
		63 A	T5B-1-8200/EA/SVB-SW	094278	1	✓	✓	
	01	2	20 A	T0-1-102/EA/SVB-SW	093451	1	✓	✓
	10203040		32 A	T3-1-102/EA/SVB-SW	016747	1	✓	✓
		63 A	T5B-1-102/EA/SVB-SW	094468	1	✓	✓	
		100 A	T5-1-102/EA/SVB-SW	098807	1	X	✓	
	01	3	20 A	T0-2-1/EA/SVB-SW	041246	1	✓	✓
	102030405060		25 A	P1-25/EA/SVB-SW	048365	1	✓	✓
		30 A	P3-30/EA/SVB-SW-MCS	237893	1	✓	✓	
		32 A	P1-32/EA/SVB-SW	053111	1	✓	✓	
		40 A	P1-40/EA/SVB-SW	199898	1	X	✓	
		63 A	P3-63/EA/SVB-SW	057857	1	✓	✓	
		80 A	P3-80/EA/SVB-SW	EP-400929	1	✓	✓	
		100 A	P3-100/EA/SVB-SW	062603	1	✓	✓	
	01	3	125 A	P5-125/EA/SVB-SW	280911	1	✓	✓
	1L101T101L201T201L301T30		160 A	P5-160/EA/SVB-SW	280925	1	✓	✓
		250 A	P5-250/EA/SVB-SW	280939	1	✓	✓	
		315 A	P5-315/EA/SVB-SW	280953	1	✓	✓	
	01	3 + N	20 A	T0-2-8900/EA/SVB-SW	207401	1	✓	✓
	1020304050607080		25 A	P1-25/EA/SVB-SW/N	083960	1	✓	✓
		32 A	P1-32/EA/SVB-SW/N	093452	1	✓	✓	
		40 A	P1-40/EA/SVB-SW/N	199900	1	X	✓	
		63 A	P3-63/EA/SVB-SW/N	012771	1	✓	✓	
		100 A	P3-100/EA/SVB-SW/N	022263	1	✓	✓	
	01	3 + N	125 A	P5-125/EA/SVB-SW/N	280913	1	✓	✓
	1L101T101L201T201L301T302L102T10		160 A	P5-160/EA/SVB-SW/N	280927	1	✓	✓
		250 A	P5-250/EA/SVB-SW/N	280941	1	✓	✓	
		315 A	P5-315/EA/SVB-SW/N	280955	1	✓	✓	
	01	6	20 A	T0-3-8342/EA/SVB-SW	031755	1	✓	✓
	102030405060708090100110120		32 A	T3-3-8342/EA/SVB-SW	073699	1	✓	✓
		63 A	T5B-3-8342/EA/SVB-SW	092307	1	✓	✓	
		100 A	T5-3-8342/EA/SVB-SW	096382	1	X	✓	
	01	8	20 A	T0-4-8344/EA/SVB-SW	008268	1	✓	✓
	102030405060708090100110120130140150160		32 A	T3-4-8344/EA/SVB-SW	008965	1	✓	✓
		63 A	T5B-4-8344/EA/SVB-SW	092061	1	✓	✓	
		100 A	T5-4-8344/EA/SVB-SW	095960	1	X	✓	









053111

Photo is representative

Flush mounting - Main switch-disconnectors without auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908	 1 0 1 1 0 2 0	1	20 A	T0-1-8200/EA/SVB	053110	✓	✓
			32 A	T3-1-8200/EA/SVB	066576	✓	✓
			63 A	T5B-1-8200/EA/SVB	094279	✓	✓
	 1 0 1 1 0 2 0 3 0 4 0	2	20 A	T0-1-102/EA/SVB	091078	✓	✓
			32 A	T3-1-102/EA/SVB	014374	✓	✓
			63 A	T5B-1-102/EA/SVB	094469	✓	✓
			100 A	T5-1-102/EA/SVB	098808	X	✓
	 1 0 1 1 0 2 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/EA/SVB	038873	✓	✓
			25 A	P1-25/EA/SVB	041097	✓	✓
			30 A	P3-30/EA/SVB-MCS	237892	✓	✓
			32 A	P1-32/EA/SVB	081438	✓	✓
			40 A	P1-40/EA/SVB	199894	X	✓
			63 A	P3-63/EA/SVB	031607	✓	✓
			80 A	P3-80/EA/SVB	EP-400924	✓	✓
			100 A	P3-100/EA/SVB	074320	✓	✓
			125 A	P5-125/EA/SVB	280898	✓	✓
			160 A	P5-160/EA/SVB	280922	✓	✓
			250 A	P5-250/EA/SVB	280936	✓	✓
			315 A	P5-315/EA/SVB	280950	✓	✓
	 1 0 1 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0	3 + N	20 A	T0-2-8900/EA/SVB	207400	✓	✓
	 1 0 1 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0	3 + N	25 A	P1-25/EA/SVB/N	081587	✓	✓
			32 A	P1-32/EA/SVB/N	091079	✓	✓
			40 A	P1-40/EA/SVB/N	199896	X	✓
			63 A	P3-63/EA/SVB/N	010398	✓	✓
			80 A	P3-80/EA/SVB/N	EP-400927	✓	✓
	 1 0 1 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	3 + N	100 A	P3-100/EA/SVB/N	019890	✓	✓
			125 A	P5-125/EA/SVB/N	280910	✓	
			160 A	P5-160/EA/SVB/N	280924	✓	✓
			250 A	P5-250/EA/SVB/N	280938	✓	✓
			315 A	P5-315/EA/SVB/N	280952	✓	✓
	 1 0 1 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	6	20 A	T0-3-8342/EA/SVB	029382	✓	✓
			32 A	T3-3-8342/EA/SVB	071326	✓	✓
			63 A	T5B-3-8342/EA/SVB	092308	✓	✓
			100 A	T5-3-8342/EA/SVB	096383	X	✓
	 1 0 1 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0	8	20 A	T0-4-8344/EA/SVB	008267	✓	✓
			32 A	T3-4-8344/EA/SVB	008964	✓	✓
			63 A	T5B-4-8344/EA/SVB	092062	✓	✓
			100 A	T5-4-8344/EA/SVB	095961	X	✓












041097

Photo is representative

Flush mounting - Main switch-disconnectors with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908		3	1	0	20 A	T0-2-15679/EA/SVB-SW	083961	1	✓	✓
		3	1	1	25 A	P1-25/EA/SVB-SW/HI11	070194	1	✓	✓
					32 A	P1-32/EA/SVB-SW/HI11	012772	1	✓	✓
					40 A	P1-40/EA/SVB-SW/HI11	199899	1	X	✓
					63 A	P3-63/EA/SVB-SW/HI11	022264	1	✓	✓
					100 A	P3-100/EA/SVB-SW/HI11	031756	1	✓	✓
		3	1	0	125 A	P5-125/EA/SVB-SW/HI10	280912	1	✓	✓
					160 A	P5-160/EA/SVB-SW/HI10	280926	1	✓	✓
					250 A	P5-250/EA/SVB-SW/HI10	280940	1	✓	✓
					315 A	P5-315/EA/SVB-SW/HI10	280954	1	✓	✓
		3	2	1	20 A	T0-3-15683/EA/SVB-SW	015600	1	✓	✓
					32 A	T3-3-15683/EA/SVB-SW	042851	1	✓	✓
		3 + N	1	1	20 A	T0-3-15680/EA/SVB-SW	041248	1	✓	✓
					32 A	P1-25/EA/SVB-SW/N/HI11	050740	1	✓	✓
					32 A	T3-3-15680/EA/SVB-SW	231946	1	✓	✓
		3 + N	1	1	32 A	P1-32/EA/SVB-SW/N/HI11	060232	1	✓	✓
					40 A	P1-40/EA/SVB-SW/N/HI11	199901	1	X	✓
		3 + N	1	1	20 A	T0-3-8901/EA/SVB-SW	231933	1	✓	✓
					32 A	T3-3-15680/EA/SVB-SW	014375	1	✓	✓
					63 A	T5B-3-8901/EA/SVB-SW	207421	1	✓	✓
					100 A	T5-3-8901/EA/SVB-SW	207409	1	X	✓
		3 + N	1	1	63 A	P3-63/EA/SVB-SW/N/HI11	069724	1	✓	✓
					80 A	P3-80/EA/SVB-SW/N/HI11	EP-400931	1	✓	✓
					100 A	P3-100/EA/SVB-SW/N/HI11	079216	1	✓	✓
		6	1	1	20 A	T0-4-15682/EA/SVB-SW	022265	1	✓	✓
					32 A	T3-4-15682/EA/SVB-SW	057089	1	✓	✓
					63 A	T5B-4-15682/EA/SVB-SW	207426	1	✓	✓
					100 A	T5-4-15682/EA/SVB-SW	207414	1	X	✓












231946

Photo is representative

Flush mounting - Main switch-disconnectors with auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O N/C	Rated current	Part number	Article number	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908		3	1 0	20 A	T0-2-15679/EA/SVB	081588	✓	✓
		3	1 1	25 A	P1-25/EA/SVB/HI11	091080	✓	✓
				32 A	P1-32/EA/SVB/HI11	072567	✓	✓
				40 A	P1-40/EA/SVB/HI11	199895	X	✓
				63 A	P3-63/EA/SVB/HI11	019891	✓	✓
				80 A	P3-80/EA/SVB/HI11	EP-400926	✓	✓
				100 A	P3-100/EA/SVB/HI11	029383	✓	✓
		3	1 0	125 A	P5-125/EA/SVB/HI10	280899	✓	✓
				160 A	P5-160/EA/SVB/HI10	280923	✓	✓
				250 A	P5-250/EA/SVB/HI10	280937	✓	✓
				315 A	P5-315/EA/SVB/HI10	280951	✓	✓
		3	2 1	20 A	T0-3-15683/EA/SVB	015571	✓	✓
				32 A	T3-3-15683/EA/SVB	040478	✓	✓
		3 + N	1 1	20 A	T0-3-15680/EA/SVB	038875	✓	✓
				32 A	P1-25/EA/SVB/N/HI11	048367	✓	✓
				32 A	T3-3-15680/EA/SVB	012002	✓	✓
		3 + N	1 1	32 A	P1-32/EA/SVB/N/HI11	057859	✓	✓
				40 A	P1-40/EA/SVB/N/HI11	199897	X	✓
		3 + N	1 1	20 A	T0-3-8901/EA/SVB	231932	✓	✓
				32 A	T3-3-8901/EA/SVB	231945	✓	✓
				63 A	T5B-3-8901/EA/SVB	207420	✓	✓
				100 A	T5-3-8901/EA/SVB	207408	X	✓
		3 + N	1 1	63 A	P3-63/EA/SVB/N/HI11	067351	✓	✓
				80 A	P3-80/EA/SVB/N/HI11	EP-400928	✓	✓
				100 A	P3-100/EA/SVB/N/HI11	076843	✓	✓
		6	1 1	20 A	T0-4-15682/EA/SVB	019892	✓	✓
				32 A	T3-4-15682/EA/SVB	054716	✓	✓
				63 A	T5B-4-15682/EA/SVB	207425	✓	✓
				100 A	T5-4-15682/EA/SVB	207413	✓	✓















019891

Photo is representative

Flush mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without 0 (Off) position 60°								
 F 072		1	10 A	TM-1-8220/E	081996	1	✓	X
		2	10 A	TM-2-8221/E	084369	1	✓	X
		3	10 A	TM-3-8222/E	086742	1	✓	X
		4	10 A	TM-4-8223/E	089115	1	✓	X
		5	10 A	TM-5-8369/E	091488	1	✓	X
		6	10 A	TM-6-8370/E	093861	1	✓	X
With 0 (Off) position 60°								
 F 071		1	10 A	TM-1-8210/E	096234	1	✓	X
		2	10 A	TM-2-8211/E	098607	1	✓	X
		3	10 A	TM-3-8212/E	010807	1	✓	X
		4	10 A	TM-4-8213/E	013180	1	✓	X
With 0 (Off) position 90°								
 F 057		2	10 A	TM-2-8219/E	017926	1	✓	X
 F 071		3	10 A	TM-3-8299/E	020299	1	✓	X












017926

Photo is representative

Flush mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (OFF) position								
 FS 429		1	20 A	T0-1-15421/E	095806	1	✓	✓
 FS 684		1	20 A	T0-1-8210/E	012742	1	✓	✓
			32 A	T3-1-8210/E	054718	1	✓	✓
			63 A	T5B-1-8210/E	094261	1	✓	✓
 FS 429		2	20 A	T0-2-15422/E	019871	1	✓	✓
 FS 4011		2	20 A	T0-2-8211/E	022234	1	✓	✓
			32 A	T3-2-8211/E	061837	1	✓	✓
			63 A	T5B-2-8211/E	093094	1	✓	✓
 FS 429		3	20 A	T0-3-15423/E	034109	1	✓	✓
 FS 684		3	20 A	T0-3-8212/E	029353	1	✓	✓
			32 A	T3-3-8212/E	068956	1	✓	✓
			63 A	T5B-3-8212/E	092386	1	✓	✓
			100 A	T5-3-8212/E	096466	1	X	✓
 FS 684		3	160 A	T6-3-8212/E/HI12	214781	1	X	✓
			315 A	T8-3-8212/E/HI12	214782	1	X	✓
 FS 161629		4	32 A	T3-4-8902/E	215222	1	✓	✓
			63 A	T5B-4-8902/E	207430	1	✓	✓
			100 A	T5-4-8902/E	207418	1	✓	✓
 FS 684		4	20 A	T0-4-8213/E	031726	1	✓	✓
			32 A	T3-4-8213/E	076075	1	✓	✓
			63 A	T5B-4-8213/E	092112	1	✓	✓
			100 A	T5-4-8213/E	096014	1	✓	✓
 FS 953		4	20 A	T0-4-8294/E	010371	1	✓	✓
			32 A	T3-4-8294/E	002513	1	✓	✓
			63 A	T5B-4-8294/E	092084	1	✓	✓
			100 A	T5-4-8294/E	095986	1	X	✓



209353







019871

Photos are representative

Flush mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With Automatic (spring) return to 0 (OFF) position from both directions, without emergency off/emergency stop function								
 FS 4011		1	20 A	T0-1-8214/E	019863	1	✓	X
		32 A	T3-1-8214/E	009632	1	✓	X	
		2	20 A	T0-2-8215/E	022236	1	✓	X
		32 A	T3-2-8215/E	016751	1	✓	X	
		3	20 A	T0-3-8216/E	024609	1	✓	X
		32 A	T3-3-8216/E	023870	1	✓	X	
Mini Cam switch-disconnector with Automatic (spring) return from both directions 30°								
 F 025		1	10 A	TM-1-8214/E	032164	1	✓	X
		2	10 A	TM-2-8215/E	034537	1	✓	X



022236









032164

Photos are representative

Flush mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Two way switch-disconnector without 0 (OFF) position								
 FS 943		1	20 A	T0-1-8220/E	031728	1	✓	X
		2	20 A	T0-2-8221/E	038847	1	✓	X
			32 A	T3-2-8221/E	045227	1	✓	X
			63 A	T5B-2-8221/E	093047	1	✓	X
		3	20 A	T0-3-8222/E	048339	1	✓	X
			32 A	T3-3-8222/E	052346	1	✓	X
			63 A	T5B-3-8222/E	092378	1	✓	X
		4	20 A	T0-4-8223/E	050712	1	✓	X
			32 A	T3-4-8223/E	059465	1	✓	X
			63 A	T5B-4-8223/E	092108	1	✓	X
		5	20 A	T0-5-8369/E	060204	1	✓	X
			32 A	T3-5-8369/E	066584	1	✓	X
		6	20 A	T0-6-8370/E	062577	1	✓	X
			32 A	T3-6-8370/E	073703	1	✓	X
		8	20 A	T0-8-8372/E	064950	1	✓	X
			32 A	T3-8-8372/E	080822	1	✓	X






060204

Photo is representative

Flush mounting - Coding switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
BCD Code 0-9 30°							
 F 007		10 A	TM-2-8550/E	020300	1	✓	X
BCD Code 0-9 + complement 30°							
 F 007		10 A	TM-4-8552/E	025046	1	✓	X
BCD Code with complete rotation in both directions							
 FS 312		20 A	T0-4-15602/E	029368	1	✓	X



020300



025046















029368

Photos are representative

Flush mounting - Manual/auto switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
60° Switching angle								
		1	10 A	TM-1-15431/E	025045	1	✓	X
F 085		2	10 A	TM-2-15432/E	027418	1	✓	X
		3	10 A	TM-3-15433/E	029791	1	✓	X
With 0 (Off) position								
		1	20 A	T0-1-15431/E	019872	1	✓	X
FS 1401		2	20 A	T0-2-15432/E	034110	1	✓	X
		3	20 A	T0-3-15433/E	048348	1	✓	X
With Automatic (spring) return from HAND								
		1	20 A	T0-1-15434/E	062586	1	✓	X
FS 1414000		2	20 A	T0-2-15435/E	003191	1	✓	X
With Automatic (spring) return from START								
		2	20 A	T0-2-15907/E	066931	1	✓	X
FS 1413890								
Without 0 (Off) position								
		1	20 A	T0-1-15451/E	076824	1	✓	X
FS 19334		2	20 A	T0-2-15452/E	091062	1	✓	X
		3	20 A	T0-3-15453/E	015127	1	✓	X






066931

Photo is representative

Flush mounting - Multi speed switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 speed, non reversing, for 2 separate windings								
		6	20 A	T0-3-8451/E	038849	1	✓	X
			32 A	T3-3-8451/E	028641	1	✓	X
			63 A	T5B-3-8451/E	092288	1	✓	X
2 speed, 2 directions, for one tapped winding								
		3	20 A	T0-4-8440/E	041222	1	✓	X
			32 A	T3-4-8440/E	035760	1	✓	X
			63 A	T5B-4-8440/E	092032	1	✓	X
		3	20 A	T0-4-8441/E	043595	1	✓	X
			32 A	T3-4-8441/E	042879	1	✓	X
			63 A	T5B-4-8441/E	092028	1	✓	X









038849

Photo is representative

Flush mounting - Reversing switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Reversing switches 60°								
		3	10 A	TM-3-8401/E	015554	1	✓	X
F 071								
Without Automatic (spring) return to 0 (Off) position,								
		2	20 A	T0-2-8400/E	053079	1	✓	X
			32 A	T3-2-8400/E	073695	1	✓	X
			63 A	T5B-2-8400/E	092918	1	✓	X
		3	20 A	T0-3-8401/E	091047	1	✓	X
			32 A	T3-3-8401/E	030992	1	✓	X
			63 A	T5B-3-8401/E	092296	1	✓	X
		4	20 A	T0-4-74949GB/E	400000	1	✓	X
			32 A	T3-4-74949GB/E	400001	1	✓	X
			63 A	T5B-4-74949GB/E	400002	1	✓	X
With Automatic (spring) return from both directions to 0 (Off position)								
		3	20 A	T0-3-8228/E	015112	1	✓	X
			32 A	T3-3-8228/E	002538	1	✓	X
			63 A	T5B-3-8228/E	092374	1	✓	X











015554

Photo is representative

Flush mounting - Reversing switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 speed, 2 directions, for one tapped winding								
			20 A	T0-6-15866/E	055460	1	✓	X
FS 629			32 A	T3-6-15866/E	054744	1	✓	X
			63 A	T5B-7-15866/E	214788	1	✓	X
FS 441								
Star delta, two-way operating direction								
		3	20 A	T0-5-15876/E	000893	1	✓	X
FS 638			32 A	T3-5-15876/E	016776	1	✓	X
		3	63 A	T5B-5-15876/E	214785	1	✓	X
FS 4017								











214785

Photo is representative

Flush mounting - Selector switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Voltmeter								
		3 x phase-N with 0 position	20 A	T0-2-15921/E	067337	1	✓	X
FS 1410757								
		3 x phase-phase 3 x phase-N with 0 position	20 A	T0-3-8007/E	095813	1	✓	X
FS 1410759								
		3 x phase-phase 3 x phase-N without 0 position with complete rotation in both directions	20 A	T0-3-15924/E	019878	1	✓	X
FS 164721								
		3 x phase-phase with 0 position	20 A	T0-2-15920/E	038861	1	✓	X
FS 1410755								
		3 x phase-phase without 0 position	20 A	T0-2-15922/E	053099	1	✓	X
FS 164854								
Ammeter with complete rotation in both directions, measurement via current transformer, with 0 (OFF) position								
		X	20 A	T0-3-8048/E	034116	1	✓	X
FS 9440								



095813

Photo is representative

Flush mounting - Star-delta switch-disconnectors

Without emergency switch off/emergency stop function











Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 635		3	20 A	T0-4-8410/E	024604	1	✓	X
			32 A	T3-4-8410/E	009657	1	✓	X
			63 A	T5B-4-8410/E	092052	1	✓	X



Photo is representative

Flush mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	N/O Number of poles	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
3 steps 60°								
		1	10 A	TM-2-8230/E	039283	1	✓	X
F 076		3	10 A	TM-5-8270/E	041656	1	✓	X
4 steps 60°								
		1	10 A	TM-2-8231/E	044029	1	✓	X
F 077		3	10 A	TM-6-8271/E	046402	1	✓	X
5 steps 60°								
		1	10 A	TM-3-8232/E	039298	1	✓	X
F 078		2	10 A	TM-5-8252/E	041671	1	✓	X
6 steps 60°, no full rotation								
		1	10 A	TM-3-8233/E	053521	1	✓	X
		2	10 A	TM-6-8253/E	055894	1	✓	X
10 steps 30°								
		1	10 A	TM-5-8237/E	069150	1	✓	X












041671

Photo is representative

Flush mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Number of poles N/O	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 steps 60°								
 F 075		10 A	1	TM-1-8240/E	058267	1	✓	X
		10 A	2	TM-2-8260/E	060640	1	✓	X
3 steps 45°								
 F 109		10 A	1	TM-2-8241/E	065386	1	✓	X
		10 A	2	TM-3-8261/E	067759	1	✓	X
		10 A	3	TM-5-8281/E	070132	1	✓	X
3 steps 60°								
 F 075		10 A	3	TM-3-8280/E	063013	1	✓	X
4 steps 30°								
 F 002		10 A	1	TM-3-8242/E	072505	1	✓	X
		10 A	2	TM-4-8262/E	074878	1	✓	X
		10 A	3	TM-6-8282/E	077251	1	✓	X
5 steps 30°								
 F 003		10 A	1	TM-3-8243/E	079624	1	✓	X
6 steps 30°								
 F 004		10 A	1	TM-3-8244/E	081997	1	✓	X
9 steps 30°								
 F 007		10 A	1	TM-5-8247/E	009741	1	✓	X



072505

Photo is representative

Flush mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With O (Off) position								
FS 418		1	20 A	T0-1-8240/E	034105	1	✓	X
FS 420		1	20 A	T0-2-8241/E	050716	1	✓	X
FS 422		1	20 A	T0-2-8242/E	067327	1	✓	X
FS 424		1	20 A	T0-3-8243/E	081565	1	✓	X
FS 426		1	20 A	T0-3-8244/E	095803	1	✓	X
FS 418		3	20 A	T0-3-8280/E	034106	1	✓	X
FS 420		3	20 A	T0-5-8281/E	048344	1	✓	X
FS 422		3	20 A	T0-6-8282/E	062582	1	✓	X











062582

Photo is representative

Flush mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without O (Off) position								
 FS 943		1	20 A	T0-1-8220/E	031728	1	✓	X
 FS 404		1	20 A	T0-2-8230/E	088685	1	✓	X
 FS 606		1	20 A	T0-2-8231/E	012750	1	✓	X
 FS 408		1	20 A	T0-3-8232/E	026988	1	✓	X
 FS 410		1	20 A	T0-3-8233/E	041226	1	✓	X
 FS 406		2	20 A	T0-4-8251/E	013971	1	✓	X
 FS 943		3	20 A	T0-3-8222/E	048339	1	✓	X
 FS 404		3	20 A	T0-5-8270/E	091059	1	✓	X
 FS 406		3	20 A	T0-6-8271/E	015124	1	✓	X




091059

Photo is representative

Flush mounting - Step switch-disconnectors for heating

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Number of poles N/O	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With O (OFF) position								
 FS 614		20 A	1	T0-1-91/E	072082	1	✓	X



072082

Photo is representative

Flush mounting - Universal control switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Maintained switches with 3 positions 1 Contact closed in each position - Additionally 1 contact closed in position 0 and 1 - Additionally 1 contact closed in position 0 and 2 - Additionally 1 contact closed in position 0 and 3							
		20 A	T0-3-15391/E	029365	1	✓	X
FS 429							
Automatic (spring) return from positions 1 and 2							
		20 A	T0-3-15394/E	072079	1	✓	X
FS 458							



072079

Photo is representative

Flush mounting dedicated accessories

Neutral terminal

Early make on switching, late-break off switching.

The N contact always behaves as an early make contact when switching on and as a late break when switching off. N-P1(P3)... switching capacity same as for contacts P1(P3)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for
Neutral terminal - for left or right side mounting	N-P1E	000651	5	✓	P1
Neutral terminal	N-P3E	062432	5	✓	P3



062432

Neutral terminal

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for
Front mounting, left	N-P5-125/160E	280969	1	✓	P5-125 (160)/E(EA)
	N-P5-250/315E	280971	1	✓	P5-250/315/E(EA)



280969

Ground terminal

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for
Front mounting, left	PE-P5-125/160E	280973	1	✓	P5-125 (160)/E(EA)
	PE-P5-250/315E	280975	1	✓	P5-250/315/E(EA)



280973

Auxiliary contacts - 1 normally open (N/O), 1 normally close (N/C)

- Late break on switching, early-make off switching. The N/O is always connected as a load-shedding contact

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For left or right side mounting	HI11-P1/P3UE	EP-400893	5	✓	P1	Flush mounting /E or /EA
					P3	Flush mounting /E or /EA

Product standards	UL 60947-4-1, CSA - C22-2 No 14-05 IEC/EN 60947-3, CE Marking
UL File No	E36332
UL CCN	NLRV
CSA File No	12528
CSA Class No	3211-05
NA Certification	UL Listed, CSA Certified



Auxiliary contacts - 2 normally open (N/O), 1 normally close (N/C)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For left or right side mounting	HI21-P5-125/160E	280963	1		P5-125 and 160	Flush mounting /EA or /E
	HI21-P5-250/315E	280965	1		P5-250 and 315	Flush mounting /EA or /E



Photos are representative

Flush mounting dedicated accessories

Flush mounting to centre mounting convertor

- For single hole fitting 22.3 mm
- To convert a Flush mounting switch into a Centre mounting switch

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
For cam switches with existing front plate - quick installation with snap fitting system	EZ-T0	081622	1	✓	T0, T3	Flush mounting /E
Mounting diameter 22.3 mm, one man mounting with screw fixing	EZ-P1	091455	1	✓	T0, T3, P1	Flush mounting /E



081622



091455

* UL/CSA certification not required

Shrouds

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
For flush mounting switches with up to 4 contact units Cable entries Quantity: 2 x Ø 20 mm + 2 x Ø 15 mm Cross section: 5 x 6 mm ² , 5 x 2.5 mm ²	H3-T0	093828	1	✓	T0, T3	Flush mounting /E



093828

* UL/CSA certification not required

IP65 Insulated enclosures

Description	Number of contact units	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
IP65 insulated enclosure - With metric knockouts	1-2	CI-K4-T5B-2*	207439	1	✓	T5B	Flush mounting /E

* For converting T5-../Z into T5-../I5 and T5B-../E into T5B-../I4, order AW-T5-... extension terminal additionally. 1 contact unit = 2 contacts

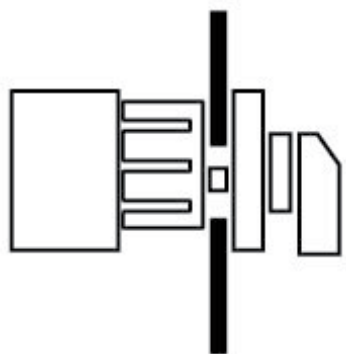
Product standards	UL 60947-4-1 CSA - C22-2 No 14-05, CSA - C22-2 No 94 IEC/EN 60947-3 CE Marking
UL File No	E54120
UL CCN	MITW2
CSA File No	12528
CSA Class No	3211-07
NA Certification	UL Listed, CSA Certified
Degree of protection	IEC: IP65 UL/CSA Type 1, 3R, 4X, 12, 13 - indoor and outdoor use



207439

Photos are representative

Centre mounting switch-disconnectors



Description

Centre mounting switch-disconnectors can be easily installed, using 22.5 mm single-hole mounting, onto doors, panels, lids, enclosures in machinery, switchboard and switchgear.

Standards/Approvals

See details page 178

Technical data

- Voltage: 690 V a.c.
- Current: 10 A to 40 A
- Mounting method: 22.5 mm single-hole mounting

Features

- Available with or without emergency switching off/emergency stop function
- Available with and without auxiliary contacts
- Available with red rotary handle and yellow locking collar and black rotary handle and locking collar
- 1-pole to 8-pole options



TM Center mounting



T0 Center mounting









Photos are representative

Centre mounting - Range overview

Rated current	10 A	20 A	25 A	32 A		40 A
On-Off switch-disconnectors	TM	T0	P1	P1	T3	P1
Without auxiliary contacts	✓	✓	✓	✓	✓	✓
With auxiliary contacts		✓			✓	
Changeover switch-disconnectors	TM	T0			T3	
Without auxiliary contacts	✓	✓			✓	
Coding switch-disconnectors	TM					
Without auxiliary contacts	✓					
Control switch-disconnectors		T0				
Without auxiliary contacts		✓				
Heater switch-disconnectors		T0				
Without auxiliary contacts		✓				
Group switch-disconnectors	TM					
Without auxiliary contacts	✓					
Manual/auto switch-disconnectors	TM	T0				
Without auxiliary contacts	✓	✓				
Multi speed switch-disconnectors		T0			T3	
Without auxiliary contacts		✓			✓	
Reversing switch-disconnectors		T0			T3	
Without auxiliary contacts		✓			✓	
Reversing star delta switch-disconnectors		T0			T3	
Without auxiliary contacts		✓			✓	
Selector switch-disconnectors		T0				
Without auxiliary contacts		✓				
Step switch-disconnectors	TM	T0				
Without auxiliary contacts	✓	✓				

Centre mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 F 056		1	10 A	TM-1-8290/EZ	000693	1	✓	X
		2	10 A	TM-1-8291/EZ	015073	1	✓	X
		3	10 A	TM-2-8292/EZ	015096	1	✓	X
		3+N	10 A	TM-2-8293/EZ	045486	1	✓	X
 FS 415		1	20 A	T0-1-15401/EZ	041227	1	✓	X
 FS 908		1	20 A	T0-1-8200/EZ	069725	1	✓	X
			32 A	T3-1-8200/EZ	066581	1	✓	X
 FS 415		2	20 A	T0-1-15402/EZ	055465	1	✓	X
			32 A	T3-1-102/EZ	091082	1	✓	X
 FS 908		2	32 A	T3-1-102/EZ	078446	1	✓	X
			32 A	T0-2-15403/EZ	069703	1	✓	X
 FS 415		3	20 A	T0-2-15403/EZ	069703	1	✓	X
			20 A	T0-2-1/EZ	027012	1	✓	X
 FS 908		3	25 A	P1-25/EZ	041250	1	✓	X
			32 A	P1-32/EZ	048369	1	✓	X
			40 A	P1-40/EZ	199903	1	X	X
			40 A	P1-40/EZ/N	199904	1	X	X
		3 + N	20 A	T0-2-8900/EZ	207402	1	✓	X
			25 A	P1-25/EZ/N	079218	1	✓	X
			32 A	P1-32/EZ/N	095829	1	✓	X
			40 A	P1-40/EZ/N	199904	1	X	X
 FS 415		4	20 A	T0-2-15404/EZ	083941	1	✓	X
 FS 908		6	20 A	T0-3-8342/EZ	045997	1	✓	X
			20 A	T0-4-8344/EZ	014002	1	✓	X
 FS 908		8	32 A	T3-4-8344/EZ	020595	1	✓	X
			32 A	T3-4-8344/EZ	020595	1	✓	X











015073

Photo is representative

Centre mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
ON Switch 30°								
 F 023		1	10 A	TM-1-8175/EZ	015690	1	✓	X
ON OFF Switch 90°/30° - With Automatic (spring) return to 1								
 F 119		1	10 A	TM-1-8178/EZ	016786	1	✓	X
ON OFF Switch 90°/30° - With Automatic (spring) return in START position								
 FS 147767		1	20 A	T0-1-15511/EZ	022248	1	✓	X
		2	20 A	T0-2-15512/EZ	036486	1	✓	X
		3	20 A	T0-3-15513/EZ	050724	1	✓	X
 FS 140660		2	20 A	T0-2-8177/EZ	017503	1	✓	X
Automatic (spring) return from position 1								
 FS 4721		1	20 A	T0-1-15321/EZ	088690	1	✓	X
		2	20 A	T0-1-15322/EZ	012755	1	✓	X
		3	20 A	T0-2-15323/EZ	026993	1	✓	X
Automatic (spring) return in position 1 and 0								
 FS 456		1	20 A	T0-1-15366/EZ	083945	1	✓	X



016786



036486



012755

Photos are representative

Centre mounting - On-Off switch-disconnectors with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
FS 908		3	1	0	20 A	T0-2-15679/EZ	031760	1	✓	X
		3	2	1	20 A	T0-2-15683/EZ	016658	1	✓	X
		3+N	1	1	20 A	T0-3-8901/EZ	231939	1	✓	X
					32 A	T3-3-8901/EZ	231950	1	✓	X
		6	1	1	20 A	T0-4-15682/EZ	012778	1	✓	X
















231950

Photo is representative

Centre mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (OFF) position								
 FS 429		1	20 A	T0-1-15421/EZ	098179	1	✓	X
 FS 684		1	20 A	T0-1-8210/EZ	048337	1	✓	X
			32 A	T3-1-8210/EZ	003072	1	✓	X
 FS 4011		1	20 A	T0-1-8214/EZ	076815	1	✓	X
 FS 429		2	20 A	T0-2-15422/EZ	022244	1	✓	X
 FS 684		2	20 A	T0-2-8211/EZ	053083	1	✓	X
			32 A	T3-2-8211/EZ	003075	1	✓	X
 FS 429		3	20 A	T0-3-15423/EZ	036482	1	✓	X
 FS 684		3	20 A	T0-3-8212/EZ	057829	1	✓	X
			32 A	T3-3-8212/EZ	003080	1	✓	X
 FS 161629		4	32 A	T3-4-8902/EZ	215223	1	✓	X
 FS 684		4	20 A	T0-4-8213/EZ	062575	1	✓	X
			32 A	T3-4-8213/EZ	003079	1	✓	X
 FS 953		4	20 A	T0-4-8294/EZ	072069	1	✓	X
With Automatic (spring) return to the 0 (OFF) position from both directions								
 FS 4011		1	20 A	T0-1-8214/EZ	076815	1	X	X
		2	20 A	T0-2-8215/EZ	081561	1	✓	X
		3	20 A	T0-3-8216/EZ	086307	1	✓	X



215223

Photo is representative

Centre mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without 0 (OFF) position 60°								
F 072		1	10 A	TM-1-8220/EZ	000692	1	✓	X
		2	10 A	TM-2-8221/EZ	015197	1	✓	X
		3	10 A	TM-3-8222/EZ	045493	1	✓	X
		4	10 A	TM-4-8223/EZ	046119	1	✓	X
		5	10 A	TM-5-8369/EZ	046126	1	✓	X
With 0 (OFF) position 60°								
F 071		1	10 A	TM-1-8210/EZ	015137	1	✓	X
		2	10 A	TM-2-8211/EZ	015166	1	✓	X
		3	10 A	TM-3-8212/EZ	045491	1	✓	X
		4	10 A	TM-4-8213/EZ	045847	1	✓	X









045491

Photo is representative

Centre mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Two way switch, without emergency switching off/emergency stop function								
 FS 943		1	20 A	T0-1-8220/EZ	095799	1	✓	X
		2	20 A	T0-2-8221/EZ	010372	1	✓	X
			32 A	T3-2-8221/EZ	001025	1	✓	X
		3	20 A	T0-3-8222/EZ	015118	1	✓	X
			32 A	T3-3-8222/EZ	001069	1	✓	
		4	20 A	T0-4-8223/EZ	019864	1	✓	X
		5	20 A	T0-5-8369/EZ	024610	1	✓	X
		6	20 A	T0-6-8370/EZ	029356	1	✓	X
			32 A	T3-6-8370/EZ	004506	1	✓	X
		8	20 A	T0-8-8372/EZ	034102	1	✓	





024610

Photo is representative

Centre mounting - Coding switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
BCD Code 0-9 30°							
 F 007		10 A	TM-2-8550/EZ	000699	1	✓	X
BCD Code 0-9 30° with complete rotation in both directions							
 FS 312		20 A	T0-4-15602/EZ	031741	1	✓	X



000699





031741

Photos are representative

Centre mounting - Control switch-disconnectors

Without emergency switch off/emergency stop function



Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Maintained switches with 3 positions 1 Contact closed in each position - Additionally 1 contact closed in position 0 and 1 - Additionally 1 contact closed in position 0 and 2 - Additionally 1 contact closed in position 0 and 3							
		20 A	T0-3-15391/EZ	031738	1	✓	X
FS 429							
Automatic (spring) return from positions 1 and 2							
		20 A	T0-3-15394/EZ	074452	1	✓	X
FS 458							



031738

Centre mounting - Group switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Pole N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 groups 60°								
 F 075		3+N	10 A	TM-1-8310/EZ	045479	1	✓	X
3 groups 30°								
 F 001		3+N	10 A	TM-1-8311/EZ	045487	1	✓	X



045487

Photo is representative

Centre mounting - Manual/auto switch-disconnectors

Front plate		Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle												
	AUTO HAND	<table><tr><td></td><td></td><td>X</td></tr><tr><td>X</td><td></td><td></td></tr></table>			X	X			1	10 A	TM-1-8220F88/EZ	016925	1	✓	X						
		X																			
X																					
F 288																					
	AUTO HAND	<table><tr><td>X</td><td></td><td></td></tr><tr><td></td><td>X</td><td></td></tr></table>	X				X		1	10 A	TM-1-15431/EZ	000691	1	✓	X						
X																					
	X																				
F 085																					
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X			X		X	2	10 A	TM-2-15432/EZ	016878	1	✓	X				
X		X																			
	X		X																		
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X		X			X		X		X	3	10 A	TM-3-15433/EZ	045490	1	✓	X
X		X		X																	
	X		X		X																
With 0 (Off) position																					
	AUTO HAND	<table><tr><td>X</td><td></td><td></td></tr><tr><td></td><td>X</td><td></td></tr></table>	X				X		1	20 A	T0-1-15431/EZ	022245	1	✓	X						
X																					
	X																				
FS 1401																					
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X			X		X	2	20 A	T0-2-15432/EZ	036483	1	✓	X				
X		X																			
	X		X																		
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X		X			X		X		X	3	20 A	T0-3-15433/EZ	050721	1	✓	X
X		X		X																	
	X		X		X																
With Automatic (spring) return from HAND																					
	AUTO HAND	<table><tr><td>X</td><td></td><td></td></tr><tr><td></td><td>X</td><td></td></tr></table>	X				X		1	20 A	T0-1-15434/EZ	018053	1	✓	X						
X																					
	X																				
FS 1414000																					
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X			X		X	2	20 A	T0-2-15435/EZ	003192	1	✓	X				
X		X																			
	X		X																		
With Automatic (spring) return from START																					
	START HAND AUTO	<table><tr><td></td><td></td><td>X</td><td>X</td></tr><tr><td>X</td><td></td><td></td><td></td></tr><tr><td></td><td>X</td><td></td><td></td></tr></table>			X	X	X					X			2	20 A	T0-2-15907/EZ	069304	1	✓	X
		X	X																		
X																					
	X																				
FS 1413890																					
Without 0 (Off) position																					
	AUTO HAND	<table><tr><td></td><td></td><td>X</td></tr><tr><td>X</td><td></td><td></td></tr></table>			X	X			1	20 A	T0-1-15451/EZ	079197	1	✓	X						
		X																			
X																					
FS 19334																					
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X			X		X	2	20 A	T0-2-15452/EZ	093435	1	✓	X				
X		X																			
	X		X																		
	AUTO HAND	<table><tr><td>X</td><td></td><td>X</td><td></td><td>X</td><td></td></tr><tr><td></td><td>X</td><td></td><td>X</td><td></td><td>X</td></tr></table>	X		X		X			X		X		X	3	20 A	T0-3-15453/EZ	017500	1	✓	X
X		X		X																	
	X		X		X																



045490



HAND AUTO

079197

Photos are representative

Centre mounting - Multi speed switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 speed, non reversing, for 2 separate windings								
		6	20 A	T0-3-8451/EZ	083936	1	✓	X
FS 644			32 A	T3-3-8451/EZ	000956	1	✓	X
2 speed, 2 directions, for one tapped winding								
		3	20 A	T0-4-8440/EZ	088682	1	✓	X
FS 644			32 A	T3-4-8440/EZ	000959	1	✓	X
		3	20 A	T0-4-8441/EZ	093428	1	✓	X
FS 684								













000956

Photo is representative

Centre mounting - Reversing switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O 	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Reversing switch, without Automatic (spring) return to 0 (Off) position								
 FS 684	 	2	20 A	T0-2-8400/EZ	055452	1	✓	X
			32 A	T3-2-8400/EZ	000687	1	✓	X
	 	3	20 A	T0-3-8401/EZ	093420	1	✓	X
			32 A	T3-3-8401/EZ	000694	1	✓	X
Reversing switch, with Automatic (spring) return from both directions to 0 (Off) position								
 FS 4011	 	3	20 A	T0-3-8228/EZ	048334	1	✓	X
			32 A	T3-3-8228/EZ	000695	1	✓	X
Reversing star delta switch, two-way operating direction								
 FS 638	 	3	20 A	T0-5-15876/EZ	000900	1	✓	X
			32 A	T3-5-15876/EZ	000797	1	✓	X
Reversing multi speed switch 2 speed, 2 directions, for one tapped winding								
 FS 629	 		20 A	T0-6-15866/EZ	012747	1	✓	X



000694



012747



Photos are representative






Centre mounting - Reversing star delta switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle																																																																																																																																																																																																																																																																																																
	<table border="1"><tr><td>0</td><td>Y</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>12</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>13</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>14</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>15</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>16</td><td></td><td>X</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	0	Y								1		X							2		X							3		X							4									5		X							6		X							7		X							8									9									10		X							11		X							12		X							13		X							14		X							15		X							16		X							3	20 A	T0-4-8410/EZ	053080	1	✓	X																																																																																																																																							
0	Y																																																																																																																																																																																																																																																																																																							
1		X																																																																																																																																																																																																																																																																																																						
2		X																																																																																																																																																																																																																																																																																																						
3		X																																																																																																																																																																																																																																																																																																						
4																																																																																																																																																																																																																																																																																																								
5		X																																																																																																																																																																																																																																																																																																						
6		X																																																																																																																																																																																																																																																																																																						
7		X																																																																																																																																																																																																																																																																																																						
8																																																																																																																																																																																																																																																																																																								
9																																																																																																																																																																																																																																																																																																								
10		X																																																																																																																																																																																																																																																																																																						
11		X																																																																																																																																																																																																																																																																																																						
12		X																																																																																																																																																																																																																																																																																																						
13		X																																																																																																																																																																																																																																																																																																						
14		X																																																																																																																																																																																																																																																																																																						
15		X																																																																																																																																																																																																																																																																																																						
16		X																																																																																																																																																																																																																																																																																																						
FS 635	<table border="1"><tr><td>1</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>12</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>13</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>14</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>15</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>16</td><td>0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	0																	2	0																	3	0																	4	0																	5	0																	6	0																	7	0																	8	0																	9	0																	10	0																	11	0																	12	0																	13	0																	14	0																	15	0																	16	0																		32 A	T3-4-8410/EZ	000721	1	✓	X
1	0																																																																																																																																																																																																																																																																																																							
2	0																																																																																																																																																																																																																																																																																																							
3	0																																																																																																																																																																																																																																																																																																							
4	0																																																																																																																																																																																																																																																																																																							
5	0																																																																																																																																																																																																																																																																																																							
6	0																																																																																																																																																																																																																																																																																																							
7	0																																																																																																																																																																																																																																																																																																							
8	0																																																																																																																																																																																																																																																																																																							
9	0																																																																																																																																																																																																																																																																																																							
10	0																																																																																																																																																																																																																																																																																																							
11	0																																																																																																																																																																																																																																																																																																							
12	0																																																																																																																																																																																																																																																																																																							
13	0																																																																																																																																																																																																																																																																																																							
14	0																																																																																																																																																																																																																																																																																																							
15	0																																																																																																																																																																																																																																																																																																							
16	0																																																																																																																																																																																																																																																																																																							

Centre mounting - Selector switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Voltmeter								
		3 x phase-N with 0 position	20 A	T0-2-15921/EZ	069710	1	✓	X
FS 1410757								
		3 x phase-phase 3 x phase-N with 0 position	20 A	T0-3-8007/EZ	098186	1	✓	X
FS 1410759								
		3 x phase-phase 3 x phase-N with 0 position with complete rotation in both directions	20 A	T0-3-15924/EZ	022251	1	✓	X
FS 164721								
		3 x phase-phase with 0 position	20 A	T0-2-15920/EZ	041234	1	✓	X
FS 1410755								
		3 x phase-phase without 0 position	20 A	T0-2-15922/EZ	055472	1	✓	X
FS 164854								












098186

Photo is representative

Centre mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Number of poles N/O	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 steps 60°								
 F 075		10 A	1	TM-1-8240/EZ	015226	1	✓	X
		10 A	2	TM-2-8260/EZ	045483	1	✓	X
		10 A	3	TM-3-8280/EZ	045496	1	✓	X
3 steps 45°								
 F 109		10 A	1	TM-2-8241/EZ	015256	1	✓	X
		10 A	2	TM-3-8261/EZ	000698	1	✓	X
		10 A	3	TM-5-8281/EZ	046125	1	✓	X
4 steps 30°								
 F 002		10 A	1	TM-3-8242/EZ	015506	1	✓	X
		10 A	2	TM-4-8262/EZ	046120	1	✓	X
5 steps 30°								
 F 003		10 A	1	TM-3-8243/EZ	015537	1	✓	X
6 steps 30°								
 F 004		10 A	1	TM-3-8244/EZ	045495	1	✓	X
9 steps 30°								
 F 007		10 A	1	TM-5-8247/EZ	015565	1	✓	X



015537

Photo is representative

Centre mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With O (Off) position								
 FS 418	 10 20 30 40	1	20 A	T0-1-8240/EZ	043597	1	✓	X
 FS 420	 10 20 30 40 50 60	1	20 A	T0-2-8241/EZ	053089	1	✓	X
 FS 422	 10 20 30 40 50 60 70 80	1	20 A	T0-2-8242/EZ	069700	1	✓	X
 FS 424	 10 20 30 40 50 60 70 80 90 100	1	20 A	T0-3-8243/EZ	083938	1	✓	X
 FS 426	 10 20 30 40 50 60 70 80 90 100 110 120	1	20 A	T0-3-8244/EZ	098176	1	✓	X
 FS 418	 10 20 30 40 50 60 70 80 90 100 110 120	3	20 A	T0-3-8280/EZ	036479	1	✓	X
 FS 420	 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170 180	3	20 A	T0-5-8281/EZ	050717	1	✓	X
 FS 422	 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170 180 190 200 210 220 230 240	3	20 A	T0-6-8282/EZ	064955	1	✓	X



043597

Photo is representative

Centre mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without O (Off) position								
		1	20 A	T0-1-8220/EZ	095799	1	✓	X
FS 943								
		1	20 A	T0-2-8230/EZ	091058	1	✓	X
FS 404								
		1	20 A	T0-2-8231/EZ	015123	1	✓	X
FS 606								
		1	20 A	T0-3-8232/EZ	029361	1	✓	X
FS 408								
		1	20 A	T0-3-8233/EZ	043599	1	✓	X
FS 410								
		2	20 A	T0-3-8251/EZ	013972	1	✓	X
FS 406								
		3	20 A	T0-3-8222/EZ	015118	1	✓	X
FS 943								
		3	20 A	T0-5-8270/EZ	093432	1	✓	X
FS 404								
		3	20 A	T0-6-8271/EZ	017497	1	✓	X
FS 406								












017497

Photo is representative

Centre mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
3 steps 60°								
 F 076		1	10 A	TM-2-8230/EZ	000701	1	✓	X
		3	10 A	TM-5-8270/EZ	046124	1	✓	X
4 steps, 60°								
 F 077		1	10 A	TM-2-8231/EZ	000700	1	✓	X
		3	10 A	TM-6-8271/EZ	046128	1	✓	X
5 steps 60°								
 F 078		1	10 A	TM-3-8232/EZ	015592	1	✓	X
		2	10 A	TM-5-8252/EZ	046123	1	✓	X
6 steps 60°, no full rotation								
 F 079		1	10 A	TM-3-8233/EZ	015630	1	✓	X
		2	10 A	TM-6-8253/E	046127	1	✓	X
10 steps 30°								
 F 011		1	10 A	TM-5-8237/EZ	015661	1	✓	X



015630

Photo is representative

Centre mounting - Step switch-disconnectors for heating

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Number of poles N/O	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (OFF) position								
 FS 614	 1 0 2 0 3 0 4 0	20 A	1	T0-1-91/EZ	074455	1	✓	X



074455

Centre mounting dedicated accessories

Key operated lock mechanism

For ordering with base switch unit		For ordering as a standalone unit		Key withdrawable in position
Part number	Article number	Part number	Article number	
Micromec lock 90° switch angle				
+EZ/S-A	045458	EZ/S-A-TM	046991	0°
+EZ/S-B	045459	EZ/S-B-TM	046992	270°
+EZ/S-E	045462	EZ/S-E-TM	046995	0° + 90°
+EZ/S-F	045463	EZ/S-F-TM	046996	270° & 0°
+EZ/S-G	045464	EZ/S-G-TM	046997	270° + 0° + 90° + 180°
+EZ/S-R	045471	EZ/S-R-TM	047004	270° + 0° + 90°
Ronis lock 60° switch angle				
+EZ/S-D	045461	X	X	270° + 90°
+EZ/S-H	045465	X	X	300° + 0° + 60° + 120° +180° + 240°
+EZ/S-J	045466	X	X	270° + 330° + 30° + 90° +150° + 210°
+EZ/S-N	045468	X	X	270° + 330° + 90° + 150°

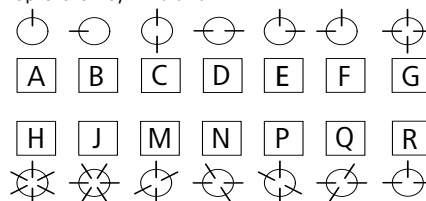


Key operation lock mechanism, including: 2 keys.


The key can only be removed in certain positions; see diagram. The MICROMECC lock for 90° can be used for other switching angles as well if the key withdrawability characteristics match the type of switch.

Example: +EZ/S-B can be used with a step switch with a switching angle of 30° if the key is only to be withdrawable in the 0 position at 270°.

Options for key withdrawal




Position marking as in example



Photos are representative

Rear mounting switch-disconnectors



Description

Rear mounting switch-disconnectors can be easily installed, either using screw fixings or directly onto a DIN-Rail, on the rear of a panel, control board, enclosures in machinery, switchboard and switchgear.

Standards/Approvals

See details page 178

Technical data

- Voltage: 690 V a.c.
- Current: 20 A to 315 A
- Mounting method: Screw fixings or directly onto a DIN-Rail

Features

- Available with or without emergency switching off/emergency stop function
- Available with and without auxiliary contacts
- Available with red rotary handle and yellow locking collar and black rotary handle and locking collar
- 1-pole to 8-pole options
-



T3 Rear mounting



P1 Rear mounting








Photos are representative

Rear mounting - Range overview

Rated current	20 A	25 A	32 A	40 A	63 A	100 A	125 A	160 A	250 A	275 A	315 A
On-Off switch-disconnectors	T0	P1	P1 T3	P1	P3 T5B	P3 T5	P5	P5 T6	P5		P5
Without auxiliary contacts	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
With auxiliary contacts	✓			✓		✓					
Main switch-disconnectors	T0	P1	P1 T3	P1	P3 T5B	P3 T5	P5	P5 T6	P5	T8	P5
Without auxiliary contacts	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
With auxiliary contacts	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Main switch-disconnectors with 400 mm metal shaft extension		P1	P1 T3	P1	P3	P3					
Without auxiliary contacts		✓	✓	✓	✓	✓					
With auxiliary contacts		✓	✓	✓	✓	✓					
Changeover switch-disconnectors	T0		T3		T5B	T5					
Without auxiliary contacts	✓		✓		✓	✓					
Manual/auto switch-disconnectors	T0										
Without auxiliary contacts	✓										
Multi speed switch-disconnectors	T0		T3		T5B						
Without auxiliary contacts	✓		✓		✓						
Reversing speed switch-disconnectors	T0		T3		T5B						
Without auxiliary contacts	✓		✓		✓						
Selector switch-disconnectors	T0										
Without auxiliary contacts	✓										
Star-delta switch-disconnectors	T0		T3		T5B						
Without auxiliary contacts	✓		✓		✓						
Step switch-disconnectors	T0										
Without auxiliary contacts	✓										
Universal switch-disconnectors	T0										
Without auxiliary contacts	✓										

Rear mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908		1	20 A	T0-1-8200/Z	076844	1	✓	X
			20 A	T0-1-15401/Z	048346	1	✓	X
			32 A	T3-1-8200/Z	071327	1	✓	X
			63 A	T5B-1-8200/Z	094270	1	✓	X
		2	20 A	T0-1-102/Z	095828	1	✓	X
			20 A	T0-1-15402/Z	062584	1	✓	X
			32 A	T3-1-102/Z	083192	1	✓	X
			63 A	T5B-1-102/Z	094460	1	✓	X
		3	20 A	T0-2-1/Z	036504	1	✓	X
			20 A	T0-2-15403/Z	076822	1	✓	X
			25 A	P1-25/Z	057708	1	✓	X
			32 A	P1-32/Z	098049	1	✓	X
			40 A	P1-40/Z	199964	1	X	X
			63 A	P3-63/Z	050591	1	✓	X
			80 A	P3-80/Z	EP-400975	1	✓	X
			100 A	P3-100/Z	090931	1	✓	X
			125 A	P5-125/Z	280920	1	✓	X
			160 A	P5-160/Z	280934	1	✓	X
			250 A	P5-250/Z	280948	1	✓	X
			315 A	P5-315/Z	280962	1	✓	X
		3 + N	20 A	T0-2-8900/Z	207407	1	✓	X
			25 A	P1-25/Z/N	088710	1	✓	X
			32 A	P1-32/Z/N	015148	1	✓	X
			40 A	P1-40/Z/N	199966	1	X	X
			63 A	P3-63/Z/N	027013	1	✓	X
			80 A	P3-80/Z/N	EP-400978	1	✓	X
			100 A	P3-100/Z/N	038878	1	✓	X
		4	20 A	T0-2-15404/Z	091060		✓	X
		6	20 A	T0-3-8342/Z	055489	1	✓	X
			32 A	T3-3-8342/Z	052344	1	✓	X
			63 A	T5B-3-8342/Z	092297	1	✓	X
		8	20 A	T0-4-8344/Z	014009	1	✓	X
			32 A	T3-4-8344/Z	020600	1	✓	X








015148

Photo is representative

Rear mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function


Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
ON - OFF Switch - With Automatic (spring) return in START position								
 FS 147767		1	20 A	T0-1-15511/Z	029367	1	✓	X
		2	20 A	T0-2-15512/Z	043605	1	✓	X
 FS 140660		2	20 A	T0-2-8177/Z	024622	1	✓	X
ON-OFF Panic switch - Key can only be withdrawn in position 0 (Pos A)								
 FS 908		3	20 A	T0-2-1/Z/SVA(A)	050978	1	✓	✓
		3	25 A	P1-25/Z/SVA(A)	050969	1	✓	✓
ON-OFF Panic switch - Key operation lock mechanism ST-0 Key can only be withdrawn in position 0 (Pos A)								
 FS 908		2	20 A	T0-1-102/Z/S	014971	1	✓	X
ON Switch - With Automatic (spring) return from position 1								
 FS 4721		1	20 A	T0-1-15321/Z	095809	1	✓	X



Photos are representative

Rear mounting - On-Off switch-disconnectors with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908	 1 0 1 0 1 0 1 0 1 0	3	1 0	20 A	T0-2-15679/Z	041252	1	✓	X
	 1 0 1 0 1 0 1 0 1 0 1 0	3-N	1 1	32 A	T3-3-8901/Z	231952	1	✓	X
	 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0	6	1 1	20 A	T0-4-15682/Z	022270	1	✓	X
				32 A	T3-4-15682/Z	030988	1	✓	X
				63 A	T5B-4-15682/Z	207429	1	✓	X
				100 A	T5-4-15682/Z	207417	1	✓	X



231952

Photo is representative

Rear mounting - Main switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
FS 908		1	20 A	T0-1-8200/V/SVB-SW	060229	1	✓	✓
			32 A	T3-1-8200/V/SVB-SW	004882	1	✓	✓
		2	20 A	T0-1-102/V/SVB-SW	022330	1	✓	✓
			32 A	T3-1-102/V/SVB-SW	021493	1	✓	✓
			63 A	T5B-1-102/V/SVB-SW	094462	1	✓	✓
			32 A	T0-2-1/V/SVB-SW	045992	1	✓	✓
		3	25 A	P1-25/V/SVB-SW	050738	1	✓	✓
			30 A	P3-30/V/SVB-SW-MCS	237895	1	✓	✓
			32 A	P1-32/V/SVB-SW	055484	1	✓	✓
			40 A	P1-40/V/SVB-SW	199958	1	X	✓
			63 A	P3-63/V/SVB-SW	060230	1	✓	✓
			80 A	P3-800/V/SVB-SW	EP-400969	1	✓	✓
			100 A	P3-100/V/SVB-SW	064976	1	✓	✓
			125 A	P5-125/V/SVB-SW	280917	1	✓	✓
			160 A	P5-160/V/SVB-SW	280931	1	✓	✓
			250 A	P5-250/V/SVB-SW	280945	1	✓	✓
		3 + N	315 A	P5-315/V/SVB-SW	280959	1	✓	✓
			20 A	T0-2-8900/V/SVB-SW	207406	1	✓	✓
			25 A	P1-25/V/SVB-SW/N	088706	1	✓	✓
			32 A	P1-32/V/SVB-SW/N	098198	1	✓	✓
			40 A	P1-40/V/SVB-SW/N	199961	1	X	✓
			63 A	P3-63/V/SVB-SW/N	017517	1	✓	✓
			80 A	P3-80/V/SVB-SW/N	EP-400971	1	✓	✓
			100 A	P3-100/V/SVB-SW/N	027009	1	✓	✓
			125 A	P5-125/V/SVB-SW/N	280919	1	✓	✓
			160 A	P5-160/V/SVB-SW/N	280933	1	✓	✓
		3 + N	250 A	P5-250/V/SVB-SW/N	280947	1	✓	✓
			315 A	P5-315/V/SVB-SW/N	280961	1	✓	✓
			20 A	T0-3-8342/V/SVB-SW	036501	1	✓	✓
			32 A	T3-3-8342/V/SVB-SW	078445	1	✓	✓
			63 A	T5B-3-8342/V/SVB-SW	092299	1	✓	✓
		6	100 A	T5-3-8342/V/SVB-SW	096380	1	X	✓
			20 A	T0-4-8344/V/SVB-SW	008272	1	✓	✓
			32 A	T3-4-8344/V/SVB-SW	008967	1	✓	✓
			63 A	T5B-4-8344/V/SVB-SW	092055	1	✓	✓
		8	100 A	T5-4-8344/V/SVB-SW	095958	1	X	✓









021493

Photo is representative

Rear mounting - Main switch-disconnectors without auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908		1	20 A	T0-1-8200/V/SVB	057856	1	✓	✓
			32 A	T3-1-8200/V/SVB	007255	1	✓	✓
			63 A	T5B-1-8200/V/SVB	094273	1	✓	✓
		2	20 A	T0-1-102/V/SVB	095824	1	✓	✓
			32 A	T3-1-102/V/SVB	019120	1	✓	✓
			63 A	T5B-1-102/V/SVB	094463	1	✓	✓
		3	20 A	T0-2-1/V/SVB	043619	1	✓	✓
			25 A	P1-25/V/SVB	055335	1	✓	✓
			30 A	P3-30/V/SVB-MCS	237894	1	✓	✓
			32 A	P1-32/V/SVB	095676	1	✓	✓
			40 A	P1-40/V/SVB	199952	1	X	✓
			63 A	P3-63/V/SVB	048218	1	✓	✓
			80 A	P3-80/V/SVB	EP-400963	1	✓	✓
			100 A	P3-100/V/SVB	088558	1	✓	✓
		3	125 A	P5-125/V/SVB	280914	1	✓	✓
			160 A	P5-160/V/SVB	280928	1	✓	✓
			250 A	P5-250/V/SVB	280942	1	✓	✓
			315 A	P5-315 kW/V/SVB	280956	1	✓	✓
		3 + N	20 A	T0-2-8900/V/SVB	207405	1	✓	✓
			25 A	P1-25/V/SVB/N	086333	1	✓	✓
			32 A	P1-32/V/SVB/N	095825	1	✓	✓
			40 A	P1-40/V/SVB/N	199955	1	X	✓
			63 A	P3-63/V/SVB/N	015144	1	✓	✓
			80 A	P3-80/V/SVB/N	EP-400966	1	✓	✓
		3 + N	100 A	P3-100/V/SVB/N	024636	1	✓	✓
			125 A	P5-125/V/SVB/N	280916	1	✓	✓
			160 A	P5-160/V/SVB/N	280930	1	✓	✓
			250 A	P5-250/V/SVB/N	280944	1	✓	✓
			315	P5-315 kW/V/SVB/N	280958	1	✓	✓
		6	20 A	T0-3-8342/V/SVB	034128	1	✓	✓
			32 A	T3-3-8342/V/SVB	076072	1	✓	✓
			63 A	T5B-3-8342/V/SVB	092300	1	✓	✓
			100 A	T5-3-8342/V/SVB	096381	1	X	✓
		8	20 A	T0-4-8344/V/SVB	014007	1	✓	✓
			32 A	T3-4-8344/V/SVB	020598	1	✓	✓
			63 A	T5B-4-8344/V/SVB	092056	1	✓	✓
			100 A	T5-4-8344/V/SVB	095959	1	X	✓










280958

Photo is representative

Rear mounting - Main switch-disconnectors with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908	 10 20 30 40 50 60 70 80 0 1	3	1	0	20 A	T0-2-15679/V/SVB-SW	088707	1	✓	✓
	 10 20 30 40 50 60 70 80 130 140 210 220 0 1	3	1	1	25 A	P1-25/V/SVB-SW/HI11	098199	1	✓	✓
					32 A	P1-32/V/SVB-SW/HI11	017518	1	✓	✓
					40 A	P1-40/V/SVB-SW/HI11	199959	1	X	✓
					63 A	P3-63/V/SVB-SW/HI11	027010	1	✓	✓
					80 A	P3-80/V/SVB-SW/HI11	EP-400970	1	✓	✓
					100 A	P3-100/V/SVB-SW/HI11	036502	1	✓	✓
	 1L10 1T10 1L20 1T20 1L30 1T30 70 80 0 1	3	1	0	125 A	P5-125/V/SVB-SW/HI10	280918	1	✓	✓
					160 A	P5-160/V/SVB-SW/HI10	280932	1	✓	✓
					250 A	P5-250/V/SVB-SW/HI10	280946	1	✓	✓
					315 A	P5-315/V/SVB-SW/HI10	280960	1	✓	✓
	 10 20 30 40 50 60 70 80 90 100 110 120 0 1	3	2	1	20 A	T0-3-15683/V/SVB-SW	015664	1	✓	✓
	 10 20 30 40 50 60 70 80 90 100 110 120 0 1	3 + N	1	1	20 A	T0-3-15680/V/SVB-SW	045994	1	✓	✓
					32 A	T3-3-15680/V/SVB-SW	019121	1	✓	✓
	 10 20 30 40 50 60 70 80 90 100 110 120 210 220 0 1	3 + N	1	1	32 A	P1-32/V/SVB-SW/N/HI11	064978	1	✓	✓
					40 A	P1-40/V/SVB-SW/N/HI11	199962	1	X	✓
	 10 20 30 40 50 60 70 80 90 100 110 120 0 1	3 + N	1	1	32 A	P1-25/V/SVB-SW/N/HI11	055486	1	✓	✓
					63 A	T5B-3-8901/V/SVB-SW	207423	1	✓	✓
	 10 20 30 40 50 60 70 80 90 100 110 120 210 220 0 1	3 + N	1	1	63 A	P3-63/V/SVB-SW/N/HI11	074470	1	✓	✓
					80 A	P3-80/V/SVB-SW/N/HI11	EP-400972	1	✓	✓
					100 A	P3-100/V/SVB-SW/N/HI11	083962	1	✓	✓
	 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 0 1	6	1	1	20 A	T0-4-15682/V/SVB-SW	027011	1	✓	✓
					32 A	T3-4-15682/V/SVB-SW	061835	1	✓	✓
					63 A	T5B-4-15682/V/SVB-SW	207428	1	✓	✓
					100 A	T5-4-15682/V/SVB-SW	207416	1	X	✓
	 1L10 1T10 1L20 1T20 1L30 1T30 2L10 2T10 2L20 2T20 2L30 2T30 130 140 210 220 0 1	6	1	1	160 A	T6-160-15682/V/SVB-SW/HI11	200127	1	X	✓
	 1L10 1T10 1L20 1T20 1L30 1T30 2L10 2T10 2L20 2T20 2L30 2T30 1030 1040 1010 1020 0 1	6	1	1	275 A	T8-3-8342/V/SVB-SW/HI11	200128	1	X	✓














199959

Photo is representative

Rear mounting - Main switch-disconnectors with auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908		3	1	0	20 A	T0-2-15679/V/SVB	086334	1	✓	✓
		3	1	1	25 A	P1-25/V/SVB/HI11	095826	1	✓	✓
					32 A	P1-32/V/SVB/HI11	015145	1	✓	✓
					40 A	P1-40/V/SVB/HI11	199953	1	X	✓
					63 A	P3-63/V/SVB/HI11	024637	1	✓	✓
					80 A	P3-80/V/SVB/HI11	EP-400965	1	✓	✓
					100 A	P3-100/V/SVB/HI11	034129	1	✓	✓
		3	1	0	125 A	P5-125/V/SVB/HI10	280915	1	✓	✓
					160 A	P5-160/V/SVB/HI10	280929	1	✓	✓
					250 A	P5-250/V/SVB/HI10	280943	1	✓	✓
		3	2	1	20 A	T0-3-15683/V/SVB	015634	1	✓	✓
					32 A	T3-3-15683/V/SVB	045224	1	✓	✓
		3 + N	1	1	20 A	T0-3-15680/V/SVB	043621	1	✓	✓
					32 A	P1-25/V/SVB/N/HI11	053113	1	✓	✓
					32 A	T3-3-15680/V/SVB	016748		✓	✓
		3 + N	1	1	32 A	P1-32/V/SVB/N/HI11	062605	1	✓	✓
					40 A	P1-40/V/SVB/N/HI11	199956	1	X	✓
		3 + N	1	1	63 A	T5B-3-8901/V/SVB	207422	1	✓	✓
		3 + N	1	1	63 A	P3-63/V/SVB/N/HI11	072097	1	✓	✓
					80 A	P3-80/V/SVB/N/HI11	EP-400967	1	✓	✓
		3 + N	1	1	100 A	P3-100/V/SVB/N/HI11	081589	1	✓	✓
		6	1	1	20 A	T0-4-15682/V/SVB	024638	1	✓	✓
					32 A	T3-4-15682/V/SVB	059462	1	✓	✓
					63 A	T5B-4-15682/V/SVB	207427	1	✓	✓
					100 A	T5-4-15682/V/SVB	207415	1	X	✓
		6	1	1	160 A	T6-160-15682/V/SVB/HI11	200619	1	X	✓
		6	1	1	275 A	T8-3-8342/V/SVB/HI11	200620	1	X	✓












199956

Photo is representative

Rear mounting - Main switch-disconnectors with 400 mm metal extension shaft without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Handle type	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908	Padlockable main switch handle		3	25 A	P1-25/M4/SVB-SW	172876	1	✓	✓
			3	32 A	P1-32/M4/SVB-SW	172866	1	✓	✓
			3	40 A	P1-40/M4/SVB-SW	199940	1	✓	✓
			3	63 A	P3-63/M4/SVB-SW	172785	1	✓	✓
			3	80 A	P3-80/M4/SVB-SW	EP-400951	1	✓	✓
			3	100 A	P3-100/M4/SVB-SW	172819	1	✓	✓
	K-Line K1 Knob		3 + N	32 A	P1-32/M4/SVB-SW/N	172868	1	✓	✓
			3 + N	25 A	P1-25/M4/SVB-SW/N	172878	1	✓	✓
			3 + N	40 A	P1-40/M4/SVB-SW/N	199942	1	✓	✓
			3 + N	25 A	P1-25/M4/K1-PG/N	172774	1	✓	✓
			3 + N	32 A	P1-32/M4/K1-PG/N	172779	1	✓	✓
			3 + N	32 A	P1-32/M4/K1-PG/N	172779	1	✓	✓
	K-Line K2 Knob		3	63 A	P3-63/M4/K2-PG	172811	1	✓	✓
			3	80 A	P3-80/M4/K2-PG	EP-400940	1	✓	✓
			3	100 A	P3-100/M4/K2-PG	172827	1	✓	✓
			3 + N	63 A	P3-63/M4/K2-PG/N	172813	1	✓	✓
			3 + N	80 A	P3-80/M4/K2-PG/N	EP-400942	1	✓	✓
			3 + N	100 A	P3-100/M4/K2-PG/N	172829	1	✓	✓








172772

Photo is representative

Rear mounting - Main switch-disconnectors with 400 mm metal extension shaft without auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Handle type	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908	Padlockable main switch handle		3	25 A	P1-25/M4/SVB	172875	1	✓	✓
			3	32 A	P1-32/M4/SVB	172865	1	✓	✓
			3	40 A	P1-40/M4/SVB	199936	1	✓	✓
			3	63 A	P3-63/M4/SVB	172784	1	✓	✓
			3	80 A	P3-80/M4/SVB	EP-400948	1	✓	✓
			3	100 A	P3-100/M4/SVB	172818	1	✓	✓
			3 + N	25 A	P1-25/M4/SVB/N	172877	1	✓	✓
			3 + N	32 A	P1-32/M4/SVB/N	172867	1	✓	✓
			3 + N	40 A	P1-40/M4/SVB/N	199938	1	✓	✓
			3	25 A	P1-25/M4/K1-PR	172771	1	✓	✓
			3	32 A	P1-32/M4/K1-PR	172873	1	✓	✓
			3 + N	25 A	P1-25/M4/K1-PR/N	172773	1	✓	✓
			3 + N	32 A	P1-32/M4/K1-PR/N	172778	1	✓	✓
K-Line K1 Knob	K-Line K1 Knob		3	25 A	P1-25/M4/K1-PR	172771	1	✓	✓
			3	32 A	P1-32/M4/K1-PR	172873	1	✓	✓
			3 + N	25 A	P1-25/M4/K1-PR/N	172773	1	✓	✓
			3 + N	32 A	P1-32/M4/K1-PR/N	172778	1	✓	✓
			3	63 A	P3-63/M4/K2-PR	172810	1	✓	✓
			3	80 A	P3-80/M4/K2-PR	EP-400944	1	✓	✓
			3	100 A	P3-100/M4/K2-PR	172826	1	✓	✓
			3 + N	63 A	P3-63/M4/K2-PR/N	172812	1	✓	✓
			3 + N	80 A	P3-80/M4/K2-PR/N	EP-400946	1	✓	✓
K-Line K2 Knob	K-Line K2 Knob		3 + N	100 A	P3-100/M4/K2-PR/N	172828	1	✓	✓




















172875

Photo is representative

Rear mounting - Main switch-disconnectors with 400 mm metal extension shaft with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Handle type	Contact sequence	Number of poles N/O	Auxiliary contact N/O N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada
 FS 908	Padlockable main switch handle		3	1 1	25 A	P1-25/M4/SVB-SW/HI11	172768	1	✓
			3	1 1	32 A	P1-32/M4/SVB-SW/HI11	172870	1	✓
			3	1 1	40 A	P1-40/M4/SVB-SW/HI11	199941	1	✓
			3	1 1	63 A	P3-63/M4/SVB-SW/HI11	172807	1	✓
			3 + N	1 1	25 A	P1-25/M4/SVB-SW/N/HI11	172770	1	✓
			3 + N	1 1	32 A	P1-32/M4/SVB-SW/N/HI11	172872		✓
			3 + N	1 1	40 A	P1-40/M4/SVB-SW/N/HI11	199943	1	✓
			3 + N	1 1	63 A	P3-63/M4/SVB-SW/N/HI11	172809	1	✓
			3 + N	1 1	80 A	P3-80/M4/SVB-SW/N/HI11	EP-400954	1	✓
			3 + N	1 1	100 A	P3-100/M4/SVB-SW/N/HI11	172825	1	✓
	Padlockable K-Line K1 Knob		3	1 1	25 A	P1-25/M4/K1-PG/HI11	172781	1	✓
			3	1 1	32 A	P1-32/M4/K1-PG/HI11	172776	1	✓
			3 + N	1 1	25 A	P1-25/M4/K1-PG/N/HI11	172864	1	✓
			3 + N	1 1	32 A	P1-32/M4/K1-PG/N/HI11	172783	1	✓
	Padlockable K-Line K2 Knob		3	1 1	63 A	P3-63/M4/K1-PG/N/HI11	172815	1	✓
			3	1 1	80 A	P3-80/M4/K1-PG/N/HI11	EP-400941	1	✓
			3	1 1	100 A	P3-100/M4/K1-PG/N/HI11	172831	1	✓
			3 + N	1 1	63 A	P3-63/M4/K1-PG/N/HI11	172817	1	✓
			3 + N	1 1	80 A	P3-80/M4/K1-PG/N/HI11	EP-400943	1	✓
			3 + N	1 1	100 A	P3-100/M4/K1-PG/N/HI11	172833	1	✓







172870

Photo is representative

Rear mounting - Main switch-disconnectors with 400 mm metal extension shaft with auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Handle type	Contact sequence	Number of poles			Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada
			N/O	N/O	N/C					
 FS 908	Padlockable main switch handle		3	1	1	25 A	P1-25/M4/SVB/HI11	172767	1	✓
			3	1	1	32 A	P1-32/M4/SVB/HI11	172869	1	✓
			3	1	1	40 A	P1-40/M4/SVB/HI11	199937	1	✓
			3	1	1	63 A	P3-63/M4/SVB/HI11	172788	1	✓
			3	1	1	80 A	P3-80/M4/SVB/HI11	EP-400949	1	✓
			3	1	1	100 A	P3-100/M4/SVB/HI11	172822	1	✓
			3 + N	1	1	25 A	P1-25/M4/SVB/N/HI11	172769	1	✓
			3 + N	1	1	32 A	P1-32/M4/SVB/N/HI11	172871	1	✓
			3 + N	1	1	40 A	P1-40/M4/SVB/N/HI11	199939	1	✓
			3 + N	1	1	80 A	P3-80/M4/SVB/N/HI11	EP-400950	1	✓
			3 + N	1	1	100 A	P3-100/M4/SVB/N/HI11	172824	1	✓
	Padlockable K-Line K1 Knob		3	1	1	25 A	P1-25/M4/K1-PR/HI11	172775	1	✓
			3	1	1	32 A	P1-32/M4/K1-PR/HI11	172780	1	✓
			3 + N	1	1	25 A	P1-25/M4/K1-PR/N/HI11	172777	1	✓
			3 + N	1	1	32 A	P1-32/M4/K1-PR/N/HI11	172782	1	✓
	Padlockable K-Line K2 Knob		3	1	1	63 A	P3-63/M4/K2-PR/HI11	172814	1	✓
			3	1	1	80 A	P3-80/M4/K2-PR/HI11	EP-400945	1	✓
			3	1	1	100 A	P3-100/M4/K2-PR/HI11	172830	1	✓
			3 + N	1	1	63 A	P3-63/M4/K2-PR/N/HI11	172816	1	✓
			3 + N	1	1	80 A	P3-80/M4/K2-PR/N/HI11	EP-400947	1	✓
			3 + N	1	1	100 A	P3-100/M4/K2-PR/N/HI11	172832	1	✓












199939

Photo is representative

Rear mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 684		1	20 A	T0-1-8210/Z	019862	1	✓	X
			32 A	T3-1-8210/Z	057091	1	✓	X
			63 A	T5B-1-8210/Z	094258	1	✓	X
 FS 429		1	20 A	T0-1-15421/Z	015125	1	✓	X
			32 A	T3-1-15421/Z	015125	1	✓	X
			63 A	T5B-1-15421/Z	015125	1	✓	X
 FS 684		2	20 A	T0-2-8211/Z	029354	1	✓	X
			32 A	T3-2-8211/Z	064210	1	✓	X
			63 A	T5B-2-8211/Z	093082	1	✓	X
 FS 429		2	20 A	T0-2-15422/Z	029363	1	✓	X
			32 A	T3-2-15422/Z	029363	1	✓	X
			63 A	T5B-2-15422/Z	029363	1	✓	X
 FS 684		3	20 A	T0-3-8212/Z	036473	1	✓	X
			32 A	T3-3-8212/Z	071329	1	✓	X
			63 A	T5B-3-8212/Z	092383	1	✓	X
			100 A	T5-3-8212/Z	096464	1	X	X
 FS 429		3	20 A	T0-3-15423/Z	043601	1	✓	X
			32 A	T3-3-15423/Z	043601	1	✓	X
			63 A	T5B-3-15423/Z	043601	1	✓	X
			100 A	T5-3-15423/Z	043601	1	X	X
 FS 161629		4	32 A	T3-4-8902/Z	215225	1	✓	X
			63 A	T5B-4-8902/Z	207431	1	✓	X
			100 A	T5-4-8902/Z	207419	1	X	X
			160 A	T5-4-8902/Z	207419	1	X	X
 FS 684		4	20 A	T0-4-8213/Z	043592	1	✓	X
			32 A	T3-4-8213/Z	078448	1	✓	X
			63 A	T5B-4-8213/Z	092109	1	✓	X
			100 A	T5-4-8213/Z	096012	1	X	X
 FS 953		4	32 A	T3-4-8294/Z	004886	1	✓	X
			63 A	T5B-4-8294/Z	092081	1	✓	X
			100 A	T5-4-8294/Z	095984	1	X	X













092383

Photo is representative

Rear mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With Automatic (spring) return from both directions								
		1	20 A	T0-1-8214/Z	050720	1	X	X
FS 4011		3	20 A	T0-3-8216/Z	055466	1	✓	X
Two way switch-disconnector - Without O (OFF) position								
		1	20 A	T0-1-8220/Z	086312	1	✓	X
FS 943		2	20 A	T0-2-8221/Z	074450	1	✓	X
			32 A	T3-2-8221/Z	047600	1	✓	X
			63 A	T5B-2-8221/Z	093044	1	✓	X
		3	20 A	T0-3-8222/Z	088686	1	✓	X
			32 A	T3-3-8222/Z	057092	1	✓	X
			63 A	T5B-3-8222/Z	092375	1	✓	X
		4	20 A	T0-4-8223/Z	086315	1	✓	X
			32 A	T3-4-8223/Z	061838	1	✓	X
			63 A	T5B-4-8223/Z	092105	1	✓	X
		5	32 A	T3-5-8369/Z	068957	1	✓	X
		6	20 A	T0-6-8370/Z	010380	1	✓	X
			20 A	T0-8-8372/Z	012753	1	✓	X
			32 A	T3-8-8372/Z	083195	1	✓	X



010380












050720

Photos are representative

Rear mounting - Manual/auto switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (Off) position								
 FS 1401		1	20 A	T0-1-15431/Z	029364	1	✓	X
		2	20 A	T0-2-15432/Z	043602	1	✓	X
		3	20 A	T0-3-15433/Z	057840	1	✓	X
With Automatic (spring) return from HAND								
 FS 1414000		1	20 A	T0-1-15434/Z	072078	1	✓	X
		2	20 A	T0-2-15435/Z	003196	1	✓	X
With Automatic (spring) return from START								
 FS 1413890		2	20 A	T0-2-15907/Z	078796	1	✓	X
Without 0 (Off) position								
 FS 19334		1	20 A	T0-1-15451/Z	086316	1	✓	X
		2	20 A	T0-2-15452/Z	010381	1	✓	X
		3	20 A	T0-3-15453/Z	024619	1	✓	X



010381

Photo is representative

Rear mounting - Multi speed switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 speed, non reversing, for 2 separate windings								
		6	20 A	T0-3-8451/Z	043596	1	✓	X
FS 644			32 A	T3-3-8451/Z	031014	1	✓	X
2 speed, 2 directions, for one tapped winding								
		3	20 A	T0-4-8440/Z	048342	1	✓	X
FS 644			32 A	T3-4-8440/Z	038133	1	✓	X
			63 A	T5B-4-8440/Z	092029	1	✓	X
		3	20 A	T0-4-8441/Z	053088	1	✓	X
FS 684			32 A	T3-4-8441/Z	045252	1	✓	X
			63 A	T5B-4-8441/Z	092025	1	✓	X








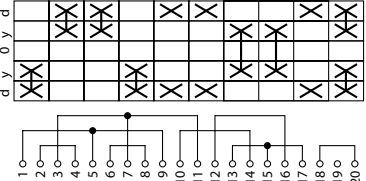



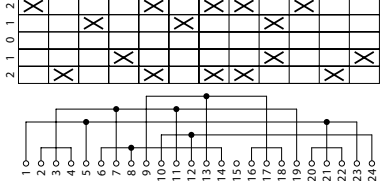



043596

Photo is representative

Rear mounting - Reversing switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Reversing switch-disconnector - Without Automatic (spring) return to 0 (Off) position								
 FS 684		2	20 A	T0-2-8400/Z	062571	1	✓	X
			32 A	T3-2-8400/Z	095060	1	✓	X
		3	20 A	T0-3-8401/Z	010366	1	✓	X
			32 A	T3-3-8401/Z	035739	1	✓	X
			63 A	T5B-3-8401/Z	092293	1	✓	X
Reversing switch-disconnector - With Automatic (spring) return from both directions to 0 (Off) position								
 FS 4011		3	20 A	T0-3-8228/Z	074437	1	✓	X
			32 A	T3-3-8228/Z	004911	1	✓	X
Reversing star delta switch-disconnector - Two-way operating direction								
 FS 638		3	20 A	T0-5-15876/Z	000942	1	✓	X
			32 A	T3-5-15876/Z	019149	1	✓	X
 FS 4017		3	63 A	T5B-5-15876/Z	214786	1	✓	X
								
Reversing multi speed, switch-disconnector 2 speed, 2 directions, for one tapped winding								
 FS 629			20 A	T0-6-15866/Z	067326	1	✓	X
			32 A	T3-6-15866/Z	057117	1	✓	X



074437












214786

Photos are representative

Rear mounting - Selector switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	Pole N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Voltmeter									
		3 x phase-N with 0 position	3+N	20 A	T0-2-15921/Z	076829	1	✓	X
FS 1410757									
		3 x phase-phase 3 x phase-N with 0 position	3+N	20 A	T0-3-8007/Z	015132	1	✓	X
FS 1410759									
		3 x phase-phase 3 x phase-N without 0 position with complete rotation in both directions	3+N	20 A	T0-3-15924/Z	029370	1	✓	X
FS 164721									
		3 x phase-phase with 0 position	3+N	20 A	T0-2-15920/Z	048353	1	✓	X
FS 1410755									
		3 x phase-phase without 0 position	3+N	20 A	T0-2-15922/Z	062591	1	✓	X
FS 164854									




015132

Photo is representative

Rear mounting - Star delta switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 635		3	20 A	T0-4-8410/Z	083929	1	X	X
			32 A	T3-4-8410/Z	012030	1	✓	X
			63 A	T5B-4-8410/Z	092049	1	✓	X











012030

Photo is representative

Rear mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With O (Off) position								
 FS 418		1	20 A	T0-1-8240/Z	060208	1	✓	X
 FS 420		1	20 A	T0-2-8241/Z	062581	1	✓	X
 FS 422		1	20 A	T0-2-8242/Z	076819	1	✓	X
 FS 424		1	20 A	T0-3-8243/Z	091057	1	✓	X
 FS 426		1	20 A	T0-3-8244/Z	015122	1	✓	X
 FS 418		3	20 A	T0-3-8280/Z	043598	1	✓	X
 FS 420		3	20 A	T0-5-8281/Z	057836	1	✓	X
 FS 422		3	20 A	T0-6-8282/Z	072074	1	✓	X











057836

Photo is representative

Rear mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without O (Off) position								
 FS 943		1	20 A	T0-1-8220/Z	086312	1	✓	X
 FS 404		1	20 A	T0-2-8230/Z	098177	1	✓	X
 FS 606		1	20 A	T0-2-8231/Z	022242	1	✓	X
 FS 408		1	20 A	T0-3-8232/Z	036480	1	✓	X
 FS 410		1	20 A	T0-3-8233/Z	050718	1	✓	X
 FS 406		2	20 A	T0-3-8251/Z	013976	1	✓	X
 FS 404		3	20 A	T0-5-8270/Z	010378	1	✓	X
 FS 406		3	20 A	T0-6-8271/Z	024616	1	✓	X




098177

Photo is representative

Rear mounting - Universal control switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Automatic (spring) return from positions 1 and 2							
 FS 458		20 A	T0-3-15394/Z	081571	1	✓	X



081571

Photo is representative

Rear mounting dedicated accessories

Neutral conductor

- Early make on switching, late-break off switching
- The N contact always behaves as an early-make contact when switching on and as a late-break contact for when switching off.
- N-P1(P3)...switching capacity same as for contacts P1(P3)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Neutral conductor	N-P1Z	000652	5	✓	P1	Rear mounting /Z
	N-P3Z	064805	5	✓	P3	Rear mounting /Z



000652

Neutral terminal

- Front mounting, left
- Service distribution board mounting right

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Neutral terminal	N-P5-125/160Z	280970	1	X	P5-125 and 160	Rear mounting /V
	N-P5-250/315Z	280972	1	X	P5-250 and 315	Rear mounting /V



Ground terminal

- Front mounting, right
- Service distribution board mounting left

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Ground terminal	PE-P5-125/160Z	280974	1	X	P5-125 and 160	Rear mounting /V
	PE-P5-250/315Z	280976	1	X	P5-250 and 315	Rear mounting /V



Auxiliary contacts - 1 normally open (N/O), 1 normally close (N/C)

- Late break on switching, early-make off switching. The N/O is always connected as a load-shedding contact

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Auxiliary contacts	HI11-P1/P3UZ	EP-400892		✓	P1	Rear mounting /V or /Z
				✓	P3-63	Rear mounting /V or /Z
				✓	P3-100	Rear mounting /V or /Z

Product standards	UL 60947-4-1, CSA - C22-2 No 14-05 IEC/EN 60947-3, CE Marking
UL File No	E36332
UL CCN	NLRV
CSA File No	12528
CSA Class No	3211-05
NA Certification	UL Listed, CSA Certified



Photos are representative

Rear mounting dedicated accessories

Auxiliary contacts - 2 normally open (N/O), 1 normally close (N/C)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Auxiliary contact for left and/or right side mounting	HI21-P5-125/160Z	280964	1	X	P5-125 and 160	Rear mounting /V or Z
	HI21-P5-250/315Z	280966	1	X	P5-250 and 315	Rear mounting /V or Z



Maintenance key for interlocked main switches

Special devices for electricians: interlocked main switches can be switched on and off for repairs with the maintenance key while the door is open (as per IEC/EN 60204-1, Section 5.1.1.1)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Maintenance key for interlocked main switches	KNK-T0	000650	5	✓	T0, T3, P1	Rear mounting /Z
	KNK-P3	000649	5	✓	P3, T5, T5B	Rear mounting /Z



Interlock extensions

A maximum of 4 units can be plugged on the interlock section every 25 mm (an equal number of shaft extensions is required for this)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Interlock extension	ZVV-T0	022298	10	✓	T0, T3	Rear mounting /Z
	ZVV-P3	024671	10	✓	T5B, T5	Rear mounting /Z



* UL/CSA certification not required

Shaft

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Aluminium shaft, 480 mm length	ZAV-P5	280979	1	✓	P5	Rear mounting /V



Shaft extensions

A maximum of 4 units can be put on the switch shaft every 25 mm

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Shaft extension	ZAV-T0	027044	10	✓	T0, T3, P1	Rear mounting /V or /Z
	ZAV-P3	029417	10	✓	P3	Rear mounting /V or /Z



Interlock extensions and shaft extensions

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Extension to 25 mm when ordering with basic unit	+ZAV(X1)+ZVV(X1)-T0/P3	254546	1	✓	P5	Rear mounting /Z




Photos are representative

Rear mounting dedicated accessories

Main switches accessories

Basic switches, Type P/XM

Front plate	Contact sequence	Number of poles	Rated current	Part number	Article number	Pack qty
 FS 908		3	25 A	P1-25/XM	172834	1
		3	32 A	P1-32/XM	172835	1
		3	40 A	P1-40/XM	199888	1
		3	63 A	P3-63/XM	172836	1
		3	80 A	P3-80/XM	EP-400973	
		3	100 A	P3-100/XM	172837	1



172836

Accessories for P/XM Switch-disconnectors

K-Line handles

Description	Suitable for	Colour	Locking mechanism	Part number	Article number	Pack qty	Feature
Knob	P1	Blue	Padlockable	K1DB/P	1818029	1	Knobs and handles provide door interlock when in the ON position and also when locked in the OFF position.
Knob	P1	Red/Yellow	Padlockable	K1DR/P	1818030	1	
Knob	P1	Grey	Padlockable	K1DG/P	1818031	1	
Knob	P3	Blue	Padlockable	K2SDB/P	1818032	1	The door interlock can also be defeated in the ON position by using a special tool.
Knob	P3	Red/Yellow	Padlockable	K2SDR/P	1818033	1	
Knob	P3	Grey	Padlockable	K2SDG/P	1818034	1	
Knob	P3	Blue	Cylinder lock/key	K2SDB/C	1818038	1	Lockable with up to 2 x 6 mm padlocks or cylinder locks
Knob	P3	Red/Yellow	Cylinder lock/key	K2SDR/C	1818039	1	
Knob	P3	Grey	Cylinder lock/key	K2SDG/C	1818040	1	



1818029



1818033

Black knobs and lockable main switch handles

Description	Suitable for	Colour	Part number	Article number	Pack qty	Feature
Knob	P1	Black	KNB-P1/M	172838	1	Door interlocked when in the ON position
Knob	P3	Black	KNB-P3/M	172839	1	
Lockable main switch handle	P1	Red/Yellow	SVB-P1/M	172840	1	Can be locked in the OFF position with up to 3 x 8 mm padlocks
Lockable main switch handle	P3	Red/Yellow	SVB-P3/M	172841	1	
Lockable main switch handle	P1	Black	SVB-SW-P1/M	172842	1	
Lockable main switch handle	P3	Black	SVB-SW-P3/M	172843	1	



172839

Metal shafts

Length	Part number	Article number	Pack qty
400 mm	P1/P3-M400	172844	10
600 mm	P1/P3-M600	172845	10



172844

Photos are representative

Rear mounting dedicated accessories

IP65 Insulated enclosures

Description	Number of contact units	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
IP65 insulated enclosure - With push-through cable entry diaphragm*	1-2	CI-K1-T0-2	207435	1	X	T0	Rear mounting /Z
	3-4	CI-K1-T0-4	207436	1	X		
	1-2	CI-K2-T3-2	207437	1	✓	T3	Rear mounting /Z
	3-4	CI-K2-T3-4	225325	1	✓		
	5	CI-K2-T3-5	207438	1	✓		
IP65 insulated enclosure - With metric knockouts	1-2	CI-K1H-T0-2	105854	1	X	T0	Rear mounting /Z
	3-4	CI-K1H-T0-4	105855	1	X		
	1-2	CI-K2H-T3-2	269462	1	X	T3	Rear mounting /Z
	3-4	CI-K2H-T3-4	105859	1	X		
	5	CI-K2H-T3-5	105860	1	X		
	3-4	CI-K4-T5B-4**	207440	1	✓	T5B	Rear mounting /Z
	1-2	CI-K5-T5-2**	207441	1	✓	T5	Rear mounting /Z
	3-4	CI-K5-T5-4**	207442	1	✓		

* The diaphragm can be pierced with the cable. 1 contact unit = 2 contacts.

** For converting T5-../Z into T5-../I5 and T5B-../E into T5B-../I4, order AW-T5-... extension terminal additionally. 1 contact unit = 2 contacts



207435 / 207436
105855 /

207437 / 269462
105859 / 105860

225325

207438

105854


207440

207441

Product standards	UL 60947-4-1, CSA - C22-2 No 14-05, CSA - C22-2 No 94 IEC/EN 60947-3, CE Marking
UL File No	E54120
UL CCN	MITW2
CSA File No	12528
CSA Class No	3211-07
NA Certification	UL Listed, CSA Certified
Degree of protection	IEC: IP65 UL/CSA Type 1, 3R, 4X, 12, 13 - indoor and outdoor use

Photos are representative

Service distribution board mounting switch-disconnectors



Description

Service distribution board switch-disconnectors can be easily installed directly onto the DIN-Rail inside the distribution board enclosure.

Standards/Approvals

See details page 178

Technical data

- Voltage: 690 V a.c.
- Current: 10 A to 100 A

Features

- Available with or without emergency switching off/emergency stop function
- Available with and without auxiliary contacts
- Available with red rotary handle and yellow locking collar and black rotary handle and locking collar
- 1-pole to 8-pole options



T0 Service distribution board mounting



T0 Service distribution board mounting











Photos are representative

Service distribution board mounting - Range overview

Rated current	10 A	20 A	25 A	32 A	40 A	63 A	100 A
On-Off switch-disconnectors		T0	P1	P1	P1	P3	P3
Without auxiliary contacts		✓	✓	✓	✓	✓	✓
With auxiliary contacts		✓					
Changeover switch-disconnectors		T0					
Without auxiliary contacts		✓					
Coding switch-disconnectors		T0					
Without auxiliary contacts		✓					
Heater switch-disconnectors		T0					
Without auxiliary contacts		✓					
Manual/auto switch-disconnectors	TM	T0					
Without auxiliary contacts	✓	✓					
Multi speed switch-disconnectors		T0					
Without auxiliary contacts		✓					
Reversing switch-disconnectors		T0					
Without auxiliary contacts		✓					
Selector switch-disconnectors		T0					
Without auxiliary contacts		✓					
Star delta switch-disconnectors		T0					
Without auxiliary contacts		✓					
Step switch-disconnectors		T0					
Without auxiliary contacts		✓					
Universal switch-disconnectors		T0					
Without auxiliary contacts		✓					

Service distribution board mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908		1	20 A	T0-1-8200/IVS	074471	1	✓	X
 FS 415		1	20 A	T0-1-15401/IVS	045973	1	✓	X
 FS 908		2	20 A	T0-1-102/IVS	015147	1	✓	X
 FS 415		2	20 A	T0-1-15402/IVS	060211	1	✓	X
 FS 908		3	20 A	T0-2-1/IVS	031758	1	✓	X
			25 A	P1-25/IVS	052962	1	✓	X
			32 A	P1-32/IVS	093303	1	✓	X
			40 A	P1-40/IVS	199931	1	X	X
			63 A	P3-63/IVS	041099	1	✓	X
			80 A	P3-80/IVS	EP-400934	1	✓	X
			100 A	P3-100/IVS	081439	1	✓	X
 FS 415		3	20 A	T0-2-15403/IVS	074449	1	✓	X
 FS 908		3 + N	20 A	T0-2-8900/IVS	207403	1	✓	X
			25 A	P1-25/IVS/N	083964	1	✓	X
			32 A	P1-32/IVS/N	010402	1	✓	X
			40 A	P1-40/IVS/N	199933	1	X	X
			63 A	P3-63/IVS/N	022267	1	✓	X
			80 A	P3-80/IVS/N	EP-400936	1	✓	X
			100 A	P3-100/IVS/N	034132	1	✓	X
		4	20 A	T0-2-1540/IVS	088687	1	✓	X
		6	20 A	T0-3-8342/IVS	050743	1	✓	X
		8	20 A	T0-4-8344/IVS	014006	1	✓	X








050743

Photo is representative

Service distribution board mounting - On-Off switch-disconnectors without auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With Automatic (spring) return in START position								
 FS 147767		1	20 A	T0-1-15511/IVS	026994	1	✓	X
 FS 140660		2	20 A	T0-2-8177/IVS	022249	1	✓	X
Automatic (spring) return from position 1								
 FS 4721		1	20 A	T0-1-15321/IVS	093436	1	✓	X
		2	20 A	T0-1-15322/IVS	017501	1	✓	X
		3	20 A	T0-2-15323/IVS	031739	1	✓	X





026994

Photo is representative

Service distribution board mounting - On-Off switch-disconnectors without auxiliary contacts

With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908		1	20 A	T0-1-8200/IVS-RT	081956	1	✓	X
		2	20 A	T0-1-102/IVS-RT	079583	1	✓	X
		3	20 A	T0-2-1/IVS-RT	084329	1	✓	X
			25 A	P1-25/IVS-RT	013140	1	✓	X
			32 A	P1-32/IVS-RT	022632	1	✓	X
			40 A	P1-40/IVS-RT	199935	1	X	X
			63 A	P3-63/IVS-RT	045845	1	✓	X
			80 A	P3-80/IVS-RT	EP-400938	1	✓	X
			100 A	P3-100/IVS-RT	086185	1	✓	X
		3-N	20 A	T0-2-8900/IVS-RT	207404	1	✓	X






084329

Photo is representative

Service distribution board mounting - On-Off switch-disconnectors with auxiliary contacts

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908	 1 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0	3	1	0	20 A	T0-2-15679/IVS	036506	1	✓	X
	 1 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	3	2	1	20 A	T0-3-15683/IVS	016722	1	✓	X
	 1 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	3+N	1	1	20 A	T0-3-8901/IVS	231940	1	✓	X
	 1 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0	6	1	1	20 A	T0-4-15682/IVS	017524	1	✓	X











231940

Photo is representative

Service distribution board mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 684		1	20 A	T0-1-8210/IVS	074440	1	✓	X
 FS 429		1	20 A	T0-1-15421/IVS	012752	1	✓	X
 FS 684		2	20 A	T0-2-8211/IVS	076813	1	✓	X
 FS 429		2	20 A	T0-2-15422/IVS	026990	1	✓	X
 FS 684		3	20 A	T0-3-8212/IVS	079186	1	✓	X
 FS 429		3	20 A	T0-3-15423/IVS	041228	1	✓	X
 FS 684		4	20 A	T0-4-8213/IVS	081559	1	✓	X
 FS 953		4	20 A	T0-4-8294/IVS	043594	1	✓	X
 FS 4011		1	20 A	T0-1-8214/IVS	045967	1	✓	X
		2	20 A	T0-2-8215/IVS	048340	1	✓	X
		3	20 A	T0-3-8216/IVS	050713	1	✓	X









079186

Photo is representative

Service distribution board mounting - Changeover switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Two way switch-disconnector without the O (OFF) position								
 FS 943		1	20 A	T0-1-8220/IVS	055459	1	✓	X
		2	20 A	T0-2-8221/IVS	057832	1	✓	X
		3	20 A	T0-3-8222/IVS	060205	1	✓	X
		4	20 A	T0-4-8223/IVS	062578	1	✓	X
		5	20 A	T0-5-8369/IVS	064951	1	✓	X
		6	20 A	T0-6-8370/IVS	067324	1	✓	X
		8	20 A	T0-8-8372/IVS	069697	1	✓	X




064951

Photo is representative

Service distribution board mounting - Coding switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With complete rotation in both directions - Binary BCD Code							
 FS 312		20 A	T0-4-15602/IVS	036487	1	✓	X













036487

Photo is representative

Service distribution board mounting - Manual/auto switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (Off) position								
 FS 1401		1	20 A	T0-1-15431/IVS	026991	1	✓	X
		2	20 A	T0-2-15432/IVS	041229	1	✓	X
		3	20 A	T0-3-15433/IVS	055467	1	✓	X
With Automatic (spring) return from HAND								
 FS 1414000		1	20 A	T0-1-15434/IVS	069705	1	✓	X
		2	20 A	T0-2-15435/IVS	003195	1	✓	X
With Automatic (spring) return from START								
 FS 1413890		2	20 A	T0-2-15907/IVS	076423	1	✓	X
Without 0 (Off) position								
 FS 19334		1	20 A	T0-1-15451/IVS	083943	1	✓	X
		2	20 A	T0-2-15452/IVS	098181	1	✓	X
		3	20 A	T0-3-15453/IVS	022246	1	✓	X
60° with a white thumb grip and front plate								
 F 085		1	10 A	TM-1-15431/IVS	225342	1	✓	X



022246



225342



Photos are representative

Service distribution board mounting - Multi speed switch-disconnectors

Without emergency switch off/emergency stop function










Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 speed, non reversing, for 2 separate windings								
 FS 644		6	20 A	T0-3-8451/IVS	026985	1	✓	X
2 speed, 2 directions, for one tapped winding								
 FS 644		3	20 A	T0-4-8440/IVS	029358	1	✓	X
 FS 684		3	20 A	T0-4-8441/IVS	031731	1	✓	X

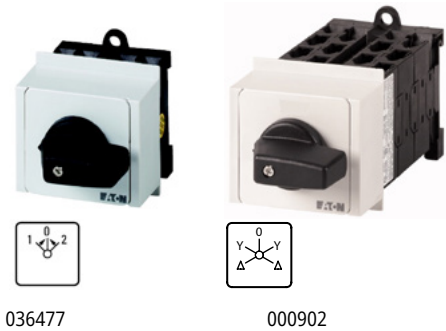


Photo is representative

Service distribution board mounting - Reversing switch-disconnectors

Without emergency switch off/emergency stop function






Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Reversing switch-disconnectors - Without Automatic (spring) return to 0 (Off) position								
 FS 684	 	2	20 A	T0-2-8400/IVS	060198	1	✓	X
	 	3	20 A	T0-3-8401/IVS	098166	1	✓	X
Reversing switch-disconnectors - With Automatic (spring) return from both directions to 0 (Off position)								
 FS 4011	 	3	20 A	T0-3-8228/IVS	062572	1	✓	X
Reversing star delta - Two-way operating direction								
 FS 638	 	3	20 A	T0-5-15876/IVS	000902	1	✓	X
Reversing switch-disconnectors - 2 speed, 2 directions, for one tapped winding								
 FS 629	 	3	20 A	T0-6-15866/IVS	036477	1	✓	X



Photos are representative

Service distribution board mounting - Selector switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Voltmeter									
 FS 1410757		3 x phase-N with 0 position	3+N	20 A	T0-2-15921/IVS	074456	1	✓	X
 FS 1410759		3 x phase-phase 3 x phase-N with 0 position	3+N	20 A	T0-3-8007/IVS	012759	1	✓	X
 FS 164721		3 x phase-phase 3 x phase-N without 0 position with complete rotation in both directions	3+N	20 A	T0-3-15924/IVS	026997	1	✓	X
 FS 1410755		3 x phase-phase with 0 position	3+N	20 A	T0-2-15920/IVS	029452	1	✓	X
 FS 164854		3 x phase-phase without 0 position	3+N	20 A	T0-2-15922/IVS	060218	1	✓	X




029452

Photo is representative

Service distribution board mounting - Star delta switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 635		3	20 A	T0-4-8410/IVS	064945	1	✓	X








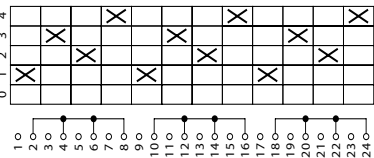


064945

Photo is representative

Service distribution board mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With O (Off) position								
 FS 418		1	20 A	T0-1-8240/IVS	027076	1	✓	X
 FS 420		1	20 A	T0-2-8241/IVS	057835	1	✓	X
 FS 422		1	20 A	T0-2-8242/IVS	074446	1	✓	X
 FS 424		1	20 A	T0-3-8243/IVS	088684	1	✓	X
 FS 426		1	20 A	T0-3-8244/IVS	012749	1	✓	X
 FS 418		3	20 A	T0-3-8280/IVS	041225	1	✓	X
 FS 420		3	20 A	T0-5-8281/IVS	055463	1	✓	X
 FS 422		3	20 A	T0-6-8282/IVS	069701	1	✓	X












041225

Photo is representative

Service distribution board mounting - Step switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Without O (Off) position								
 FS 943		1	20 A	T0-1-8220/IVS	055459	1	✓	X
 FS 404		1	20 A	T0-2-8230/IVS	095804	1	✓	X
 FS 606		1	20 A	T0-2-8231/IVS	019869	1	✓	X
 FS 408		1	20 A	T0-3-8232/IVS	034107	1	✓	X
 FS 410		1	20 A	T0-3-8233/IVS	048345	1	✓	X
 FS 406		2	20 A	T0-3-8251/IVS	013974	1	✓	X
 FS 943		3	20 A	T0-3-8222/IVS	060205	1	✓	X
 FS 404		3	20 A	T0-5-8270/IVS	098178	1	✓	X
 FS 406		3	20 A	T0-6-8271/IVS	022243	1	✓	X




022243

Photo is representative

Service distribution board mounting - Step switch-disconnectors for heating

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Number of poles N/O	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (OFF) position								
 FS 614		20 A	1	T0-1-91/IVS	079201	1	✓	X





079201

Photo is representative

Service distribution board mounting - Universal control switch-disconnectors

Without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Maintained switches with 3 positions 1 Contact closed in each position - Additionally 1 contact closed in position 0 and 1 - Additionally 1 contact closed in position 0 and 2 - Additionally 1 contact closed in position 0 and 3							
		20 A	T0-3-15391/IVS	036484	1	✓	X
Automatic (spring) return from positions 1 and 2							
		20 A	T0-3-15394/IVS	079198	1	✓	X



079198

Photo is representative

Service distribution board mounting dedicated accessories

Retrofitting front plate

- For retrofitting Service distribution board mounting T0../IVS design. Use the basic switch's front plate
- Including push-in shaft

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Service distribution board mounting accessory	IVS-T0	091114	1	✓	T0	Service distribution board /IVS



Neutral terminal

- Early-make on switching, late-break off switching
- The N contact always behaves as an early-make contact when switching on and as a late-break contact when switching off.
- N-P1(P3)... switching capacity same as for contacts P1(P3)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Switched neutral	N-P1Z	000652	5	✓	P1	Service distribution board /IVS
	N-P3Z	064805	5	✓	P3	Service distribution board /IVS



000652

Auxiliary contacts

- 1 normally open (N/O), 1 normally close contact (N/C)
- Late-break contact on switching, early-make off switching. The N/O is always connected as a load-shedding contact

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Auxiliary contacts	H111-P1/P3UZ	EP-400892	5	✓	P1	Service distribution board /IVS
					P3-63 and P3-100	Service distribution board /IVS



EP-400892

Key operated lock mechanism

For ordering with base switch unit		+IVS/S-R	232042	270° + 0° + 90°
Part number	Article number	Key withdrawable in position		
Micromec lock 90° switch angle				
+IVS/S-A	232034	0°		
+IVS/S-B	232036	270°		
+IVS/S-E	232040	0° + 90°		
+IVS/S-F	232038	270° & 0°		
+IVS/S-G	232043	270° + 0° + 90° + 180°		



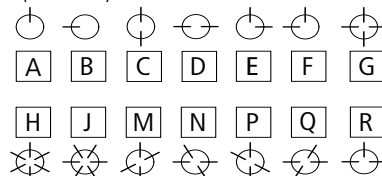


Key operation lock mechanism, including 2 keys.


The key can only be removed in certain positions; see diagram. The MICROMECC lock for 90° can be used for other switching angles as well if the key withdrawability characteristics match the type of switch.

Example: +IVS/S-B can be used with a step switch with a switching angle of 30° if the key is only to be withdrawable in the 0 position at 270°.

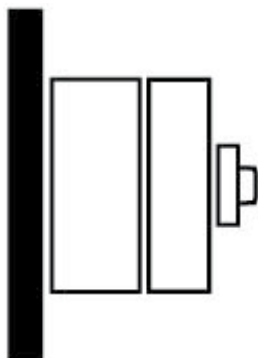
Options for key withdrawal



Position marking as in example



Photos are representative



P1 Switch-disconnector
fitted in a Ci-K
Polycarbonate enclosure



T3 Switch-disconnector
fitted in a steel
enclosure

Description

Enclosed switch-disconnectors can be installed alongside traditional panels and assemblies, or as a standalone unit for external applications (such as HVAC systems) with robust ingress protection.

Standards/Approvals

See details page 178

Technical data

- Voltage: 690 V a.c.
- Current: 20 A to 275 A

Features

- Available with or without emergency switching off/emergency stop function
- Available with and without auxiliary contacts
- Available with red rotary handle and yellow locking collar and black rotary handle and locking collar
- 1-pole to 8-pole options
- Ci-K enclosed units can be optionally ordered with a North American style variant, see details page 152

Soft and hard knockouts

Standard Ci-K enclosure have "soft knockouts" which utilises a soft puncturable cable membrane for connection of supply and load lines while maintaining ingress protection.

Hard knockouts are also referred to as metric knockouts, and are made of a solid plastic where the central retainer is "knocked out" from the enclosure, and a metric cable gland is used to secure the ingress of supply and load lines

An option of "hard knockouts" are available for some products as a standard selection, these can be identified within the part number by the inclusion of the letter 'H' after the enclosure size, e.g. I1H or I2H. They can be requested, if the option is not stated in the catalogue, for enclosure sizes I1 and I2




Parts numbers for ordering the optional hard knockouts and associated cable glands can be found on page 151.

Enclosed switch-disconnectors - Range overview

Rated current	20 A	25 A	32 A	40 A	63 A	95 A	100 A	160 A	275 A
On-Off switch-disconnectors	T0	P1	P1 T3	P1	P3 T5B		P3 T5		
Without auxiliary contacts	✓	✓	✓	✓	✓	✓	✓		
With auxiliary contacts	✓	✓	✓	✓		✓		✓	
Main switch-disconnectors	T0	P1	P1 T3	P1	P3 T5B	T5	P3 T5	T6	T8
Without auxiliary contacts	✓	✓	✓	✓	✓	✓	✓		
With auxiliary contacts	✓	✓	✓	✓	✓	✓	✓	✓	✓
Changeover switch-disconnectors	T0		T3		T5B		T5		
Without auxiliary contacts	✓		✓		✓		✓		
Coding switch-disconnectors	T0								
Without auxiliary contacts	✓								
Heater switch-disconnectors	T0								
Without auxiliary contacts	✓								
Manual/auto switch-disconnectors	T0								
Without auxiliary contacts	✓								
Multi speed switch-disconnectors	T0		T3		T5B				
Without auxiliary contacts	✓		✓		✓				
Reversing switch-disconnectors	T0		T3		T5B				
Without auxiliary contacts	✓		✓		✓				
Safety switch-disconnectors		P1	P1	P1	P3 T5B		P3 T5		
With auxiliary contacts		✓	✓	✓	✓		✓	✓	
Selector switch-disconnectors	T0								
Without auxiliary contacts	✓								
Star delta switch-disconnectors	T0		T3		T5B				
Without auxiliary contacts	✓		✓		✓				
Step switch-disconnectors	T0								
Without auxiliary contacts	✓								
Universal switch-disconnectors	T0								
Without auxiliary contacts	✓								

Enclosed - On-Off switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908	 1 0 1 0	1	20 A	T0-1-8200/I1	207074	1	X	X
			32 A	T3-1-8200/I2	207167	1	✓	X
			63 A	T5B-1-8200/I4	207218	1	✓	X
	 1 0 2 0 3 0 4 0	2	20 A	T0-1-102/I1	207061	1	X	X
			32 A	T3-1-102/I2	207165	1	✓	X
			63 A	T5B-1-102/I4	207215	1	✓	X
	 1 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/I1	207081	1	X	X
			20 A	T0-2-15403/I1	207088	1	X	X
			25 A	P1-25/I2	207299	1	✓	X
			25 A	P1-25/I2H	226898	1	X	X
			32 A	P1-32/I2	207320	1	✓	X
			32 A	P1-32/I2H	227866	1	X	X
			40 A	P1-40/I2	199906	1	X	X
			40 A	P1-40/I2H	199915	1	X	X
			63 A	P3-63/I4	207356	1	✓	X
			80 A	P3-80/I5	EP-400979	1	✓	X
			100 A	P3-100/I5	207381	1	✓	X
	 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0	3 + N	20 A	T0-2-8900/I1	207109	1	X	X
			25 A	P1-25/I2/N	207303	1	✓	X
			25 A	P1-25/I2H/N	226901	1	X	X
			32 A	P1-32/I2/N	207324	1	✓	X
			32 A	P1-32/I2H/N	227869	1	X	X
			40 A	P1-40/N	199908	1	X	X
			40 A	P1-40/I2H/N	199921	1	X	X
			63 A	P3-63/I4/N	207360	1	✓	X
			80 A	P3-80/I5/N	EP-400981	1	✓	X
			100 A	P3-100/I5/N	207385	1	✓	X
	 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0	4	20 A	T0-2-1540-I1	207089	1	X	X
	 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	6	20 A	T0-3-8342/I1	207131	1	X	X
			32 A	T3-3-8342/I2	207187	1	✓	X
			63 A	T5B-3-8342/I4	207226	1	✓	X
	 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0	8	20 A	T0-4-8344/I1	207139	1	X	X
			32 A	T3-4-8344/I2	207194	1	✓	X
			63 A	T5B-3-8344/I4	207233	1	✓	X









226898

Photo is representative

Enclosed - On-Off switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in steel enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Steel enclosures specifications		Part number	Article number	Pack qty	Padlockable handle
				Size	Handle colour				
 FS 908		1	20 A	SE1	Black	T0-1-8200/SE1	197383	1	X
		2	20 A	SE1	Black	T0-1-102/SE1	197379	1	X
		3	20 A	SE1	Black	T0-2-1/SE1	197376	1	X
			25 A	SE1	Black	P1-25/SE1	197344	1	X
			32 A	SE1	Black	P1-32/SE1	197352	1	X
			40 A	SE1	Black	P1-40/SE1	199944	1	X
			63 A	SE3	Black	P3-63/SE3	197360	1	X
			80 A	SE3	Black	P3-80/SE3	EP-400955	1	X
			100 A	SE3	Black	P3-100/SE3	197368	1	X
		4	20 A	SE1	Black	T0-2-8900/SE1	197420	1	X
		3 + N	25 A	SE1	Black	P1-25/SE1/N	197345	1	X
			32 A	SE1	Black	P1-32/SE1/N	197353	1	X
			40 A	SE1	Black	P1-40/SE1/N	199945	1	X
		4	63 A	SE3	Black	P3-63/SE3/N	197361	1	X
			80 A	SE3	Black	P3-80/SE3/N	EP-400956	1	X
			100 A	SE3	Black	P3-100/SE3/N	197369	1	X
		6	20 A	SE1	Black	T0-3-8342/SE1	197408	1	X
			32 A	SE2	Black	T3-3-8342/SE1	197456	1	X
		8	20 A	SE2	Black	T0-4-8344/SE2	197411	1	X
		8	32 A	SE2	Black	T3-4-8344/SE2	197459	1	X






197379

Photo is representative

Enclosed - On-Off switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Pole N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Key operation lock mechanism ST-0 Key can only be withdrawn in position 0 (Pos A)								
		2	20 A	T0-1-102/I1/S	207063	1	✓	X
With SVA Padlocking feature and two keys If the key is withdrawn in position 1 the switch can be switched off but not on again without the key Key can only be withdrawn in position 0 (Pos A)								
		3	20 A	T0-2-1/I1/SVA(A)	207083	1	X	✓
		3	25 A	P1-25/I2/SVA(A)	207304	1	X	✓
		3	32 A	P1-32/I2/SVA(A)	207325	1	X	✓
Panic switch-disconnectors fitted with a SVA Cylinder lock Supplied with two keys If the key is withdrawn in position 1 the switch can be switched off but not on again without the key								
		3	20 A	T0-2-1/I1/SVA(S)	207084	1	X	✓
		3	25 A	P1-25/I2/SVA(S)	207305	1	X	✓
		3	32 A	P1-32/I2/SVA(S)	207326	1	X	✓



207063



207304










207326

Photos are representative

Enclosed - On-Off switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 415		1	20 A	T0-1-15401/I1	207067	1	X	X
		2	20 A	T0-1-15402/I1	207068	1	X	X
With Automatic (spring) return from position 1								
 FS 4721		1	20 A	T0-1-15321/I1	207064	1	✓	X
		2	20 A	T0-1-15322/I1	207065	1	✓	X
		3	20 A	T0-2-15323/I1	207087	1	✓	X
With Automatic (spring) return in START position								
 FS 147767		1	20 A	T0-1-15511/I1	207073	1	✓	X
		2	20 A	T0-2-15512/I1	207093	1	✓	X
		3	20 A	T0-3-15513/I1	207117	1	✓	X
 FS 140660		2	20 A	T0-2-8177/I1	207101	1	✓	X






207087

Photo is representative

Enclosed - On-Off switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, with emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908		1	20 A	T0-1-8200/I1-RT	207075	1	✓	X
		2	20 A	T0-1-102/I1-RT	207062	1	X	X
			32 A	T3-1-102/I2-RT	207166	1	✓	X
		3	20 A	T0-2-1/I1-RT	207082	1	X	X
			25 A	P1-25/I2-RT	207300	1	✓	X
			32 A	P1-32/I2-RT	207321	1	✓	X
			40 A	P1-40/I2-RT	199930	1	X	X
			63 A	P3-63/I4-RT	207357	1	✓	X
			80 A	P3-80/I5-RT	EP-400991	1	✓	X
			100 A	P3-100/I5-RT	207382	1	✓	X
		3-N	20 A	T0-2-8900/I1-RT	207110	1	✓	X
Panic switch-disconnector fitted with SVC Padlocking feature Supplied with two keys*								
 FS 908 GE		3	20 A	T0-2-1/I1/SVC(S)-RT	207086	1	X	✓
		3	25 A	P1-25/I2/SVC(S)-RT	207307	1	X	✓
		3	32 A	P1-32/I2/SVC(S)-RT	207328	1	X	✓
Panic switch-disconnector fitted with a SVA Cylinder lock Supplied with two keys								
 FS 908 GE		3	20 A	T0-2-1/I1/SVA(S)-RT	207085	1	X	✓
		3	25 A	P1-25/I2/SVA(S)-RT	207306	1	X	✓






*Note: If the locking device is padlocked in position 1 the switch can be switched off but not on again without removing the padlock.
Lockable with max 3 padlocks



Photos are representative

Enclosed - On-Off switch-disconnectors with auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 908		3	1 0	20 A	T0-2-15679/I1	207094	1	X	X
		3	1 1	25 A	P1-25-I2H/HI11	226899	1	X	X
				32 A	P1-32-I2H/HI11	227867	1	X	X
				40 A	P1-40-I2H/HI11	199916	1	X	X
		3	2 1	20 A	T0-3-15683/I1	207118	1	X	X
				32 A	T3-3-15683/I2	207182	1	✓	X
		3-N	1 1	20 A	T0-3-8901/I1	231941	1	X	X
				32 A	T3-3-8901/I2	231951	1	✓	X
		6	1 1	20 A	T0-4-15682/I1	207135	1	X	X
				32 A	T3-4-15682/I2	207190	1	✓	X
				63 A	T5B-4-15682/I4	207229	1	✓	X
				100 A	T5-4-15682/I5	207269	1	X	X







207190

Photo is representative

Enclosed - On-Off switch-disconnectors with auxiliary contacts

Switch-disconnector fitted in steel enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts		Rated current	Steel enclosures specifications		Part number	Article number	Pack qty	Padlockable handle
			N/O	N/C		Size	Handle colour				
 FS 908		3	1	0	20 A	SE1	Black	T0-2-15679/SE1	197440	1	X
		3	2	1	20 A	SE1	Black	T0-3-15683/SE1	197449	1	X
					32 A	SE2	Black	T3-3-15683/SE2	197475	1	X
		4	1	1	20 A	SE1	Black	T0-3-15680/SE1	197443	1	X
		6	1	1	20 A	SE2	Black	T0-4-15682/SE2	197446	1	X
					32 A	SE2	Black	T3-4-15682/SE2	197472	1	X






197446

Photo is representative

Enclosed - Main switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908	 1 0 1 0	1	20 A	T0-1-8200/I1/SVB-SW	207146	1	X	✓
			32 A	T3-1-8200/I2/SVB-SW	207201	1	✓	✓
			63 A	T5B-1-8200/I4/SVB-SW	207241	1	✓	✓
	 1 0 2 0 3 0 4 0	2	20 A	T0-1-102/I1/SVB-SW	207144	1	X	✓
			32 A	T3-1-102/I2/SVB-SW	207199	1	✓	✓
			63 A	T5B-1-102/I4/SVB-SW	207239	1	✓	✓
	 1 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/I1/SVB-SW	207148	1	X	✓
			25 A	P1-25/I2/SVB-SW	207294	1	✓	✓
			25 A	P1-25/I2H/SVB-SW	227861	1	X	✓
32 A			P1-32/I2/SVB-SW	207315	1	✓	✓	
32 A			P1-32/I2H/SVB-SW	227872	1	X	✓	
40 A			P1-40/I2/SVB-SW	199912	1	X	✓	
40 A			P1-40/I2H/SVB-SW	199925	1	X	✓	
63 A			P3-63/I4/SVB-SW	207344	1	✓	✓	
80 A			P3-80/I5/SVB-SW	EP-400987	1	✓	✓	
100 A			P3-100/I5/SVB-SW	207374	1	✓	✓	
 1 0 3 0 4 0 5 0 6 0 7 0 8 0	3 + N	20 A	T0-2-8900/I1/SVB-SW	207152		X	✓	
		25 A	P1-25/I2/SVB-SW/N	207296	1	✓	✓	
		25 A	P1-25/I2H/SVB-SW/N	227863	1	X	✓	
		32 A	P1-32/I2/SVB-SW/N	207317	1	✓	✓	
		32 A	P1-32/I2H/SVB-SW/N	227874	1	X	✓	
		32 A	P1-32/I2H/N	227869	1	X	✓	
		40 A	P1-40/I2/SVB-SW/N	199914	1	X	✓	
		40 A	P1-40/I2H/SVB-SW/N	199927	1	X	✓	
		63 A	P3-63/I4/SVB-SW/N	207346	1	✓	✓	
		80 A	P3-80/I5/SVB-SW/N	EP-400989	1	✓	✓	
		100 A	P3-100/I5/SVB-SW/N	207376	1	✓	✓	
 1 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	6	20 A	T0-3-8342/I1/SVB-SW	207160	1	X	✓	
		32 A	T3-3-8342/I2/SVB-SW	207209	1	✓	✓	
		63 A	T5B-3-8342/I4/SVB-SW	207243	1	✓	✓	
		100 A	T5-3-8342/I5/SVB-SW	207280	1	X	✓	
 1 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0	8	20 A	T0-4-8344/I1/SVB-SW	207164	1	X	✓	
		32 A	T3-4-8344/I2/SVB-SW	207213	1	✓	✓	
		63 A	T5B-4-8344/I4/SVB-SW	207249	1	✓	✓	
		95 A	T5-4-8344/I5/SVB-SW	207284	1	X	✓	






207239

Photo is representative

Enclosed - Main switch-disconnectors without auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures with pre-assembled EMC screen, Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Padlockable handle
 FS 908		3	20 A	T0-2-1/I2H/MBS/SVB-SW	182426	✓
			63 A	P3-63/I4/MBS/SVB-SW	182422	✓
		3 + N	20 A	T0-2-8900/I2H/MBS/SVB-SW	182428	✓
		3	25 A	P1-25/I2H/MBS/SVB-SW	182414	✓
			32 A	P1-32/I2H/MBS/SVB-SW	182418	✓
			40 A	P1-40/I2H/MBS/SVB-SW	199919	✓



182428

Photo is representative

Enclosed - Main switch-disconnectors without auxiliary contacts

Switch-disconnector fitted in steel enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Steel enclosures specifications		Part number	Article number	Pack qty	Suitable for export to North America and Canada
				Size	Handle colour				
 FS 908		1	20 A	SE1	Black	T0-1-8200/SE1/SVB-SW	197385	1	X
		2	20 A	SE1	Black	T0-1-102/SE1/SVB-SW	197381	1	X
		3	20 A	SE1	Black	T0-2-1/SE1/SVB-SW	197378	1	X
			25 A	SE1	Black	P1-25/SE1/SVB-SW	197349	1	X
			32 A	SE1	Black	P1-32/SE1/SVB-SW	197357	1	X
			40 A	SE1	Black	P1-40/SE1/SVB-SW	199949	1	X
			63 A	SE3	Black	P3-63/SE3/SVB-SW	197365	1	X
			80 A	SE3	Black	P3-80/SE3/SVB-SW	EP-400960	1	X
			100 A	SE3	Black	P3-100/SE3/SVB-SW	197373	1	X
		4	20 A	SE1	Black	T0-2-8900/SE1/SVB-SW	197422	1	X
									X
		3 + N	25 A	SE1	Black	P1-25/SE1/SVB-SW/N	197351	1	X
			32 A	SE1	Black	P1-32/SE1/SVB-SW/N	197359	1	X
			40 A	SE1	Black	P1-40/SE1/SVB-SW/N	199951	1	X
	4	4	63 A	SE3	Black	P3-63/SE3/SVB-SW/N	197367	1	X
			80 A	SE3	Black	P3-80/SE3/SVB-SW/N	EP-400962	1	X
			100 A	SE3	Black	P3-100/SE3/SVB-SW/N	197375	1	X
		6	20 A	SE1	Black	T0-3-8342/SE1/SVB-SW	197410	1	X
			32 A	SE2	Black	T3-3-8342/SE1/SVB-SW	197458	1	X
		8	20 A	SE2	Black	T0-4-8344/SE2/SVB-SW	197413	1	X
 FS 635		8	32 A	SE2	Black	T3-4-8344/SE2/SVB-SW	197461	1	X

Note: All the SVB-SW handles are padlockable








197422

Photo is representative

Enclosed - Main switch-disconnectors without auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908		1	20 A	T0-1-8200/I1/SVB	207145	1	X	✓
			32 A	T3-1-8200/I2/SVB	207200	1	✓	✓
			63 A	T5B-1-8200/I4/SVB	207240	1	✓	✓
		2	20 A	T0-1-102/I1/SVB	207143	1	X	✓
			32 A	T3-1-102/I2/SVB	207198	1	X	✓
			63 A	T5B-1-102/I4/SVB	207238	1	✓	✓
			100 A	T5-1-102/I5/SVB	207273	1	X	✓
		3	20 A	T0-2-1/I1/SVB	207147	1	X	✓
			25 A	P1-25/I2/SVB	207293	1	✓	✓
			25 A	P1-25/I2H/SVB	226900	1	X	✓
			32 A	P1-32/I2/SVB	207314	1	✓	✓
			32 A	P1-32/I2H/SVB	227868	1	✓	✓
			40 A	P1-40/I2/SVB	199909	1	X	✓
			40 A	P1-40/I2H/SVB	199922	1	X	✓
			63 A	P3-63/I4/SVB	207343	1	✓	✓
			80 A	P3-80/I5/SVB	EP-400982	1	✓	✓
			100 A	P3-100/I5/SVB	207373	1	✓	✓
		3 + N	20 A	T0-2-8900/I1/SVB	207151	1	X	✓
		3 + N	25 A	P1-25/I2/SVB/N	207298	1	✓	✓
			25 A	P1-25/I2H/SVB/N	227860	1	X	✓
			32 A	P1-32/I2/SVB/N	207319	1	✓	✓
			32 A	P1-32/I2H/SVB/N	227871	1	X	✓
			40 A	P1-40/I2/SVB/N	199911	1	X	✓
			40 A	P1-40/I2H/SVB/N	199924	1	X	✓
			63 A	P3-63/I4/SVB/N	207349	1	✓	✓
			80 A	P3-80/I5/SVB/N	EP-400985	1	✓	✓
			100 A	P3-100/I5/SVB/N	207379	1	✓	✓
		6	20 A	T0-3-8342/I1/SVB	207159	1	X	✓
			32 A	T3-3-8342/I2/SVB	207208	1	✓	✓
			63 A	T5B-3-8342/I4/SVB	207242	1	✓	✓
		8	100 A	T5-3-8342/I5/SVB	207279	1	X	✓
			20 A	T0-4-8344/I1/SVB	207163	1	X	✓
			32 A	T3-4-8344/I2/SVB	207212	1	✓	✓
			63 A	T5B-4-8344/I4/SVB	207248	1	✓	✓
			95 A	T5-4-8344/I5/SVB	207283	1	X	✓






207283

Photo is representative

Enclosed - Main switch-disconnectors without auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures with pre-assembled EMC screen, With emergency switch off/ emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack quantity	Suitable for export to North America (US) and Canada	Padlockable handle
 FS 908	 1 0 1 0 1 0 2 0 3 0 4 0 5 0 6 0	3	20 A	T0-2-1/I2H/MBS/SVB	182425	1	X	✓
	 1 0 1 0 1 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0	3 + N	20 A	T0-2-8900/I2H/MBS/SVB	182427	1	X	✓
	 1 0 1 0 1 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0 17 0 18 0 19 0 20 0 21 0 22 0	3	25 A	P1-25/I2H/MBS/SVB	182413	1	X	✓
			32 A	P1-32/I2H/MBS/SVB	182417	1	X	✓
			40 A	P1-40/I2H/MBS/SVB	199917	1	X	✓
	 1 0 1 0 1 0 2 0 3 0 4 0 5 0 6 0	3	63 A	P3-63/I4/MBS/SVB	182421	1	X	✓









182421

Photo is representative

Enclosed - Main switch-disconnectors without auxiliary contacts

Switch-disconnectors fitted in steel enclosure With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Steel enclosure specification	Size	Handle colour	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada
 FS 908		1	20 A	SE1	Red	T0-1-8200/SE1/SVB	197384	1	X	
		2	20 A	SE1	Red	T0-1-102/SE1/SVB	197380	1	X	
		3	20 A	SE1	Red	T0-2-1/SE1/SVB	197377	1	X	
			25 A	SE1	Red	P1-25/SE1/SVB	197346	1	X	
			32 A	SE1	Red	P1-32/SE1/SVB	197354	1	X	
			40 A	SE1	Red	P1-40/SE1/SVB	199946	1	X	
			63 A	SE3	Red	P3-63/SE3/SVB	197362	1	X	
			80 A	SE3	Red	P3-80/SE3/SVB	EP-400957	1	X	
			100 A	SE3	Red	P3-100/SE3/SVB	197370	1	X	
		4	20 A	SE1	Red	T0-2-8900/SE1/SVB	197421	1	X	
		3 + N	25 A	SE1	Red	P1-25/SE1/SVB/N	197348	1	X	
			32 A	SE1	Red	P1-32/SE1/SVB/N	197356	1	X	
			40 A	SE1	Red	P1-40//SE1/SVB/N	199948	1	X	
		4	63 A	SE3	Red	P3-63/SE3/SVB/N	197364	1	X	
			80 A	SE3	Red	P3-80/SE3/SVB/N	EP-400959	1	X	
			100 A	SE3	Red	P3-100/SE3/SVB/N	197372	1	X	
		6	20 A	SE1	Red	T0-3-8342-SE1/SVB	197409	1	X	
			32 A	SE2	Red	T3-3-8342/SE2/SVB	197457	1	X	
		8	20 A	SE2	Red	T0-4-8344/SE2/SVB	197412	1	X	
			32 A	SE2	Red	T3-4-8344/SE2/SVB	197460	1	X	

Note: All the SVB handles are padlockable



197460

Photo is representative

Enclosed - Main switch-disconnectors with auxiliary contacts

Switch-disconnector fitted in Ci-K Polycarbonate enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O	N/C	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canada
FS 908		3	1	0	20 A	T0-2-15679/I1/SVB-SW	207150	1	X
		3	1	1	25 A	P1-25/I2/SVB-SW/HI11	207295	1	✓
					25 A	P1-25/I2H/SVB-SW/HI11	227862	1	X
					25 A	P1-25/I2H/SVB/HI11	226902	1	X
					32 A	P1-32/I2/SVB-SW/HI11	207316	1	✓
					32 A	P1-32/I2H/SVB-SW/HI11	227873	1	X
					40 A	P1-40/I2/SVB-SW/HI11	199913	1	X
					40 A	P1-40/I2H/SVB-SW/HI11	199926	1	X
					63 A	P3-63/I4/SVB-SW/HI11	207345	1	✓
					80 A	P3-80/I5/SVB-SW/HI11	EP-400988	1	✓
					100 A	P3-100/I5/SVB-SW/HI11	207375	1	✓
		3	2	1	20 A	T0-3-15683/I1/SVB-SW	207158	1	X
					32 A	T3-3-15683/I2/SVB-SW	207207	1	✓
		3 + N	1	1	20 A	T0-3-15680/I1/SVB-SW	207154	1	X
					32 A	T3-3-15680/I2/SVB-SW	207203	1	✓
		3 + N	1	1	20 A	T0-3-8901/I1/SVB-SW	231935	1	X
					32 A	T3-3-8901/I2/SVB-SW	218988	1	✓
					63 A	T5B-3-8901/I4/SVB-SW	207245	1	✓
					100 A	T5-3-8901/I5/SVB-SW	207278	1	X
		3 + N	1	1	63 A	P3-63/I4/SVB-SW/N/HI11	207347	1	✓
					80 A	P3-80/I5/SVB-SW/N/HI11	EP-400990	1	✓
					100 A	P3-100/I5/SVB-SW/N/HI11	207377	1	✓
		6	1	1	20 A	T0-4-15682/I1/SVB-SW	207162	1	X
					32 A	T3-4-15682/I2/SVB-SW	207211	1	✓
					63 A	T5B-4-15682/I4/SVB-SW	207247	1	✓
					100 A	T5-4-15682/I5/SVB-SW	207282	1	X
		6	1	1	160 A	T6-160-6/I45/SVB-SW/HI11*	201447	1	X
		6	1	1	275 A	T8-3-8342/I48/SVB-SW/HI11*	201449	1	X

* Enclosure without flanges with K95/1N*BR

Note: All the SVB-SW handles are padlockable








207211

Photo is representative

Enclosed - Main switch-disconnectors with auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures with pre-assembled EMC screen, Without emergency switch off/ emergency stop function

Front plate	Contact sequence	Number of poles	Auxiliary contacts		Rated current	Part number	Article number	Padlokable handle
		N/O	N/O	N/C				
 FS 908		1			20 A	T0-2-15679/I2H/MBS/SVB-SW	182430	✓
		1		1	20 A	T0-3-15680/I2H/MBS/SVB-SW	182432	✓
		2		1	20 A	T0-3-15683/I2H/MBS/SVB-SW	182434	✓
		1		1	20 A	T0-4-15682/I2H/MBS/SVB-SW	182436	✓
		1		1	25 A 32 A 40 A	P1-25/I2H/MBS/SVB-SW/HI11 P1-32/I2H/MBS/SVB-SWHI11 P1-40/I2H/MBS/SVB-SWHI11	182416 182420 199920	✓ ✓ ✓
		1		1	63 A	P3-63/I4/MBS/SVB-SW/HI11	182424	✓





182432

Photo is representative

Enclosed - Main switch-disconnectors with auxiliary contacts

Switch-disconnector fitted in steel enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Auxiliary contacts			Rated current	Steel enclosures specifications			Article number	Pack qty	Suitable for export to North America and Canada
		Number of poles	N/O	N/C		Size	Handle colour	Part number			
 FS 908		3	1	0	20 A	SE1	Black	T0-2-15679/SE1/SVB-SW	197442	1	X
		3	2	1	20 A	SE1	Black	T0-3-15683/SE1/SVB-SW	197451	1	X
					32 A	SE2	Black	T3-3-15683/SE2/SVB-SW	197477	1	X
		3	1	1	25 A	SE1	Black	P1-25/SE1/SVB-SW/HI11	197350	1	X
					32 A	SE1	Black	P1-32/SE1/SVB-SW/HI11	197358	1	X
					40 A	SE1	Black	P1-40/SE1/SVB-SW/HI11	199950	1	X
					63 A	SE3	Black	P3-63/SE3/SVB-SW/HI11	197366	1	X
					80 A	SE3	Black	P3-80/SE3/SVB-SW/HI11	EP-400961	1	X
					100 A	SE3	Black	P3-100/SE3/SVB-SW/HI11	197374	1	X
		4	1	1	20 A	SE1	Black	T0-3-15680/SE1/SVB-SW	197445	1	X
	6	1	1	20 A	SE2	Black	T0-4-15682/SE2/SVB-SW	197448	1	X	
					32 A	SE2	Black	T3-4-15682/SE2/SVB-SW	197474	1	X

Note: All the SVB-SW handles are padlockable











197448

Photo is representative

Enclosed - Main switch-disconnectors with auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O N/C	Rated current	Part number	Article number	Suitable for export to North America (US) and Canada
 FS 908		3	1 0	20 A	T0-2-15679/I1/SVB	207149	X
		3	1 1	25 A	P1-25/I2/SVB/HI11	207297	✓
				25 A	P1-25/I2H/SVB/HI11	226902	X
				32 A	P1-32/I2/SVB/HI11	207318	✓
				32 A	P1-32/I2H/SVB/HI11	227870	X
				40 A	P1-40/I2/SVB/HI11	199910	X
				40 A	P1-40/I2H/SVB/HI11	199923	X
				63 A	P3-63/I4/SVB/HI11	207348	✓
				80 A	P3-80/I5/SVB/HI11	EP-400984	✓
				100 A	P3-100/I5/SVB/HI11	207378	✓
		3	2 1	20 A	T0-3-15683/I1/SVB	207157	X
				32 A	T3-3-15683/I2/SVB	207206	✓
		3 + N	1 1	20 A	T0-3-15680/I1/SVB	207153	X
				32 A	T3-3-15680/I2/SVB	207202	✓
		3 + N	1 1	20 A	T0-3-8901/I1/SVB	231934	X
				32 A	T3-3-8901/I2/SVB	218987	✓
				63 A	T5B-3-8901/I4/SVB	207244	✓
				100 A	T5-3-8901/I5/SVB	207277	X
		3 + N	1 1	63 A	P3-63/I4/SVB/N/HI11	207350	✓
				80 A	P3-80/I5/SVB/N/HI11	EP-400986	✓
				100 A	P3-100/I5/SVB/N/HI11	207380	✓
		6	1 1	20 A	T0-4-15682/I1/SVB	207161	X
				32 A	T3-4-15682/I2/SVB	207210	X
				63 A	T5B-4-15682/I4/SVB	207246	✓
				100 A	T5-4-15682/I5/SVB	207281	X
		6	1 1	160 A	T6-160-6/I45/SVB/HI11*	201448	X
		6	1 1	275 A	T8-3-8342/I48/SVB/HI11**	201450	X



207246

Note: All the SVB handles are padlockable

* Enclosure without flanges with K95/1N*BR
 ** With KS4-CI and K150/1-BR; Ingress protection IP64

Photo is representative

Enclosed - Main switch-disconnectors with auxiliary contacts

Switch-disconnectors fitted in steel enclosure With emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Auxiliary contacts N/O N/C		Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US) and Canata	Padlockable handle
FS 908 ON OFF	01 10 20 30 40 50 60 70 80 1 2 3 4 5 6 7 8	3	1	0	20 A	T0-2-15679/SE1/SVB	197441	1	X	✓
	01 10 20 30 40 50 60 130 210 220 1 2 3 4 5 6 7 8 9 10 11 12	3	1	1	25 A	P1-25/SE1/SVB/HI11	197347	1	X	✓
					32 A	P1-32/SE1/SVB/HI11	197355	1	X	✓
					40 A	P1-40/SE1/SVB/HI11	199947	1	X	✓
					63 A	P3-63/SE1/SVB/HI11	197363	1	X	✓
					80 A	P3-80/SE1/SVB/HI11	EP-400958	1	X	✓
					100 A	P3-100/SE1/SVB/HI11	197371	1	X	✓
	01 10 20 30 40 50 60 70 80 90 100 110 120 1 2 3 4 5 6 7 8 9 10 11 12	3	2	1	20 A	T0-3-15683/SE1/SVB	197450	1	X	✓
			2	1	32 A	T3-3-15683/SE2/SVB	197476	1	X	✓
	01 10 20 30 40 50 60 70 80 90 100 110 120 1 2 3 4 5 6 7 8 9 10 11 12	4	1	0	20 A	T0-3-15680/SE1/SVB	197444	1	X	✓
	01 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	6	1	1	20 A	T0-4-15682/SE2/SVB	197447	1	X	✓
			1	1	32 A	T3-4-15682/SE2-SVB	197473	1	X	✓












197355

Photo is representative

Enclosed - Changeover switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 684		1	20 A	T0-1-8210/I1	207076	1	X	X
			32 A	T3-1-8210/I2	207169	1	✓	X
			63 A	T5B-1-8210/I4	207432	1	✓	X
 FS 429		1	20 A	T0-1-15421/I1	207069	1	✓	X
			20 A	T0-1-15421/I1	207069	1	✓	X
 FS 684		2	20 A	T0-2-8211/I1	207102	1	X	X
			32 A	T3-2-8211/I2	207178	1	✓	X
			63 A	T5B-2-8211/I4	207220	1	✓	X
 FS 429		2	20 A	T0-2-15422/I1	207090	1	✓	
			20 A	T0-2-15422/I1	207090	1	✓	
 FS 684		3	20 A	T0-3-8212/I1	207123	1	X	X
			32 A	T3-3-8212/I2	207183	1	✓	X
			63 A	T5B-3-8212/I4	207223	1	✓	X
			100 A	T5-3-8212/I5	207266	1	X	X
 FS 429		3	20 A	T0-3-15423/I1	207114	1	✓	X
			20 A	T0-3-15423/I1	207114	1	✓	X
 FS 161629		4	32 A	T3-4-8902/I2	215224	1	✓	X
			63 A	T5B-4-8902/I4	207237	1	✓	X
			100 A	T5-4-8902/I5	207214	1	X	X
 FS 429		4	20 A	T0-4-8213/I1	207136	1	✓	X
			32 A	T3-4-8213/I2	207191	1	✓	X
			63 A	T5B-4-8213/I4	207230	1	✓	X
			100 A	T5-4-8213/I5	207270	1	X	X
 FS 953		4	20 A	T0-4-8294/I1	207138	1	X	X
			32 A	T3-4-8294/I2	207193	1	✓	X
			63 A	T5B-4-8294/I4	207232	1	✓	X
			100 A	T5-4-8294/I5	207433	1	X	X










207232

Photo is representative

Enclosed - Changeover switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosures Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With Automatic (spring) return to the O (OFF) position from both directions								
 FS 4011		1	20 A	T0-1-8214/I1	207077	1	✓	X
		2	20 A	T0-2-8215/I1	207103	1	✓	X
			32 A	T3-2-8215/I2	207179	1	✓	X
		3	20 A	T0-3-8216/I1	207434	1	✓	X
			32 A	T3-3-8216/I2	207184	1	✓	X
Two way switch-disconnector								
 FS 943		1	20 A	T0-1-8220/I1	207078	1	X	X
		2	20 A	T0-2-8221/I1	207104	1	X	X
			32 A	T3-2-8221/I2	207180	1	✓	X
			63 A	T5B-2-8221/I4	207221	1	✓	X
		3	20 A	T0-3-8220/I1	207124	1	X	X
			32 A	T3-3-8222/I2	207185	1	✓	X
			63 A	T5B-3-8222/I4	207224	1	✓	X
		4	20 A	T0-4-8223/I1	207137	1	X	X
			32 A	T3-4-8223/I2	207192	1	✓	X
			63 A	T5B-3-8223/I4	207231	1	✓	X
		5	32 A	T3-5-8369/I2	207536	1	✓	X












207137

Photo is representative

Enclosed - Changeover switch-disconnectors

Switch-disconnectors fitted in steel enclosure Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Steel enclosures specifications		Part number	Article number	Pack qty	Suitable for export to North America and Canada	Padlockable handle
				Size	Handle colour					
With 0 (OFF) position										
 FS 684		1	20 A	SE1	Black	T0-1-8210/SE1	197386	1	X	✓
		2	20 A	SE1	Black	T0-2-8211/SE1	197387	1	X	✓
		3	20 A	SE1	Black	T0-3-8212/SE1	197388	1	X	✓
		4	20 A	SE2	Black	T0-4-8213/SE2	197389	1	X	✓
 FS 1401		1	20 A	SE1	Black	T0-1-15431/SE1	197430	1	X	✓
		2	20 A	SE1	Black	T0-2-15432/SE1	197431	1	X	✓
		3	20 A	SE1	Black	T0-3-15433/SE1	197432	1	X	✓
With Automatic (spring) return to the O (OFF) position from both directions										
 FS 4011		1	20 A	SE1	Black	T0-1-8214/SE1	197390	1	X	✓
		2	20 A	SE1	Black	T0-2-8215/SE1	197391	1	X	✓
		3	20 A	SE1	Black	T0-3-8216/SE1	197392	1	X	✓






197389

Photo is representative

Enclosed - Changeover switch-disconnectors

Switch-disconnectors fitted in steel enclosure Without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Steel enclosures specifications			Article number	Pack qty	Suitable for North America and Canada	Padlockable handle
				Size	Handle colour	Part number				
Two way switch-disconnector without 0 (OFF) position										
 FS 943		1	20 A	SE1	Black	T0-1-8220/SE1	197393	1	X	X
		2	20 A	SE1	Black	T0-2-8221/SE1	197394	1	X	X
		3	20 A	SE1	Black	T0-3-8222/SE1	197395	1	X	X
		4	20 A	SE2	Black	T0-3-8223/SE2	197396	1	X	X




197396

Photo is representative

Enclosed - Coding switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With complete rotation in both directions - Binary BCD Code							
 FS 312		20 A	T0-4-15602/I1	207134	1	✓	X












207134

Photo is representative

Enclosed - Manual/auto switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (Off) position								
 FS 1401		1	20 A	T0-1-15431/I1	207070	1	✓	X
		2	20 A	T0-2-15432/I1	207091	1	✓	X
		3	20 A	T0-3-15433/I1	207115	1	✓	X
With Automatic (spring) return from HAND								
 FS 1414000		1	20 A	T0-1-15434/I1	207071	1	✓	X
		2	20 A	T0-2-15435/I1	218971	1	✓	X
With Automatic (spring) return from START								
 FS 1413890		2	20 A	T0-2-15907/I1	207095	1	✓	X
Without 0 (Off) position								
 FS 19334		1	20 A	T0-1-15451/I1	207072	1	✓	X
		2	20 A	T0-2-15452/I1	207092	1	✓	X
		3	20 A	T0-3-15453/I1	207116	1	✓	X






207071

Photo is representative

Enclosed - Multi speed switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
2 speed, non reversing, for 2 separate windings								
 FS 644		6	20 A	T0-3-8451/I1	207133	1	X	X
			32 A	T3-3-8451/I2	207189	1	✓	X
			63 A	T5B-3-8451/I4	207228	1	✓	X
2 speed, 2 directions, for one tapped winding								
 FS 644		3	20 A	T0-4-8440/I1	207141	1	X	X
			32 A	T3-4-8440/I2	207196	1	✓	X
			63 A	T5B-4-8440/I4	207235	1	✓	X
 FS 684		3	20 A	T0-4-8441/I1	207142	1	X	X
			32 A	T3-4-8441/I2	207197	1	✓	X
			63 A	T5B-4-8441/I4	207236	1	✓	X








207133

Photo is representative

Enclosed - Reversing switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Reversing switch-disconnector - Without Automatic (spring) return to 0 (Off) position								
 FS 684		2	20 A	T0-2-8400/I1	207111	1	✓	X
			32 A	T3-2-8400/I2	207181	1	✓	X
			63 A	T5B-2-8400/I4	207222	1	✓	X
		3	20 A	T0-3-8401/I1	207132	1	✓	X
			32 A	T3-3-8401/I2	207188	1	✓	X
			63 A	T5B-3-8401/I4	207227	1	✓	X
Reversing switch-disconnector - With Automatic (spring) return from both directions to 0 (Off) position								
 FS 4011		3	20 A	T0-3-8228/I1	207125	1	✓	X
			32 A	T3-3-8228/I2	207186	1	✓	X
			63 A	T5B-3-8228/I4	207225	1	✓	X
Reversing stat-delta switch-disconnector - Two-way operating direction								
 FS 638		3	32 A	T3-5-15876/I2	207537	1	✓	X









207225

Photo is representative

Enclosed - Safety switch-disconnectors with auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	Auxiliary contacts		Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)
			N/O	N/C					
 FS 908		3	0	0	25 A	P1-25/I2-SI-SW	207309	1	X
					32 A	P1-32/I2-SI-SW	207330	1	X
					63 A	P3-63/I4-SI-SW	207362	1	X
					80 A	P3-80/I5-SI-SW	EP-400998	1	X
					100 A	P3-100/I5-SI-SW	207387	1	X
		3	1	1	25 A	P1-25/I2-SI/Hi11-SW	207311	1	X
					32 A	P1-32/I2-SI/Hi11-SW	207332	1	X
					63 A	P3-63/I4-SI/Hi11-SW	207364	1	X
					80 A	P3-80/I5-SI/Hi11-SW	EP-400995	1	X
					100 A	P3-100/I5-SI/Hi11-SW	207389	1	X
		3+N	0	1	25 A	P1-25/I2-SI/N-SW	207313	1	X
					32 A	P1-32/I2-SI/N-SW	207334	1	X
					63 A	P3-63/I4-SI/N-SW	207366	1	X
					80 A	P3-80/I5-SI/N-SW	EP-400997	1	X
					100 A	P3-100/I5-SI/N-SW	207391	1	X
		6	0	0	63 A	T5B-3-8342/I4-SI-SW	207251	1	X
					100 A	T5-3-8342/I5-SI-SW	207448	1	X
		6	1	1	63 A	T5B-4-15682/I4-SI-SW	207255	1	X
					100 A	T5-4-15682/I5-SI-SW	207286	1	X
		6	2	0	63 A	T5B-4-8903/I4-SI-SW	207259	1	X
					100 A	T5-4-8903/I5-SI-SW	207290	1	X

Note: All the SI handles are padlockable







See further details about the safety switch-disconnectors page 145



Photo is representative

Enclosed - Safety switch-disconnectors with auxiliary contacts

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, with emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	Auxiliary contacts		Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)
			N/O	N/C					
 FS 908	 1 0 1 1 1 1 0 0 0 0 0 0 1 0 2 0 3 0 4 0 5 0 6 0	3	0	0	25 A	P1-25/I2-SI	207313	1	X
					32 A	P1-32/I2-SI	207329	1	X
					63 A	P3-63/I4-SI	207361	1	X
					80 A	P3-80/I5-SI	EP-400993	1	X
					100 A	P3-100/I5-SI	207386	1	X
	 1 0 1 1 1 1 1 1 0 0 0 0 0 0 0 0 1 0 2 0 3 0 4 0 5 0 6 0 13 0 14 0 21 0 22 0	3	1	1	25 A	P1-25/I2-SI/HI11	207310	1	X
					32 A	P1-32/I2-SI/HI11	207331	1	X
					63 A	P3-63/I4-SI/HI11	207363	1	X
					80 A	P3-80/I5-SI/HI11	EP-400994	1	X
					100 A	P3-100/I5-SI/HI11	207388	1	X
	 1 0 1 1 1 1 1 1 0 0 0 0 0 0 0 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 20 0	3+N	0	1	25 A	P1-25/I2-SI/N	207312	1	X
					32 A	P1-32/I2-SI/N	207333	1	X
					63 A	P3-63/I4-SI/N	207365	1	X
					80 A	P3-80/I5-SI/N	EP-400996	1	X
					100 A	P3-100/I5-SI/N	207390	1	X
	 1 0 1 1 1 1 1 1 1 1 0 0 0 0 0 0 0 0 0 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0	6	0	0	63 A	T5B-3-8342/I4-SI	207250	1	X
					100 A	T5-3-8342/I5-SI	207447	1	X
	 1 0 1 1 1 1 1 1 1 1 1 1 0 0 0 0 0 0 0 0 0 0 0 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0	6	1	1	63 A	T5B-4-15682/I4-SI	207254	1	X
					100 A	T5-4-15682/I5-SI	207285	1	X
	 1 0 1 1 1 1 1 1 1 1 1 1 0 0 0 0 0 0 0 0 0 0 0 0 1 0 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0 11 0 12 0 13 0 14 0 15 0 16 0	6	2	0	63 A	T5B-4-8903/I4-SI	207258	1	X
					100 A	T5-4-8903/I5-SI	207289	1	X

Note: All the SI handles are padlockable
See further details about the safety switch-disconnectors page 145



Photo is representative

Enclosed - Safety switch-disconnectors

Notes:

Engineering:

Maintenance, repair and safety switches all have the same electrical function. They are designed to safely isolate electrical installations (loads) from mains power during maintenance and repair work and to ensure that a hazard does not arise which endangers personnel, machinery and production materials.

A safety switch is an additional enclosed main switch = isolator dedicated to an individual electrical load and mounted in the immediate vicinity of the motor of the electrical load. This is particularly important if there is any danger of the main switch being inadvertently operated.

Application

By using up to 3 padlocks, each fitter/electrician involved can protect themselves by preventing unauthorised personnel from switching the unit on.

Maintenance/manual override switches are simply additional enclosed main switches with a padlocking feature.

Enclosed main switch with padlocking facility.

Features

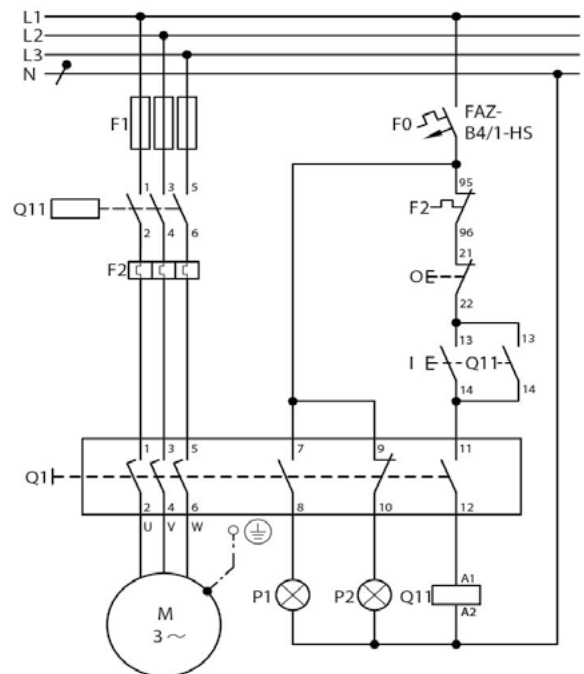
- Safety switches are always housed in insulated enclosures and have an inscription saying 'Safety switches' on a bright orange label.
- Switches to be used in emergency stop switching have a red handle and yellow locking collar in accordance with STOP category 0 (as per IEC/EN 60204/VDE 0113).
- If the switch is not approved for emergency stop switch, both parts will be black ('SW' part no. suffix).
- The cover and handle are interlocked by fitting a padlock.

Selection

The switches must be selected according to the following performance specifications:





- 1) According to motor switching capacity, when the switch is fitted in such a way that the operator may use it for operational ON and OFF switching
- 2) The rating data always applies to 3 poles. When the motor rating is divided between 6 poles, such as for star-delta switching, a 6 pole switch can be used to control 1.73 time the rated power.
- 3) If the switch has a load shedding Contact (LA), you can select the appropriate switch according to the uninterrupted current. The load switching contact is an auxiliary contact, which closed in the ON position and opens early when switching off, so that a contactor located in the circuit takes over the switching duty and the maintenance/safety switch operates at zero load. When switching on, the load-shedding contact closes later than or at the same time as the main contacts. With P and T switches this is the N/O auxiliary contact.
- 4) The 'ON' position can be locked with a padlock (by altering the handle). This is not permissible for switches with a red/yellow handle.

Safety switches with load shedding and signaling



Enclosed - Selector switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Voltmeter switch-disconnector								
		3 x phase-phase 3 x phase-N with 0 position	20 A	T0-3-8007/I1	207120	1	✓	X
FS 1410759								
		3 x phase-phase 3 x phase-N without 0 position with complete rotation in both directions	20 A	T0-3-15924/I1	207119	1	✓	X
FS 164721								




207120

Photo is representative

Enclosed - Star delta switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
 FS 635		3	20 A	T0-4-8410/I1	207140	1	X	X
			32 A	T3-4-8410/I2	207195	1	✓	X
			63 A	T5B-4-8410/I4	207234	1	✓	X
















207140

Photo is representative

Enclosed - Step switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Number of poles N/O	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With O (Off) position								
 FS 418		1	20 A	T0-1-8240/I1	207079	1	✓	X
 FS 420		1	20 A	T0-2-8241/I1	207107	1	✓	X
 FS 422		1	20 A	T0-2-8242/I1	207108	1	✓	X
 FS 424		1	20 A	T0-3-8243/I1	207128	1	✓	X
 FS 426		1	20 A	T0-3-8244/I1	207129	1	✓	X
 FS 418		3	20 A	T0-3-8280/I1	207130	1	✓	X
Without O (Off) position								
 FS 943		1	20 A	T0-1-8220/I1	207078	1	✓	X
 FS 404		1	20 A	T0-2-8230/I1	207105	1	✓	X
 FS 606		1	20 A	T0-2-8231/I1	207106	1	✓	X
 FS 408		1	20 A	T0-3-8232/I1	207126	1	✓	X
 FS 410		1	20 A	T0-3-8233/I1	207127	1	✓	X
 FS 406		2	20 A	T0-4-8251/I1	218984	1	✓	X
 FS 943		3	20 A	T0-3-8222/I1	207124	1	✓	X




207105

Photo is representative

Enclosed - Step switch-disconnectors for heating

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Number of poles N/O	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
With 0 (Off) position heater switches								
 FS 614	 1 2 3 4	20 A	1	T0-1-91/11	207080	1	✓	X






207080

Photo is representative

Enclosed - Universal control switch-disconnectors

Switch-disconnectors fitted in polycarbonate Ci-K Enclosure, without emergency switch off/emergency stop function

Front plate	Contact sequence	Rated current	Part number	Article number	Pack qty	Suitable for export to North America (US and Canada)	Padlockable handle
Maintained switches with 3 positions 1 Contact closed in each position - Additionally 1 contact closed in position 0 and 1 - Additionally 1 contact closed in position 0 and 2 - Additionally 1 contact closed in position 0 and 3							
		20 A	T0-3-15391/I1	207112	1	✓	X
FS 429							
Automatic (spring) return from positions 1 and 2							
		20 A	T0-3-15394/I1	207113	1	✓	X
FS 458							



207113

Photo is representative

Enclosed switch-disconnectors dedicated accessories

IP65 Insulated enclosures

Description	Number of contact units	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
IP65 insulated enclosure - With metric knockouts (hard knockouts)	Only available together with basic unit	+I1H	105870	1	X	T0	Surface mounting I1
		+I2H	105871	1	X	T3	Surface mounting I2
					X	P1	Surface mounting I2



105870/ 105871

Cable glands

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Cable gland for metric knockouts (hard knockouts)	V-M25	206911	1	X	T0	Surface mounting I1 and I2
	KT-M25	207603	1	X	T3	Surface mounting I1 and I2
				X	P1	Surface mounting I1 and I2



206911



207603

Neutral terminals

Description	Flex cable	Suitable for	Part number	Article number	Std. pack
For connection of a 5 th conductor	1-4 mm ²	CI-K1, CI-K2	K-CI-K1/2	207451	20
	1.5-16 mm ²	CI-K4	K-CI-K4	206916	20
	10-35 mm ²	CI-K5	K-CI-K5	218488	20



207451

Exterior mounting angle brackets

Description	Suitable for	Part number	Article number	Std. pack
4 angle brackets per set	CI-K4, CI-K5	AB-CI-K4/5	206914	1 off



206914

Mounting plate shield

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for
To connect the shielding	MBS-I2 ⁽¹⁾	290191	1	✓	CI-K2 Polycarbonate enclosure
	MBS-I4 ⁽¹⁾	118742	1	✓	CI-K4 Polycarbonate enclosure



290191

Photos are representative

Enclosed switch-disconnectors dedicated accessories

Neutral terminal

- Early make on switching, late-break off switching
- The N contact always behaves as an early-make contact when switching on and as a late-break contact for when switching off.
- N-P1(P3)...switching capacity same as for contacts P1(P3)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For P1.../I2 optionally, NP1Z or HI11-P1/P3Z, can only be fitted on the left	N-P1Z	000652	5	✓	P1	Surface mounting /I2
					P3-63	Surface mounting /I4
					P3-100	Surface mounting /I5



000652

Auxiliary contacts - 1 normally open (N/O), 1 normally close (N/C)

Late break on switching, early-make off switching. The N/O is always connected as a load-shedding contact

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For P1.../I2 optionally, NP1Z or HI11-P1/P3Z, can only be fitted on the left	HI11-P1/P3UZ ⁽¹⁾	EP-400892	5	✓	P1	Surface mounting /I2
				✓	P3-63	Surface mounting /I4
				✓	P3-63	Rear mounting /V or /Z
				✓	P3-100	Surface mounting /I5

	(1)
Product standards	UL 60947-4-1, CSA - C22-2 No 14-05 IEC/EN 60947-3, CE Marking, UKCA Marking
UL File No	E36332
UL CCN	NLRV
CSA File No	12528
CSA Class No	3211-05
NA Certification	UL Listed, CSA Certified



EP-400892

P Switch-disconnectors and T cam switches in North American (NA) version

In its NA version the cam switch features a terminal inscription in English and/or a terminal inscription deviating from the IEC standard. Switches in mounting types I2 to I4 feature an additional inscription on the enclosure's front (e.g. part no and protection type). Not possible in combination with key operation lock mechanism S-T0, SVA-T3 and SVC-T3

An overview of these cam switches can be found in the instructional leaflet AWA 1150-2327.

	P1	P3-63	P3-100	T0	T3	T5B
Mounting form /E, /EA/EZ, /Z, /N, /IVS				+NA-12 105864	+NA-12 105864	
/I2	+NA-12 105866				+NA-12 105866	
/I4		+NA-12 105866				
/I5			+NA-12 105869			+NA-15 105869

Photos are representative

Universal accessories

Red and yellow main switch assembly kits - For T0, T3, T5B, T5, P1 and P3 Flush, rear and surface mounting switch-disconnectors

- Padlocking feature, lockable with max. 3 padlocks
- For locking in the 0 position, for switches with positions 0 - I at 90°
- Permissible with T0 with up to max. 4 contact units and with T3 with up to max 6 contact units
- Switching angle as front plate FS908
- Designed as per IEC/EN 60204-1. VDE 0113 Part 1

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Red rotary handle with yellow locking ring As emergency switching off/emergency stop device	SVB-T0	057892	1	✓	T0, T3, P1	Flush mounting /E
					T0, T3, P1	Rear mounting /Z
					T0	Surface mounting /I1
					T3, P1	Surface mounting /I2
Red rotary handle with yellow locking ring As emergency switching off/emergency stop device	SVB-P3	052999	1	✓	T5B, T5, P3	Flush mounting /E
					T5B, T5, P3	Rear mounting /Z
					T5B, P3-63	Surface mounting /I4
					T5, P3-100	Surface mounting /I5



* UL/CSA certification not required

Black main switch assembly kits - For T0, T3, T5B, T5, P1 and P3 Flush, rear and surface mounting switch-disconnectors

- Padlocking feature, lockable with max. 3 padlocks
- For locking in the 0 position, for switches with positions 0 - I at 90°
- Permissible with T0 with up to max. 4 contact units and with T3 with up to max 6 contact units
- Switching angle as front plate FS908
- Designed as per IEC/EN 60204-1. VDE 0113 Part 1

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Black rotary handle and black locking collar Without emergency switching off/emergency stop device function	SVB-SW-T0	060265	1	✓	T0, T3, P1	Flush mounting /E
					T0, T3, P1	Rear mounting /Z
					T0	Surface mounting /I1
					T3, P1	Surface mounting /I2
Black rotary handle and black locking collar Without emergency switching off/emergency stop device function	SVB-SW-P3	062491	1	✓	T5B, T5, P3	Flush mounting /E
					T5B, T5, P3	Rear mounting /Z
					T5B, P3-63	Surface mounting /I4
					T5, P3-100	Surface mounting /I5



* UL/CSA certification not required

Photos are representative

Universal accessories

Red and black main switch assembly kits with PE Terminal and N Terminal - For T0, T3 and T5B Flush, and rear mounting switches

- Padlocking feature
- For converting flush mounting switch T.../E into flush mounting main switch T../EA/SVB
- For converting rear mounting switch T.../Z into rear mounting main switch T../V/SVB
- Designed as per IEC/EN 60204-1. VDE 0113 Part 1

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Red rotary handle with yellow locking ring	V/EA/SVB-T0	062638	1	✓	T0, T3	Flush mounting /E
					T0, T3	Rear mounting /Z
As emergency switching off/emergency stop device	V/EA/SVB/T5	045065	1	✓	T5B	Flush mounting /E
					T5B	Rear mounting /Z
Black rotary handle with black locking ring	V/EA/SVB-SW-T0	065011	1	✓	T0, T3	Flush mounting /E
					T0, T3	Rear mounting /Z
Without emergency switching off/emergency stop function	V/EA/SVB-SW/T5	045064	1	✓	T5B	Flush mounting /E
					T5B	Rear mounting /Z



062638

Black thumb grip

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Black thumb grip	KNB-T0	038909	10	✓	T0, T3, P1	Flush mounting /E
					T0, T3, P1	Centre mounting /EZ
					T0, T3, P1	Service distribution board /IVS
					T0, T3, P1	Rear mounting /Z
					T0	Surface mounting /I1
					T3, P1	Surface mounting /I2
	KNB-P3	041282	10	✓	T5B, P3	Flush mounting /E
					T5B, P3	Rear mounting /Z
					T5B, T5, P3-63	Surface mounting /I4
					P3-100	Surface mounting /I5



038909



041282

Red thumb grip

- Only for emergency switching off/emergency stop switches
- Designed as per IEC/EN 60204-1. VDE 0113 Part 1
- Order yellow FS908E-T0 front plate additionally

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Red thumb grip	KNB-RT-T0	043655	10	✓	T0, T3, P1	Flush mounting /E
					T0, T3, P1	Rear mounting /Z
					T0	Surface mounting /I1
					T3, P1	Surface mounting /I2
	KNB-RT-P3	046028	10	✓	T5B, P3	Flush mounting /E
					T5B, P3	Rear mounting /Z
					T5B, T5, P3-63	Surface mounting /I4
					P3-100	Surface mounting /I5



043655

Photos are representative

Front plates


For use with	Switch type	Part number	Article number	Dimensions (W x H x D)	Std. pack	Suitable for export to North America (US and Canada)*
Standard front plate - Suitable for laser inscription						
For frame 48 x 48	T0, T3, P1	FS(*)-T0	231893	45 x 45 mm	10	✓
For frame 88 x 88	P3, T5, T5B	FS(*)-P3	231895	84 x 84 mm	10	✓
Emergency switching off/emergency stop front plates						
For frame 48 x 48	T0, T3, P1	FS908GE-T0	003198	45 x 45 mm	5	✓
For frame 88 x 88	P3, T5, T5B	FS908GE-P3	031475	84 X 84 mm	5	✓
Blank plate - Can be engraved						
For frame 48 x 48	T0, T3, P1	FS-ALU980-T0	266905	45 x 45 mm	50	✓
For frame 88 x 88	P3, T5, T5B	FS-ALU980-P3	266906	84 X 84 mm	10	✓

* UL/CSA certification not required

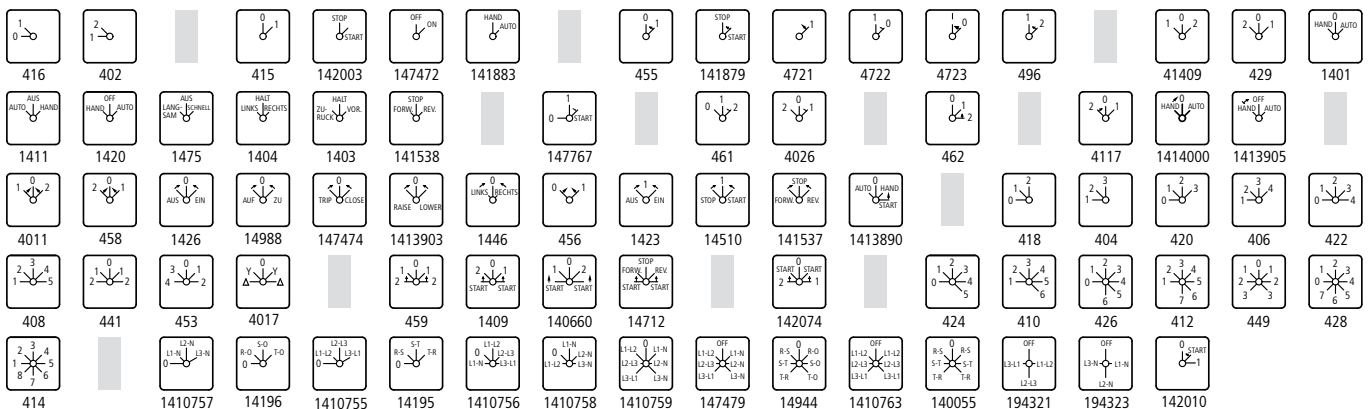
Notes: Standard front plates

For standard switches the normal front plate can be replaced if required with the front plate shown below (not with T6, T8 and TM). Providing the switching angle, number of positions and the position of the 0 are the same.

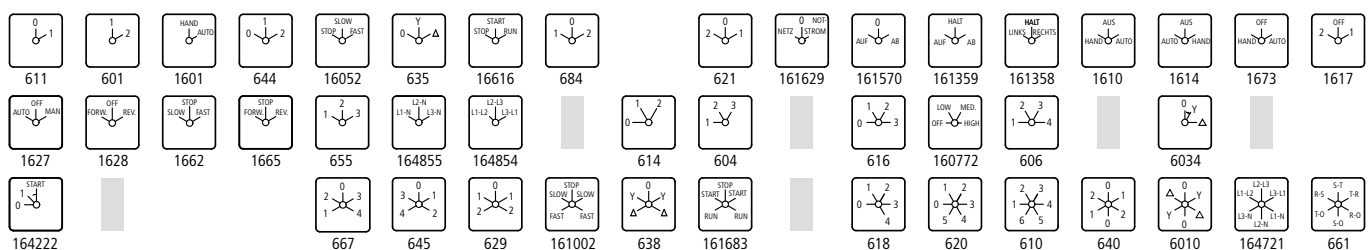
Switching angle 30°



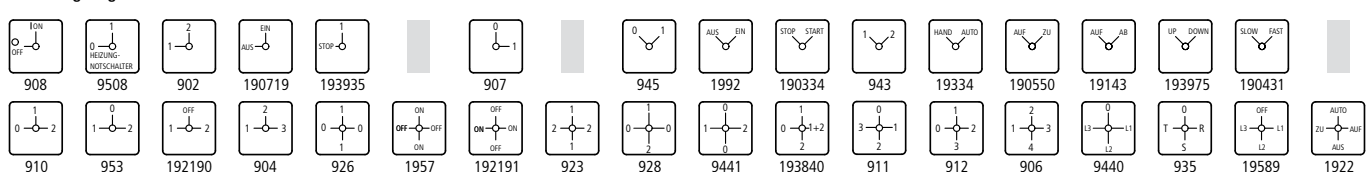
Switching angle 45°



Switching angle 60°



Switching angle 90°



Universal accessories

Black label mount and insert label

- For padlocking features consisting of one label and one insert label
- Front plates are already included as a standard with:
 - T.../EA/SVB and P.../EA/SVB main switches flush mounting
 - T.../V/SVB, P.../V/SVB main switches for rear mounting

Description	Language	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for
Inscribed with 'Main switch - Open only in 0 position'	German/English	ZFS61/62-T0	030170	25	✓	T0, T3, P1
		ZFS61/62/P3	065739	25	✓	T5, T5B, P3
	French	ZFS63-T0	047424	25	✓	T0, T3, P1
		ZFS63-P3	047423	25	✓	T5, T5B, P3
	Italian	ZFS68-T0	065751	25	✓	T0, T3, P1
	Portuguese	ZFS68-T0	065751	25	✓	T0, T3, P1
	Swedish	ZFS68-T0	065751	25	✓	T0, T3, P1
	Spanish	ZFS77-T0	065752	25	✓	T0, T3, P1
		ZFS77-P3	047422	25	✓	T5, T5B, P3
	Hungarian	ZFS80-T0	205548	25	✓	T0, T3, P1
		ZFS80-P3	205565	25	✓	T5, T5B, P3
Blank	X	ZFS60-T0	019924	25	✓	T0, T3, P1
		ZFS60-P3	022297	25	✓	T5, T5B, P3



065739



019924

Label mount, black - clip-on

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for
Label mount	ZFSX-T0	024670	25	✓	T0, T3, P1
	ZFSX-P3	027043	25	✓	T5, T5B, P3



Insert label

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for
Blank insert label	BS45X14-T0	029416	25	✓	T0, T3, P1
	BS84X24-P3	031789	25	✓	T5, T5B, P3



P5 Switch-disconnector add-on front plate

- Enter country reference when ordering
 - D = German
 - GB = English
 - F = French
 - I = Italian
 - E = Spanish

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Switch type	Mounting
P5 Add-on front plate	ZFS(*)-P5	105225	1	✓	P5-.../EA/SVB	Flush mounting /EA
				✓	P5-.../V/SVB	Rear mounting /V



* UL/CSA certification not required

Photos are representative

S-T0 key operated lock mechanism, with two keys, front IP53

The key replaces the thumb grip, cannot be switched without key. The switch position indication is on the lock. Normally the key is withdrawable in every position.

On Cam switches ordered with front plate FS908 together with key operation, the key is only withdrawable in the 0 position.

The key withdraw can be changed (also retrospectively) with the locking cam 'VR-T0'

When retrofitting the key operation, the existing front plate of the cam switch can be used

Description	Withdrawability	Part number	Article number	Std. pack	Suitable for
KMS 1 lock mechanism: individual lock mechanism, not suitable for master key systems. Key withdrawable in all positions	Withdrawable positions can be programmed by user	S-T0	086709	1	Flush mounting /E: T0-1 to T0-6, T3-1 to T3-5, P1
KMS-2-10, KMS 201-400 lock mechanisms: individual lock mechanisms, not suitable for master key systems. Key withdrawable in all positions	Withdrawable positions can be programmed by user	S-SOND-KMS(*)-T0	231957	1	Surface mounting /I1: T0-1 to T0-4 Surface mounting /I2: T3-1 to T3-4, P1
Lock KMS1 switches with FS908 are possible as main switch. Key can be withdrawn in positions as specified.	Withdrawable positions programmed at factory as ordered	S(*)-T0	231959	1	Rear mounting /Z: T0-1 to T0-6, T3-1 to T3-4, P1
SA(...) = master key system (master-key facility) with security certificate. Ordering only with lock plan filled out with the full configuration of the planned lock system . When reordering state item number from the lock plan, e.g. (A 6294-1.2). Key can be withdrawn in positions as specified.	Withdrawable positions programmed at factory as ordered	S(*)-SOND-SA(*)-T0	231965	1	



086709

SVA-T3 Cylinder lock, with two keys, front IP65

Description	Withdrawability	Part number	Article number	Std. pack	Suitable for
KMS 1 lock mechanism: individual lock mechanism, not suitable for master key systems. Key withdrawable in all positions	Withdrawable positions can be programmed by user	SVA-T3	050974	1	Flush mounting /E: T0, T3, P1
KMS-2-10, KMS 201-400 lock mechanisms: individual lock mechanisms, not suitable for master key systems. Key withdrawable in all positions	Withdrawable positions can be programmed by user	SVA-SOND-KMS(*)-T3	231967	1	Surface mounting /I1: T0 Surface mounting /I2: T3, P1 Rear mounting /Z: T0, T3, P1
Lock KMS1 switches with FS908 are possible as main switch. Key can be withdrawn in positions as specified.	Withdrawable positions programmed at factory as ordered	SVA(*)-T3	907745	1	Flush mounting /E: T0-1 to T0-4 T3-1 to T3-6, P1
SA(...) = master key system (master-key facility) with security certificate. Ordering only with lock plan filled out with the full configuration of the planned lock system . When reordering state item number from the lock plan, e.g. (A 6294-1.2). Key can be withdrawn in positions as specified.	Withdrawable positions programmed at factory as ordered	SVA(*)-SOND-SA(*)-T3	231971	1	Surface mounting /I1: T0-1 to T0-4 Surface mounting /I2: T3, P1



050974

Photos are representative

SVC-T3 Padlocking feature, front IP65

The locking slide can be locked with a maximum of 3 padlocks when in its pressed, interlocked position

Description	Withdrawability	Part number	Article number	Std. pack	Mounting form	Suitable for
All positions can be locked	The positions that can be locked can be programmed by the user	SVC-T3	050975	1	Flush mounting /E	T0, T3, P1
					Surface mounting /I1	T0
					Surface mounting /I2	T3, P1
					Rear mounting /Z	T0, T3, P1
Specific positions or ranges can be locked	The positions that can be locked are programmable at the factory as ordered	SVC(*)-T3	907748	1	Switches with FS908 front plate can be used as main switches for:	
					Flush mounting /E	T0-1 to T0-4, T3-1 to T3-5, P1
					Surface mounting /I1	T0-1 to T0-4
					Surface mounting /I2	T3-1 to T3-5, P1



907748

Key

Description	Part number	Article number	Std. pack
For KMS 1 individual lock mechanism	ES-KMS1-T0	231972	10
For KMS 2-10 or KMS 201-400 individual lock mechanisms	ES-KMS(*)-T0	231973	1
Individual key, stainless, for master key system and stored individual lock mechanisms, state lock plan no. and key	HS-SA(*)-T0	256151	1

Master key must be ordered separately.
The security certificate must be sent when reordering for example: HS-SA(A6294-1-.2)-T0



Locking cams (2 cams per set)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for
For later change of key withdrawability in the engagements positions	VR-T0	089082	1	✓	S-T0 for all switching angles
For changing the blocked positions/ ranges	VR-T3	050987	1	✓	SVA-T3, SVC-T3



089082



050987

Photos are representative

Universal accessories

P1 and P3 Neutral terminal

- Early make on switching, late-break off switching
- The N contact always behaves as an early-make contact when switching on and as a late-break contact for when switching off.
- N-P1(P3)...switching capacity same as for contacts P1(P3)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For left or right side mounting	N-P1E	000651	5	✓	P1	Flush mounting /E Centre mounting /EZ
For P1.../I2 optionally, NP1Z or HI11-P1/P3Z, can only be fitted on the left	N-P1Z	000652	5	✓	P1	Surface mounting /I2 Rear mounting /Z Service distribution board /IVS
	N-P3E	062432	5	✓	P3	Flush mounting /E
	N-P3Z	064805	5	✓	P3	Rear mounting /Z Service distribution board /IVS
					P3-63	Surface mounting /I4 Rear mounting /Z
					P3-100	Surface mounting /I5 Rear mounting /Z



P5 Neutral terminal

- Front mounting, left
- Service distribution board mounting right

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Neutral terminal	N-P5-125/160E	280969	1	X	P5-125 and 160	Flush mounting /EA
	N-P5-125/160Z	280970	1	X	P5-125 and 160	Rear mounting /V
	N-P5-250/315E	280971	1	X	P5-250 and 315	Flush mounting /EA
	N-P5-250/315Z	280972	1	X	P5-250 and 315	Rear mounting /V



P5 Ground terminal

- Front mounting, right
- Service distribution board mounting left

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Ground terminal	PE-P5-125/160E	280973	1	X	P5-125 and 160	Flush mounting /EA
	PE-P5-125/160Z	280974	1	X	P5-125 and 160	Rear mounting /V
	PE-P5-250/315E	280975	1	X	P5-250 and 315	Flush mounting /EA
	PE-P5-250/315Z	280976	1	X	P5-250 and 315	Rear mounting /V



P1 Switch terminals

- For use with P1 Switch terminals and additional terminals such as auxiliary and neutral units

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
Fork terminal	FORKTERM-P1	400136	8	X	P1	All mounting options



Photos are representative

Universal accessories

P1 and P3 Auxiliary contacts - 1 normally open (N/O), 1 normally close (N/C)

- Late break on switching, early-make off switching. The N/O is always connected as a load-shedding contact

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For left or right side mounting	HI11-PI/P3UE	EP-400893	5	✓	P1	Flush mounting /E or /EA
					P1	Center mounting /EZ
					P3	Flush mounting /E or /EA
For P1.../I2 optionally, NP1Z or HI11-P1/P3Z, can only be fitted on the left	HI11-PI/P3UZ	EP-400892	5	✓	P1	Surface mounting /I2
				✓	P1	Rear mounting /V or /Z
				✓	P1	Service distribution mounting /IVS
				✓	P3-63	Surface mounting /I4
				✓	P3-63	Rear mounting /V or /Z
				✓	P3-63	Service distribution mounting /IVS
				✓	P3-100	Surface mounting /I5
				✓	P3-100	Rear mounting /V or /Z
				✓	P3-100	Service distribution mounting /IVS

Product standards	UL 60947-4-1, CSA - C22-2 No 14-05 IEC/EN 60947-3, CE Marking
UL File No	E36332
UL CCN	NLRV
CSA File No	12528
CSA Class No	3211-05
NA Certification	UL Listed, CSA Certified



EP-400893

P5 Auxiliary contacts - 2 normally open (N/O), 1 normally close (N/C)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
For left or right side mounting	HI21-P5-125/160E	280963	1		P5-125 and 160	Flush mounting /EA or /E
	HI21-P5-125/160Z	280964	1		P5-125 and 160	Rear mounting /V or Z
	HI21-P5-250/315E	280965	1		P5-250 and 315	Flush mounting /EA or /E
	HI21-P5-250/315Z	280966	1		P5-250 and 315	Rear mounting /V or Z



280964

Coupling drive (including push-in shaft)

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Coupling drive for the retrofitting of switch T0 and T0.../XZ as rear mounting spare part to T0 and T3....Z	DE-T0	093487	1	✓	T0, T3	Rear mounting /Z
Coupling drive for the conversion of T5 and T5B.../E Flush mounting switch to rear mounting spare part for T5, T5B and P3.../Z	DE-P3	093972	1	✓	T5, T5B, P3	Flush mounting /E



093487



093972

Photos are representative

Interlock sections

- With PE and neutral terminal connection
- Mounting on the back of flush mounting switch, with interlock function in rear mounting switches

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Interlock sections - Mounting on the back of flush mounting switch	UV-T0	019925	1	✓	T0, T3	Flush mounting /E Centre mounting /EZ Rear mounting /Z
Interlock sections - With interlock function for rear mounting switches	UV-P3	048289	1	✓	T5B, T5	Flush mounting /E Rear mounting /Z



Shrouds

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)***	Suitable for	Mounting
For flush mounting switches with up to 4 contact units Cable entries Quantity: 2 x Ø 20 mm + 2 x Ø 15 mm Cross section: 5 x 6 mm ² , 5 x 2.5 mm ²	H3-T0	093828	1	✓	T0, T3	Flush mounting /E
For covering the connection terminals of up to 2 contact units*	H1-T5	045062	1	✓	T5B, T5	Flush mounting /E Rear mounting /Z
Extension for H1-T5 protective shroud on 3-8 contact units. One HZ-T5 required per contact unit	HZ-T5	045063	1	✓	H1-T5	
For covering the connection terminals on 3-pole switch-disconnectors*	H-P1	017253	5	✓	P1	Flush mounting /E
			5	✓	P1	Rear mounting /V
For covering the connection terminals on 4-pole switch-disconnectors*	H-P14	019626	5	✓	P1-...N, HI11	All mounting options
For covering the connection terminals on 3-pole open switch-disconnectors with N neutral terminal and/or HI11 auxiliary contact**	H-P3	021999	5	✓	P3	Flush mounting /EA
					P3	Rear mounting /V
					P3-...N, HI11	All mounting options
For covering the terminals	H-P5-125/160	293977	1	✓	P5	All mounting options
	H-P5-250/315	293978	1	✓	P5	All mounting options
Set (6 units) for covering the connection terminals	H-T8	200184	6	✓	T8-3-8342/...	All mounting options

* Can be optionally used for input wiring and/or outgoer

** The protective shroud is designed for mounting on the switch-disconnector on both sides; non required parts can be broken off

*** UL/CSA certification not required



093828



045062



045063



017253



019626



021999



293977 / 293978



200184

Photos are representative

Universal accessories

Control cable terminal

Terminal capacity:

- Solid or stranded 4 mm²
- Flexible with ferrules to DIN 46228: 4 mm²

Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for
Control cable terminal	ST-P5-250/314	280978	1	✓	P5-250/315



IP65 Insulated enclosures

Description	Number of contact units	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)	Suitable for	Mounting
IP65 insulated enclosure - With push-through cable entry diaphragm*	1-2	CI-K1-T0-2	207435	1	X	T0	Rear mounting /Z
	3-4	CI-K1-T0-4	207436	1	X		
	1-2	CI-K2-T3-2	207437	1	✓	T3	Rear mounting /Z
	3-4	CI-K2-T3-4	225325	1	✓		
	5	CI-K2-T3-5	207438	1	✓		
IP65 insulated enclosure - With metric knockouts	1-2	CI-K1H-T0-2	105854	1	X	T0	Rear mounting /Z
	3-4	CI-K1H-T0-4	105855	1	X		
	1-2	CI-K2H-T3-2	269462	1	X	T3	Rear mounting /Z
	3-4	CI-K2H-T3-4	105859	1	X		
	5	CI-K2H-T3-5	105860	1	X		
	1-2	CI-K4-T5B-2**	207439	1	✓	T5B	Flush mounting /E
	3-4	CI-K4-T5B-4**	207440	1	✓	T5B	Rear mounting /Z
	1-2	CI-K5-T5-2**	207441	1	✓	T5	Rear mounting /Z
	3-4	CI-K5-T5-4**	207442	1	✓		
	Only available together with basic unit	+I1H	105870	1	X	T0	Surface mounting I1
		+I2H	105871	1	X	T3	Surface mounting I2
					X	P1	Surface mounting I2

* The diaphragm can be pierced with the cable. 1 contact unit = 2 contacts.

** For converting T5../Z into T5../I5 and T5B../E into T5B../I4, order AW-T5-... extension terminal additionally. 1 contact unit = 2 contacts



207435 / 207436
105855 /



207437 / 269462
105859 / 105860



225325



207438



105854 / 105870
105871



207439 / 207440



207441



207442

Product standards	UL 60947-4-1 CSA - C22-2 No 14-05, CSA - C22-2 No 94 IEC/EN 60947-3 CE Marking
UL File No	E54120
UL CCN	MITW2
CSA File No	12528
CSA Class No	3211-07
NA Certification	UL Listed, CSA Certified
Degree of protection	IEC: IP65 UL/CSA Type 1, 3R, 4X, 12, 13 - indoor and outdoor use

Photos are representative

Universal accessories

Neutral terminals

Description	Flex cable	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Neutral terminal for connection of a 5th conductor	1-4 mm ²	K-CI-K1/2*	207451	20	✓	P1	Surface mounting I2
						T0	Surface mounting I1
						T3	Surface mounting I3
	1.5-16 mm ²	K-CI-K4	206916	20	✓	T5B	Surface mounting I4
						P3	Surface mounting I4
	10-35 mm ²	K-CI-K5	218488	20	✓	T5	Surface mounting I5
						P3	Surface mounting I5

* UL/CSA certification not required



206916



218488

Set of external brackets

Set of external brackets						
Description	Part number	Article number	Std. pack	Suitable for export to North America (US and Canada)*	Suitable for	Mounting
Set of external fixing brackets, for fixing CI-K4 and CI-K5 directly on walls.	AB-CI-K4/5	206914	1	✓	T5B	Surface mounting I4
					P3-63	Surface mounting I4
T5					Surface mounting I5	
P3-100					Surface mounting I5	
One set contains 4 brackets						

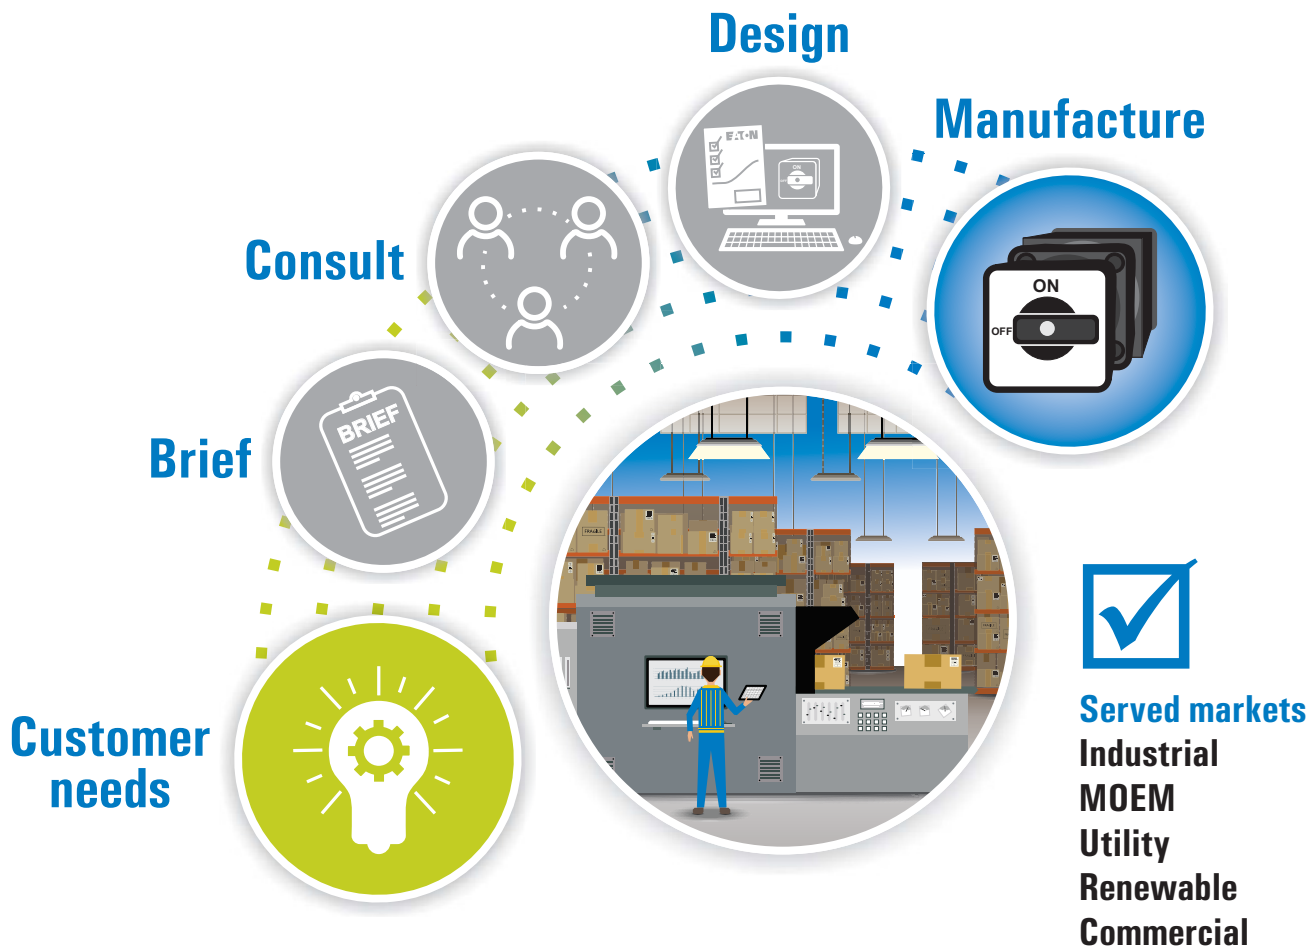
* UL/CSA certification not required



Photos are representative

Customised switch-disconnectors design service

Eaton supports custom solutions to suit your application needs thanks to over 50 years of expert knowledge in Switch-disconnectors design.



Our services include:

- Customised mounting connections.
- Acquire UL/IEC/CCC/CSA certificates.
- Customised testing such as temperature rise or vibration.
- Special plating for connection terminal.
- Modification of enclosures.
- Additional earthing arrangements.
- Custom printed face plates.
- Unique control switching configurations.

Contact us today...

buletechnical@eaton.com

Non standard Cam switches and Switch-disconnectors

T0 Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
20 A	1	Flush mounting		Red	T0-1-SOND*/E	907765	✓
		Flush mounting	✓	Red	T0-1-SOND*/EA/SVB	907776	✓
		Flush mounting	✓	Black	T0-1-SOND*/EA/SVB-SW	908043	✓
		Centre mounting		Red	T0-1-SOND*/EZ	907787	✓
		Surface mounting in size 1 Ci-K Enclosure		Red	T0-1-SOND*/I1	207480	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Red	T0-1-SOND*/I1/SVB	207481	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Black	T0-1-SOND*/I1/SVB-SW	207482	✓
		Service distribution board		Red	T0-1-SOND*/IVS	907806	✓
		Rear mounting	✓	Red	T0-1-SOND*/V/SVB	907817	✓
		Rear mounting	✓	Black	T0-1-SOND*/V/SVB-SW	908054	✓
		Rear mounting		Red	T0-1-SOND*/Z	907839	✓
	2	Flush mounting		Red	T0-2-SOND*/E	907766	✓
		Flush mounting	✓	Red	T0-2-SOND*/EA/SVB	907777	✓
		Flush mounting	✓	Black	T0-2-SOND*/EA/SVB-SW	908044	✓
		Centre mounting		Red	T0-2-SOND*/EZ	907788	✓
		Surface mounting in size 1 Ci-K Enclosure		Red	T0-2-SOND*/I1	207483	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Red	T0-2-SOND*/I1/SVB	207484	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Black	T0-2-SOND*/I1/SVB-SW	207485	✓
		Service distribution board		Red	T0-2-SOND*/IVS	907807	✓
		Rear mounting	✓	Red	T0-2-SOND*/V/SVB	907818	✓
		Rear mounting	✓	Black	T0-2-SOND*/V/SVB-SW	908055	✓
		Rear mounting		Red	T0-2-SOND*/Z	907840	✓
	3	Flush mounting		Red	T0-3-SOND*/E	907767	✓
		Flush mounting	✓	Red	T0-3-SOND*/EA/SVB	907778	✓
		Flush mounting	✓	Black	T0-3-SOND*/EA/SVB-SW	908045	✓
		Centre mounting		Red	T0-3-SOND*/EZ	907789	✓
		Surface mounting in size 1 Ci-K Enclosure		Red	T0-3-SOND*/I1	207486	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Red	T0-3-SOND*/I1/SVB	207487	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Black	T0-3-SOND*/I1/SVB-SW	207488	✓
		Service distribution board		Red	T0-3-SOND*/IVS	907808	✓
		Rear mounting	✓	Red	T0-3-SOND*/V/SVB	907819	✓
		Rear mounting	✓	Black	T0-3-SOND*/V/SVB-SW	908056	✓
		Rear mounting		Red	T0-3-SOND*/Z	907841	✓
	4	Flush mounting		Red	T0-4-SOND*/E	907768	✓
		Flush mounting	✓	Red	T0-4-SOND*/EA/SVB	907779	✓
		Flush mounting	✓	Black	T0-4-SOND*/EA/SVB-SW	908046	✓
		Centre mounting		Red	T0-4-SOND*/EZ	907790	✓
		Surface mounting in size 1 Ci-K Enclosure		Red	T0-4-SOND*/I1	207489	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Red	T0-4-SOND*/I1/SVB	207490	✓
		Surface mounting in size 1 Ci-K Enclosure	✓	Black	T0-4-SOND*/I1/SVB-SW	207491	✓
		Service distribution board		Red	T0-4-SOND*/IVS	907809	✓
		Rear mounting	✓	Red	T0-4-SOND*/V/SVB	907820	✓
		Rear mounting	✓	Black	T0-4-SOND*/V/SVB-SW	908057	✓
		Rear mounting		Red	T0-4-SOND*/Z	907842	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T0 Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
20 A	5	Flush mounting		Red	T0-5-SOND*/E	907769	✓
		Centre mounting		Red	T0-5-SOND*/EZ	907791	✓
		Service distribution board		Red	T0-5-SOND*/IVS	907810	✓
		Rear mounting		Red	T0-5-SOND*/Z	907843	✓
	6	Flush mounting		Red	T0-6-SOND*/E	907770	✓
		Centre mounting		Red	T0-6-SOND*/EZ	907792	✓
		Service distribution board		Red	T0-6-SOND*/IVS	907811	✓
		Rear mounting		Red	T0-6-SOND*/Z	907844	✓
	7	Flush mounting		Red	T0-7-SOND*/E	907771	✓
		Centre mounting		Red	T0-7-SOND*/EZ	907793	✓
		Service distribution board		Red	T0-7-SOND*/IVS	907812	✓
		Rear mounting		Red	T0-7-SOND*/Z	907845	✓
	8	Flush mounting		Red	T0-8-SOND*/E	907772	✓
		Centre mounting		Red	T0-8-SOND*/EZ	907794	✓
		Service distribution board		Red	T0-8-SOND*/IVS	907813	✓
		Rear mounting		Red	T0-8-SOND*/Z	907846	✓
	9	Flush mounting		Red	T0-9-SOND*/E	907773	✓
		Centre mounting		Red	T0-9-SOND*/EZ	907795	✓
		Service distribution board		Red	T0-9-SOND*/IVS	907814	✓
		Rear mounting		Red	T0-9-SOND*/Z	907847	✓
	10	Flush mounting		Red	T0-10-SOND*/E	907774	✓
		Centre mounting		Red	T0-10-SOND*/EZ	907796	✓
		Service distribution board		Red	T0-10-SOND*/IVS	907815	✓
		Rear mounting		Red	T0-11-SOND*/Z	907848	✓
	11	Flush mounting		Red	T0-11-SOND*/E	907775	✓
		Centre mounting		Red	T0-11-SOND*/EZ	907797	✓
		Service distribution board		Red	T0-11-SOND*/IVS	907816	✓
		Rear mounting		Red	T0-11-SOND*/Z	907849	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T3 Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
32 A	1	Flush mounting		Red	T3-1-SOND*/E	907850	✓
		Flush mounting	✓	Red	T3-1-SOND*/EA/SVB	907861	✓
		Flush mounting	✓	Black	T3-1-SOND*/EA/SVB-SW	908080	✓
		Centre mounting		Red	T3-1-SOND*/EZ	907872	✓
		Surface mounting in size 2 Ci-K Enclosure		Red	T3-1-SOND*/I2	207492	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Red	T3-1-SOND*/I2/SVB	207493	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Black	T3-1-SOND*/I2/SVB-SW	207494	✓
		Rear mounting	✓	Red	T3-1-SOND*/V/SVB	907891	✓
		Rear mounting	✓	Black	T3-1-SOND*/V/SVB-SW	908091	✓
		Rear mounting		Red	T3-1-SOND*/Z	907913	✓
	2	Flush mounting		Red	T3-1-SOND*/E	907850	✓
		Flush mounting	✓	Red	T3-1-SOND*/EA/SVB	907861	✓
		Flush mounting	✓	Black	T3-1-SOND*/EA/SVB-SW	908080	✓
		Centre mounting		Red	T3-1-SOND*/EZ	907872	✓
		Surface mounting in size 2 Ci-K Enclosure		Red	T3-1-SOND*/I2	207492	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Red	T3-1-SOND*/I2/SVB	207493	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Black	T3-1-SOND*/I2/SVB-SW	207494	✓
		Rear mounting	✓	Red	T3-1-SOND*/V/SVB	907891	✓
		Rear mounting	✓	Black	T3-1-SOND*/V/SVB-SW	908091	✓
		Rear mounting		Red	T3-1-SOND*/Z	907913	✓
	3	Flush mounting		Red	T3-1-SOND*/E	907852	✓
		Flush mounting	✓	Red	T3-1-SOND*/EA/SVB	907863	✓
		Flush mounting	✓	Black	T3-1-SOND*/EA/SVB-SW	908082	✓
		Centre mounting		Red	T3-1-SOND*/EZ	907874	✓
		Surface mounting in size 2 Ci-K Enclosure		Red	T3-1-SOND*/I2	207498	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Red	T3-1-SOND*/I2/SVB	207499	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Black	T3-1-SOND*/I2/SVB-SW	207500	✓
		Rear mounting	✓	Red	T3-1-SOND*/V/SVB	907893	✓
		Rear mounting	✓	Black	T3-1-SOND*/V/SVB-SW	908093	✓
		Rear mounting		Red	T3-1-SOND*/Z	907915	✓
	4	Flush mounting		Red	T3-1-SOND*/E	907852	✓
		Flush mounting	✓	Red	T3-1-SOND*/EA/SVB	907863	✓
		Flush mounting	✓	Black	T3-1-SOND*/EA/SVB-SW	908082	✓
		Centre mounting		Red	T3-1-SOND*/EZ	907874	✓
		Surface mounting in size 2 Ci-K Enclosure		Red	T3-1-SOND*/I2	207498	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Red	T3-1-SOND*/I2/SVB	207499	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Black	T3-1-SOND*/I2/SVB-SW	207500	✓
		Rear mounting	✓	Red	T3-1-SOND*/V/SVB	907893	✓
		Rear mounting	✓	Black	T3-1-SOND*/V/SVB-SW	908093	✓
		Rear mounting		Red	T3-1-SOND*/Z	907915	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T3 Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
32 A	5	Flush mounting		Red	T3-5-SOND*/E	907850	✓
		Flush mounting	✓	Red	T3-5-SOND*/EA/SVB	907861	✓
		Flush mounting	✓	Black	T3-5-SOND*/EA/SVB-SW	908080	✓
		Centre mounting		Red	T3-5-SOND*/EZ	907872	✓
		Surface mounting in size 2 Ci-K Enclosure		Red	T3-5-SOND*/I2	207492	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Red	T3-5-SOND*/I2/SVB	207493	✓
		Surface mounting in size 2 Ci-K Enclosure	✓	Black	T3-5-SOND*/I2/SVB-SW	207494	✓
		Rear mounting	✓	Red	T3-5-SOND*/V/SVB	907891	✓
		Rear mounting	✓	Black	T3-5-SOND*/V/SVB-SW	908091	✓
		Rear mounting		Red	T3-5-SOND*/Z	907913	✓
	6	Flush mounting		Red	T3-6-SOND*/E	907855	✓
		Flush mounting	✓	Red	T3-6-SOND*/EA/SVB	907866	✓
		Flush mounting	✓	Black	T3-6-SOND*/EA/SVB-SW	908085	✓
		Centre mounting		Red	T3-6-SOND*/EZ	907877	✓
		Rear mounting	✓	Red	T3-6-SOND*/V/SVB	907896	✓
		Rear mounting	✓	Black	T3-6-SOND*/V/SVB-SW	908096	✓
		Rear mounting		Red	T3-6-SOND*/Z	907918	✓
	7	Flush mounting		Red	T3-7-SOND*/E	907856	✓
		Centre mounting		Red	T3-7-SOND*/EZ	907878	✓
		Rear mounting		Red	T3-7-SOND*/Z	907919	✓
	8	Flush mounting		Red	T3-8-SOND*/E	907857	✓
		Centre mounting		Red	T3-8-SOND*/EZ	907879	✓
		Rear mounting		Red	T3-8-SOND*/Z	907920	✓
	9	Flush mounting		Red	T3-9-SOND*/E	907858	✓
		Centre mounting		Red	T3-9-SOND*/EZ	907880	✓
		Rear mounting		Red	T3-9-SOND*/Z	907921	✓
	10	Flush mounting		Red	T3-10-SOND*/E	907859	✓
		Centre mounting		Red	T3-10-SOND*/EZ	907881	✓
		Rear mounting		Red	T3-10-SOND*/Z	907922	✓
	11	Flush mounting		Red	T3-11-SOND*/E	907860	✓
		Centre mounting		Red	T3-11-SOND*/EZ	907882	✓
		Rear mounting		Red	T3-11-SOND*/Z	907923	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T5B Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
63 A	1	Flush mounting		Red	T5B-1-SOND*/E	907924	✓
		Flush mounting	✓	Red	T5B-1-SOND*/EA/SVB	907934	✓
		Flush mounting	✓	Black	T5B-1-SOND*/EA/SVB-SW	908106	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5B-1-SOND*/I4	207510	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5B-1-SOND*/I4/SVB	207511	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5B-1-SOND*/I4/SVB-SW	207512	✓
		Rear mounting	✓	Red	T5B-1-SOND*/V/SVB	907950	✓
		Rear mounting	✓	Black	T5B-1-SOND*/V/SVB-SW	908114	✓
		Rear mounting		Red	T5B-1-SOND*/Z	907968	✓
	2	Flush mounting		Red	T5B-2-SOND*/E	907925	✓
		Flush mounting	✓	Red	T5B-2-SOND*/EA/SVB	907935	✓
		Flush mounting	✓	Black	T5B-2-SOND*/EA/SVB-SW	908107	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5B-2-SOND*/I4	207514	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5B-2-SOND*/I4/SVB	207515	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5B-2-SOND*/I4/SVB-SW	207516	✓
		Rear mounting	✓	Red	T5B-2-SOND*/V/SVB	907951	✓
		Rear mounting	✓	Black	T5B-2-SOND*/V/SVB-SW	908115	✓
		Rear mounting		Red	T5B-2-SOND*/Z	907969	✓
	3	Flush mounting		Red	T5B-3-SOND*/E	907926	✓
		Flush mounting	✓	Red	T5B-3-SOND*/EA/SVB	907936	✓
		Flush mounting	✓	Black	T5B-3-SOND*/EA/SVB-SW	908108	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5B-3-SOND*/I4	207518	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5B-3-SOND*/I4/SVB	207519	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5B-3-SOND*/I4/SVB-SW	207520	✓
		Rear mounting	✓	Red	T5B-3-SOND*/V/SVB	907952	✓
		Rear mounting	✓	Black	T5B-3-SOND*/V/SVB-SW	908116	✓
		Rear mounting		Red	T5B-3-SOND*/Z	907970	✓
	4	Flush mounting		Red	T5B-4-SOND*/E	907927	✓
		Flush mounting	✓	Red	T5B-4-SOND*/EA/SVB	907937	✓
		Flush mounting	✓	Black	T5B-4-SOND*/EA/SVB-SW	908109	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5B-4-SOND*/I4	207521	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5B-4-SOND*/I4/SVB	207522	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5B-4-SOND*/I4/SVB-SW	207523	✓
		Rear mounting	✓	Red	T5B-4-SOND*/V/SVB	907953	✓
		Rear mounting	✓	Black	T5B-4-SOND*/V/SVB-SW	908117	✓
		Rear mounting		Red	T5B-4-SOND*/Z	907971	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T5B Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
63 A	5	Flush mounting		Red	T5B-5-SOND*/E	907928	✓
		Flush mounting	✓	Red	T5B-5-SOND*/EA/SVB	907938	✓
		Flush mounting	✓	Black	T5B-5-SOND*/EA/SVB-SW	908110	✓
		Rear mounting	✓	Red	T5B-5-SOND*/V/SVB	907954	✓
		Rear mounting	✓	Black	T5B-5-SOND*/V/SVB-SW	908118	✓
		Rear mounting		Red	T5B-5-SOND*/Z	907972	✓
	6	Flush mounting		Red	T5B-6-SOND*/E	907929	✓
		Flush mounting	✓	Red	T5B-6-SOND*/EA/SVB	907939	✓
		Flush mounting	✓	Black	T5B-6-SOND*/EA/SVB-SW	908111	✓
		Rear mounting	✓	Red	T5B-6-SOND*/V/SVB	907955	✓
		Rear mounting	✓	Black	T5B-6-SOND*/V/SVB-SW	908119	✓
		Rear mounting		Red	T5B-6-SOND*/Z	907973	✓
	7	Flush mounting		Red	T5B-7-SOND*/E	907930	✓
		Flush mounting	✓	Red	T5B-7-SOND*/EA/SVB	907940	✓
		Flush mounting	✓	Black	T5B-7-SOND*/EA/SVB-SW	908112	✓
		Rear mounting	✓	Red	T5B-7-SOND*/V/SVB	907956	✓
		Rear mounting	✓	Black	T5B-7-SOND*/V/SVB-SW	908120	✓
		Rear mounting		Red	T5B-7-SOND*/Z	907974	✓
	8	Flush mounting		Red	T5B-8-SOND*/E	907931	✓
		Flush mounting	✓	Red	T5B-8-SOND*/EA/SVB	907941	✓
		Flush mounting	✓	Black	T5B-8-SOND*/EA/SVB-SW	908113	✓
		Rear mounting	✓	Red	T5B-8-SOND*/V/SVB	907957	✓
		Rear mounting	✓	Black	T5B-8-SOND*/V/SVB-SW	908121	✓
		Rear mounting		Red	T5B-8-SOND*/Z	907975	✓
	9	Flush mounting		Red	T5B-9-SOND*/E	907932	✓
		Rear mounting		Red	T5B-9-SOND*/Z	907976	✓
	10	Flush mounting		Red	T5B-10-SOND*/E	907933	✓
		Rear mounting		Red	T5B-10-SOND*/Z	907977	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T5 Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
100 A	1	Flush mounting		Red	T5-1-SOND*/E	907978	✓
		Flush mounting	✓	Red	T5-1-SOND*/EA/SVB	908031	✓
		Flush mounting	✓	Black	T5-1-SOND*/EA/SVB-SW	908126	✓
		Surface mounting in size 5 Ci-K Enclosure		Red	T5-1-SOND*/I4	207524	✓
		Surface mounting in size 5 Ci-K Enclosure	✓	Red	T5-1-SOND*/I4/SVB	207525	✓
		Surface mounting in size 5 Ci-K Enclosure	✓	Black	T5-1-SOND*/I4/SVB-SW	207526	✓
		Rear mounting	✓	Red	T5-1-SOND*/V/SVB	908003	✓
		Rear mounting	✓	Black	T5-1-SOND*/V/SVB-SW	908134	✓
		Rear mounting		Red	T5-1-SOND*/Z	908021	✓
	2	Flush mounting		Red	T5-2-SOND*/E	907979	✓
		Flush mounting	✓	Red	T5-2-SOND*/EA/SVB	907988	✓
		Flush mounting	✓	Black	T5-2-SOND*/EA/SVB-SW	908127	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5-2-SOND*/I4	207527	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5-2-SOND*/I4/SVB	207528	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5-2-SOND*/I4/SVB-SW	207529	✓
		Rear mounting	✓	Red	T5-2-SOND*/V/SVB	908004	✓
		Rear mounting	✓	Black	T5-2-SOND*/V/SVB-SW	908135	✓
		Rear mounting		Red	T5-2-SOND*/Z	908022	✓
	3	Flush mounting		Red	T5-3-SOND*/E	907980	✓
		Flush mounting	✓	Red	T5-3-SOND*/EA/SVB	907989	✓
		Flush mounting	✓	Black	T5-3-SOND*/EA/SVB-SW	908128	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5-3-SOND*/I4	207530	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5-3-SOND*/I4/SVB	207531	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5-3-SOND*/I4/SVB-SW	207532	✓
		Rear mounting	✓	Red	T5-3-SOND*/V/SVB	908005	✓
		Rear mounting	✓	Black	T5-3-SOND*/V/SVB-SW	908136	✓
		Rear mounting		Red	T5-3-SOND*/Z	908023	✓
	4	Flush mounting		Red	T5-4-SOND*/E	907981	✓
		Flush mounting	✓	Red	T5-4-SOND*/EA/SVB	907990	✓
		Flush mounting	✓	Black	T5-4-SOND*/EA/SVB-SW	908129	✓
		Surface mounting in size 4 Ci-K Enclosure		Red	T5-4-SOND*/I4	207533	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Red	T5-4-SOND*/I4/SVB	207534	✓
		Surface mounting in size 4 Ci-K Enclosure	✓	Black	T5-4-SOND*/I4/SVB-SW	207535	✓
		Rear mounting	✓	Red	T5-4-SOND*/V/SVB	908005	✓
		Rear mounting	✓	Black	T5-4-SOND*/V/SVB-SW	908137	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

T5 Cam switches

Rated current	Number of contact chambers	Mounting option	Main switch	Handle colour	Part number	Article number	Suitable for export to North America (US and Canada)
100 A	5	Flush mounting		Red	T5-5-SOND*/E	907982	✓
		Flush mounting	✓	Red	T5-5-SOND*/EA/SVB	908991	✓
		Flush mounting	✓	Black	T5-5-SOND*/EA/SVB-SW	908130	✓
		Rear mounting	✓	Red	T5-5-SOND*/V/SVB	908007	✓
		Rear mounting	✓	Black	T5-5-SOND*/V/SVB-SW	908138	✓
		Rear mounting		Red	T5-5-SOND*/Z	908025	✓
	6	Flush mounting		Red	T5-6-SOND*/E	907983	✓
		Flush mounting	✓	Red	T5-6-SOND*/EA/SVB	908992	✓
		Flush mounting	✓	Black	T5-6-SOND*/EA/SVB-SW	908131	✓
		Rear mounting	✓	Red	T5-6-SOND*/V/SVB	908008	✓
		Rear mounting	✓	Black	T5-6-SOND*/V/SVB-SW	908139	✓
		Rear mounting		Red	T5-6-SOND*/Z	908026	✓
	7	Flush mounting		Red	T5-7-SOND*/E	907984	✓
		Flush mounting	✓	Red	T5-7-SOND*/EA/SVB	908993	✓
		Flush mounting	✓	Black	T5-7-SOND*/EA/SVB-SW	908132	✓
		Rear mounting	✓	Red	T5-7-SOND*/V/SVB	908009	✓
		Rear mounting	✓	Black	T5-7-SOND*/V/SVB-SW	908140	✓
		Rear mounting		Red	T5-7-SOND*/Z	908027	✓
	8	Flush mounting		Red	T5-8-SOND*/E	907985	✓
		Flush mounting	✓	Red	T5-8-SOND*/EA/SVB	908994	✓
		Flush mounting	✓	Black	T5-8-SOND*/EA/SVB-SW	908133	✓
		Rear mounting	✓	Red	T5-8-SOND*/V/SVB	908010	✓
		Rear mounting	✓	Black	T5-8-SOND*/V/SVB-SW	908141	✓
		Rear mounting		Red	T5-8-SOND*/Z	908028	✓
	9	Flush mounting		Red	T5-9-SOND*/E	907986	✓
		Flush mounting	✓	Red	T5-9-SOND*/EA/SVB	908029	✓
		Flush mounting	✓	Black	T5-9-SOND*/EA/SVB-SW	907987	✓
		Rear mounting	✓	Red	T5-9-SOND*/V/SVB	908030	✓

Note: Please use the 'Ordering non-standard contact sequences' order form when ordering for the first time. When placing repeat orders, specify the contact sequence number together (e.g. 47110GB).

For Standard information please refer to pages 180 and 181

Non standard Cam switches and Switch-disconnectors

TM Non-standard switches - SOND-ERSTBESTELLUNG

For new orders with a completed form

Rated current	Number of contact chambers	Mounting option	Main switch	Part number	Article number	Suitable for export to North America (US and Canada)
10 A	1	Flush mounting		TM-1-SOND-ERSTBESTELLUNG/E	208261	✓
	1	Centre mounting		TM-1-SOND-ERSTBESTELLUNG/EZ	208262	✓
	1	Service distribution board		TM-1-SOND-ERSTBESTELLUNG/IVS	225347	✓
	2	Flush mounting		TM-2-SOND-ERSTBESTELLUNG/E	208263	✓
	2	Centre mounting		TM-2-SOND-ERSTBESTELLUNG/EZ	208264	✓
	2	Service distribution board		TM-2-SOND-ERSTBESTELLUNG/IVS	225349	✓
	3	Flush mounting		TM-3-SOND-ERSTBESTELLUNG/E	208265	✓
	3	Centre mounting		TM-3-SOND-ERSTBESTELLUNG/EZ	208266	✓
	4	Flush mounting		TM-4-SOND-ERSTBESTELLUNG/E	208267	✓
	4	Centre mounting		TM-4-SOND-ERSTBESTELLUNG/EZ	208268	✓
	5	Flush mounting		TM-5-SOND-ERSTBESTELLUNG/E	208269	✓
	5	Centre mounting		TM-5-SOND-ERSTBESTELLUNG/EZ	208270	✓
	6	Flush mounting		TM-6-SOND-ERSTBESTELLUNG/E	208271	✓
	6	Centre mounting		TM-6-SOND-ERSTBESTELLUNG/EZ	208272	✓
	7	Flush mounting		TM-7-SOND-ERSTBESTELLUNG/E	208273	✓
	7	Centre mounting		TM-7-SOND-ERSTBESTELLUNG/EZ	208274	✓
	8	Flush mounting		TM-8-SOND-ERSTBESTELLUNG/E	208275	✓
	8	Centre mounting		TM-8-SOND-ERSTBESTELLUNG/EZ	208276	✓

TM Non-standard switches - SOND

For repeat orders for which the design number is already known Form F02 is not required for this purpose. The design number is a six-digit number and must always be greater than 200000.

Rated current	Number of contact chambers	Mounting option	Main switch	Part number	Article number	Suitable for export to North America (US and Canada)
10 A	1	Flush mounting		TM-1-SOND*/E	907749	✓
	2	Flush mounting		TM-2-SOND*/E	907763	✓
	3	Flush mounting		TM-3-SOND*/E	907750	✓
	4	Flush mounting		TM-4-SOND*/E	907751	✓
	5	Flush mounting		TM-5-SOND*/E	907764	✓
	6	Flush mounting		TM-6-SOND*/E	907752	✓
	7	Flush mounting		TM-7-SOND*/E	907753	✓
	8	Flush mounting		TM-8-SOND*/E	907754	✓
	1	Centre mounting		TM-1-SOND*/E	907755	✓
	2	Centre mounting		TM-2-SOND*/EZ	907756	✓
	3	Centre mounting		TM-3-SOND*/EZ	907757	✓
	4	Centre mounting		TM-4-SOND*/EZ	907758	✓
	5	Centre mounting		TM-5-SOND*/EZ	907759	✓
	6	Centre mounting		TM-6-SOND*/EZ	907760	✓
	7	Centre mounting		TM-7-SOND*/EZ	907761	✓
	8	Centre mounting		TM-8-SOND*/EZ	907762	✓
	1	Service distribution board		TM-1-SOND*/IVS	225346	✓
	2	Service distribution board		TM-2-SOND*/IVS	225348	✓

For Standard information please refer to pages 180 and 181

Ordering of non standard contact sequences

Contact sequence The adjacent form makes it easier to specify the contact sequence.	Fleeting contacts The duration of the fleeting contact depends primarily on the actuation speed. In order to actuate a contactor with a fleeting pulse, the switching angle of the cam switch must not be less than 60°, since the pulse time can be too short if the switching angle is smaller. Fleeting contact elements always cooperate in both operating directions.
Switching angle 30, 45, 60, 90° Preferred angle: 60° For On-Off switches: 90° For main switches: 90° as FS 908 Changeover with interruption between 2 positions (ON-OFF-ON) not permissible for T0, T3 and TM = 30°, 45°; for T5 (T5B) = 30° Star delta switch only with switching angle ≥ 60°	Complete rotation Only possible with a total switching angle at 360° the direction of switching can be either operating direction. The number of switch position multiplied by the switching angle must be 360°, TM with 12 positions (one every 30°) only available with complete rotation, not with stop.
Terminal marking TM switches have consecutive terminal markings starting with 1.	Front plates Front plates are part of the equipment supplied with a 'first order of rotary switch' and therefore do not need to be ordered separately.

(1)	For T0.../I1 max 4 contact units For T3.../I2 max 5 contact units
(2)	For T0 up to a max 8 contact = 4 BE For T3: up to a max. of 12 contacts = 6 BE

Non standard Cam switches and Switch-disconnectors

Non-standard contact sequence ordering example




Binding document for ordering T cam switch combinations for the first time

Order No.: 123456	Item: 7	Office: Cologne	Author: HWS																																										
Customer: Sample Company		Customer no.: A4711/2004	Date: 29.2.2004																																										
Quantity: 3	Switching angle:	Part no.:	Number of contacts:																																										
Euros/unit:	☐ 30 ☐ 45 ☐ 60 ☐ 90	☐ TM ☐ T0 ☐ T3 ☐ T5B ☐ T5	☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐ 9 ☐ 10 ☐ 11																																										
		☐ 12 ☐ 13 ☐ 14 ☐ 15 ☐ 16 ☐ 17 ☐ 18 ☐ 19 ☐ 20 ☐ 21 ☐ 22	Mounting form: ☐ E ☐ EA/SVB ☐ EZ ☐ I... ☐ I.../SVB ☐ IVS ☐ V/SVB ☐ Z ☐ + ST-0 ☐ + _____																																										
Max. characters per position <table border="1"> <thead> <tr> <th>Degrees</th> <th>TM-E</th> <th>TM-EZ</th> <th>TM-IVS</th> <th>T0(3)</th> <th>T5(B)</th> </tr> </thead> <tbody> <tr> <td>0.18</td> <td>5</td> <td>5</td> <td>6</td> <td>13</td> <td>13</td> </tr> <tr> <td>30, 210, 330</td> <td>8</td> <td>7</td> <td>4</td> <td>8</td> <td>8</td> </tr> <tr> <td>45, 135, 225, 315</td> <td>6</td> <td>5</td> <td>4</td> <td>6</td> <td>7</td> </tr> <tr> <td>60, 120, 240, 300</td> <td>5</td> <td>5</td> <td>3</td> <td>5</td> <td>7</td> </tr> <tr> <td>90, 270</td> <td>5</td> <td>4</td> <td>1</td> <td>4</td> <td>7</td> </tr> <tr> <td>150</td> <td>4</td> <td>4</td> <td>4</td> <td>8</td> <td>8</td> </tr> </tbody> </table>				Degrees	TM-E	TM-EZ	TM-IVS	T0(3)	T5(B)	0.18	5	5	6	13	13	30, 210, 330	8	7	4	8	8	45, 135, 225, 315	6	5	4	6	7	60, 120, 240, 300	5	5	3	5	7	90, 270	5	4	1	4	7	150	4	4	4	8	8
Degrees	TM-E	TM-EZ	TM-IVS	T0(3)	T5(B)																																								
0.18	5	5	6	13	13																																								
30, 210, 330	8	7	4	8	8																																								
45, 135, 225, 315	6	5	4	6	7																																								
60, 120, 240, 300	5	5	3	5	7																																								
90, 270	5	4	1	4	7																																								
150	4	4	4	8	8																																								

Front plate no. FS		Contact units																					
		1234567891011																					
☐ Complete rotation ☐ Automatic spring-return																							
Inscription 																							
Degrees		1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39	41	43
		2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44
270	1	X	X	X	X	X		X															
300																							
315																							
330	2	X		X					X														
0																							
30	3	X				X	X																
45																							
60	4									X													
90																							
120																							
135																							
150																							
180																							
210																							
225																							
240																							
Key withdrawable		X	Part no. for repeat orders (to be filled in by factory) T																				

Key withdrawability for ..S-T0 and SVA-T3:

Pos. 1:	Key withdrawable	} In the case of SVA-T3, the unit can still be switched between positions 1 and 2 if the key has been removed..
Pos. 2:	Key withdrawable	
Pos. 3:	Key withdrawable	
Pos. 4:	Key not withdrawable	

EAT•N						Binding document for initial orders for T rotary switch combinations																	
Order number:		Item:		Office:				Name:															
Customer:				Customer number:				Date:															
Note: The number of possible contacts, as well as the possible combinations with mounting forms are shown in the Main Catalogue.		Quantity:		Switching angle:		Type:		No. of contacts:				Mounting form:											
		Euro/each:		30 45 60 90		TM T0 T3 T5B T5		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22				E EA/SVB EZ I... I.../SVB IVS V/SVB XZ Z + + EA/SVB-SW I.../SVB-SW V/SVB-SW											
Max. characters per switching angle on FS plate																							
Degrees		TM-E	TM-EZ	TM-IVS	T0(3)	T5(B)																	
0		5	5	6	13	13																	
30, 210, 330		8	7	4	8	8																	
45, 135, 225, 315		6	5	4	6	7																	
60, 120, 240, 300		5	5	3	5	7																	
90, 270		5	4	1	4	7																	
150		4	4	4	8	8																	
180		5	5	6	7	13																	
Front plate no.		Contact units																					
FS		1 2 3 4 5 6 7 8 9 10 11																					
Complete rotation		1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43																					
Spring-return		2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44																					
																							
Degrees	Inscription	1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39	41	43
270		2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44
300																							
315																							
330																							
0																							
30																							
45																							
60																							
90																							
120																							
135																							
150																							
180																							
210																							
225																							
240																							
Key withdrawable		Type for re-ordering (to be filled in by factory) T																					

EATON

Binding document for initial orders of non-standard front plates

Order number:			Item:		
Office:			Name:		
Customer:			Customer number:		
Quantity:		Euro/each:		Date:	

The text is always centered in the text box

Non-Standard Front Plates

Inscription:
Front plate with black lettering

Insert Text

Note: The maximum number of characters allowed outside the marked areas!

Type Non-standard front plate T0, T3 or P1
 FS-SOND-ERSTBESTELLUNG-T0
 (SAP-Nr: 225355)
 Height of ≤ 2 characters 4 mm
 letters ≥ 2 characters 3 mm

Type Non-standard front plate T5B, T5 or P3
 FS-SOND-ERSTBESTELLUNG-P3
 (SAP-Nr: 225356)
 Height of ≤ 2 characters 8 mm
 letters ≥ 2 characters 5 mm

Type Non-standard front plate TM/E
 TM/E-FRONTSCCHILD-NR(*)
 (SAP-Nr: 239021)
 Type Non-standard front plate TM/EZ
 TM/EZ-FRONTSCCHILD-NR(*)
 (SAP-Nr: 239022)
 Height of ≤ 2 characters 3,5 mm
 letters ≥ 2 characters 3 mm

For P1 and P3 complete only the 270° and 0° positions

Maximal numbers of characters possible position

Degrees	TM-E	TM-EZ	T0/P1	T5/P3
0	5	5	13	13
30, 210, 330	8	7	8	8
45, 135, 225, 315	6	5	6	7
60, 120, 240, 300	5	5	5	7
90, 270	5	4	4	7
150	4	4	8	8
180	5	5	7	13

Dimensions

Type	Size of front plate
TM-.../E	29 x 29 mm (for frame size 30 x 30)
TM-.../EZ	29 x 29 mm (for frame size 30 x 30)
T0, T3, P1	45 x 45 mm (for frame size 48 x 48)
T5B, T5, P3	84 x 84 mm (for frame size 88 x 88)

Type for re-ordering (to be fill in by factory)

FS

P Switch-disconnectors standards

Product group	IEC 60947-1	IEC 60947-3	CE Marking	UKCA Marking	Degree of protection		NA Certification	UL FILE No.	UL CCN		UL 489	UL 508
					IEC	UL/CSA			NLRV	NLRV7		
P1 - ... /E	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /EZ	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /Z	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /M4	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /IVS	✓	✓	✓	✓	IP30	-	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /I1	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P1 - ... /I1H	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P1 - ... /I2	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P1 - ... /I2H	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P1 - ... /... -SI(-SW)	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P1 - ... /SE1	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P3 - ... /E	✓	✓	✓	✓	IP65	1	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /Z	✓	✓	✓	✓	IP65	1	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /M4	✓	✓	✓	✓	IP65	1	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /IVS	✓	✓	✓	✓	IP30	1	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /I3	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P3 - ... /I4	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /I5	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X	X
P3 - ... /... -SI	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P3 - ... /SE3	✓	✓	✓	✓	IP65	-	X	X	X	X	X	X
P3-30/...-MCS	X	X	X	X	X	X	X	X	X	X	✓	X
P5 - ... /E	✓	✓	✓	✓	IP65	12	UL Listed, CSA Certified	E36332	✓	✓	X	✓
P5 - ... /Z	✓	✓	✓	✓	IP65	12	UL Listed, CSA Certified	E36332	✓	✓	X	✓
P5 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	12	UL Listed, CSA Certified	E36332	✓	✓	X	✓

Notes:

All switch-disconnectors comply to IEC 62061-1

All switch-disconnectors with emergency switch off/emergency stop function comply to IEC 60204-1

P Switch-disconnectors standards

Product group	UL 60947-1	UL 60947-4-1	CSA FILE No.	CSA Class No.							Suitable for	
				3211-25	3211-05	CSA 60947-1-13	CSA 60947-4-1-14	CSA C22.2 No. 0-10	CSA 22.2 14-10	CSA 22.2 14-13	Branch circuits	Motor disconnect
P1 - ... /E	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P1 - ... /EZ	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P1 - ... /Z	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P1 - ... /M4	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P1 - ... /SVB(-SW)	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P1 - ... /IVS	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	X
P1 - ... /I1	X	X	X	X	X	X	X	X	X		X	X
P1 - ... /I1H	X	X	X	X	X	X	X	X	X	X	X	X
P1 - ... /I2	✓	✓	012528	✓	✓	✓	✓	✓		✓	✓	✓
P1 - ... /I2H	X	X	X	X	X	X	X	X	X	X	X	X
P1 - ... /... -SI(-SW)	X	X	X	X	X	X	X	X	X	X	X	X
P1 - ... /SE1	X	X	X	X	X	X	X	X	X	X	X	X
P3 - ... /E	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P3 - ... /Z	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P3 - ... /M4	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P3 - ... /IVS	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	
P3 - ... /SVB(-SW)	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P3 - ... /I3	X	X	X	X	X	X	X	X	X	X	X	X
P3 - ... /I4	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P3 - ... /I5	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
P3 - ... /... -SI	X	X	X	X	X	X	X	X	X	X	X	X
P3 - ... /SE3	X	X	X	X	X	X	X	X	X	X	X	X
P3-30/...-MCS	X	X	X	X	X	X	X	X	X	X	X	X
P5 - ... /E	X	X	223805	X	✓	X	X	X	✓	X	✓	✓
P5 - ... /Z	X	X	223805	X	✓	X	X	X	✓	X	✓	✓
P5 - ... /SVB(-SW)	X	X	223805	X	✓	X	X	X	✓	X	✓	✓

Notes:

All switch-disconnectors comply to IEC 62061-1

All switch-disconnectors with emergency switch off/emergency stop function comply to IEC 60204-1

T Rotary cam switch-disconnectors standards

Product group	IEC 60947-1	IEC 60947-3	CE Marking	UKCA Marking	Degree of protection		NA Certification	UL FILE No.	UL CCN		UL 508
					IEC	UL/CSA			NLRV	NLRV7	
TM - ... /E	✓	✓	✓	✓	IP65	-	UL Listed, Certified for UL use in Canada	E36332	✓	X	✓
TM - ... /EZ	✓	✓	✓	✓	IP65	-	UL Listed, Certified for UL use in Canada	E36332	✓	X	✓
TM - ... /IVS	✓	✓	✓	✓	IP30	-	UL Listed, Certified for UL use in Canada	E36332	✓	X	✓
T0 - ... /E	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T0 - ... /EZ	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T0 - ... /Z	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T0 - ... /IVS	✓	✓	✓	✓	IP30	-	UL Listed, CSA Certified	E36332	✓	X	X
T0 - ... /I1	✓	✓	✓	✓	IP65	-	X	X	X	X	X
T0 - ... /I1H	✓	✓	✓	✓	IP65	-	X	X	X	X	X
T0 - ... /I2	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T0 - ... /I2H	✓	✓	✓	✓	IP65	-	X	X	X	X	X
T0 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T3 - ... /E	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T3 - ... /EZ	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T3 - ... /Z	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T3 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T3 - ... /I2	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T3 - ... /I2H	✓	✓	✓	✓	IP65	-	X	X	X	X	X
T5(B) - ... /E	✓	✓	✓	✓	IP65	1	UL Listed, CSA Certified	E36332	✓	X	X
T5(B) - ... /Z	✓	✓	✓	✓	IP65	1	UL Listed, CSA Certified	E36332	✓	X	X
T5(B) - ... /I	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T5(B) - ... /SVB(-SW)	✓	✓	✓	✓	IP65	1, 12	UL Listed, CSA Certified	E36332	✓	X	X
T6 - ... /E	✓	✓	✓	✓	IP65	X	Contact BuleTechnical@Eaton.com for more information	X	X	X	X
T6 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	X		X	X	X	X
T6 - ... /I45	✓	✓	✓	✓	IP65	X		X	X	X	X
T8 - ... /E	✓	✓	✓	✓	IP65	X-		X	X	X	X
T8 - ... /SVB(-SW)	✓	✓	✓	✓	IP65	X		X	X	X	X
T6 - ... /I48	✓	✓	✓	✓	IP65	X		X	X	X	X

Notes:

All switch-disconnectors comply to IEC 62061-1

All switch-disconnectors with emergency switch off/emergency stop function comply to IEC 60204-1

T Rotary cam switch-disconnectors standards

Product group	UL 60947-1	UL 60947-4-1	CSA FILE No.	CSA Class No.							Suitable for	
				3211-25	3211-05	CSA 60947-1-13	CSA 60947-4-1-14	CSA C22.2 No. 0-10	CSA 22.2 14-10	CSA 22.2 14-13	Branch circuits	Motor disconnect
TM - ... /E	X	X	UL report applies to both US and Canada	X	X	X	X	X	✓	X	X	X
TM - ... /EZ	X	X		X	X	X	X	X	✓	X	X	X
TM - ... /IVS	X	X		X	X	X	X	X	✓	X	X	X
T0 - ... /E	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T0 - ... /EZ	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T0 - ... /Z	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T0 - ... /IVS	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	X
T0 - ... /I1	X	X	X	X	X	X	X	X	X	X	X	X
T0 - ... /I1H	X	X	X	X	X	X	X	X	X	X	X	X
T0 - ... /I2	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T0 - ... /I2H	X	X	X	X	X	X	X	X	X	X	X	X
T0 - ... /SVB(-SW)	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T3 - ... /E	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T3 - ... /EZ	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T3 - ... /Z	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T3 - ... /SVB(-SW)	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T3 - ... /I2	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T3 - ... /I2H	X	X	X	X	X	X	X	X	X	X	X	X
T5(B) - ... /E	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T5(B) - ... /Z	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T5(B) - ... /I	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T5(B) - ... /SVB(-SW)	✓	✓	012528	✓	✓	✓	✓	✓	X	✓	✓	✓
T6 - ... /E	X	X	X	X	X	X	X	X	X	X	X	X
T6 - ... /SVB(-SW)	X	X	X	X	X	X	X	X	X	X	X	X
T6 - ... /I45	Contact buletechnical@eaton.com for more information											
T8 - ... /E												
T8 - ... /SVB(-SW)												
T6 - ... /I48												

Notes:

All switch-disconnectors comply to IEC 62061-1

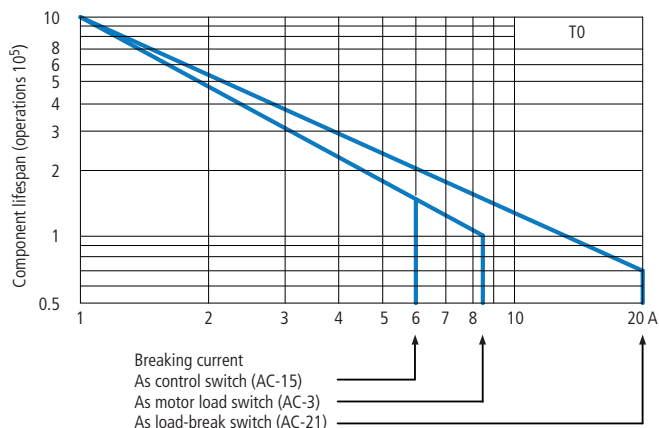
All switch-disconnectors with emergency switch off/emergency stop function comply to IEC 60204-1

Characteristic curves

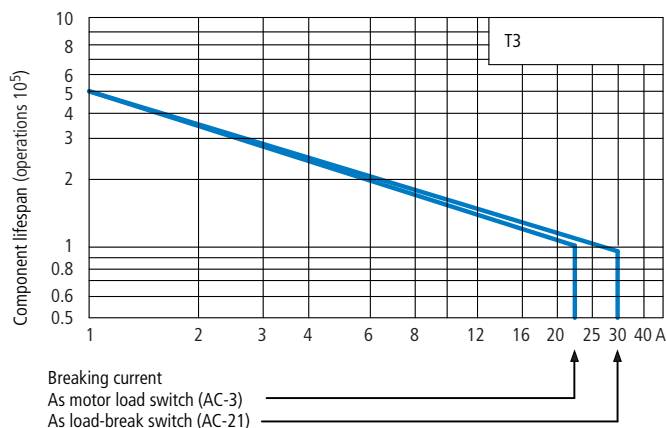
Component lifespan based on breaking current and utilisation category AC-3 and AC-21 at 400 V a.c., AC-15 at 230 V.

To ensure a reasonable service life in utilisation category AC-4 (extreme load: 100% inching, reversing or plug braking) the motor's standstill current must not exceed the rated operational current of the switch AC-21A.

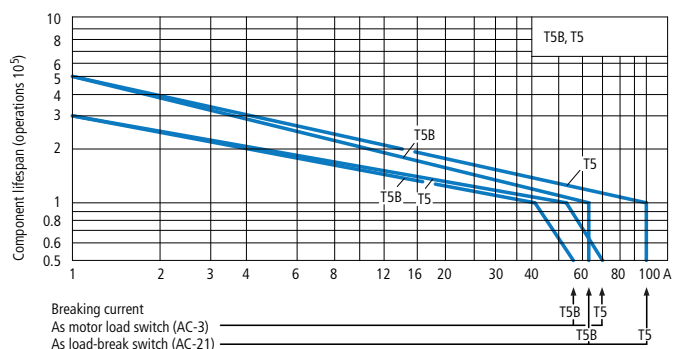
T0 - Characteristic curve



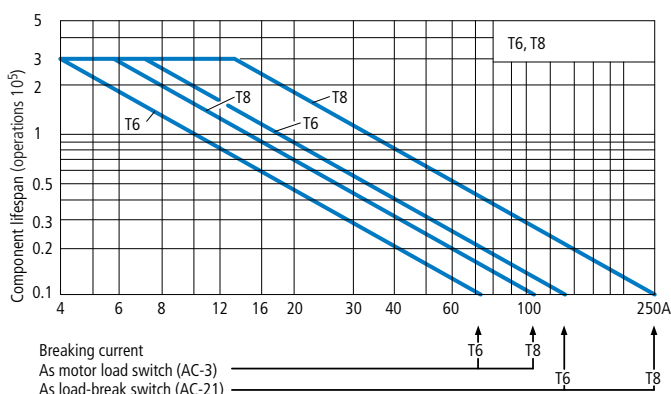
T3 - Characteristic curve



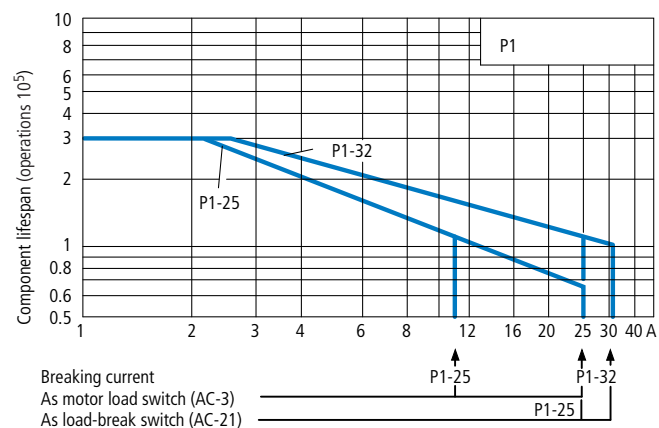
T5, T5B - Characteristic curve



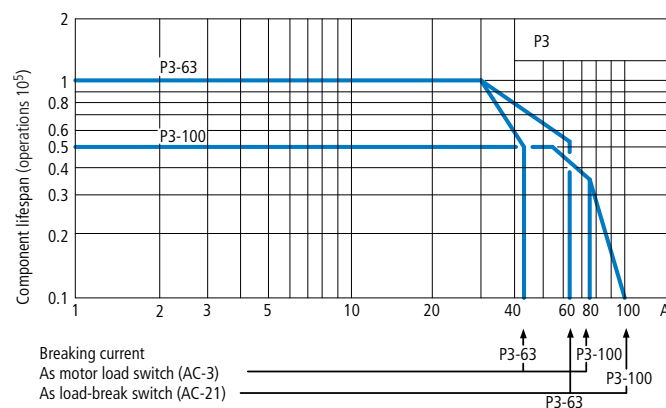
T6, T8 - Characteristic curve



P1 - Characteristic curve



P3 - Characteristic curve



Technical data

P1 and P3 Switch-disconnectors

				P1-25	P1-32	P1-40	P3-63	P3-80	P3-100
General									
Standards				IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL, switch-disconnector to IEC/EN 60947-3		IEC/EN 60947, IEC/EN 60204	IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL, switch-disconnector to IEC/EN 60947-3		
Lifespan mechanical	Operations	x 10 ⁶		0.3	0.3	0.3	0.1	0.1	0.1
Maximum operating frequency	Operations/h			50	50	50	50	50	50
Climatic proofing				Damp heat: constant to IEC 60068-2-78 / cyclical to IEC 60068-2-30					
Ambient temperature (for derating details please contact buletechnical@eaton.com)	Open		°C	-25 - 50	-25 - 50	-25 - 50	-25 - 50	-25 - 50	-25 - 50
	Enclosed		°C	-25 - 40	-25 - 40	-25 - 40	-25 - 40	-25 - 40	-25 - 40
Mounting position				Any	Any	Any	Any	Any	Any
Mechanical shock resistance (IEC/EN 60068-2-27)	Half-sinusoidal shock 20 ms		g	15	15	15	15	15	15
Contacts									
Rated operational voltage	U _e	V A C		690	690	690	690	690	690
Rated impulse withstand voltage	U _{imp}	V A C		6000	6000	6000	6000	6000	6000
Overvoltage category/pollution degree				III/3	III/3	III/3	III/3	III/3	III/3
Rated uninterrupted current	I _u	A		25	32	40	63	80	100
Load rating with intermittent operation, class 12	AB 60% DF		x I _e	1.3	1.3	1.3	1.3	1.3	1.3
	AB 40% DF		x I _e	1.6	1.6	1.6	1.6	1.6	1.6
	AB 25% DF		x I _e	2	2	2	2	2	2
Short-circuit rating	Fuse	A gG/gL		25	50	50	80	100	100
Rated conditional short-circuit current	Load side	I _q	kA	50	80	80	4	4	4
	Supply side	I _q	kA	-	-	-	100	80	80
Rated short-time withstand current (1s current)		I _{sw}	A _{rms}	640	640	640	1260	1260	1260
Isolating characteristics to IEC/EN 60947		VAC		≤ 690	≤ 690	≤ 690	≤ 690	≤ 690	≤ 690
Safe isolation according to EN 61140									
Safe isolation to VDE 0106 Part 101 and Part 101 A1 between the auxiliary contacts and main circuits			VAC	440	440	440	440	440	440
Switching angle		°		90	90	90	90	90	90
Contacts		Number		Max. 3 (+N)	Max. 3 (+N)	Max. 3 (+N)	Max. 3 (+N)	Max. 3 (+N)	Max. 3 (+N)
Current heat loss per contact at I _e		W		1.1	1.8	1.9	4.5	6	7.5
Terminal capacity									
Solid or stranded		mm ²		1 x (1.5-6) 2 x (1.5-6)	1 x (1.5-6) 2 x (1.5-6)	1 x (1.5-10) 2 x (1.5-10)	1 x (2.5-35) 2 x (2.5-10)	1 x (2.5-35) 2 x (2.5-10)	1 x (2.5-35) 2 x (2.5-10)
Flexible with ferrule to DIN 46228		mm ²		1 x (1-4) 2 x (1-4)	1 x (1-4) 2 x (1-4)	1 x (1-4) 2 x (1-4)	1 x (1.5-25) 2 x (1.5-6)	1 x (1.5-25) 2 x (1.5-6)	1 x (1.5-25) 2 x (1.5-6)
Fork terminal				-	-	1 x (1.5-10) 2 x (1.5-10)	-	-	-
Terminal screw				M4	M4	M4	M5	M5	M5
Tightening torque		Nm		1.6	1.6	1.6	3	3	3
Switching capacity									
AC Voltage									
Rated making capacity cos φ = 0.35 *P1-40 φ = 0.45			A	240	320	360*	800	875	950
*P1-40 φ = 0.45	Rated breaking capacity, motor load switch cos φ = 0.35	230 V	A	190	260	X	640	700	760
		400/415 V	A	150	300	290*	600	675	740
		500 V	A	170	290	X	590	750	880
		690 V	A	150	250	130*	340	440	520
Rated operational current 440V, load-break switch AC-21A	I _e	A		25	32	40	63	80	100
AC-3 motor load switch motor load	230 V	P	kW	5.5	7.5	7.5	15	18.5	22
	400/415 V	P	kW	7.5	13	15	30	33.5	37
	500 V	P	kW	7.5	18.5	X	30	38	45
	690 V	P	kW	7.5	15	15	30	33.5	37

Notes: Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft. Rated uninterrupted current I_u is specified for max cross-section. For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.

P1 and P3 Switch-disconnectors

				P1-25	P1-32	P1-40	P3-63	P3-80	P3-100		
Switching capacity											
AC-23A motor load switch motor load	230 V	P	kW	7	8.5	11	18.5	30	30		
	400/415 V	P	kW	13	15	22	30	50	50		
	500 V	P	kW	11	18.5	X	37	65	65		
	690 V	P	kW	11	18.5	18.5	30	45	45		
DC Voltage											
DC-1, load switch L/R = 1 ms	Rated operational current		I _e	A	25	32	X	63	80	100	
	Voltage per contact connected in series			V	60	60	X	60	60	60	
DC-23A, motor load switch L/R = 15 ms	24 V	Rated operational current		I _e	A	25	25	X	50	50	50
		Contacts			Number	1	1	X	1	1	1
	48 V	Rated operational current		I _e	A	25	25	X	50	50	50
		Contacts			Number	2	2	X	2	2	2
	60 V	Rated operational current		I _e	A	25	25	X	50	50	50
		Contacts			Number	3	3	X	3	3	3
	120 V	Rated operational current		I _e	A	12	12	X	25	25	25
		Contacts			Number	3	3	X	3	3	3
Rating data for approved types UL File No E36332 (Devices for world markets IEC, UL/CSA)											
Contacts											
Rated operational voltage U _e				V a.c.	600	600	600	600	600	600	
Rated operational current I _b	Rated current			A	20	30	40	60	80	100	
	Pilot duty				A 600 P 600	A 600 P 600	A 600 P 600	-	-	-	
Switching capacity											
AC-3: max, rated power, 40-60 Hz AC motors											
3-phase	200 V a.c.	HP	5	7½	X	15	15	20			
		HP	5	10	X	15	20	25			
		HP	10	20	X	40	50	60			
		HP	15	25	X	50	60	75			
Single-phase	200 V a.c.	HP	1½	2	X	3	5	5			
		HP	3	3	X	7½	10	10			
		HP	3	5	X	10	15	15			
Short-circuit rating											
	Standard	600 V a.c.	kA	5	5	5	10	10	10		
	With back-up fuse		A	110	110	110	150	150	150		
	With circuit-breakers		Part no.	NZMH6	NZMH6	NZMH6	NZMH6	NZMH6	NZMH6		
	Current setting		A	125	125	125	125	125	125		
Disconnect in motor circuits	600 V a.c.	kA	10	10	10	10	10	-			
	With back-up fuse		Class	50 A/J	50 A/J	50 A/J	100 A	100 A	100 A		
Terminal capacity											
Terminal capacity											
Cu cable	Min./	AWG	14	14	14	14	14	14			
	Max	AWG	8	8	8	2	2	2			
Tightening torque	Max	in-lb	14.1	14.1	14.1	26.5	26.5	26.5			
	H1 11										
Auxiliary contacts (1 N/O + 1 N/C)											
Pilot duty				P 600							
Heavy pilot duty				A 600							
General use				10 A - 600 V AC							

P5 Switch-disconnectors

					P5-125	P5-160	P5-250	P5-315
General								
Standards				IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL switch-disconnector to IEC/EN 60947-3				
Lifespan mechanical		Operations	x 10 ⁶	0.1	0.1	0.08	0.08	
Maximum operating frequency		Operations/h		50	50	50	50	
Climatic proofing				Damp heat, constant to IEC 60068-2-78 Damp heat, cyclical to IEC 60068-2-30				
Ambient temperature (for derating information contact buletechnical@eaton.com)	Open	°C	-25 - 50	-25 - 50	-25 - 50	-25 - 50		
	Enclosed	°C	-25 - 40	-25 -40	-25 - 40	-25 - 40		
Mounting position			Any	Any	Any	Any		
Contacts								
Rated operational voltage		U _e	V A C	690	690	690	690	
Rated impulse withstand voltage		U _{imp}	V A C	8000	8000	8000	8000	
Overvoltage category/pollution degree			III/3	III/3	III/3	III/3		
Rated uninterrupted current		I _a	A	125	160	250	315	
Load rating with intermittent operation, class 12	AB 60% DF		x I _e	1.3	1.3	1.3	1.3	
	AB 40% DF		x I _e	1.6	1.6	1.6	1.6	
	AB 25% DF		x I _e	2	2	2	2	
Short-circuit rating	Fuse		AgG/gL	125	160	250	315	
Rated conditional short-circuit current	Load side	I _q	kA	30	30	30	15	
	Supply side	I _q	kA	-	-	-	-	
Rated short-time withstand current (1s current)		I _{cw}	A _{rms}	2500	3000	4600	5800	
Isolating characteristics to IEC/EN 60947			V AC	≤ 690	≤ 690	≤ 690	≤ 690	
Safe isolation according to EN 61140								
Safe isolation to VDE 0106 Part 101 and Part 101 A1 between the auxiliary contacts and main circuits			VAC	440	440	440	440	
Switching angle			°	90	90	90	90	
Contacts			Number	Max. 3 (+N)	Max. 3 (+N)	Max. 3 (+N)	Max. 3 (+N)	
Current heat loss per contact at I _e			W	8	10	13	16	
Terminal capacity								
Solid or stranded			mm ²	1 x (10-95) 2 x (10-35)	1 x (10-95) 2 x (10-35)	1 x (16-185) 2 x (16-70)	1 x (10-95) 2 x (10-35)	
Copper strip, 1 flat conductor	Number of layers x width x thickness		mm	6 x 9 x 0.8	-	6 x 20 x 1	-	
Copper strip, 2 flat conductors		mm	-	6 x 9 x 0.8	-	6 x 20 x 1		
Flexible with ferrule to DIN 46228			mm ²	1 x (16-70) 2 x (16-25)	1 x (16-70) 2 x (16-25)	1 x (25-120) 2 x (25-50)	1 x (25-120) 2 x (25-50)	
Terminal screw				Hexagon screw 5		Hexagon screw 6		
Tightening torque			Nm	14	14	16	16	
	400/415 V	P	kW	13	15	30	50	
	500 V	P	kW	11	18.5	37	65	
	690 V	P	kW	11	18.5	30	45	

Notes: Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft. Rated uninterrupted current I_a is specified for max cross-section. For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.

P5 Switch-disconnectors

					P5-125	P5-160	P5-250	P5-315
Switching capacity								
AC Voltage								
Rated making capacity $\cos \varphi = 0.35$				A	850	1050	1700	2050
Rated breaking capacity, motor load switch $\cos \varphi = 0.35$	230 V			A	800	900	1600	1800
	400/415 V			A	750	850	1380	1650
	500 V			A	650	850	1250	1550
	690 V			A	340	340	400	400
Rated operational current 440V, load-break switch AC-21A			I_e	A	125	160	250	315
AC-3 motor load switch motor load	230 V	P	kW	22	30	37	45	
	400 V	P	kW	37	45	55	75	
	690 V	P	kW	30	37	45	45	
AC-23A motor load switch motor load	230 V	P	kW	30	30	37	55	
	400 V	P	kW	45	55	90	110	
	690 V	P	kW	37	37	45	45	
DC Voltage								
DC-1, load switch L/R = 1 ms	Rated operational current		I_e	A	125	160	250	315
	Voltage per contact connected in series			V	42	42	42	42
DC-23A, motor load switch L/R = 15 ms	24 V	Rated operational current	I_e	A	125	160	250	315
	Voltage per contact connected in series		Number	3	3	3	3	
	48 V	Rated operational current	I_e	A	125	160	250	315
	Contacts		Number	3	3	3	3	
	60 V	Rated operational current	I_e	A	125	160	250	315
	Contacts		Number	3	3	3	3	
	120 V	Rated operational current	I_e	A	125	160	250	315
	Contacts		Number	3	3	3	3	

Notes: Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft. Rated uninterrupted current I_u is specified for max cross-section.

For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.

				HI...-P1(P3)...	HI...-P5...
Auxiliary contacts					
Standards					
Control circuit isolator to IEC/EN 60947-5					
Rated insulation voltage		U_i	VAC	500	500
Rated uninterrupted current		I_u	A	10	10
Rated operational current					
AC-15 at 230 V		I_e	A	6	6
400 V / 415 V		I_e	A	-	-
DC-13					
125 V		I_e	A	1.1	0.23
250 V		I_e	A	0.55	0.1
Short-circuit training					
Max fuse		A	gG/gL	10	10
Terminal capacity					
Solid		mm ²		1 x 0.75 - 2.5 2 x 0.75 - 1.5	1 x 0.75 - 2.5 2 x 0.75 - 1.5
Flexible with ferrule to DIN 46228		mm ²		1 x 0.5 - 1.5 2 x 0.5 - 1.5	1 x 0.5 - 1.5 2 x 0.5 - 1.5
Tightening torque		Nm		0.6	0.8
Control circuit reliability at 24 V d.c., 10 mA		H_f		< 10 ⁻⁵ , < 1 failure for 100,000 switching operations	

P5 Switch-disconnectors

				P5-125	P5-160	P5-250	P5-315
Rating data for approved types UL File No E36332							
Contacts							
Rated operational voltage		U _e		600	600	600	600
Rated impulse withstand voltage ⁽¹⁾		U _{imp}	V a.c.	8000	8000	8000	8000
Rated uninterrupted current ⁽²⁾		I _a	A	125	160	250	300
Rated operational current							
Ampere rating	Off switch	I _e	A	125	160	250	300
	Changeover switches	I _e	A	125	160	X	X
Non inductive and slightly inductive loads							
Rated switching duty							
DOL rating (similar to AC-3)							
3-phase, 3-pole							
	120 V		HP	15	20	30	40
	240 V		HP	30	40	60	75
	480 V		HP	60	60	75	100
	600 V		HP	60	60	75	100
Short-circuit rating							
Max back-up fuse, gL characteristics			A	125	160	250	315
Rated short-time withstand current (1s current)			A	2500	3000	4600	5000
Terminal capacity							
Cu cable							
Solid or stranded for box terminal		AWG	3/0	3/0	X	X	
		MCM	X	X	350	350	
Flexible without ferrule		AWG	2/0	2/0	X	X	
		MCM	X	X	300	300	
Connection with cable lug or busbar				M10 x	M10 x	M10 x	M10 x
Terminal screw				20	20	20	20
Max. width				20	20	20	20
Max width with terminal cover				25	25	25	25
Ambient temperature	Open on 100% I _U /I _{th}			50°C over 24 hours with peaks up to 55°C			
	Enclosed on 100% I _{he}			35°C over 24 hours with peaks up to 40°C			

(1) Valid for mains with grounded star point, overvoltage category III, pollution degree 3, (2) Valid for connection with cable for 75°C

				HI11	HI21-P5-125(160)	HI21-P5-250(315)
Auxiliary contacts						
Standards						
Rated uninsulated voltage	U_i	V a.c.		600	600	
Rated uninterrupted current	I_a	A		10	10	
Rated operational current	I_e					
Pilot duty			P600	P600	P600	
Heavy pilot duty			A600	A600	A600	
General use			10 A - 600 V a.c.			
Ampere rating						
Non inductive and slightly inductive loads			-	10	10	
Short-circuit rating						
Max. fuse	gL characteristic	A	-	16	16	
Terminal capacity						
Solid or stranded		AWG	-	12	12	
Flexible without ferrule		AWG	-	14	14	

Devices for world markets IEC, UL/CSA

				TM
General				
Standards				IEC/EN 60947, VDE 0660, CSA, UL Control switch to IEC/EN 60947-5-1 Control circuit isolators to IEC/EN 60947-5-1
Control circuit isolator (IEC/EN 60947-5-1)				Max 6 contacts, switching angle 90°
Lifespan mechanical	Operations	x 10 ⁶		>1
Maximum operating frequency	Operations/h			3000
Climatic proofing				Damp heat, constant to IEC 60068-2-78; Damp heat, cyclic to IEC 60068-2-30
Ambient temperature (for derating information contact buletechnical@eaton.com)	Open	°C		-25 -50
	Enclosed	°C		-25 -40
Mounting position				Any
Contacts				
Mechanical data				
Contacts		Number		Max. 16
Contacts units (BE)				Max 8
Switching angle		°		90, 60, 45, 30
Smallest switching angle for ON-OFF-ON		°		60
Max switch position		≤		≤12
Electrical characteristics				
Rated operational voltage		U _e	V a.c.	500
Rated impulse withstand voltage		U _{imp}	V a.c.	4000
Overvoltage category/pollution degree				III/3
Rated insulation voltage		Ui	V a.c.	500
Rated insulation voltage to UL/CSA			V a.c.	300
Rated conditional short-circuit current	Load side	I _{cs}	kA	0
	Supply side	I _{qs}	kA	-
Rated uninterrupted current		I _s	A	10
Switching capacity				
AC-23 motor load switch	230 V a.c.	3-pole	kW	1.8
	440 V a.c.	3-pole	kW	3
	230 V a.c.	1-pole	kW	0.75
	440 V a.c.	1-pole	kW	1.1
AC-15 control switch	230 V a.c.	1-pole	A	2.5
	400 V a.c.	1-pole	A	1.5
	440 V a.c.	1-pole	A	1
DC-13, control switch L/R = 50 ms	Rated operational current I _e		I _e A	3
	Voltage per contact connected in series		V	32
Switching capacity (UL489, CSA 22.2 No 5.1)	240 V a.c.	3-pole	HP	1
	277 V a.c.	1-pole	HP	¾
	300 V a.c.	Heavy-duty	A	10
Max short-circuit protection device				
Fuse		A	gG/gL	10
Terminal capacity				
Solid or stranded			mm ²	1 x 1.5 / 2 x 1.5
Flexible without ferrule			mm ²	1 x 1.5 / 2 x 1.5
Solid or stranded			AWG	1 x 14 / 2 x 14
Flexible			AWG	1 x 16 / 2 x 16
Terminal screw				M2.5
Tightening torque			Nm	0.35

T0, T3, T5B, T5 Cam switch-disconnectors

					T0...	T3...	T5B...	T5...
General								
Standards				IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL switch-disconnector to IEC/EN 60947-3 Load break switch according to IEC/EN 60947-3				
Lifespan mechanical	Operations	x 10 ⁶		0.5	0.5	0.5	0.5	0.5
Maximum operating frequency	Operations/h			3000	3000	3000	3000	3000
Climatic proofing				Damp heat, constant to IEC 60068-2-78; Damp heat, cyclic to IEC 60068-2-30				
Ambient temperature (for derating information contact buletechnical@eaton.com)	Open		°C	-25 -50	-25 -50	-25 -50	-25 -50	-25 -50
	Enclosed		°C	-25 -40	-25 -40	-25 -40	-25 -40	-25 -40
Mounting position				Any	Any	Any	Any	Any
Mechanical shock resistance to IEC 60068-2-27	Half-sinusoidal shock to 20 ms	g		>15	>15	>15	>15	>15
Contacts								
Rated operational voltage	U _e	V A C		690	690	690	690	690
Rated impulse withstand voltage	U _{imp}	V A C		6000	6000	6000	6000	6000
Overvoltage category/pollution degree				III/3	III/3	III/3	III/3	III/3
Rated uninterrupted current	Open	I _u	A	20	32	63	100	100
	Enclosed	I _u	A	20	32	63	100	100
Load rating with intermittent operation, class 12	AB 60% DF		x I _e	2	2	2	2	2
	AB 40% DF		x I _e	1.6	1.6	1.6	1.6	1.6
	AB 25% DF		x I _e	1.3	1.3	1.3	1.3	1.3
Rated conditional short-circuit current	Load side	I _q	kA	6	1	2	2	2
	Supply side	I _q	kA	-	-	-	-	-
Short-circuit rating	Fuse		A gG/gL	20	35	80	100	100
Rated short-time withstand current (1s current)	I _{cw}	A _{rms}		320	650	1300	1850	1850
Safe isolation according to EN 61140								
Between the contacts			VAC	440	440	440	440	440
Switching angle			°	90 60 45 30	90 60 45 30	90 60 45 30	90 60 45 30	90 60 45 30
Contact units			Number	Max. 11	Max. 11	Max. 10	Max. 10	Max. 10
Contacts with double-break				Max. 22	Max. 22	Max. 20	Max. 20	Max. 20
Current heat loss per contact at I _e			W	0.6	1.1	4.5	7.5	7.5
Terminal capacity								
Solid or stranded		mm ²		1 x (1-2.5) 2 x (1-2.5)	1 x (1-2.5) 2 x (1-2.5)	1 x (2.5-35) 2 x (2.5-16)	1 x (2.5-35) 2 x (2.5-16)	1 x (2.5-35) 2 x (2.5-16)
Flexible with ferrule to DIN 46228		mm ²		1 x (0.75-2.5) 2 x (0.75-2.5)	1 x (0.75-4) 2 x (0.75-4)	1 x (1.5-25) 2 x (1.5-10)	1 x (1.5-25) 2 x (1.5-10)	1 x (1.5-25) 2 x (1.5-10)
Terminal screw				M3.5	M4	M6	M6	M6
Tightening torque		Nm		1	2	4	4	4

Notes: The following applies for mechanical shock resistance: T3.../I...>12g.

Applies to T0.../SVB: isolating characteristics to IEC/EN 60947 for rated operational voltage U_e up to 500 V a.c.

The following applies to rated uninterrupted current I_u of contacts: max 95 A with T5-4-8344/15.

The following applies to solid, stranded and flexible terminal capacities:

T0, , (8)...: If 2 conductors are used, a max difference of 2 cross-section sizes is permissible.

T5(B)-...: If 2 conductors are used, a max difference of 1 cross-section sizes is permissible.

The following applies for part no T8-3-8342/...: switching angle = 90° and flat conductor connection = 1 flat conductor.

25 x 5 or 2 flat conductors, 20 x 3

T0, T3, T5B and T5 Cam switch-disconnectors

				T0-...	T3-...	T5B-...	T5-...	
Switching capacity								
AC Voltage								
Rated making capacity cos φ = 0.35			A	130	320	800	960	
Rated breaking capacity, motor load switch cos φ = 0.35	230 V		A	100	260	520	760	
	400 V		A	110	260	600	740	
	500 V		A	80	240	480	590	
	690 V		A	60	170	340	420	
Rated operational current, load-break switch AC-21A	440 V	I _e	A	20	32	63	100	
Motor rating Motor load switch AC-3	230 V	P	kW	3	6.5	15	22	
	230 V star-delta	P	kW	4	11	22	30	
	400/415 V	P	kW	4	12	22	30	
	400 V star-delta	P	kW	5.5	18.5	37	45	
	500 V	P	kW	5.5	15	22	37	
	500 V star-delta	P	kW	7.5	22	37	55	
	690 V	P	kW	4	15	22	30	
	690 V star-delta	P	kW	5.5	22	37	45	
Motor rating Motor load switch AC-23A	230 V	P	kW	3.5	7.5	15	18.5	
	400/415 V	P	kW	6.5	13	22	30	
	500 V	P	kW	7.5	15	22	37	
	690 V	P	kW	6.5	15	22	30	
Motor rating Motor load switch AC-15	230 V	P	kW	6	10	16	16	
	400/415 V	P	kW	4	6	6	6	
	500 V	P	kW	2	4	4	4	
DC Voltage								
DC-1, load switch L/R = 1 ms	Rated operational current	I _e	A	10	25	63	80	
	Voltage per contact connected in series		V	60	60	60	60	
DC-21A	Rated operational current 240 V		A	1	1			
	240 V contacts		Number	1	1			
DC-23A, motor load switch L/R = 15 ms	24 V	Rated operational current	I _e	A	10	25	50	-
		Voltage per contact connected in series		Number	1	1	1	-
	48 V	Rated operational current	I _e	A	10	25	50	-
		Contacts		Number	2	2	2	-
	60 V	Rated operational current	I _e	A	10	25	50	-
		Contacts		Number	3	3	3	-
	120 V	Rated operational current	I _e	A	5	12	25	-
		Contacts		Number	3	3	3	-
	240 V	Rated operational current	I _e	A	5	5	20	-
		Contacts		Number	5	5	6	-
DC-13, control switch L/R = 50 ms	Rated operational current		I _e	A	10	20	25	-
	Voltage per contact connected in series		Number	32	32	24	-	
Control circuit reliability at 24 V d.c., 10 mA			F _f	< 10-5, < 1 failure for 100,000 switching operations				

T0, T3 and T5B Cam switch-disconnectors- Approvals for North America

				T0	T3	T5B
Rating data for approved types UL File No E36332						
Contacts						
Rated operational voltage	U _e			600	600	600
Rated uninterrupted current	I _u			16	25	65
Rated current		A		16	25	65
Pilot duty				A 600 P 600	A 600	
Switching capacity						
AC-3, max, rated power, 40-60 Hz AC motors						
3-phase	200 V a.c.	HP		3	5	15
	230 V a.c.	HP		3	7½	15
	460 V a.c.	HP		10	15	40
	575 V a.c.	HP		10	15	50
	Single-phase					
	115 V a.c.	HP		1	1½	3
	200 V a.c.	HP		2	3	7½
	230 V a.c.	HP		2	3	10
Short-circuit rating						
Standard	600 V a.c.	kA		5	5	5
	With back-up fuse	A		50	80	Class J
	With circuit-breakers	Part No		NZMH6	NZMH6	-
	Current setting	A		50	125	-
Disconnect in motor circuits		600 V a.c.	kA	10	10	-
With back-up fuse		Class		20 A/J	40 A/J	-
Terminal capacity						
Cu cable	Min	AWG		18	14	12
	Max	MCM		14	10	4
Tightening torque	Max	in-lb		8.8	17.6	35.3

Notes: Do not use AW extension terminals where UL/CSA approval is required.

	UL approved protection types		
	UL/NEMA 1	UL/NEMA 3R	UL/NEMA 12
T0-../E; /Z;/SVB	•	•	-
T3-../E; /Z;/SVB	•	•	-
T5B-../E; /Z;/SVB	•	•	•

Notes: Protection types as defined in NEC (NFPA 70), UL, CSA, NEMA

T6 and T8 Cam switch-disconnectors

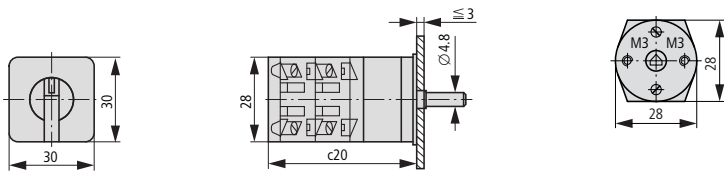
			T6-3-8212/E/HI12	T6-160-...	T8-...
General					
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL switch-disconnector to IEC/EN 60947-3 Load break switch according to IEC/EN60947-3		
Lifespan mechanical	Operations	x 10 ⁶	0.1	0.1	0.1
Maximum operating frequency	Operations/h		50	50	50
Climatic proofing			Damp heat, constant to IEC 60068-2-78; Damp heat, cyclic to IEC 60068-2-30		
Ambient temperature (for derating information contact buletechnical@eaton.com)	Open	°C	-25 -50	-25 -50	-25 -50
	Enclosed	°C	-25 -40	-25 -40	-25 -40
Mounting position			Any	Any	Any
Mechanical shock resistance to IEC 60068-2-27	Half-sinusoidal shock to 20 ms	g	>15	>15	>15
Contacts					
Rated operational voltage		U _e	V A C	690	690
Rated impulse withstand voltage		U _{imp}	V A C	6000	6000
Overvoltage category/pollution degree				III/3	III/3
Rated uninterrupted current	Open	I _b	A	200	160
Load rating with intermittent operation, class 12	AB 60% DF		x I _e	2	2
	AB 40% DF		x I _e	1.6	1.6
	AB 25% DF		x I _e	1.3	1.3
Rated conditional short-circuit current	Load side	I _q	kA	5	30
	Supply side	I _q	kA	-	-
Short-circuit rating	Fuse		A gG/gL	20	35
Rated short-time withstand current (1s current)		I _{cw}	A _{rms}	320	650
Safe isolation according to EN 61140					
Between the contacts			VAC	440	440
Switching angle			°	90 60	90 60
Contact units			Number	Max. 3	Max.3
Contacts with double-break				Max. 6	Max. 6
Current heat loss per contact at I _e			W	11	11
Terminal					
Solid or stranded			mm ²	1 x 70 2 x 25	150
Flexible with ferrule to DIN 46228			mm ²	1 x 50 2 x 16	120
Flat terminals for rails			mm ²		1 x (25 x 5) 2 x (20 x-3)
Terminal screw				M6	M5, hexagon screw
Tightening torque			Nm	5.6	14

T6 and T8 Cam switch-disconnectors


				T6-3-8212/E/HI12	T6-160-...	T8-...	
Switching capacity							
AC Voltage							
Rated making capacity cos φ = 0.35 Rated breaking capacity, motor load switch cos φ = 0.35 Rated operational current, load-break switch AC-21A Motor rating Motor load switch AC-3 Motor rating Motor load switch AC-23A Motor rating Motor load switch AC-15			A	1600	1600	2390	
	230 V		A	1280	1280	1910	
	400 V		A	900	900	1800	
	500 V		A	880	880	1200	
	690 V		A	340	340	420	
	440 V	I _e	A	125	160	315	
	230 V	P	kW	22	22	22	
	230 V star-delta	P	kW	22	22	37	
	400/415 V	P	kW	37	45	55	
	400 V star-delta	P	kW	37	45	55	
	500 V	P	kW	37	37	37	
	500 V star-delta	P	kW	37	37	37	
	690 V	P	kW	22	22	37	
	690 V star-delta	P	kW	22	22	37	
	230 V	P	kW	37	37	75	
400/415 V	P	kW	45	55	132		
500 V	P	kW	55	75	132		
690 V	P	kW	30	30	37		
230 V	P	kW	-	-	-		
400/415 V	P	kW	-	-	-		
500 V	P	kW	-	-	-		
DC Voltage							
DC-1, load switch L/R = 1 ms	Rated operational current	I _e	A	125	125	315	
	Voltage per contact connected in series		V	42	42	42	
DC-23A, motor load switch L/R = 15 ms	24 V	Rated operational current	I _e	A	125	125	250
		Voltage per contact connected in series		Number	1	1	1
	48 V	Rated operational current	I _e	A	125	125	250
		Contacts		Number	2	2	2
	60 V	Rated operational current	I _e	A	125	125	125
		Contacts		Number	3	3	3
	120 V	Rated operational current	I _e	A	50	50	50
		Contacts		Number	3	3	3
DC-13, control switch L/R = 50 ms	Rated operational current	I _e	A	125	125	250	
	Voltage per contact connected in series		Number	24	24		
Control circuit reliability at 24 V d.c., 10 mA	Fault probability		H _f	< 10-5, < 1 failure for 100,000 switching operations			
Auxiliary contact							
Standards				Control circuit isolator to IEC/EN 60947-5 f			
Rated insulation voltage	Ui	V a.c.		500	500	-	
Rated uninterrupted current	I _u	A		10	10	-	
Rated operational current	AC-15 at 230 V			6		-	
	400 V/415 V			4		-	
Short-circuit rating	Max fuse	A	gG/gL	10		-	
Terminal capacity	Solid		mm²	0.75-2.5	0.75-2.5	-	
	Flexible with ferrule to DIN 46228		mm²	0.5-1.5	0.5-1.5	-	
Tightening torque			Nm	0.35	0.35	-	
Control cirucit reliability at 24 V d.c., 10 mA	Fault probability	HF		< 10-5, < 1 failure for 100,000 switching operations			

Dimensions

TM Flush mounting /E - mm

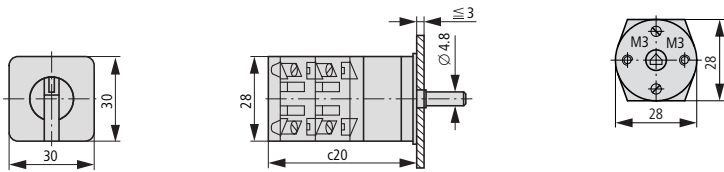


Drilling dimensions




TM Flush mounting TM.../E/SVB-(SW) - mm

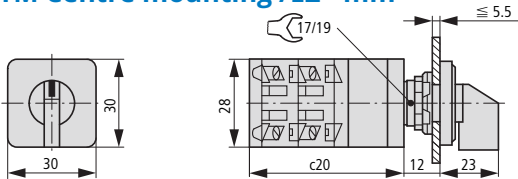
Control circuit isolators for 2 padlocks Ø 4 mm or 1 padlock Ø 6 mm



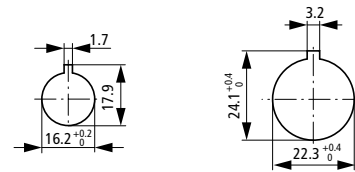
Drilling dimensions



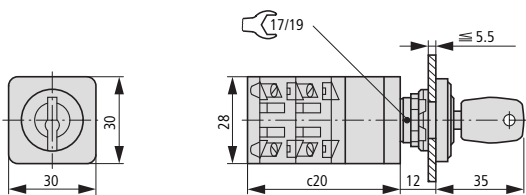
TM Centre mounting /EZ - mm




Drilling dimensions¹⁾



TM Centre mounting with key operation TM-...+EZ/S - mm




Drilling dimensions¹⁾



Part no.	c20	c21
TM-1	39	42
TM-2	51	54
TM-3	63	66
TM-4	75	
TM-5	87	
TM-6	99	
TM-7	111	
TM-8	123	

Depth of one contact unit: 12 mm

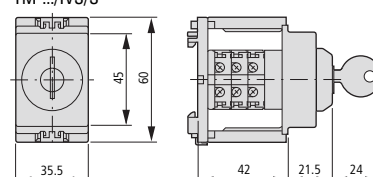
TM Service distribution board mounting /IVS - mm



Part no.	c1	c2
TM-1	44	21
TM-2	46	26.5

Depth of one contact unit 12 mm

TM-.../IVS/S


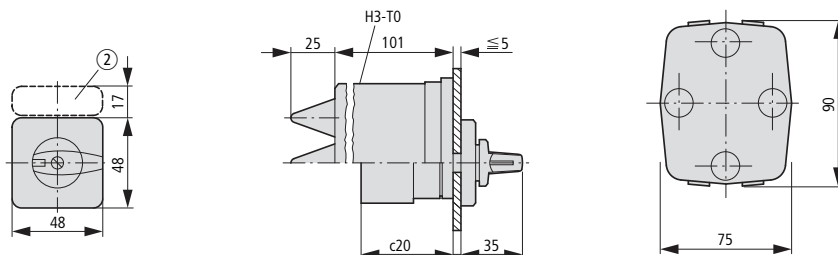


Drilling dimensions optionally: 16.2 mm = without reduction RMQ16; 22.3 mm = with reduction RMQ Titan

Dimensions

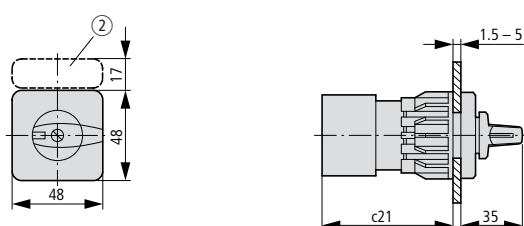
T0 and T3 Flush mounting /E (+H-T0) - mm

Drilling dimensions






T0 and T3 Centre mounting /EZ - mm

Drilling dimensions



T0

T3



Part no.	c20	c21
T0-1...	41	61
T0-2...	50	70
T0-3...	60	80
T0-4...	69	89
T0-5...	79	99
T0-6...	88	108
T0-7...	98	118
T0-8...	107	127
T0-9...	117	137
T0-10...	126	146
T0-11...	136	156

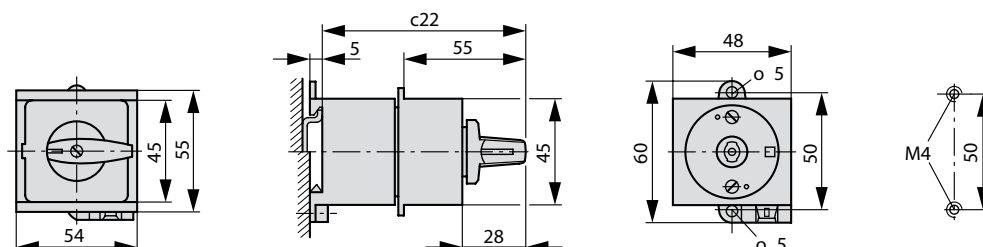
Depth of one contact unit: 9.5 mm

Part no.	c20	c21
T3-1...	44	64
T3-2...	56	76
T3-3...	67	87
T3-4...	79	99
T3-5...	90	110
T3-6...	102	122
T3-7...	113	133
T3-8...	125	145
T3-9...	136	156
T3-10...	148	168
T3-11...	159	179

Depth of one contact unit: 11.5 mm

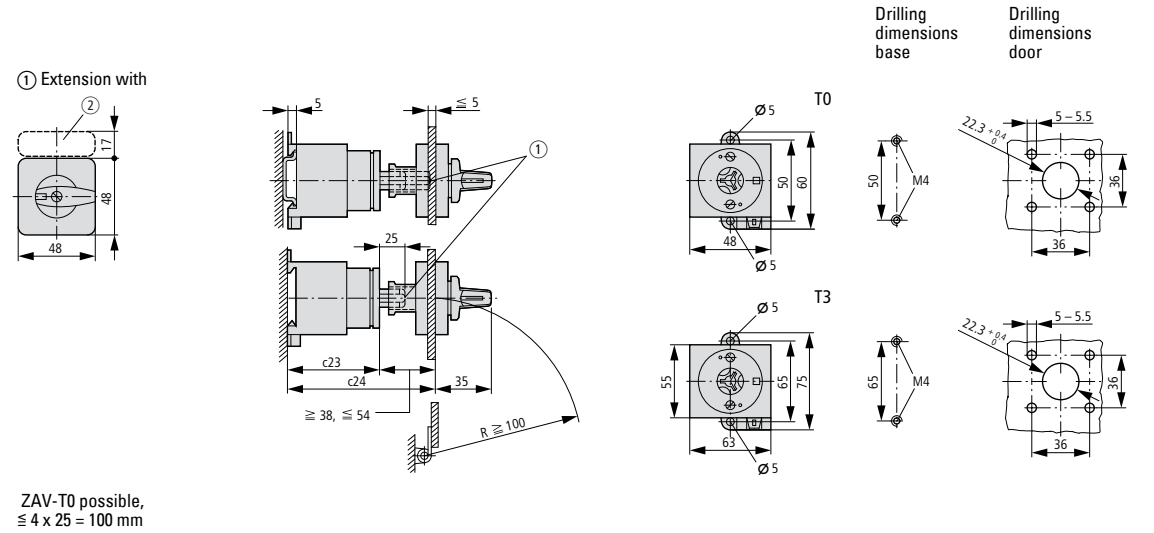
② Not included as standard

T0 Service distribution board mounting /IVS - mm



Dimensions

T0 and T3 Rear mounting /Z - mm



Part no.	c20	c21	c22	c23	c24 ≧/≦	c24 with ≦ 4 ZAV	c25
T0-1...	41	61	77	48	86 – 102	202	72
T0-2...	50	70	87	57	96 – 112	212	72
T0-3...	60	80	96	67	105 – 121	221	91
T0-4...	69	89	106	76	115 – 131	231	91
T0-5...	79	99	115	86	124 – 140	240	–
T0-6...	88	108	125	95	134 – 150	250	–
T0-7...	98	118	134	105	143 – 159	259	–
T0-8...	107	127	144	114	153 – 169	269	–
T0-9...	117	137	154	124	162 – 178	278	–
T0-10...	126	146	163	133	172 – 188	288	–
T0-11...	136	156	173	143	181 – 197	297	–

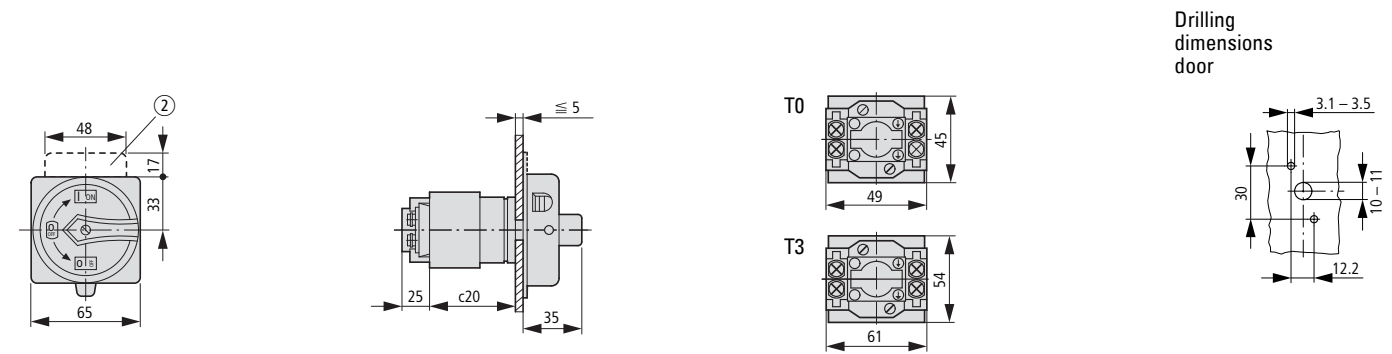
Depth of one contact unit: 9.5 mm

Part no.	c20	c21	c22	c23	c24 ≧/≦	c24 with ≦ 4 ZAV	c25
T3-1...	44	64	80	51	86 – 105	205	79
T3-2...	56	76	92	63	101 – 115	216	79
T3-3...	67	87	103	74	112 – 128	228	101
T3-4...	79	99	115	86	124 – 139	239	101
T3-5...	90	110	126	97	135 – 151	251	–
T3-6...	102	122	138	109	147 – 162	262	–
T3-7...	113	133	149	120	158 – 174	274	–
T3-8...	125	145	161	132	170 – 185	285	–
T3-9...	136	156	172	143	181 – 196	296	–
T3-10...	148	168	184	155	193 – 208	308	–
T3-11...	159	179	195	166	204 – 219	319	–

Depth of one contact unit: 11.5 mm

② Not included as standard

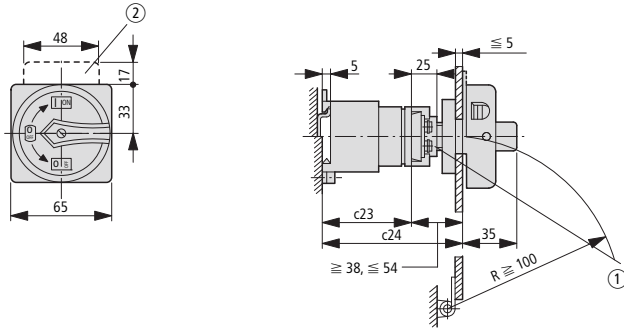
T0 and T3 Flush mounting Main switch /EA/SVB - mm



Dimensions

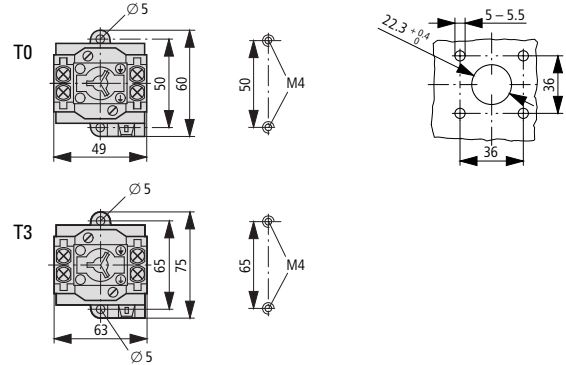
T0 and T3 Rear Main switch /V/SVB - mm

Rear mounting main switches
T0.../V/SVB
T3.../V/SVB



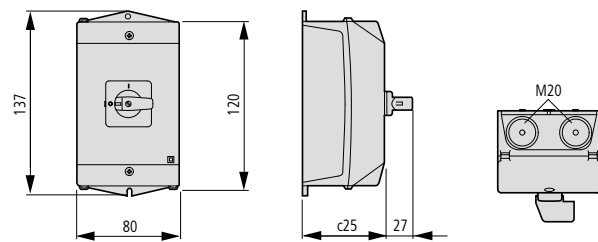
Drilling
dimensions
base

Drilling
dimensions
door




- ① Interlock extension possible with ZVV-T0 + ZAV-T0, F 4 x 25 = 100 mm
- ② Not included as standard

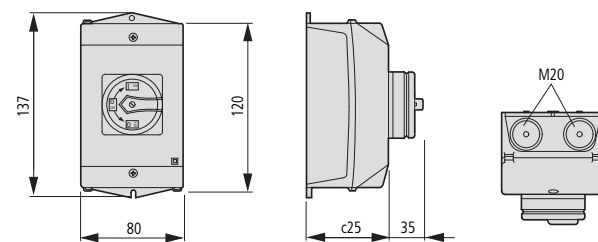
T0 Surface mounting /I1 - mm




Drilling dimensions
base



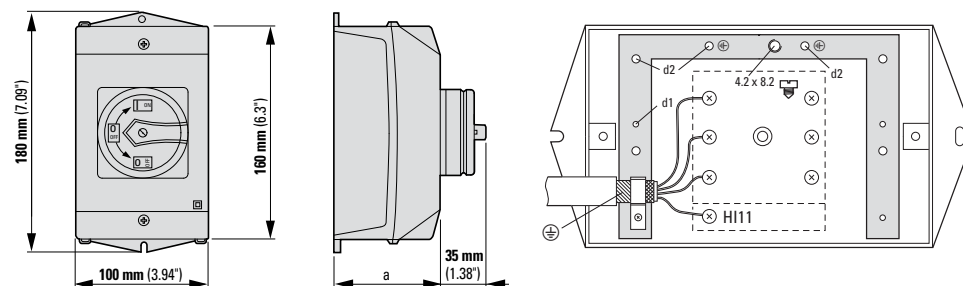
T0 Surface mounting main switches /I1 padlock facility - mm



Drilling dimensions
base



T0 Surface mounting main switch /I2H/MBS/SVB with pre-assembled EMC screen - mm

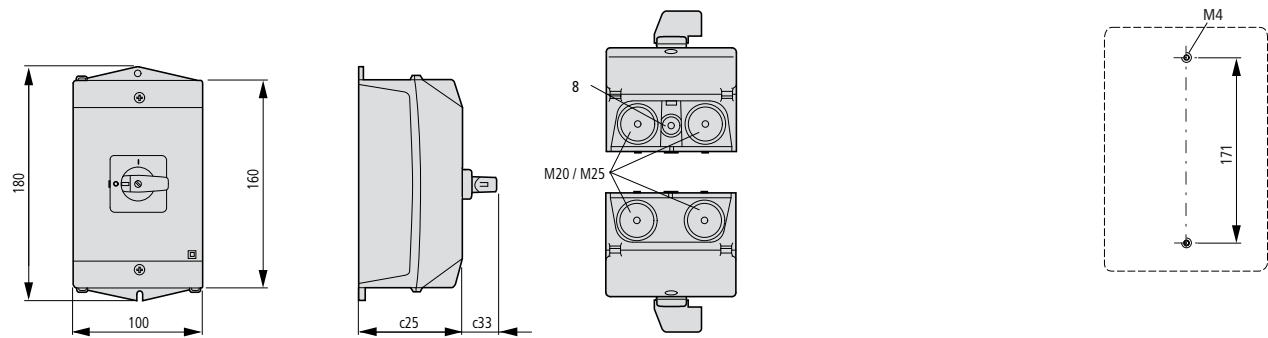


mm	in	mm	Ø	mm	in
7	0.28	2 x 4.2 x 8.2	d1	3.5	0.14
8	0.32	2 x 4.2 x 8.2	d1	3.5	0.14
10	0.39	2 x 4.2 x 8.2	d1	3.5	0.14
12	0.47	2 x 4.8 x 10.5	d2	4.1	0.16

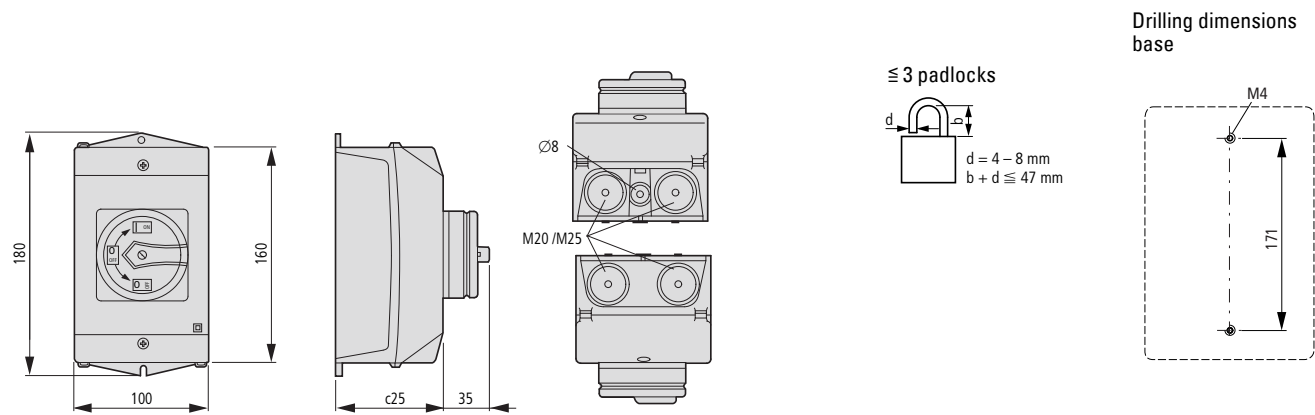
a = 101 mm (3.98")

Dimensions

T3 Surface mounting /I2 - mm



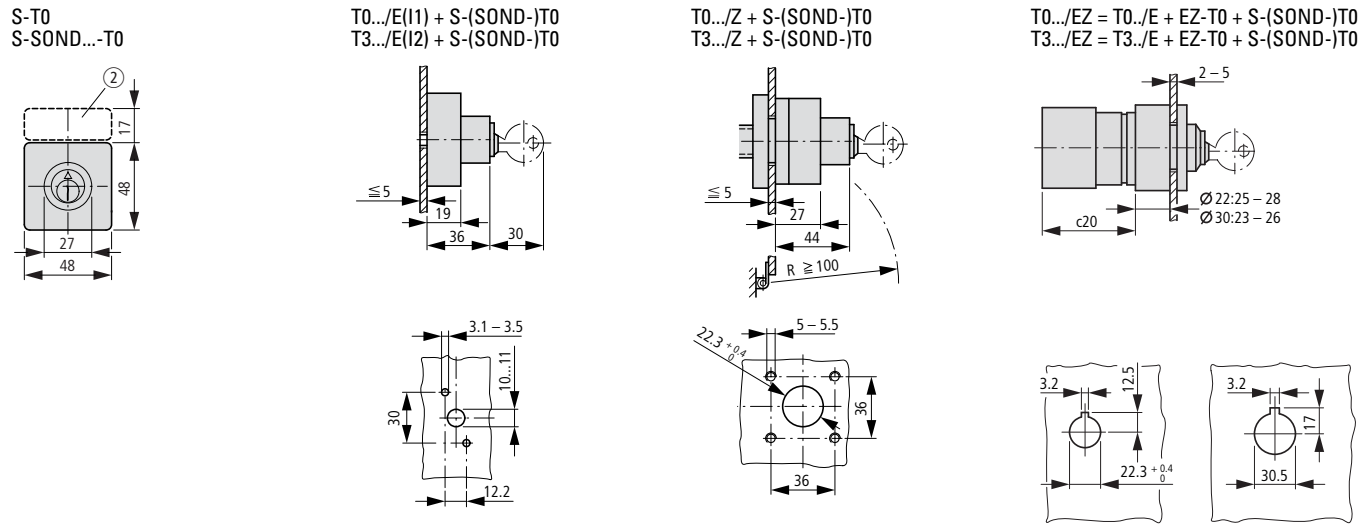
T3.../I2/SVB Surface mounting main switch - mm



Part no.	c25
T0-1...	75
T0-2...	75
T0-3...	95
T0-4...	95

Part no.	c25	c33
T3-1...	80	27
T3-2...	80	27
T3-3...	100	35
T3-4...	100	35
T3-5...	145	35


Key operated lock mechanism - mm




Dimensions

Cylinder lock - mm


SVA-T3




T0.../11/SVA
T3.../12/SVA
P1.../12/SVA



T0.../E/SVA...
T3.../E/SVA...
P1.../E/SVA




T0.../Z/SVA...
T3.../Z/SVA...
P1.../Z/SVA




Padlocking feature - mm


SVC-T3




T0.../11/SVC
T3.../12/SVC
P1.../12/SVC



T0.../E/SVC...
T3.../E/SVC...
P1.../E/SVC






T0.../Z/SVC...
T3.../Z/SVC...
P1.../Z/SVC




Modules - mm

Switched neutral conductor N-P...
Auxiliary contacts HI 11-P1/P3



≤ 3 padlocks



Part no.	a3	a31	a32	a33	b31
P1-...	49	15	15	83	49
P3-..	72	18	15	114	60


② Not included as standard

Dimensions

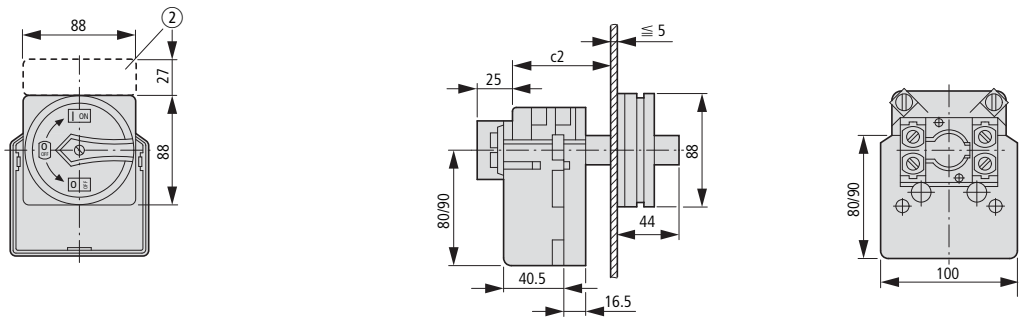
T5(B) Flush mounting /E - mm




Drilling dimensions door



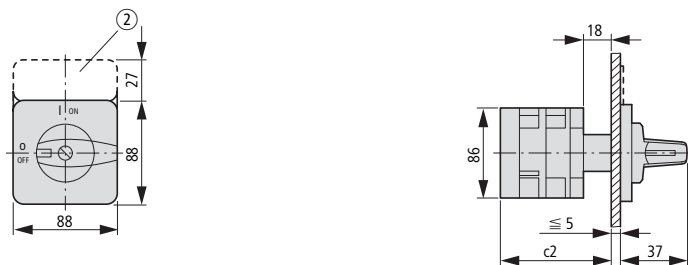
T5(B) Flush mounting main switches /EA/SVB - mm




Drilling dimensions door



T5(B) Rear mounting /Z - mm

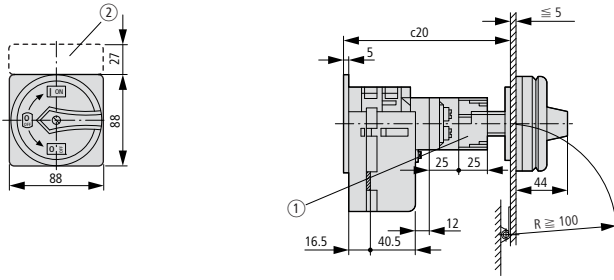


Drilling dimensions door



Dimensions

T5(B) Rear mounting main switch /V/SVB - mm




Part no.	c2	c20 ≥/≤	c20 with ≤ 4 ZAV	c21	c22
T5(B)-1...	54	92 – 107	207	90	125 (95)
T5(B)-2...	71	109 – 124	224	90	125 (95)
T5(B)-3...	87	125 – 140	240	123	160 (160)
T5(B)-4...	104	142 – 157	257	123	160 (160)
T5(B)-5...	120	158 – 173	273	—	—
T5(B)-6...	137	175 – 190	290	—	—
T5(B)-7...	153	191 – 206	306	—	—
T5(B)-8...	170	208 – 223	323	—	—
T5(B)-9...	186	224 – 239	339	—	—
T5(B)-10...	203	240 – 356	356	—	—


Depth of one contact unit: 16.5 mm

Cam switches T5B and T5 have identical designs, only their contacts are different

Drilling dimensions
base

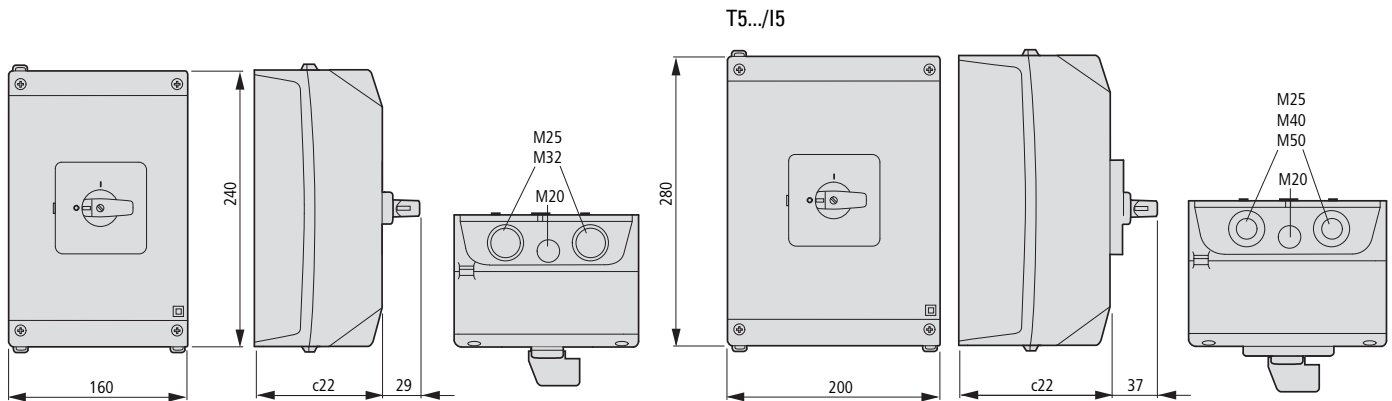


Drilling dimensions
door



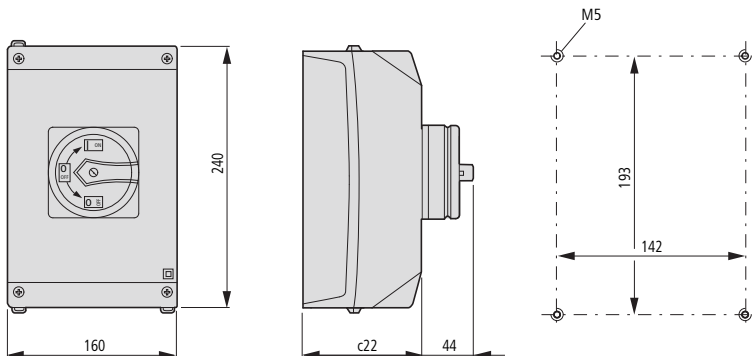
- ① Extension possible with ZVV-P3, $\leq 4 \times 25 = 100$ mm
- ② Not included as standard

T5B Surface mounting /I4 - mm




T5B Surface mounting main switches /I4/SVB - mm

Drilling dimensions

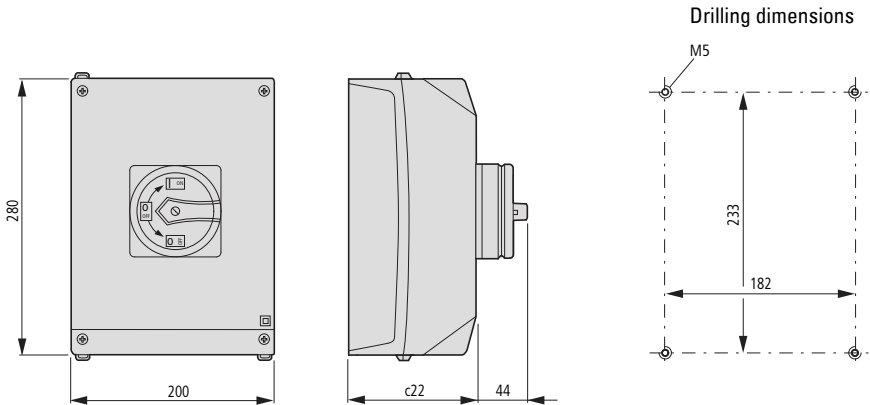


≤ 3 padlocks

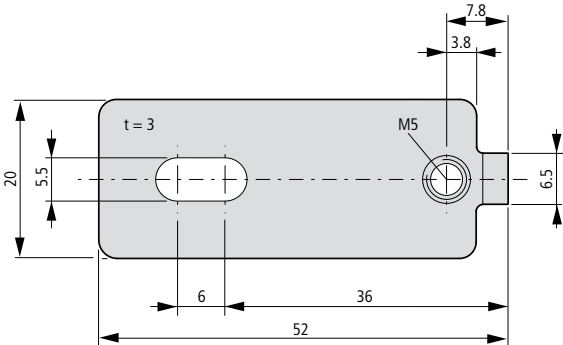


Dimensions

T5 Surface mounting main switches /I5/SVB - mm



AB-CI-K415 External fixing brackets -mm

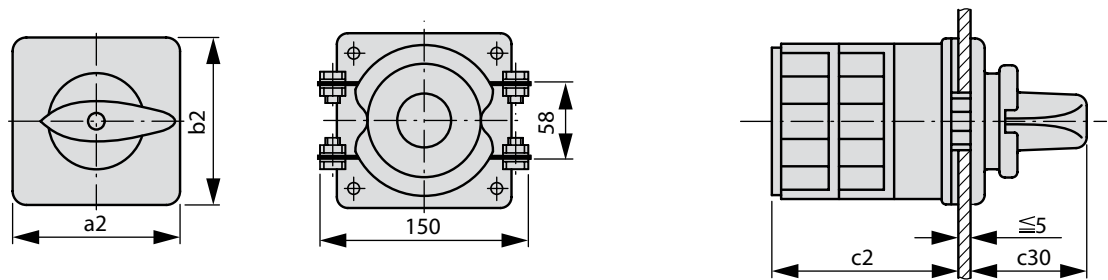


Part no.	c22
T5(B)-1...	125
T5(B)-2...	125
T5(B)-3...	160
T5(B)-4...	160

Depth of one contact unit: 16.5 mm

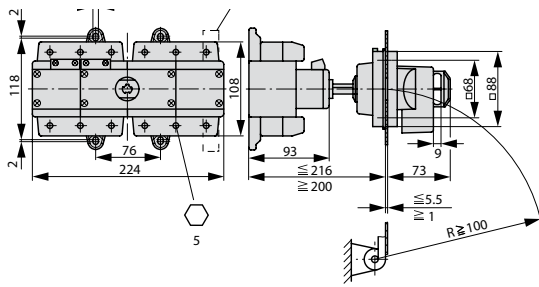
Cam switches T5B and T5 have identical designs, only their contacts are different

T6-3-8212/E/HI12 and T8-3-8212/E/HI12 Flush mounting - mm

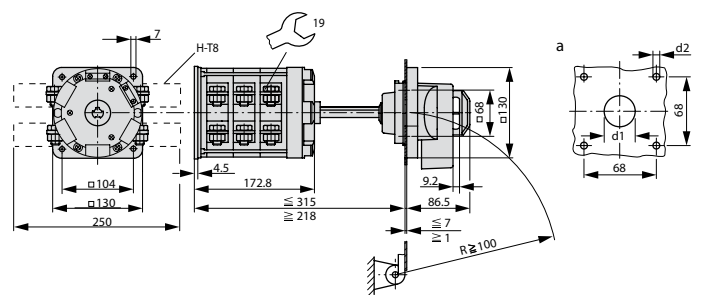


Dimensions

T6-160-6/V/SVB-SW/HI11 - mm




T8-3-8342/V/SVB-(SW)/HI11 - mm




Part no.	a2	b2	c2	c30	d1	d2	x1	y1
T6-3-8212/E/H112	88	88	152	44	⊙ 26 – 30	⊙ 6.0	68	68
T8-3-8212/E/H112	130	130	173	62	⊙ 22 – 25	⊙ 7.0	104	104
T8-3-8342/V/SVB-(SW)/H111	—	—	—	—	⊙ 26 – 30	⊙ 7.0	68	68

Drilling dimensions door




T6: 4 M5 x 20
T8: 4 M6 x 20

≤ 3 padlocks for T.../SVB





P Flush mounting/E and Centre mounting /EZ - mm


P.../E




P1.../EZ


$$P1.../EZ = c2 + 5 \text{ mm}$$


Drilling dimensions
door
P1-.../E



P1-.../EZ






P3-.../E




P Service distribution board /IVS - mm



P3.../IVS



≤ 3 padlocks

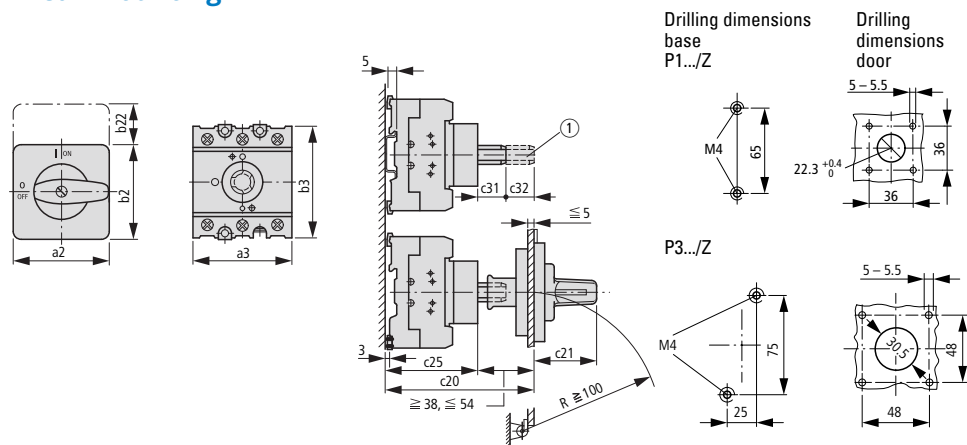


P1.../IVS



Dimensions

P Rear mounting /Z - mm

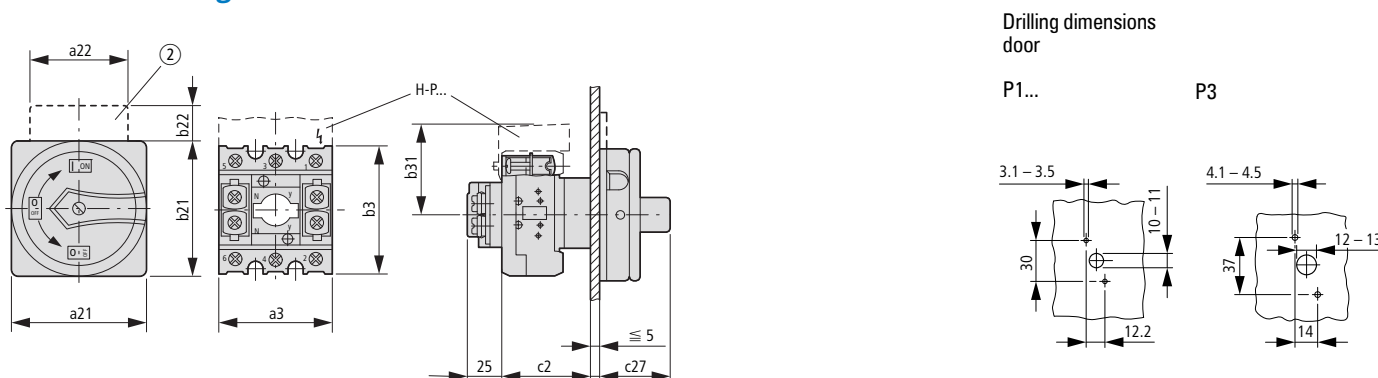


① Shaft extension with ZAV... possible $\leq 4 \times 25 = 100$ mm

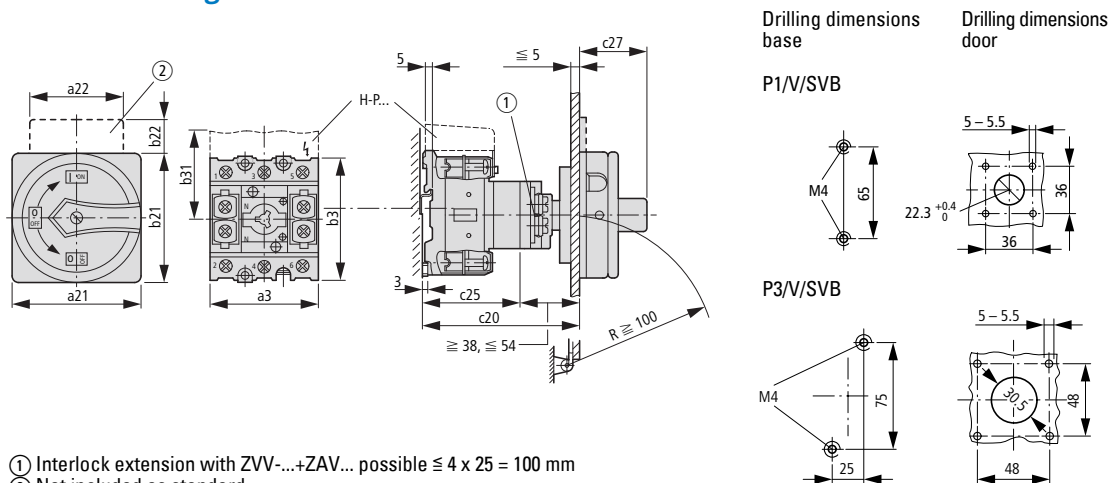
Part no.	a2	a3	a4	a21	a22	a23	a31	a32	a33	b2	b3	b21	b22	b23	b24	b31
P1	48	49	53.5	65	48	87	15	15	83	48	70	65	17	180	32	49
P3	87	72	71.5	87	87	125	18	15	114	87	83	87	27	175	—	60

Part no.	c2	c3	c20 $\cong/\cong$	c20 with $\cong 4$ ZAV/ZVV	c21	c22	c23	c24	c25	c27	c28	c31	c32	c33
P1	59	86	96 – 112	212	35	32	65	68	58	35	77	25	25	27
P3	59	82	103 – 118	218	37	41	63	81	65	44	90	25	25	29

P Flush mounting main switch /EA/SVB - mm



P Rear mounting main switch /V/SVB - mm



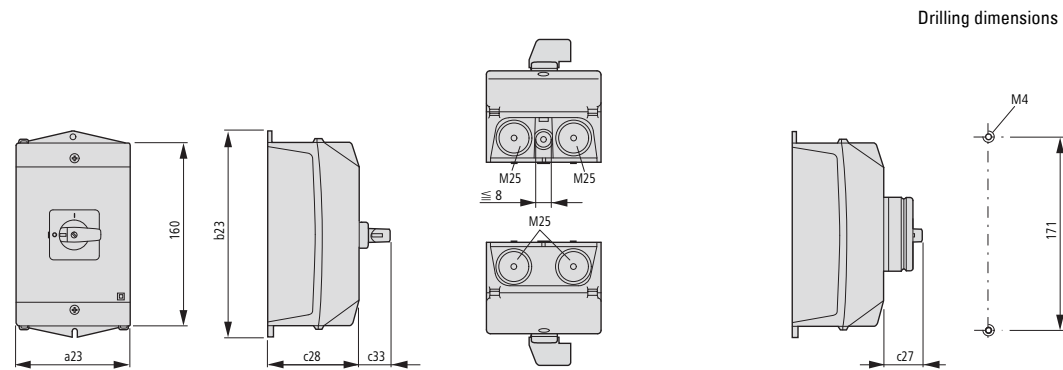
- ① Interlock extension with ZVV...+ZAV... possible $\leq 4 \times 25 = 100$ mm
 ② Not included as standard

Dimensions

P1 Surface mounting /I2 - mm

Surface mounting
P1.../I2

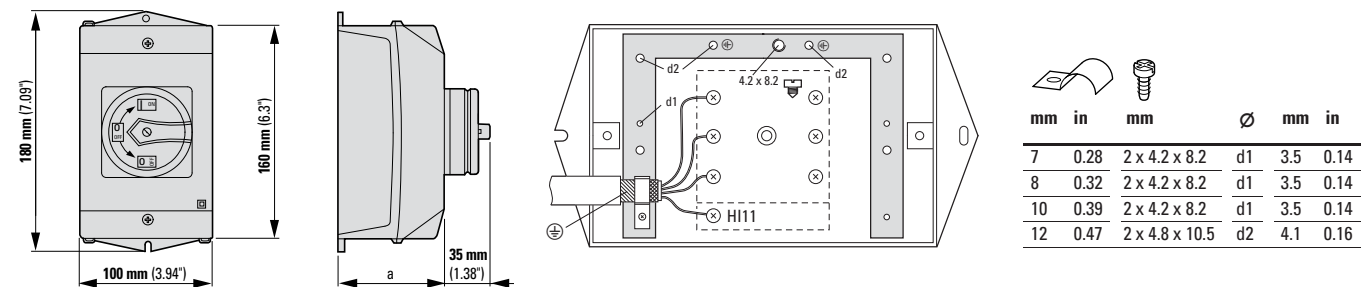
Surface mounting main switches/safety switches
P1.../I2/SVB / P1.../I2/SI



Part no.	a2	a3	a4	a21	a22	a23	a31	a32	a33	b2	b3	b21	b22	b23	b24	b31
P1.../I2	48	49	53.5	65	48	100	15	15	83	48	70	65	17	180	35.5	49

Part no.	c2	c3	c20 ≧/≦	c20 with ≦ 4 ZAV/ZVV	c21	c22	c23	c24	c25	c27	c28	c31	c32	c33
P1...	59	86	96 – 112	212	35	32	65	68	58	35	80	25	25	27

P1 Surface mounting main switch /I2H/MBS/SVB with pre-assembled EMC screen - mm



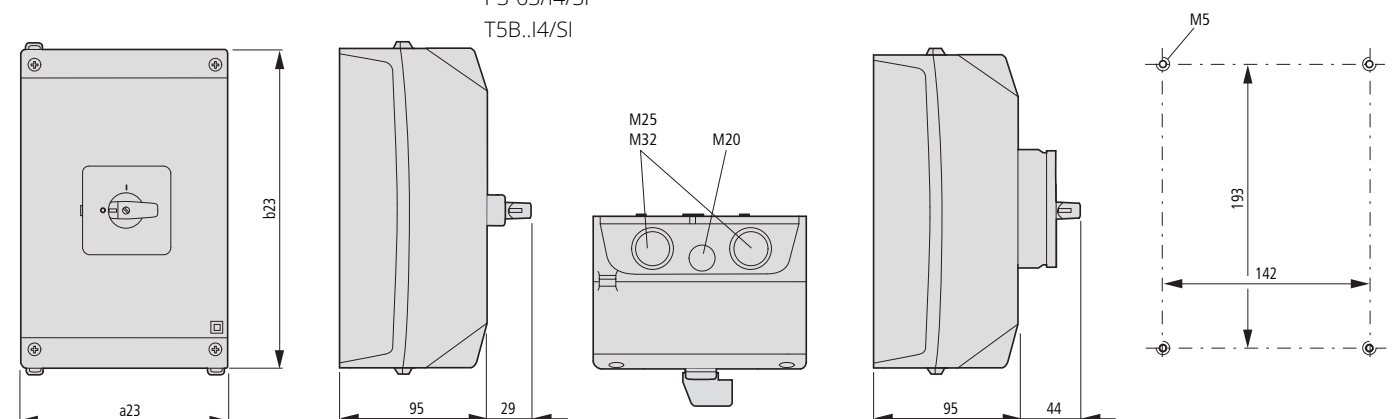
a = 101 mm (3.98")

P3-63 Surface mounting /I4 - mm

Surface mounting
P3-63/I4

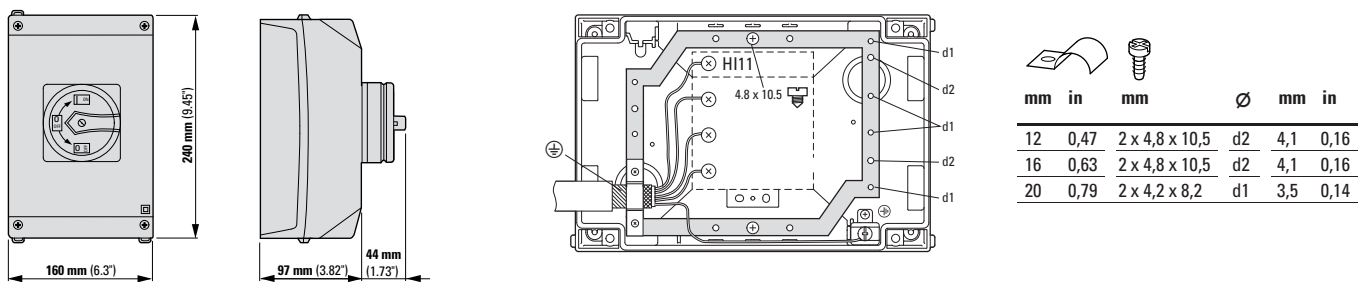
Surface mounting main switches/safety switches
P3-63/I4/SVB
P3-63/I4/SI
T5B..I4/SI

Drilling dimensions



Dimensions

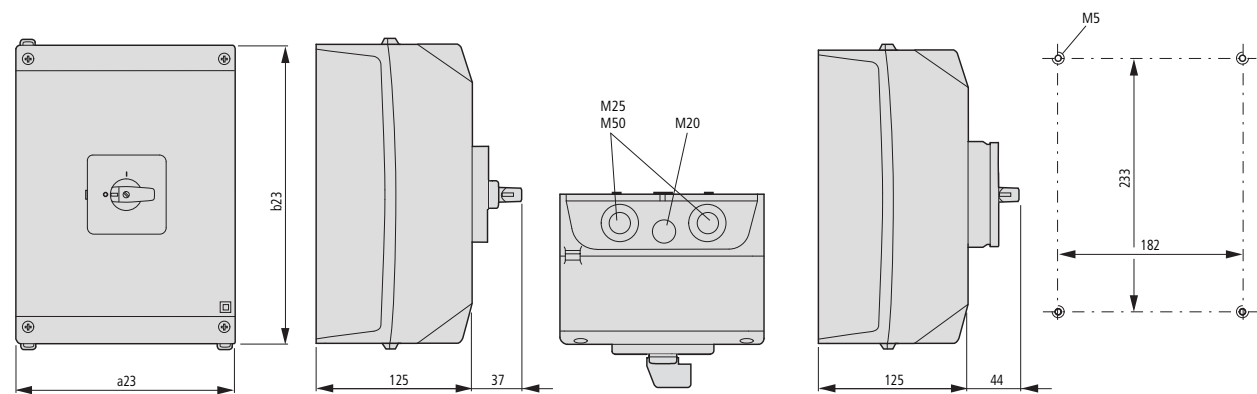
P3 Surface mounting main switch /I4/MBS/SVB with pre-assembled EMC screen - mm



P3-100 Surface mounting /I5 - mm

Surface mounting
P3-100/I5
Surface mounting main switches/safety switches
P3-100/I5/SVB
P3-100/I5/SI
T5-.../I5/SI

Drilling dimensions

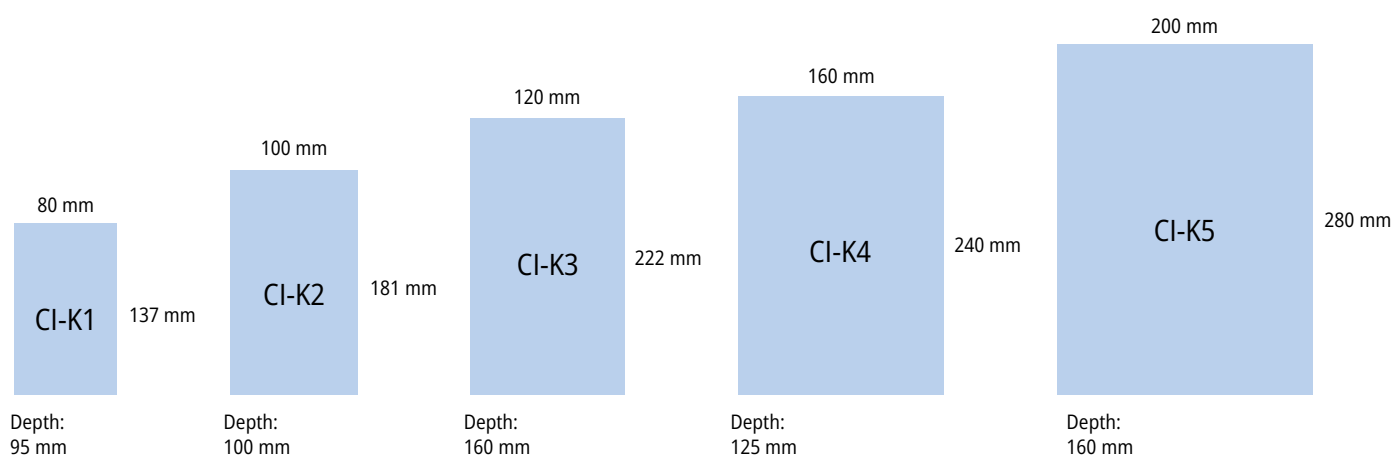


Part no.	a2	a3	a4	a21	a22	a23	a31	a32	a33	b2	b3	b21	b22	b23	b24	b31
P3-63/I4	87	72	71.5	87	87	160	18	15	114	87	83	87	27	240	35.5	60
P3-100/I5	87	72	71.5	87	87	200	18	15	114	87	83	87	27	280	35.5	60

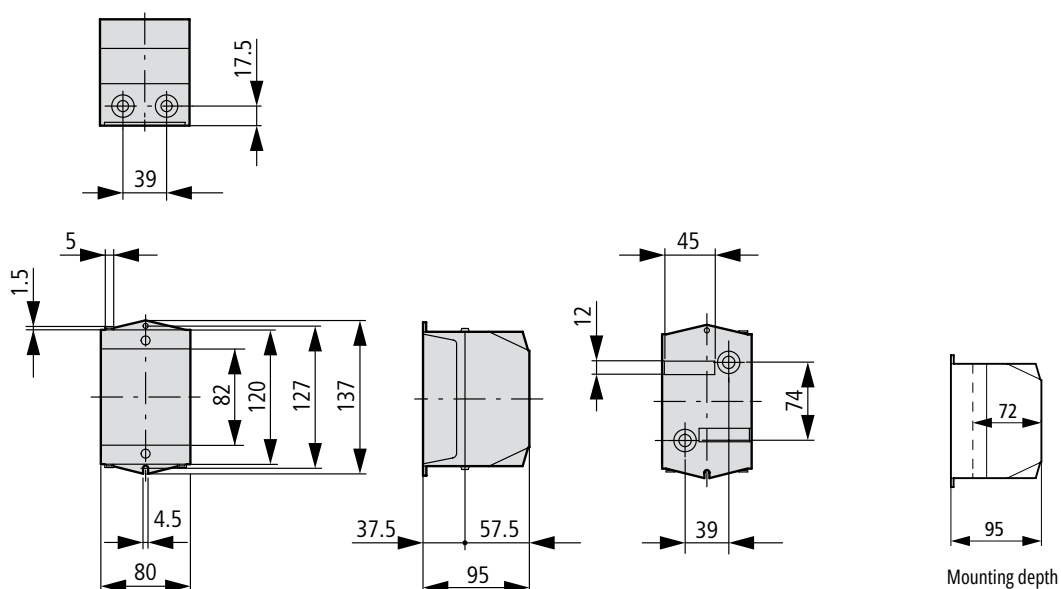
Part no.	c2	c3	c20 ≅/≅	c20 with ≤ 4 ZAV/ZVV	c21	c22	c23	c24	c25	c27	c28	c31	c32	c33
P3-63	59	82	103 – 118	218	37	41	63	81	65	44	125	25	25	37
P3-100	59	82	103 – 118	218	37	41	63	81	65	44	125	25	25	37

Dimensions

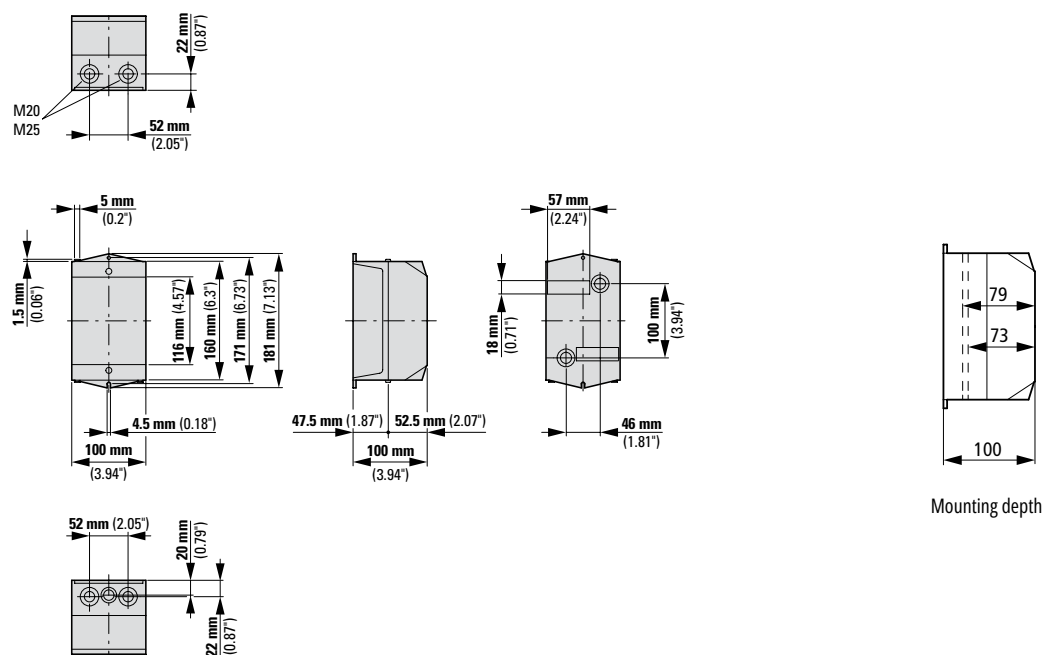
CI-K Polycarbonate enclosures - Dimensions overview - mm



CI-K1 - mm

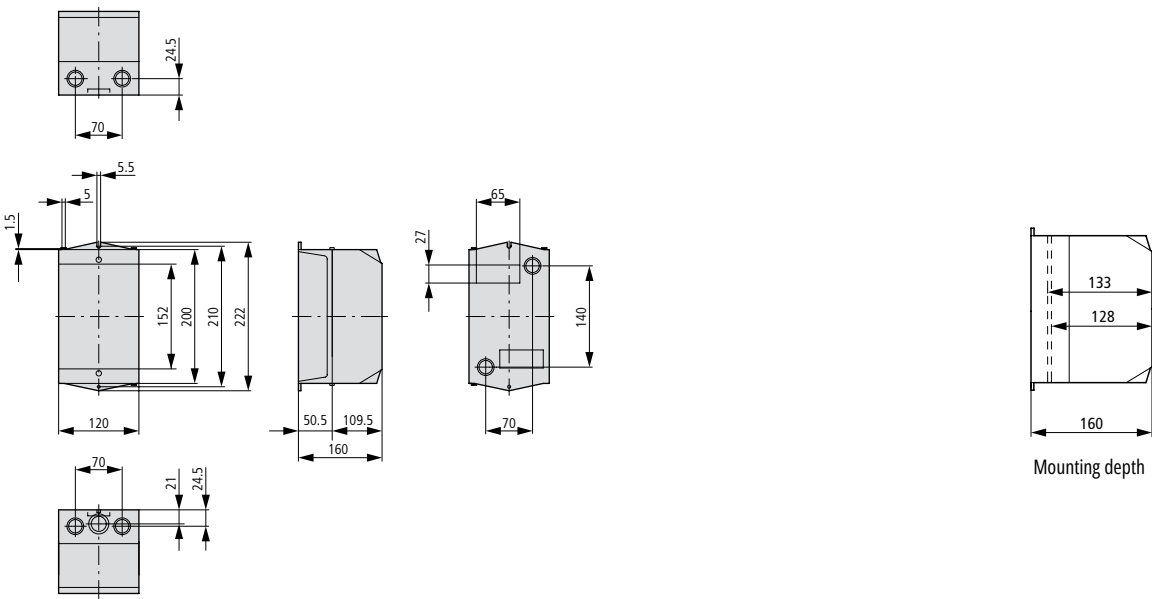


CI-K2 - mm

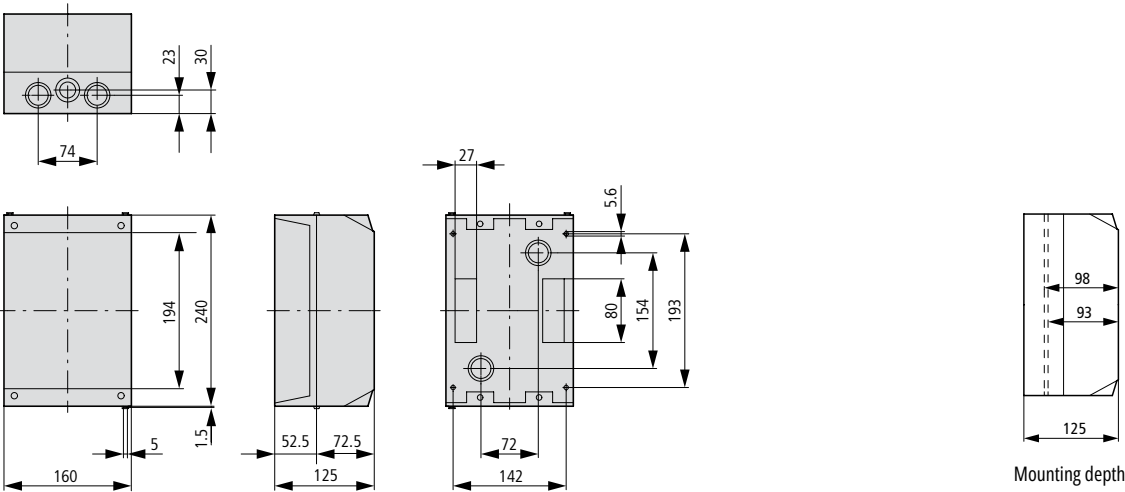


Dimensions

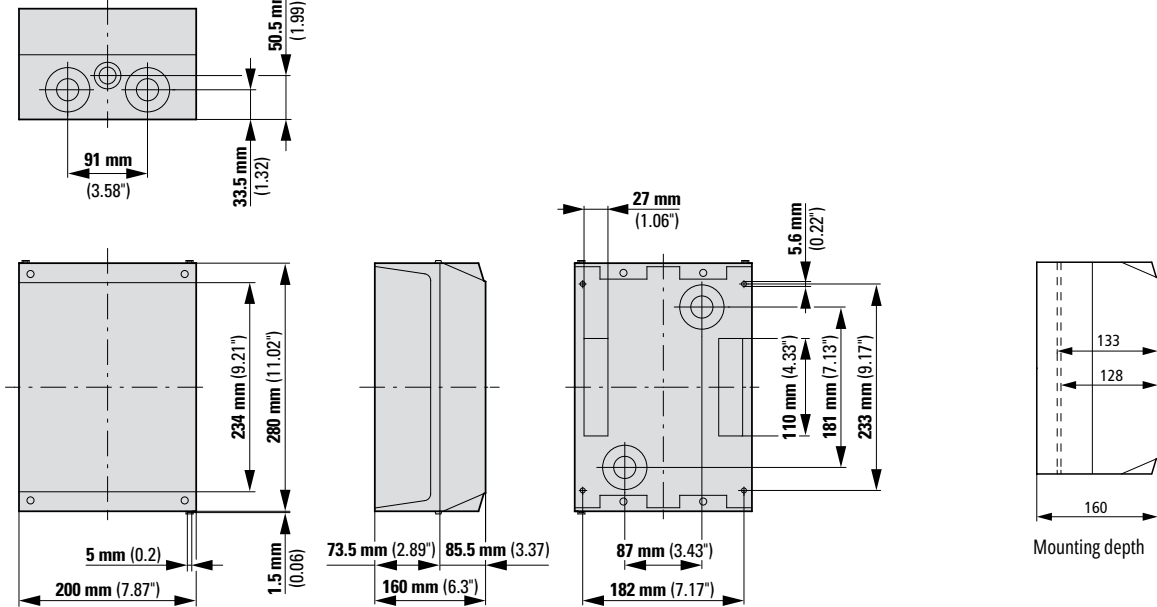
CI-K3 - mm



CI-K4 - mm



CI-K5 - mm



Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
000649	KNK-P3	92	010372	T0-2-8221/EZ	54	015226	TM-1-8240/EZ	63
000650	KNK-T0	92	010378	T0-5-8270/Z	89	015256	TM-2-8241/EZ	63
000651	N-P1E	45, 159	010380	T0-6-8370/Z	82	015506	TM-3-8242/EZ	63
000652	N-P1Z	91, 113, 152, 159	010381	T0-2-15452/Z	83	015537	TM-3-8243/EZ	63
000687	T3-2-8400/EZ	60	010382	T0-1-15322/E	21	015554	TM-3-8401/E	35
000691	TM-1-15431/EZ	58	010398	P3-63/EA/SVB/N	25	015565	TM-5-8247/EZ	63
000692	TM-1-8220/EZ	53	010402	P1-32/IVS/N	97	015571	T0-3-15683/EA/SVB	27
000693	TM-1-8290/EZ	49	010405	T0-4-15682/E	23	015592	TM-3-8232/EZ	66
000694	T3-3-8401/EZ	60	010807	TM-3-8212/E	28	015600	T0-3-15683/EA/SVB-SW	26
000695	T3-3-8228/EZ	60	011082	T0-2-1/E-RT	22	015630	TM-3-8233/EZ	66
000698	TM-3-8261/EZ	63	012002	T3-3-15680/EA/SVB	27	015634	T0-3-15683/V/SVB	76
000699	TM-2-8550/EZ	55	012030	T3-4-8410/Z	87	015661	TM-5-8237/EZ	66
000700	TM-2-8231/EZ	66	012742	T0-1-8210/E	29	015664	T0-3-15683/V/SVB-SW	75
000701	TM-2-8230/EZ	66	012747	T0-6-15866/EZ	60	015690	TM-1-8175/EZ	50
000721	T3-4-8410/EZ	61	012749	T0-3-8244/IVS	109	016318	T3-1-102/E-RT	22
000797	T3-5-15876/EZ	60	012750	T0-2-8231/E	42	016619	T0-3-15683/E	23
000893	T0-5-15876/E	36	012752	T0-1-15421/IVS	101	016658	T0-2-15683/EZ	51
000900	T0-5-15876/EZ	60	012753	T0-8-8372/Z	82	016722	T0-3-15683/IVS	100
000902	T0-5-15876/IVS	106	012755	T0-1-15322/EZ	50	016747	T3-1-102/EA/SVB-SW	24
000942	T0-5-15876/Z	85	012759	T0-3-8007/IVS	107	016748	T3-3-15680/V/SVB	76
000956	T3-3-8451/EZ	59	012771	P3-63/EA/SVB-SW/N	24	016751	T3-2-8215/E	30
000959	T3-4-8440/EZ	59	012772	P1-32/EA/SVB-SW/HI11	26	016776	T3-5-15876/E	36
001025	T3-2-8221/EZ	54	012778	T0-4-15682/EZ	51	016786	TM-1-8178/EZ	50
001069	T3-3-8222/EZ	54	013140	P1-25/IVS-RT	99	016878	TM-2-15432/EZ	58
002388	P1-25/E-RT	22	013180	TM-4-8213/E	28	016925	TM-1-8220F88/EZ	58
002513	T3-4-8294/E	29	013971	T0-4-8251/E	42	017025	T3-1-8200/E-RT	22
002538	T3-3-8228/E	35	013972	T0-3-8251/EZ	65	017253	H-P1	161
003072	T3-1-8210/EZ	52	013974	T0-3-8251/IVS	110	017497	T0-6-8271/EZ	65
003075	T3-2-8211/EZ	52	013976	T0-3-8251/Z	89	017500	T0-3-15453/EZ	58
003079	T3-4-8213/EZ	52	014000	T0-4-8344/E	18	017501	T0-1-15322/IVS	98
003080	T3-3-8212/EZ	52	014002	T0-4-8344/EZ	49	017503	T0-2-8177/EZ	50
003191	T0-2-15435/E	33	014006	T0-4-8344/IVS	97	017517	P3-63/V/SVB-SW/N	73
003192	T0-2-15435/EZ	58	014007	T0-4-8344/V/SVB	74	017518	P1-32/V/SVB-SW/HI11	75
003195	T0-2-15435/IVS	104	014009	T0-4-8344/Z	70	017524	T0-4-15682/IVS	100
003196	T0-2-15435/Z	83	014374	T3-1-102/EA/SVB	25	017926	TM-2-8219/E	28
003197	P1-32/E-RT	22	014375	T3-3-15680/EA/SVB-SW	26	018053	T0-1-15434/EZ	58
003198	FS908GE-T0	155	014377	T3-3-15683/E	23	019120	T3-1-102/V/SVB	74
004506	T3-6-8370/EZ	54	014933	T0-1-102/EZ/S	20	019121	T3-3-15680/V/SVB-SW	75
004882	T3-1-8200/V/SVB-SW	73	014971	T0-1-102/Z/S	71	019149	T3-5-15876/Z	85
004886	T3-4-8294/Z	81	015073	TM-1-8291/EZ	49	019626	H-P14	161
004911	T3-3-8228/Z	85	015096	TM-2-8292/EZ	49	019862	T0-1-8210/Z	81
005743	P3-63/E-RT	22	015112	T0-3-8228/E	35	019863	T0-1-8214/E	30
007189	P3-100/E-RT	22	015118	T0-3-8222/EZ	54, 65	019864	T0-4-8223/EZ	54
007255	T3-1-8200/V/SVB	74	015122	T0-3-8244/Z	88	019869	T0-2-8231/IVS	110
008267	T0-4-8344/EA/SVB	25	015123	T0-2-8231/EZ	65	019871	T0-2-15422/E	29
008268	T0-4-8344/EA/SVB-SW	24	015124	T0-6-8271/E	42	019872	T0-1-15431/E	33
008272	T0-4-8344/V/SVB-SW	73	015125	T0-1-15421/Z	81	019875	T0-1-15511/E	20
008964	T3-4-8344/EA/SVB	25	015127	T0-3-15453/E	33	019878	T0-3-15924/E	37
008965	T3-4-8344/EA/SVB-SW	24	015130	T0-2-8177/E	20	019890	P3-100/EA/SVB/N	25
008967	T3-4-8344/V/SVB-SW	73	015132	T0-3-8007/Z	86	019891	P3-63/EA/SVB/HI11	27
009046	T0-1-102/E-RT	22	015137	TM-1-8210/EZ	53	019892	T0-4-15682/EA/SVB	27
009474	T0-1-8200/E-RT	22	015144	P3-63/V/SVB/N	74	019894	P3-63/E/N	18
009632	T3-1-8214/E	30	015145	P1-32/V/SVB/HI11	76	019924	ZFS60-T0	156
009657	T3-4-8410/E	38	015147	T0-1-102/IVS	97	019925	UV-T0	161
009741	TM-5-8247/E	40	015148	P1-32/Z/N	70	020299	TM-3-8299/E	28
010366	T0-3-8401/Z	85	015166	TM-2-8211/EZ	53	020300	TM-2-8550/E	32
010371	T0-4-8294/E	29	015197	TM-2-8221/EZ	53	020593	T3-4-8344/E	18

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
020595	T3-4-8344/EZ	49	028641	T3-3-8451/E	34	036484	T0-3-15391/IVS	112
020598	T3-4-8344/V/SVB	74	029353	T0-3-8212/E	29	036486	T0-2-15512/EZ	50
020600	T3-4-8344/Z	70	029354	T0-2-8211/Z	81	036487	T0-4-15602/IVS	103
021493	T3-1-102/V/SVB-SW	73	029356	T0-6-8370/EZ	54	036501	T0-3-8342/V/SVB-SW	73
021999	H-P3	161	029358	T0-4-8440/IVS	105	036502	P3-100/V/SVB-SW/HI11	75
022234	T0-2-8211/E	29	029361	T0-3-8232/EZ	65	036504	T0-2-1/Z	70
022236	T0-2-8215/E	30	029363	T0-2-15422/Z	81	036506	T0-2-15679/IVS	100
022242	T0-2-8231/Z	89	029364	T0-1-15431/Z	83	038133	T3-4-8440/Z	84
022243	T0-6-8271/IVS	110	029365	T0-3-15391/E	44	038724	P1-25/E	18
022244	T0-2-15422/EZ	52	029367	T0-1-15511/Z	71	038847	T0-2-8221/E	31
022245	T0-1-15431/EZ	58	029368	T0-4-15602/E	32	038849	T0-3-8451/E	34
022246	T0-3-15453/IVS	104	029370	T0-3-15924/Z	86	038854	T0-1-15401/E	19
022248	T0-1-15511/EZ	50	029382	T0-3-8342/EA/SVB	25	038861	T0-2-15920/E	37
022249	T0-2-8177/IVS	98	029383	P3-100/EA/SVB/HI11	27	038873	T0-2-1/EA/SVB	25
022251	T0-3-15924/EZ	62	029387	T0-2-15679/E	23	038875	T0-3-15680/EA/SVB	27
022263	P3-100/EA/SVB-SW/N	24	029416	BS45X14-T0	156	038878	P3-100/Z/N	70
022264	P3-63/EA/SVB-SW/HI11	26	029417	ZAV-P3	92	038909	KNB-T0	154
022265	T0-4-15682/EA/SVB-SW	26	029452	T0-2-15920/IVS	107	039283	TM-2-8230/E	39
022267	P3-63/IVS/N	97	029791	TM-3-15433/E	33	039298	TM-3-8232/E	39
022270	T0-4-15682/Z	72	030170	ZFS61/62-T0	156	040478	T3-3-15683/EA/SVB	27
022297	ZFS60-P3	156	030988	T3-4-15682/Z	72	041097	P1-25/EA/SVB	25
022298	ZVV-T0	92	030992	T3-3-8401/E	35	041099	P3-63/IVS	97
022330	T0-1-102/V/SVB-SW	73	031014	T3-3-8451/Z	84	041222	T0-4-8440/E	34
022632	P1-32/IVS-RT	99	031475	FS908GE-P3	155	041225	T0-3-8280/IVS	109
023869	T3-4-15682/E	23	031607	P3-63/EA/SVB	25	041226	T0-3-8233/E	42
023870	T3-3-8216/E	30	031726	T0-4-8213/E	29	041227	T0-1-15401/EZ	49
024604	T0-4-8410/E	38	031728	T0-1-8220/E	31, 42	041228	T0-3-15423/IVS	101
024609	T0-3-8216/E	30	031731	T0-4-8441/IVS	105	041229	T0-2-15432/IVS	104
024610	T0-5-8369/EZ	54	031738	T0-3-15391/EZ	56	041234	T0-2-15920/EZ	62
024616	T0-6-8271/Z	89	031739	T0-2-15323/IVS	98	041246	T0-2-1/EA/SVB-SW	24
024619	T0-3-15453/Z	83	031741	T0-4-15602/EZ	55	041248	T0-3-15680/EA/SVB-SW	26
024620	T0-2-15323/E	21	031755	T0-3-8342/EA/SVB-SW	24	041250	P1-25/EZ	49
024622	T0-2-8177/Z	71	031756	P3-100/EA/SVB-SW/HI11	26	041252	T0-2-15679/Z	72
024636	P3-100/V/SVB/N	74	031758	T0-2-1/IVS	97	041282	KNB-P3	154
024637	P3-63/V/SVB/HI11	76	031759	P3-100/E/N	18	041656	TM-5-8270/E	39
024638	T0-4-15682/V/SVB	76	031760	T0-2-15679/EZ	51	041671	TM-5-8252/E	39
024639	T0-2-1/E	18	031789	BS84X24-P3	156	042851	T3-3-15683/EA/SVB-SW	26
024670	ZFSX-T0	156	032164	TM-1-8214/E	30	042879	T3-4-8441/E	34
024671	ZVV-P3	92	034102	T0-8-8372/EZ	54	043592	T0-4-8213/Z	81
025045	TM-1-15431/E	33	034105	T0-1-8240/E	41	043594	T0-4-8294/IVS	101
025046	TM-4-8552/E	32	034106	T0-3-8280/E	41	043595	T0-4-8441/E	34
026861	P3-63/E	18	034107	T0-3-8232/IVS	110	043596	T0-3-8451/Z	84
026985	T0-3-8451/IVS	105	034109	T0-3-15423/E	29	043597	T0-1-8240/EZ	64
026988	T0-3-8232/E	42	034110	T0-2-15432/E	33	043598	T0-3-8280/Z	88
026990	T0-2-15422/IVS	101	034113	T0-2-15512/E	20	043599	T0-3-8233/EZ	65
026991	T0-1-15431/IVS	104	034116	T0-3-8048/E	37	043601	T0-3-15423/Z	81
026993	T0-2-15323/EZ	50	034128	T0-3-8342/V/SVB	74	043602	T0-2-15432/Z	83
026994	T0-1-15511/IVS	98	034129	P3-100/V/SVB/HI11	76	043605	T0-2-15512/Z	71
026997	T0-3-15924/IVS	107	034132	P3-100/IVS/N	97	043619	T0-2-1/V/SVB	74
027009	P3-100/V/SVB-SW/N	73	034537	TM-2-8215/E	30	043621	T0-3-15680/V/SVB	76
027010	P3-63/V/SVB-SW/HI11	75	035739	T3-3-8401/Z	85	043624	T0-3-8342/E	18
027011	T0-4-15682/V/SVB-SW	75	035760	T3-4-8440/E	34	043655	KNB-RT-T0	154
027012	T0-2-1/EZ	49	036473	T0-3-8212/Z	81	044029	TM-2-8231/E	39
027013	P3-63/Z/N	70	036477	T0-6-15866/IVS	106	044973	T0-2-1/E/SVC(S)-RT	22
027043	ZFSX-P3	156	036479	T0-3-8280/EZ	64	044974	P1-25/E/SVC(S)-RT	22
027044	ZAV-T0	92	036480	T0-3-8232/Z	89	044975	P1-32/E/SVC(S)-RT	22
027076	T0-1-8240/IVS	109	036482	T0-3-15423/EZ	52	044977	P1-32/E/SA(S)	21
027418	TM-2-15432/E	33	036483	T0-2-15432/EZ	58	045062	H1-T5	161

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
045063	HZ-T5	161	048340	T0-2-8215/IVS	101	055465	T0-1-15402/EZ	49
045064	V/EA/SVB-SW/T5	154	048342	T0-4-8440/Z	84	055466	T0-3-8216/Z	82
045065	V/EA/SVB/T5	154	048344	T0-5-8281/E	41	055467	T0-3-15433/IVS	104
045224	T3-3-15683/V/SVB	76	048345	T0-3-8233/IVS	110	055472	T0-2-15922/EZ	62
045225	T3-3-8342/E	18	048346	T0-1-15401/Z	70	055483	T0-1-8200/EA/SVB-SW	24
045227	T3-2-8221/E	31	048348	T0-3-15433/E	33	055484	P1-32/V/SVB-SW	73
045252	T3-4-8441/Z	84	048351	T0-3-15513/E	20	055486	PI-25/V/SVB-SW/N/HI11	75
045458	EZ/S-A	67	048353	T0-2-15920/Z	86	055489	T0-3-8342/Z	70
045459	EZ/S-B	67	048365	P1-25/EA/SVB-SW	24	055894	TM-6-8253/E	39
045461	EZ/S-D	67	048367	P1-25/EA/SVB/N/HI11	27	057089	T3-4-15682/EA/SVB-SW	26
045462	EZ/S-E	67	048369	P1-32/EZ	49	057091	T3-1-8210/Z	81
045463	EZ/S-F	67	050591	P3-63/Z	70	057092	T3-3-8222/Z	82
045464	EZ/S-G	67	050712	T0-4-8223/E	31	057117	T3-6-15866/Z	85
045465	EZ/S-H	67	050713	T0-3-8216/IVS	101	057708	P1-25/Z	70
045466	EZ/S-J	67	050716	T0-2-8241/E	41	057829	T0-3-8212/EZ	52
045468	EZ/S-N	67	050717	T0-5-8281/EZ	64	057832	T0-2-8221/IVS	102
045471	EZ/S-R	67	050718	T0-3-8233/Z	89	057835	T0-2-8241/IVS	109
045479	TM-1-8310/EZ	57	050720	T0-1-8214/Z	82	057836	T0-5-8281/Z	88
045483	TM-2-8260/EZ	63	050721	T0-3-15433/EZ	58	057840	T0-3-15433/Z	83
045486	TM-2-8293/EZ	49	050724	T0-3-15513/EZ	50	057856	T0-1-8200/V/SVB	74
045487	TM-1-8311/EZ	57	050738	P1-25/V/SVB-SW	73	057857	P3-63/EA/SVB-SW	24
045490	TM-3-15433/EZ	58	050740	P1-25/EA/SVB-SW/N/HI11	26	057859	P1-32/EA/SVB/N/HI11	27
045491	TM-3-8212/EZ	53	050743	T0-3-8342/IVS	97	057892	SVB-T0	153
045493	TM-3-8222/EZ	53	050965	P1-25/E/SVA(A)	20	058267	TM-1-8240/E	40
045496	TM-3-8280/EZ	63	050966	P1-25/E/SA(S)	21	059462	T3-4-15682/V/SVB	76
045845	P3-63/IVS-RT	99	050967	P1-25/E/SVA(S)-RT	22	059465	T3-4-8223/E	31
045847	TM-4-8213/EZ	53	050969	P1-25/Z/SVA(A)	71	060198	T0-2-8400/IVS	106
045495	TM-3-8244/EZ	63	050970	P1-32/E/SVA(A)	20	060204	T0-5-8369/E	31
045967	T0-1-8214/IVS	101	050971	P1-32/E/SVA(S)-RT	22	060205	T0-3-8222/IVS	102, 110
045973	T0-1-15401/IVS	97	050974	SVA-T3	157	060208	T0-1-8240/Z	88
045992	T0-2-1/V/SVB-SW	73	050975	SVC-T3	158	060211	T0-1-15402/IVS	97
045994	T0-3-15680/V/SVB-SW	75	050976	T0-2-1/E/SVA(A)	20	060218	T0-2-15922/IVS	107
045997	T0-3-8342/EZ	49	050977	T0-2-1/E/SVA(S)	21	060229	T0-1-8200/V/SVB-SW	73
046028	KNB-RT-P3	154	050978	T0-2-1/Z/SVA(A)	71	060230	P3-63/V/SVB-SW	73
046119	TM-4-8223/EZ	53	050987	VR-T3	158	060232	P1-32/EA/SVB-SW/N/HI11	26
046120	TM-4-8262/EZ	63	052344	T3-3-8342/Z	70	060265	SVB-SW-T0	153
046123	TM-5-8252/EZ	66	052346	T3-3-8222/E	31	060640	TM-2-8260/E	40
046124	TM-5-8270/EZ	66	052962	P1-25/IVS	97	061835	T3-4-15682/V/SVB-SW	75
046125	TM-5-8281/EZ	63	052999	SVB-P3	153	061837	T3-2-8211/E	29
046126	TM-5-8369/EZ	53	053079	T0-2-8400/E	35	061838	T3-4-8223/Z	82
046127	TM-6-8253/E	66	053080	T0-4-8410/EZ	61	062432	N-P1E	45, 159
046128	TM-6-8271/EZ	66	053083	T0-2-8211/EZ	52	062491	SVB-SW-P3	153
046402	TM-6-8271/E	39	053088	T0-4-8441/Z	84	062571	T0-2-8400/Z	85
046991	EZ/S-A-TM	67	053089	T0-2-8241/EZ	64	062572	T0-3-8228/IVS	106
046992	EZ/S-B-TM	67	053092	T0-1-15402/E	19	062575	T0-4-8213/EZ	52
046995	EZ/S-E-TM	67	053099	T0-2-15922/E	37	062577	T0-6-8370/E	31
046996	EZ/S-F-TM	67	053110	T0-1-8200/EA/SVB	25	062578	T0-4-8223/IVS	102
046997	EZ/S-G-TM	67	053111	P1-32/EA/SVB-SW	24	062581	T0-2-8241/Z	88
047004	EZ/S-R-TM	67	053113	P1-25/V/SVB/N/HI11	76	062582	T0-6-8282/E	41
047422	ZFS77-P3	156	053521	TM-3-8233/E	39	062584	T0-1-15402/Z	70
047423	ZFS63-P3	156	054716	T3-4-15682/EA/SVB	27	062586	T0-1-15434/E	33
047424	ZFS63-T0	156	054718	T3-1-8210/E	29	062591	T0-2-15922/Z	86
047600	T3-2-8221/Z	82	054744	T3-6-15866/E	36	062603	P3-100/EA/SVB-SW	24
048218	P3-63/V/SVB	74	055335	P1-25/V/SVB	74	062605	P1-32/V/SVB/N/HI11	76
048289	UV-P3	161	055452	T0-2-8400/EZ	60	062638	V/EA/SVB-T0	154
048334	T0-3-8228/EZ	60	055459	T0-1-8220/IVS	102, 110	063013	TM-3-8280/E	40
048337	T0-1-8210/EZ	52	055460	T0-6-15866/E	36	064208	T3-1-8200/E	18
048339	T0-3-8222/E	31, 42	055463	T0-5-8281/IVS	109	064210	T3-2-8211/Z	81

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
064805	N-P3Z	91, 113, 159	074440	T0-1-8210/IVS	101	083929	T0-4-8410/Z	87
064945	T0-4-8410/IVS	108	074446	T0-2-8242/IVS	109	083936	T0-3-8451/EZ	59
064950	T0-8-8372/E	31	074449	T0-2-15403/IVS	97	083938	T0-3-8243/EZ	64
064951	T0-5-8369/IVS	102	074450	T0-2-8221/Z	82	083941	T0-2-15404/EZ	49
064955	T0-6-8282/EZ	64	074452	T0-3-15394/EZ	56	083943	T0-1-15451/IVS	104
064976	P3-100/V/SVB-SW	73	074455	T0-1-91/EZ	67	083945	T0-1-15366/EZ	50
064978	P1-32/V/SVB-SW/N/HI11	75	074456	T0-2-15921/IVS	107	083960	P1-25/EA/SVB-SW/N	24
065011	V/EA/SVB-SW-T0	154	074470	P3-63/V/SVB-SW/N/HI11	75	083961	T0-2-15679/EA/SVB-SW	26
065386	TM-2-8241/E	40	074471	T0-1-8200/IVS	97	083962	P3-100/V/SVB-SW/N/HI11	75
065739	ZFS61/62/P3	156	074877	TM-2-8292/E	18	083964	P1-25/IVS/N	97
065751	ZFS68-T0	156	074878	TM-4-8262/E	40	084329	T0-2-1/IVS-RT	99
065752	ZFS77-T0	156	076072	T3-3-8342/V/SVB	74	084369	TM-2-8221/E	28
066576	T3-1-8200/EA/SVB	25	076073	T3-1-102/E	18	086185	P3-100/IVS-RT	99
066581	T3-1-8200/EZ	49	076075	T3-4-8213/E	29	086307	T0-3-8216/EZ	52
066584	T3-5-8369/E	31	076423	T0-2-15907/IVS	104	086312	T0-1-8220/Z	82, 89
066931	T0-2-15907/E	33	076813	T0-2-8211/IVS	101	086315	T0-4-8223/Z	82
067201	P3-100/E	18	076815	T0-1-8214/EZ	52	086316	T0-1-15451/Z	83
067324	T0-6-8370/IVS	102	076819	T0-2-8242/Z	88	086317	T0-1-15321/E	21
067326	T0-6-15866/Z	85	076822	T0-2-15403/Z	70	086333	P1-25/V/SVB/N	74
067327	T0-2-8242/E	41	076824	T0-1-15451/E	33	086334	T0-2-15679/V/SVB	76
067330	T0-2-15403/E	19	076829	T0-2-15921/Z	86	086709	S-T0	157
067337	T0-2-15921/E	37	076843	P3-100/EA/SVB/N/HI11	27	086742	TM-3-8222/E	28
067351	P3-63/EA/SVB/N/HI11	27	076844	T0-1-8200/Z	70	088558	P3-100/V/SVB	74
067352	T0-1-8200/E	18	076845	P1-25/E/N	18	088682	T0-4-8440/EZ	59
067759	TM-3-8261/E	40	077250	TM-2-8293/E	18	088684	T0-3-8243/IVS	109
068949	T3-1-8200/EA/SVB-SW	24	077251	TM-6-8282/E	40	088685	T0-2-8230/E	42
068956	T3-3-8212/E	29	078445	T3-3-8342/V/SVB-SW	73	091047	T0-3-8401/E	35
068957	T3-5-8369/Z	82	078446	T3-1-102/EZ	49	091057	T0-3-8243/Z	88
069150	TM-5-8237/E	39	078448	T3-4-8213/Z	81	091058	T0-2-8230/EZ	54, 65
069304	T0-2-15907/EZ	58	078796	T0-2-15907/Z	83	091059	T0-5-8270/E	42
069697	T0-8-8372/IVS	102	079065	P1-32/E	18	091060	T0-2-15404/Z	70
069700	T0-2-8242/EZ	64	079186	T0-3-8212/IVS	101	091062	T0-2-15452/E	33
069701	T0-6-8282/IVS	109	079197	T0-1-15451/EZ	58	091078	T0-1-102/EA/SVB	25
069703	T0-2-15403/EZ	49	079198	T0-3-15394/IVS	112	091079	P1-32/EA/SVB/N	25
069705	T0-1-15434/IVS	104	079201	T0-1-91/IVS	111	091080	P1-25/EA/SVB/HI11	27
069710	T0-2-15921/EZ	62	079216	P3-100/EA/SVB-SW/N/HI11	26	091082	T0-1-102/EZ	49
069724	P3-63/EA/SVB-SW/N/HI11	26	079218	P1-25/EZ/N	49	091114	IVS-T0	113
069725	T0-1-8200/EZ	49	079583	T0-1-102/IVS-RT	99	091455	EZ-P1	46
070131	TM-1-8290/E	18	079623	TM-3-8256/E	18	091488	TM-5-8369/E	28
070132	TM-5-8281/E	40	079624	TM-3-8243/E	40	092025	T5B-4-8441/Z	84
070194	P1-25/EA/SVB-SW/HI11	26	080822	T3-8-8372/E	31	092028	T5B-4-8441/E	34
071326	T3-3-8342/EA/SVB	25	081438	P1-32/EA/SVB	25	092029	T5B-4-8440/Z	84
071327	T3-1-8200/Z	70	081439	P3-100/IVS	97	092032	T5B-4-8440/E	34
071329	T3-3-8212/Z	81	081559	T0-4-8213/IVS	101	092049	T5B-4-8410/Z	87
072069	T0-4-8294/EZ	52	081561	T0-2-8215/EZ	52	092052	T5B-4-8410/E	38
072074	T0-6-8282/Z	88	081565	T0-3-8243/E	41	092055	T5B-4-8344/V/SVB-SW	73
072078	T0-1-15434/Z	83	081568	T0-2-15404/E	19	092056	T5B-4-8344/V/SVB	74
072079	T0-3-15394/E	44	081571	T0-3-15394/Z	90	092061	T5B-4-8344/EA/SVB-SW	24
072082	T0-1-91/E	43	081572	T0-1-15366/E	21	092062	T5B-4-8344/EA/SVB	25
072097	P3-63/V/SVB/N/HI11	76	081587	P1-25/EA/SVB/N	25	092064	T5B-3-8344/E	18
072504	TM-1-8291/E	18	081588	T0-2-15679/EA/SVB	27	092081	T5B-4-8294/Z	81
072505	TM-3-8242/E	40	081589	P3-100/V/SVB/N/HI11	76	092084	T5B-4-8294/E	29
072567	P1-32/EA/SVB/HI11	27	081622	EZ-T0	46	092105	T5B-4-8223/Z	82
073695	T3-2-8400/E	35	081956	T0-1-8200/IVS-RT	99	092108	T5B-4-8223/E	31
073699	T3-3-8342/EA/SVB-SW	24	081996	TM-1-8220/E	28	092109	T5B-4-8213/Z	81
073703	T3-6-8370/E	31	081997	TM-3-8244/E	40	092112	T5B-4-8213/E	29
074320	P3-100/EA/SVB	25	083192	T3-1-102/Z	70	092288	T5B-3-8451/E	34
074437	T0-3-8228/Z	85	083195	T3-8-8372/Z	82	092293	T5B-3-8401/Z	85

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
092296	T5B-3-8401/E	35	095958	T5-4-8344/V/SVB-SW	73	172807	P3-63/M4/SVB-SW/HI11	79
092297	T5B-3-8342/Z	70	095959	T5-4-8344/V/SVB	74	172809	P3-63/M4/SVB-SW/N/HI11	79
092299	T5B-3-8342/V/SVB-SW	73	095960	T5-4-8344/EA/SVB-SW	24	172810	P3-63/M4/K2-PR	78
092300	T5B-3-8342/V/SVB	74	095961	T5-4-8344/EA/SVB	25	172811	P3-63/M4/K2-PG	77
092307	T5B-3-8342/EA/SVB-SW	24	095984	T5-4-8294/Z	81	172812	P3-63/M4/K2-PR/N	78
092308	T5B-3-8342/EA/SVB	25	095986	T5-4-8294/E	29	172813	P3-63/M4/K2-PG/N	77
092310	T5B-3-8342/E	18	096012	T5-4-8213/Z	81	172814	P3-63/M4/K2-PR/HI11	80
092374	T5B-3-8228/E	35	096014	T5-4-8213/E	29	172815	P3-63/M4/K1-PG/N/HI11	79
092375	T5B-3-8222/Z	82	096234	TM-1-8210/E	28	172816	P3-63/M4/K2-PR/N/HI11	80
092378	T5B-3-8222/E	31	096380	T5-3-8342/V/SVB-SW	73	172817	P3-63/M4/K1-PG/N/HI11	79
092383	T5B-3-8212/Z	81	096381	T5-3-8342/V/SVB	74	172818	P3-100/M4/SVB	78
092386	T5B-3-8212/E	29	096382	T5-3-8342/EA/SVB-SW	24	172819	P3-100/M4/SVB-SW	77
092918	T5B-2-8400/E	35	096383	T5-3-8342/EA/SVB	25	172770	P1-25/M4/SVB-SW/N/HI11	79
093044	T5B-2-8221/Z	82	096464	T5-3-8212/Z	81	172822	P3-100/M4/SVB/HI11	80
093047	T5B-2-8221/E	31	096466	T5-3-8212/E	29	172824	P3-100/M4/SVB/N/HI11	80
093082	T5B-2-8211/Z	81	097225	T5-1-8200/E-RT	22	172826	P3-100/M4/K2-PR	78
093094	T5B-2-8211/E	29	098049	P1-32/Z	70	172827	P3-100/M4/K2-PG	77
093303	P1-32/IVS	97	098166	T0-3-8401/IVS	106	172828	P3-100/M4/K2-PR/N	78
093420	T0-3-8401/EZ	60	098176	T0-3-8244/EZ	64	172829	P3-100/M4/K2-PG/N	77
093428	T0-4-8441/EZ	59	098177	T0-2-8230/Z	89	172830	P3-100/M4/K2-PR/HI11	80
093432	T0-5-8270/EZ	65	098178	T0-5-8270/IVS	110	172831	P3-100/M4/K1-PG/N/HI11	79
093435	T0-2-15452/EZ	58	098179	T0-1-15421/EZ	52	172832	P3-100/M4/K2-PR/N/HI11	80
093436	T0-1-15321/IVS	98	098181	T0-2-15452/IVS	104	172833	P3-100/M4/K1-PG/N/HI11	79
093451	T0-1-102/EA/SVB-SW	24	098186	T0-3-8007/EZ	62	172834	P1-25/XM	93
093452	P1-32/EA/SVB-SW/N	24	098198	P1-32/V/SVB-SW/N	73	172835	P1-32/XM	93
093456	P1-32/E/N	18	098199	P1-25/V/SVB-SW/HI11	75	172836	P3-63/XM	93
093487	DE-T0	160	098607	TM-2-8211/E	28	172837	P3-100/XM	93
093828	H3-T0	46, 161	098608	TM-1-8178/E	19	172838	KNB-P1/M	93
093861	TM-6-8370/E	28	098807	T5-1-102/EA/SVB-SW	24	172839	KNB-P3/M	93
093972	DE-P3	160	098808	T5-1-102/EA/SVB	25	172840	SVB-P1/M	93
094258	T5B-1-8210/Z	81	105225	ZFS(*)-P5	156	172841	SVB-P3/M	93
094261	T5B-1-8210/E	29	105854	CI-K1H-T0-2	94, 162	172842	SVB-SW-P1/M	93
094270	T5B-1-8200/Z	70	105855	CI-K1H-T0-4	94, 162	172843	SVB-SW-P3/M	93
094273	T5B-1-8200/V/SVB	74	105859	CI-K2H-T3-4	94, 162	172844	P1/P3-M400	93
094278	T5B-1-8200/EA/SVB-SW	24	105860	CI-K2H-T3-5	94, 162	172845	P1/P3-M600	93
094279	T5B-1-8200/EA/SVB	25	105870	I1H	151, 162	172864	P1-25/M4/K1-PG/N/HI11	79
094280	T5B-1-8200/E-RT	22	105871	I2H	151, 162	172865	P1-32/M4/SVB	78
094281	T5B-1-8200/E	18	118742	MBS-I4	152	172866	P1-32/M4/SVB-SW	77
094460	T5B-1-102/Z	70	172767	P1-25/M4/SVB/HI11	80	172867	P1-32/M4/SVB/N	78
094462	T5B-1-102/V/SVB-SW	73	172768	P1-25/M4/SVB-SW/HI11	79	172868	P1-32/M4/SVB-SW/N	77
094463	T5B-1-102/V/SVB	74	172769	P1-25/M4/SVB/N/HI11	80	172869	P1-32/M4/SVB/HI11	80
094468	T5B-1-102/EA/SVB-SW	24	172770	P1-25/M4/SVB-SW/N/HI11	79	172870	PI-32/M4/SVB-SW/HI11	79
094469	T5B-1-102/EA/SVB	25	172771	P1-25/M4/K1-PR	78	172871	P1-32/M4/SVB/N/HI11	80
094470	T5B-1-102/E-RT	22	172772	P1-25/M4/K1-PG	77	172872	PI-32/M4/SVB-SW/N/HI11	79
094471	T5B-1-102/E	18	172773	P1-25/M4/K1-PR/N	78	172873	P1-32/M4/K1-PR	78
095060	T3-2-8400/Z	85	172774	P1-25/M4/K1-PG/N	77	172874	P1-32/M4/K1-PG	77
095676	P1-32/V/SVB	74	172775	P1-25/M4/K1-PR/HI11	80	172875	PI-25/M4/SVB	78
095799	T0-1-8220/EZ	54, 65	172776	P1-32/M4/K1-PG/HI11	79	172876	P1-25/M4/SVB-SW	77
095803	T0-3-8244/E	41	172777	P1-25/M4/K1-PR/N/HI11	80	172877	P1-25/M4/SVB/N	78
095804	T0-2-8230/IVS	110	172778	P1-32/M4/K1-PR/N	78	172878	P1-25/M4/SVB-SW/N	77
095806	T0-1-15421/E	29	172779	P1-32/M4/K1-PG/N	77	1818029	K1DB/P	93
095809	T0-1-15321/Z	71	172780	P1-32/M4/K1-PR/HI11	80	1818030	K1DR/P	93
095813	T0-3-8007/E	37	172781	P1-25/M4/K1-PG/HI11	79	1818031	K1DG/P	93
095824	T0-1-102/V/SVB	74	172782	P1-32/M4/K1-PR/N/HI11	80	1818032	K2SDB/P	93
095825	P1-32/V/SVB/N	74	172783	P1-32/M4/K1-PG/N/HI11	79	1818033	K2SDR/P	93
095826	P1-25/V/SVB/HI11	76	172784	P3-63/M4/SVB	78	1818034	K2SDG/P	93
095828	T0-1-102/Z	70	172785	P3-63/M4/SVB-SW	77	1818038	K2SDB/C	93
095829	P1-32/EZ/N	49	172788	P3-63/M4/SVB/HI11	80	1818039	K2SDR/C	93

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
1818040	K2SDG/C	93	197377	T0-2-1/SE1/SVB	128	199894	P1-40/EA/SVB	25
182413	P1-25/I2H/MBS/SVB	127	197378	T0-2-1/SE1/SVB-SW	125	199895	P1-40/EA/SVB/HI11	27
182414	P1-25/I2H/MBS/SVB-SW	124	197379	T0-1-102/SE1	117	199896	P1-40/EA/SVB/N	25
182415	P1-25/I2H/MBS/SVB/HI11	133	197380	T0-1-102/SE1/SVB	128	199897	P1-40/EA/SVB/N/HI11	27
182416	P1-25/I2H/MBS/SVB-SW/HI11	130	197381	T0-1-102/SE1/SVB-SW	125	199898	P1-40/EA/SVB-SW	24
182417	P1-32/I2H/MBS/SVB	127	197383	T0-1-8200/SE1	117	199899	P1-40/EA/SVB-SW/HI11	26
182418	P1-32/I2H/MBS/SVB-SW	124	197384	T0-1-8200/SE1/SVB	128	199900	P1-40/EA/SVB-SW/N	24
182419	P1-32/I2H/MBS/SVB/HI11	133	197385	T0-1-8200/SE1/SVB-SW	125	199901	P1-40/EA/SVB-SW/N/HI11	26
182420	P1-32/I2H/MBS/SVB-SWHI11	130	197386	T0-1-8210/SE1	137	199902	P1-40/E-RT	22
182421	P3-63/I4/MBS/SVB	127	197387	T0-2-8211/SE1	137	199903	P1-40/EZ	49
182422	P3-63/I4/MBS/SVB-SW	124	197388	T0-3-8212/SE1	137	199904	P1-40/EZ/N	49
182423	P3-63/I4/MBS/SVB/HI11	133	197389	T0-4-8213/SE2	137	199906	P1-40/I2	116
182424	P3-63/I4/MBS/SVB-SW/HI11	130	197390	T0-1-8214/SE1	137	199908	P1-40/N	116
182425	T0-2-1/I2H/MBS/SVB	127	197391	T0-2-8215/SE1	137	199909	P1-40/I2/SVB	126
182426	T0-2-1/I2H/MBS/SVB-SW	124	197392	T0-3-8216/SE1	137	199910	P1-40/I2/SVB/HI11	132
182427	T0-2-8900/I2H/MBS/SVB	127	197393	T0-1-8220/SE1	138	199911	P1-40/I2/SVB/N	126
182428	T0-2-8900/I2H/MBS/SVB-SW	124	197394	T0-2-8221/SE1	138	199912	P1-40/I2/SVB-SW	123
182429	T0-2-15679/I2H/MBS/SVB	133	197395	T0-3-8222/SE1	138	199913	P1-40/I2/SVB-SW/HI11	129
182430	T0-2-15679/I2H/MBS/SVB-SW	130	197396	T0-3-8223/SE2	138	199914	P1-40/I2/SVB-SW/N	123
182431	T0-3-15680/I2H/MBS/SVB	133	197408	T0-3-8342/SE1	117	199915	P1-40/I2H	116
182432	T0-3-15680/I2H/MBS/SVB-SW	130	197409	T0-3-8342-SE1/SVB	128	199916	P1-40-I2H/HI11	121
182433	T0-3-15683/I2H/MBS/SVB	133	197410	T0-3-8342/SE1/SVB-SW	125	199917	P1-40/I2H/MBS/SVB	127
182434	T0-3-15683/I2H/MBS/SVB-SW	130	197411	T0-4-8344/SE2	117	199918	P1-40/I2H/MBS/SVB/HI11	133
182435	T0-4-15682/I2H/MBS/SVB	133	197412	T0-4-8344/SE2/SVB	128	199919	P1-40/I2H/MBS/SVB-SW	124
182436	T0-4-15682/I2H/MBS/SVB-SW	130	197413	T0-4-8344/SE2/SVB-SW	125	199920	P1-40/I2H/MBS/SVB-SWHI11	130
197344	P1-25/SE1	117	197420	T0-2-8900/SE1	117	199921	P1-40/I2H/N	116
197345	P1-25/SE1/N	117	197421	T0-2-8900/SE1/SVB	128	199922	P1-40/I2H/SVB	126
197346	P1-25/SE1/SVB	128	197422	T0-2-8900/SE1/SVB-SW	125	199923	P1-40/I2H/SVB/HI11	132
197347	P1-25/SE1/SVB/HI11	134	197430	T0-1-15431/SE1	137	199924	P1-40/I2H/SVB/N	126
197348	P1-25/SE1/SVB/N	128	197431	T0-2-15432/SE1	137	199925	P1-40/I2H/SVB-SW	123
197349	P1-25/SE1/SVB-SW	125	197432	T0-3-15433/SE1	137	199926	P1-40/I2H/SVB-SW/HI11	129
197350	P1-25/SE1/SVB-SW/HI11	131	197440	T0-2-15679/SE1	122	199927	P1-40/I2H/SVB-SW/N	123
197351	P1-25/SE1/SVB-SW/N	125	197441	T0-2-15679/SE1/SVB	134	199930	P1-40/I2-RT	120
197352	P1-32/SE1	117	197442	T0-2-15679/SE1/SVB-SW	131	199931	P1-40/IVS	97
197353	P1-32/SE1/N	117	197443	T0-3-15680/SE1	122	199933	P1-40/IVS/N	97
197354	PI-32/SE1/SVB	128	197444	T0-3-15680/SE1/SVB	134	199935	P1-40/IVS-RT	99
197355	P1-32/SE1/SVB/HI11	134	197445	T0-3-15680/SE1/SVB-SW	131	199936	P1-40/M4/SVB	78
197356	PI-32/SE1/SVB/N	128	197446	T0-4-15682/SE2	122	199937	P1-40/M4/SVB/HI11	80
197357	P1-32/SE1/SVB-SW	125	197447	T0-4-15682/SE2/SVB	134	199938	P1-40/M4/SVB/N	78
197358	P1-32/SE1/SVB-SW/HI11	131	197448	T0-4-15682/SE2/SVB-SW	131	199939	P1-40/M4/SVB/N/HI11	80
197359	P1-32/SE1/SVB-SW/N	125	197449	T0-3-15683/SE1	122	199940	P1-40/M4/SVB-SW	77
197360	P3-63/SE3	117	197450	T0-3-15683/SE1/SVB	134	199941	PI-40/M4/SVB-SW/HI11	79
197361	P3-63/SE3/N	117	197451	T0-3-15683/SE1/SVB-SW	131	199942	P1-40/M4/SVB-SW/N	77
197362	P3-63/SE3/SVB	128	197456	T3-3-8342/SE1	117	199943	PI-40/M4/SVB-SW/N/HI11	79
197363	P3-63/SE1/SVB/HI11	134	197457	T3-3-8342/SE2/SVB	128	199944	P1-40/SE1	117
197364	P3-63/SE3/SVB/N	128	197458	T3-3-8342/SE1/SVB-SW	125	199945	P1-40/SE1/N	117
197365	P3-63/SE3/SVB-SW	125	197459	T3-4-8344/SE2	117	199946	PI-40/SE1/SVB	128
197366	P3-63/SE3/SVB-SW/HI11	131	197460	T3-4-8344/SE2/SVB	128	199947	P1-40/SE1/SVB/HI11	134
197367	P3-63/SE3/SVB-SW/N	125	197461	T3-4-8344/SE2/SVB-SW	125	199948	PI-40/SE1/SVB/N	128
197368	P3-100/SE3	117	197472	T3-4-15682/SE2	122	199949	P1-40/SE1/SVB-SW	125
197369	P3-100/SE3/N	117	197473	T3-4-15682/SE2-SVB	134	199950	P1-40/SE1/SVB-SW/HI11	131
197370	P3-100/SE3/SVB	128	197474	T3-4-15682/SE2/SVB-SW	131	199951	P1-40/SE1/SVB-SW/N	125
197371	P3-100/SE1/SVB/HI11	134	197475	T3-3-15683/SE2	122	199952	P1-40/V/SVB	74
197372	P3-100/SE3/SVB/N	128	197476	T3-3-15683/SE2/SVB	134	199953	P1-40/V/SVB/HI11	76
197373	P3-100/SE3/SVB-SW	125	197477	T3-3-15683/SE2/SVB-SW	131	199955	P1-40/V/SVB/N	74
197374	P3-100/SE3/SVB-SW/HI11	131	199888	PI-40/XM	93	199956	P1-40/V/SVB/N/HI11	76
197375	P3-100/SE3/SVB-SW/N	125	199889	P1-40/E	18	199958	P1-40/V/SVB-SW	73
197376	T0-2-1/SE1	117	199891	P1-40/E/N	18	199959	P1-40/V/SVB-SW/HI11	75

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
199961	P1-40/V/SVB-SW/N	73	207107	T0-2-8241/I1	148	207179	T3-2-8215/I2	136
199962	P1-40/V/SVB-SW/N/HI11	75	207108	T0-2-8242/I1	148	207180	T3-2-8221/I2	136
199964	P1-40/Z	70	207109	T0-2-8900/I1	116	207181	T3-2-8400/I2	142
199966	P1-40/Z/N	70	207110	T0-2-8900/I1-RT	120	207182	T3-3-15683/I2	121
200127	T6-160-15682/V/SVB-SW/HI11	75	207111	T0-2-8400/I1	142	207183	T3-3-8212/I2	135
200128	T8-3-8342/V/SVB-SW/HI11	75	207112	T0-3-15391/I1	150	207184	T3-3-8216/I2	136
200184	H-T8	161	207113	T0-3-15394/I1	150	207185	T3-3-8222/I2	136
200619	T6-160-15682/V/SVB/HI11	76	207114	T0-3-15423/I1	135	207186	T3-3-8228/I2	142
200620	T8-3-8342/V/SVB/HI11	76	207115	T0-3-15433/I1	140	207187	T3-3-8342/I2	116
201447	T6-160-6/I45/SVB-SW/HI11	129	207116	T0-3-15453/I1	140	207188	T3-3-8401/I2	142
201448	T6-160-6/I45/SVB/HI11	132	207117	T0-3-15513/I1	119	207189	T3-3-8451/I2	141
201449	T8-3-8342/I48/SVB-SW/HI11	129	207118	T0-3-15683/I1	121	207190	T3-4-15682/I2	121
201450	T8-3-8342/I48/SVB/HI11	132	207119	T0-3-15924/I1	146	207191	T3-4-8213/I2	135
205548	ZFS80-T0	156	207120	T0-3-8007/I1	146	207192	T3-4-8223/I2	136
205565	ZFS80-P3	156	207123	T0-3-8212/I1	135	207193	T3-4-8294/I2	135
206911	V-M25	151	207124	T0-3-8222/I1	136, 148	207194	T3-4-8344/I2	116
206914	AB-CI-K4/5	151, 163	207125	T0-3-8228/I1	142	207195	T3-4-8410/I2	147
206916	K-CI-K4	151, 163	207126	T0-3-8232/I1	148	207196	T3-4-8440/I2	141
207061	T0-1-102/I1	116	207127	T0-3-8233/I1	148	207197	T3-4-8441/I2	141
207062	T0-1-102/I1-RT	120	207128	T0-3-8243/I1	148	207198	T3-1-102/I2/SVB	126
207063	T0-1-102/I1/S	118	207129	T0-3-8244/I1	148	207199	T3-1-102/I2/SVB-SW	123
207064	T0-1-15321/I1	119	207130	T0-3-8280/I1	148	207200	T3-1-8200/I2/SVB	126
207065	T0-1-15322/I1	119	207131	T0-3-8342/I1	116	207201	T3-1-8200/I2/SVB-SW	123
207067	T0-1-15401/I1	119	207132	T0-3-8401/I1	142	207202	T3-3-15680/I2/SVB	132
207068	T0-1-15402/I1	119	207133	T0-3-8451/I1	141	207203	T3-3-15680/I2/SVB-SW	129
207069	T0-1-15421/I1	135	207134	T0-4-15602/I1	139	207206	T3-3-15683/I2/SVB	132
207070	T0-1-15431/I1	140	207136	T0-4-8213/I1	135	207207	T3-3-15683/I2/SVB-SW	129
207071	T0-1-15434/I1	140	207137	T0-4-8223/I1	136	207208	T3-3-8342/I2/SVB	126
207072	T0-1-15451/I1	140	207138	T0-4-8294/I1	135	207209	T3-3-8342/I2/SVB-SW	123
207073	T0-1-15511/I1	119	207139	T0-4-8344/I1	116	207210	T3-4-15682/I2/SVB	132
207074	T0-1-8200/I1	116	207140	T0-4-8410/I1	147	207211	T3-4-15682/I2/SVB-SW	129
207075	T0-1-8200/I1/RT	120	207141	T0-4-8440/I1	141	207212	T3-4-8344/I2/SVB	126
207076	T0-1-8210/I1	135	207142	T0-4-8441/I1	141	207213	T3-4-8344/I2/SVB-SW	123
207077	T0-1-8214/I1	136	207143	T0-1-102/I1/SVB	126	207214	T5-4-8902/I5	135
207078	T0-1-8220/I1	136, 148	207144	T0-1-102/I1/SVB-SW	123	207215	T5B-1-102/I4	116
207079	T0-1-8240/I1	148	207145	T0-1-8200/I1/SVB	126	207218	T5B-1-8200/I4	116
207080	T0-1-91/I1	149	207146	T0-1-8200/I1/SVB-SW	123	207220	T5B-2-8211/I4	135
207081	T0-2-1/I1	116	207147	T0-2-1/I1/SVB	126	207221	T5B-2-8221/I4	136
207082	T0-2-1/I1-RT	120	207148	T0-2-1/I1/SVB-SW	123	207222	T5B-2-8400/I4	142
207083	T0-2-1/I1/SVA(A)	118	207149	T0-2-15679/I1/SVB	132	207223	T5B-3-8212/I4	135
207084	T0-2-1/I1/SVA(S)	118	207150	T0-2-15679/I1/SVB-SW	129	207224	T5B-3-8222/I4	136
207085	T0-2-1/I1/SVA(S)-RT	120	207151	T0-2-8900/I1/SVB	126	207225	T5B-3-8228/I4	142
207086	T0-2-1/I1/SVC(S)-RT	120	207152	T0-2-8900/I1/SVB-SW	123	207226	T5B-3-8342/I4	116
207087	T0-2-15323/I1	119	207153	T0-3-15680/I1/SVB	132	207227	T5B-3-8401/I4	142
207088	T0-2-15403/I1	116	207154	T0-3-15680/I1/SVB-SW	129	207228	T5B-3-8451/I4	141
207089	T0-2-1540-I1	116	207157	T0-3-15683/I1/SVB	132	207229	T5B-4-15682/I4	121
207090	T0-2-15422/I1	135	207158	T0-3-15683/I1/SVB-SW	129	207230	T5B-4-8213/I4	135
207091	T0-2-15432/I1	140	207159	T0-3-8342/I1/SVB	126	207231	T5B-3-8223/I4	136
207092	T0-2-15452/I1	140	207160	T0-3-8342/I1/SVB-SW	123	207232	T5B-4-8294/I4	135
207093	T0-2-15512/I1	119	207161	T0-4-15682/I1/SVB	132	207233	T5B-3-8344/I4	116
207094	T0-2-15679/I1	121	207162	T0-4-15682/I1/SVB-SW	129	207234	T5B-4-8410/I4	147
207095	T0-2-15907/I1	140	207163	T0-4-8344/I1/SVB	126	207235	T5B-4-8440/I4	141
207101	T0-2-8177/I1	119	207164	T0-4-8344/I1/SVB-SW	123	207236	T5B-4-8441/I4	141
207102	T0-2-8211/I1	135	207165	T3-1-102/I2	116	207237	T5B-4-8902/I4	135
207103	T0-2-8215/I1	136	207166	T3-1-102/I2-RT	120	207238	T5B-1-102/I4/SVB	126
207104	T0-2-8221/I1	136	207167	T3-1-8200/I2	116	207239	T5B-1-102/I4/SVB-SW	123
207105	T0-2-8230/I1	148	207169	T3-1-8210/I2	135	207240	T5B-1-8200/I4/SVB	126
207106	T0-2-8231/I1	148	207178	T3-2-8211/I2	135	207241	T5B-1-8200/I4/SVB-SW	123

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
207242	T5B-3-8342/I4/SVB	126	207321	P1-32/I2-RT	120	207413	T5-4-15682/EA/SVB	27
207243	T5B-3-8342/I4/SVB-SW	123	207324	P1-32/I2/N	116	207414	T5-4-15682/EA/SVB-SW	26
207244	T5B-3-8901/I4/SVB	132	207325	P1-32/I2/SVA(A)	118	207415	T5-4-15682/V/SVB	76
207245	T5B-3-8901/I4/SVB-SW	129	207326	P1-32/I2/SVA(S)	118	207416	T5-4-15682/V/SVB-SW	75
207246	T5B-4-15682/I4/SVB	132	207329	P1-32/I2-SI	144	207417	T5-4-15682/Z	72
207247	T5B-4-15682/I4/SVB-SW	129	207330	P1-32/I2-SI-SW	143	207418	T5-4-8902/E	29
207248	T5B-4-8344/I4/SVB	126	207331	P1-32/I2-SI/HI11	144	207419	T5-4-8902/Z	81
207249	T5B-4-8344/I4/SVB-SW	123	207332	P1-32/I2-SI/HI11-SW	143	207420	T5B-3-8901/EA/SVB	27
207250	T5B-3-8342/I4-SI	144	207333	P1-32/I2-SI/N	144	207421	T5B-3-8901/EA/SVB-SW	26
207251	T5B-3-8342/I4-SI-SW	143	207334	P1-32/I2-SI/N-SW	143	207422	T5B-3-8901/V/SVB	76
207254	T5B-4-15682/I4-SI	144	207343	P3-63/I4/SVB	126	207423	T5B-3-8901/V/SVB-SW	75
207255	T5B-4-15682/I4-SI-SW	143	207344	P3-63/I4/SVB-SW	123	207424	T5B-4-15682/E	23
207258	T5B-4-8903/I4-SI	144	207345	P3-63/I4/SVB-SW/HI11	129	207425	T5B-4-15682/EA/SVB	27
207259	T5B-4-8903/I4-SI-SW	143	207346	P3-63/I4/SVB-SW/N	123	207426	T5B-4-15682/EA/SVB-SW	26
207266	T5-3-8212/I5	135	207347	P3-63/I4/SVB-SW/N/HI11	129	207427	T5B-4-15682/V/SVB	76
207269	T5-4-15682/I5	121	207348	P3-63/I4/SVB/HI11	132	207428	T5B-4-15682/V/SVB-SW	75
207270	T5-4-8213/I5	135	207349	P3-63/I4/SVB/N	126	207429	T5B-4-15682/Z	72
207273	T5-1-102/I5/SVB	126	207350	P3-63/I4/SVB/N/HI11	132	207430	T5B-4-8902/E	29
207277	T5-3-8901/I5/SVB	132	207356	P3-63/I4	116	207431	T5B-4-8902/Z	81
207278	T5-3-8901/I5/SVB-SW	129	207357	P3-63/I4-RT	120	207432	T5B-1-8210/I4	135
207279	T5-3-8342/I5/SVB	126	207360	P3-63/I4/N	116	207433	T5-4-8294/I5	135
207280	T5-3-8342/I5/SVB-SW	123	207361	P3-63/I4-SI	144	207434	T0-3-8216/I1	136
207281	T5-4-15682/I5/SVB	132	207362	P3-63/I4-SI-SW	143	207435	CI-K1-T0-2	94, 162
207282	T5-4-15682/I5/SVB-SW	129	207363	P3-63/I4-SI/HI11	144	207436	CI-K1-T0-4	94, 162
207283	T5-4-8344/I5/SVB	126	207364	P3-63/I4-SI/HI11-SW	143	207437	CI-K2-T3-2	94, 162
207284	T5-4-8344/I5/SVB-SW	123	207365	P3-63/I4-SI/N	144	207438	CI-K2-T3-5	94, 162
207285	T5-4-15682/I5-SI	144	207366	P3-63/I4-SI/N-SW	143	207439	CI-K4-T5B-2	46, 162
207286	T5-4-15682/I5-SI-SW	143	207373	P3-100/I5/SVB	126	207440	CI-K4-T5B-4	94, 162
207289	T5-4-8903/I5-SI	144	207374	P3-100/I5/SVB-SW	123	207441	CI-K5-T5-2	94, 162
207290	T5-4-8903/I5-SI-SW	143	207375	P3-100/I5/SVB-SW/HI11	129	207442	CI-K5-T5-4	94, 162
207293	P1-25/I2/SVB	126	207376	P3-100/I5/SVB-SW/N	123	207447	T5-3-8342/I5-SI	144
207294	P1-25/I2/SVB-SW	123	207377	P3-100/I5/SVB-SW/N/HI11	129	207448	T5-3-8342/I5-SI-SW	143
207295	P1-25/I2/SVB-SW/HI11	129	207378	P3-100/I5/SVB/HI11	132	207451	K-CI-K1/2	151, 163
207296	P1-25/I2/SVB-SW/N	123	207379	P3-100/I5/SVB/N	126	207480	T0-1-SOND*/I1	165
207297	P1-25/I2/SVB/HI11	132	207380	P3-100/I5/SVB/N/HI11	132	207481	T0-1-SOND*/I1/SVB	165
207298	P1-25/I2/SVB/N	126	207381	P3-100/I5	116	207482	T0-1-SOND*/I1/SVB-SW	165
207299	P1-25/I2	116	207382	P3-100/I5-RT	120	207483	T0-2-SOND*/I1	165
207300	P1-25/I2-RT	120	207385	P3-100/I5/N	116	207484	T0-2-SOND*/I1/SVB	165
207303	P1-25/I2/N	116	207386	P3-100/I5-SI	144	207485	T0-2-SOND*/I1/SVB-SW	165
207304	P1-25/I2/SVA(A)	118	207387	P3-100/I5-SI-SW	143	207486	T0-3-SOND*/I1	165
207305	P1-25/I2/SVA(S)	118	207388	P3-100/I5-SI/HI11	144	207487	T0-3-SOND*/I1/SVB	165
207306	P1-25/I2/SVA(S)-RT	120	207389	P3-100/I5-SI/HI11-SW	143	207488	T0-3-SOND*/I1/SVB-SW	165
207307	P1-25/I2/SVC(S)-RT	120	207390	P3-100/I5-SI/N	144	207489	T0-4-SOND*/I1	165
207313	P1-25/I2-SI	144	207391	P3-100/I5-SI/N-SW	143	207490	T0-4-SOND*/I1/SVB	165
207328	P1-32/I2/SVC(S)-RT	120	207398	T0-2-8900/E	18	207491	T0-4-SOND*/I1/SVB-SW	165
207309	P1-25/I2-SI-SW	143	207399	T0-2-8900/E-RT	22	207492	T3-5-SOND*/I2	167, 168
207310	P1-25/I2-SI/HI11	144	207400	T0-2-8900/EA/SVB	25	207493	T3-5-SOND*/I2/SVB	167, 168
207311	P1-25/I2-SI/HI11-SW	143	207401	T0-2-8900/EA/SVB-SW	24	207494	T3-5-SOND*/I2/SVB-SW	167, 168
207312	P1-25/I2-SI/N	144	207402	T0-2-8900/EZ	49	207498	T4-1-SOND*/I2	167
207313	P1-25/I2-SI/N-SW	143	207403	T0-2-8900/IVS	97	207499	T4-1-SOND*/I2/SVB	167
207314	P1-32/I2/SVB	126	207404	T0-2-8900/IVS-RT	99	207500	T4-1-SOND*/I2/SVB-SW	167
207315	P1-32/I2/SVB-SW	123	207405	T0-2-8900/V/SVB	74	207510	T5B-1-SOND*/I4	169
207316	P1-32/I2/SVB-SW/HI11	129	207406	T0-2-8900/V/SVB-SW	73	207511	T5B-1-SOND*/I4/SVB	169
207317	P1-32/I2/SVB-SW/N	123	207407	T0-2-8900/Z	70	207512	T5B-1-SOND*/I4/SVB-SW	169
207318	P1-32/I2/SVB/HI11	132	207408	T5-3-8901/EA/SVB	27	207514	T5B-2-SOND*/I4	169
207319	P1-32/I2/SVB/N	126	207409	T5-3-8901/EA/SVB-SW	26	207515	T5B-2-SOND*/I4/SVB	169
207320	P1-32/I2	116	207412	T5-4-15682/E	23	207516	T5B-2-SOND*/I4/SVB-SW	169

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
207518	T5B-3-SOND*/I4	169	226898	P1-25/I2H	116	280910	P5-125/EA/SVB/N	25
207519	T5B-3-SOND*/I4/SVB	169	226899	P1-25/I2H/HI11	121	280911	P5-125/EA/SVB-SW	24
207520	T5B-3-SOND*/I4/SVB-SW	169	226900	P1-25/I2H/SVB	126	280912	P5-125/EA/SVB-SW/HI10	26
207521	T5B-4-SOND*/I4	169	226901	P1-25/I2H/N	116	280913	P5-125/EA/SVB-SW/N	24
207522	T5B-4-SOND*/I4/SVB	169	226902	P1-25/I2H/SVB/HI11	129, 132	280914	P5-125/V/SVB	74
207523	T5B-4-SOND*/I4/SVB-SW	169	227860	P1-25/I2H/SVB/N	126	280915	P5-125/V/SVB/HI10	76
207524	T5-1-SOND*/I4	171	227861	P1-25/I2H/SVB-SW	123	280916	P5-125/V/SVB/N	74
207525	T5-1-SOND*/I4/SVB	171	227862	P1-25/I2H/SVB-SW/HI11	129	280917	P5-125/V/SVB-SW	73
207526	T5-1-SOND*/I4/SVB-SW	171	227863	P1-25/I2H/SVB-SW/N	123	280918	P5-125/V/SVB-SW/HI10	75
207527	T5-2-SOND*/I4	171	227866	P1-32/I2H	116	280919	P5-125/V/SVB-SW/N	73
207528	T5-2-SOND*/I4/SVB	171	227867	P1-32/I2H/HI11	121	280920	P3-100/Z	70
207529	T5-2-SOND*/I4/SVB-SW	171	227868	P1-32/I2H/SVB	126	280921	P5-160/E	18
207530	T5-3-SOND*/I4	171	227869	P1-32/I2H/N	116, 123	280922	P5-160/EA/SVB	25
207531	T5-3-SOND*/I4/SVB	171	227870	P1-32/I2H/SVB/HI11	132	280923	P5-160/EA/SVB/HI10	27
207532	T5-3-SOND*/I4/SVB-SW	171	227871	P1-32/I2H/SVB/N	126	280924	P5-160/EA/SVB/N	25
207533	T5-4-SOND*/I4	171	227872	P1-32/I2H/SVB-SW	123	280925	P5-160/EA/SVB-SW	24
207534	T5-4-SOND*/I4/SVB	171	227873	P1-32/I2H/SVB-SW/HI11	129	280926	P5-160/EA/SVB-SW/HI10	26
207535	T5-4-SOND*/I4/SVB-SW	171	227874	P1-32/I2H/SVB-SW/N	123	280927	P5-160/EA/SVB-SW/N	24
207536	T3-5-8369/I2	136	228291	T0-2-1/E/SVA(S)-RT	22	280928	P5-160/V/SVB	74
207537	T3-5-15876/I2	142	231893	FS(*)-T0	155	280929	P5-160/V/SVB/HI10	76
207603	KT-M25	151	231895	FS(*)-P3	155	280930	P5-160/V/SVB/N	74
208261	TM-1-SOND-ERSTBESTELLUNG/E	173	231932	T0-3-8901/EA/SVB	27	280931	P5-160/V/SVB-SW	73
208262	TM-1-SOND-ERSTBESTELLUNG/EZ	173	231933	T0-3-8901/EA/SVB-SW	26	280932	P5-160/V/SVB-SW/HI10	75
208263	TM-2-SOND-ERSTBESTELLUNG/E	173	231934	T0-3-8901/I1/SVB	132	280933	P5-160/V/SVB-SW/N	73
208264	TM-2-SOND-ERSTBESTELLUNG/EZ	173	231935	T0-3-8901/I1/SVB-SW	129	280934	P5-160/Z	70
208265	TM-3-SOND-ERSTBESTELLUNG/E	173	231938	T0-3-8901/E	23	280935	P5-250/E	18
208266	TM-3-SOND-ERSTBESTELLUNG/EZ	173	231939	T0-3-8901/EZ	51	280936	P5-250/EA/SVB	25
208267	TM-4-SOND-ERSTBESTELLUNG/E	173	231940	T0-3-8901/IVS	100	280937	P5-250/EA/SVB/HI10	27
208268	TM-4-SOND-ERSTBESTELLUNG/EZ	173	231941	T0-3-8901/I1	121	280938	P5-250/EA/SVB/N	25
208269	TM-5-SOND-ERSTBESTELLUNG/E	173	231945	T3-3-8901/EA/SVB	27	280939	P5-250/EA/SVB-SW	24
208270	TM-5-SOND-ERSTBESTELLUNG/EZ	173	231946	T3-3-15680/EA/SVB-SW	26	280940	P5-250/EA/SVB-SW/HI10	26
208271	TM-6-SOND-ERSTBESTELLUNG/E	173	231949	T3-3-8901/E	23	280941	P5-250/EA/SVB-SW/N	24
208272	TM-6-SOND-ERSTBESTELLUNG/EZ	173	231940	T0-3-8901/IVS	100	280942	P5-250/V/SVB	74
208273	TM-7-SOND-ERSTBESTELLUNG/E	173	231941	T0-3-8901/I1	121	280943	P5-250/V/SVB/HI10	76
208274	TM-7-SOND-ERSTBESTELLUNG/EZ	173	231945	T3-3-8901/EA/SVB	27	280944	P5-250/V/SVB/N	74
208275	TM-8-SOND-ERSTBESTELLUNG/E	173	231946	T3-3-15680/EA/SVB-SW	26	280945	P5-250/V/SVB-SW	73
208276	TM-8-SOND-ERSTBESTELLUNG/EZ	173	231949	T3-3-8901/E	23	280946	P5-250/V/SVB-SW/HI10	75
214781	T6-3-8212/E/HI12	29	231965	S(*)-SOND-SA(*)-T0	157	280947	P5-250/V/SVB-SW/N	73
214782	T8-3-8212/E/HI12	29	231967	SVA-SOND-KMS(*)-T3	157	280948	P5-250/Z	70
214785	T5B-5-15876/E	36	231971	SVA(*)-SOND-SA(*)-T3	157	280949	P5-315/E	18
214786	T5B-5-15876/Z	85	231972	ES-KMS1-T0	158	280950	P5-315/EA/SVB	25
214788	T5B-7-15866/E	36	231973	ES-KMS(*)-T0	158	280951	P5-315/EA/SVB/HI10	27
215222	T3-4-8902/E	29	232034	IVS/S-A	113	280952	P5-315/EA/SVB/N	25
215223	T3-4-8902/EZ	52	232036	IVS/S-B	113	280953	P5-315/EA/SVB-SW	24
215224	T3-4-8902/I2	135	232038	IVS/S-F	113	280954	P5-315/EA/SVB-SW/HI10	26
215225	T3-4-8902/Z	81	232040	IVS/S-E	113	280955	P5-315/EA/SVB-SW/N	24
218488	K-CI-K5	151, 163	232042	IVS/S-R	113	280956	P5-315 kW/V/SVB	74
218971	T0-2-15435/I1	140	232043	IVS/S-G	113	280957	P5-315/V/SVB/HI10	76
218984	T0-4-8251/I1	148	254546	ZAV(X1)+ZVV(X1)-T0/P3	92	280958	P5-315 kW/V/SVB/N	74
218987	T3-3-8901/I2/SVB	132	256151	HS-SA(*)-T0	158	280959	P5-315/V/SVB-SW	73
218988	T3-3-8901/I2/SVB-SW	129	266905	FS-ALU980-T0	155	280960	P5-315/V/SVB-SW/HI10	75
225325	CI-K2-T3-4	94, 162	266906	FS-ALU980-P3	155	280961	P5-315/V/SVB-SW/N	73
225342	TM-1-15431/IVS	104	269462	CI-K2H-T3-2	94, 162	280962	P5-315/Z	70
225346	TM-1-SOND*/IVS	173	207135	T0-4-15682/I1	121	280963	HI21-P5-125/160E	45, 160
225347	TM-1-SOND-ERSTBESTELLUNG/IVS	173	280897	P5-125/E	18	280964	HI21-P5-125/160Z	92, 160
225348	TM-2-SOND*/IVS	173	280898	P5-125/EA/SVB	25	280965	HI21-P5-250/315E	45, 160
225349	TM-2-SOND-ERSTBESTELLUNG/IVS	173	280899	P5-125/EA/SVB/HI10	27	280966	HI21-P5-250/315Z	92, 160

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
280969	N-P5-125/160E	45, 159	907794	T0-8-SOND*/EZ	166	907921	T3-9-SOND*/Z	168
280970	N-P5-125/160Z	91, 159	907795	T0-9-SOND*/EZ	166	907922	T3-10-SOND*/Z	168
280971	N-P5-250/315E	45, 159	907796	T0-10-SOND*/EZ	166	907923	T3-11-SOND*/Z	168
280972	N-P5-250/315Z	91, 159	907797	T0-11-SOND*/EZ	166	907924	T5B-1-SOND*/E	169
280973	PE-P5-125/160E	45, 159	907806	T0-1-SOND*/IVS	165	907925	T5B-2-SOND*/E	169
280974	PE-P5-125/160Z	91, 159	907807	T0-2-SOND*/IVS	165	907926	T5B-3-SOND*/E	169
280975	PE-P5-250/315E	45, 159	907808	T0-3-SOND*/IVS	165	907927	T5B-4-SOND*/E	169
280976	PE-P5-250/315Z	91, 159	907809	T0-4-SOND*/IVS	165	907928	T5B-5-SOND*/E	170
280978	ST-P5-250/314	162	907810	T0-5-SOND*/IVS	166	907929	T5B-6-SOND*/E	170
280979	ZAV-P5	92	907811	T0-6-SOND*/IVS	166	907930	T5B-7-SOND*/E	170
290191	MBS-I2	152	907812	T0-7-SOND*/IVS	166	907931	T5B-8-SOND*/E	170
293977	H-P5-125/160	161	907813	T0-8-SOND*/IVS	166	907932	T5B-9-SOND*/E	170
293978	H-P5-250/315	161	907814	T0-9-SOND*/IVS	166	907933	T5B-10-SOND*/E	170
400000	T0-4-74949GB/E	35	907815	T0-10-SOND*/IVS	166	907934	T5B-1-SOND*/EA/SVB	169
400001	T3-4-74949GB/E	35	907816	T0-11-SOND*/IVS	166	907935	T5B-2-SOND*/EA/SVB	169
400002	T5B-4-74949GB/E	35	907817	T0-1-SOND*/V/SVB	165	907936	T5B-3-SOND*/EA/SVB	169
400136	FORKTERM-P1	159	907818	T0-2-SOND*/V/SVB	165	907937	T5B-4-SOND*/EA/SVB	169
907745	SVA(*)-T3	157	907819	T0-3-SOND*/V/SVB	165	907938	T5B-5-SOND*/EA/SVB	170
907748	SVC(*)-T3	158	907820	T0-4-SOND*/V/SVB	165	907939	T5B-6-SOND*/EA/SVB	170
907749	TM-1-SOND*/E	173	907839	T0-1-SOND*/Z	165	907940	T5B-7-SOND*/EA/SVB	170
907750	TM-3-SOND*/E	173	907840	T0-2-SOND*/Z	165	907941	T5B-8-SOND*/EA/SVB	170
907751	TM-4-SOND*/E	173	907841	T0-3-SOND*/Z	165	907950	T5B-1-SOND*/V/SVB	169
907752	TM-6-SOND*/E	173	907842	T0-4-SOND*/Z	165	907951	T5B-2-SOND*/V/SVB	169
907753	TM-7-SOND*/E	173	907843	T0-5-SOND*/Z	166	907952	T5B-3-SOND*/V/SVB	169
907754	TM-8-SOND*/E	173	907844	T0-6-SOND*/Z	166	907953	T5B-4-SOND*/V/SVB	169
907755	TM-1-SOND*/E	173	907845	T0-7-SOND*/Z	166	907954	T5B-5-SOND*/V/SVB	170
907756	TM-2-SOND*/EZ	173	907846	T0-8-SOND*/Z	166	907955	T5B-6-SOND*/V/SVB	170
907757	TM-3-SOND*/EZ	173	907847	T0-9-SOND*/Z	166	907956	T5B-7-SOND*/V/SVB	170
907758	TM-4-SOND*/EZ	173	907848	T0-11-SOND*/Z	166	907957	T5B-8-SOND*/V/SVB	170
907759	TM-5-SOND*/EZ	173	907849	T0-11-SOND*/Z	166	907968	T5B-1-SOND*/Z	169
907760	TM-6-SOND*/EZ	173	907850	T3-5-SOND*/E	167, 168	907969	T5B-2-SOND*/Z	169
907761	TM-7-SOND*/EZ	173	907852	T3-1-SOND*/E	167	907970	T5B-3-SOND*/Z	169
907762	TM-8-SOND*/EZ	173	907855	T3-6-SOND*/E	168	907971	T5B-4-SOND*/Z	169
907763	TM-2-SOND*/E	173	907856	T3-7-SOND*/E	168	907972	T5B-5-SOND*/Z	170
907764	TM-5-SOND*/E	173	907857	T3-8-SOND*/E	168	907973	T5B-6-SOND*/Z	170
907765	T0-1-SOND*/E	165	907858	T3-9-SOND*/E	168	907974	T5B-7-SOND*/Z	170
907766	T0-2-SOND*/E	165	907859	T3-10-SOND*/E	168	907975	T5B-8-SOND*/Z	170
907767	T0-3-SOND*/E	165	907860	T3-11-SOND*/E	168	907976	T5B-9-SOND*/Z	170
907768	T0-4-SOND*/E	165	907861	T3-5-SOND*/EA/SVB	167, 168	907977	T5B-10-SOND*/Z	170
907769	T0-5-SOND*/E	166	907863	T4-1-SOND*/EA/SVB	167	907978	T5-1-SOND*/E	171
907770	T0-6-SOND*/E	166	907866	T3-6-SOND*/EA/SVB	168	907979	T5-2-SOND*/E	171
907771	T0-7-SOND*/E	166	907872	T3-5-SOND*/EZ	167, 168	907980	T5-3-SOND*/E	171
907772	T0-8-SOND*/E	166	907874	T4-1-SOND*/EZ	167	907981	T5-4-SOND*/E	171
907773	T0-9-SOND*/E	166	907877	T3-6-SOND*/EZ	168	907982	T5-5-SOND*/E	172
907774	T0-10-SOND*/E	166	907878	T3-7-SOND*/EZ	168	907983	T5-6-SOND*/E	172
907775	T0-11-SOND*/E	166	907879	T3-8-SOND*/EZ	168	907984	T5-7-SOND*/E	172
907776	T0-1-SOND*/EA/SVB	165	907880	T3-9-SOND*/EZ	168	907985	T5-8-SOND*/E	172
907777	T0-2-SOND*/EA/SVB	165	907881	T3-10-SOND*/EZ	168	907986	T5-9-SOND*/E	172
907778	T0-3-SOND*/EA/SVB	165	907882	T3-11-SOND*/EZ	168	907987	T5-9-SOND*/EA/SVB-SW	172
907779	T0-4-SOND*/EA/SVB	165	907891	T3-5-SOND*/V/SVB	167, 168	907988	T5-2-SOND*/EA/SVB	171
907787	T0-1-SOND*/EZ	165	907893	T4-1-SOND*/V/SVB	167	907989	T5-3-SOND*/EA/SVB	171
907788	T0-2-SOND*/EZ	165	907896	T3-6-SOND*/V/SVB	168	907990	T5-4-SOND*/EA/SVB	171
907789	T0-3-SOND*/EZ	165	907913	T3-5-SOND*/Z	167, 168	908003	T5-1-SOND*/V/SVB	171
907790	T0-4-SOND*/EZ	165	907915	T4-1-SOND*/Z	167	908004	T5-2-SOND*/V/SVB	171
907791	T0-5-SOND*/EZ	166	907918	T3-6-SOND*/Z	168	908005	T5-4-SOND*/V/SVB	171
907792	T0-6-SOND*/EZ	166	907919	T3-7-SOND*/Z	168	908007	T5-5-SOND*/V/SVB	172
907793	T0-7-SOND*/EZ	166	907920	T3-8-SOND*/Z	168	908008	T5-6-SOND*/V/SVB	172

Index - By article number

Article number	Part number	Page	Article number	Part number	Page	Article number	Part number	Page
908010	T5-8-SOND*/V/SVB	172	908141	T5-8-SOND*/V/SVB-SW	172	EP-400989	P3-80/I5/SVB-SW/N	123
908021	T5-1-SOND*/Z	171	908991	T5-5-SOND*/EA/SVB	172	EP-400990	P3-80/I5/SVB-SW/N/HI11	129
908022	T5-2-SOND*/Z	171	908992	T5-6-SOND*/EA/SVB	172	EP-400991	P3-80/I5-RT	120
908023	T5-3-SOND*/Z	171	908993	T5-7-SOND*/EA/SVB	172	EP-400993	P3-80/I5-SI	144
908025	T5-5-SOND*/Z	172	908994	T5-8-SOND*/EA/SVB	172	EP-400994	P3-80/I5-SI/HI11	144
908026	T5-6-SOND*/Z	172	EP-400892	HI11-P1/P3UZ	91, 113, 152, 160	EP-400995	P3-80/I5-SI/HI11-SW	143
908027	T5-7-SOND*/Z	172	EP-400893	HI11-P1/P3UE	45, 160	EP-400996	P3-80/I5-SI/N	144
908028	T5-8-SOND*/Z	172	EP-400924	P3-80/EA/SVB	25	EP-400997	P3-80/I5-SI/N-SW	143
908029	T5-9-SOND*/EA/SVB	172	EP-400926	P3-80/EA/SVB/HI11	27	EP-400998	P3-80/I5-SI-SW	143
908030	T5-9-SOND*/V/SVB	172	EP-400927	P3-80/EA/SVB/N	25	EP-400919	P3-80/E	18
908031	T5-1-SOND*/EA/SVB	171	EP-400928	P3-80/EA/SVB/N/HI11	27	EP-400921	P3-80/E/N	18
908043	T0-1-SOND*/EA/SVB-SW	165	EP-400929	P3-80/EA/SVB-SW	24			
908044	T0-2-SOND*/EA/SVB-SW	165	EP-400931	P3-80/EA/SVB-SW/N/HI11	26			
908045	T0-3-SOND*/EA/SVB-SW	165	EP-400932	P3-80/E-RT	22			
908046	T0-4-SOND*/EA/SVB-SW	165	EP-400934	P3-80/IVS	97			
908054	T0-1-SOND*/V/SVB-SW	165	EP-400936	P3-80/IVS/N	97			
908055	T0-2-SOND*/V/SVB-SW	165	EP-400938	P3-80/IVS-RT	99			
908056	T0-3-SOND*/V/SVB-SW	165	EP-400943	P3-80/M4/K2-PG/N/HI11	79			
908057	T0-4-SOND*/V/SVB-SW	165	EP-400940	P3-80/M4/K2-PG	77			
908080	T3-5-SOND*/EA/SVB-SW	167, 168	EP-400941	P3-80/M4/K2-PG/HI11	79			
908082	T4-1-SOND*/EA/SVB-SW	167	EP-400942	P3-80/M4/K2-PG/N	77			
908085	T3-6-SOND*/EA/SVB-SW	168	EP-400944	P3-80/M4/K2-PR	78			
908091	T3-5-SOND*/V/SVB-SW	167, 168	EP-400945	P3-80/M4/K2-PR/HI11	80			
908093	T4-1-SOND*/V/SVB-SW	167	EP-400946	P3-80/M4/K2-PR/N	78			
908096	T3-6-SOND*/V/SVB-SW	168	EP-400947	P3-80/M4/K2-PR/N/HI11	80			
908106	T5B-1-SOND*/EA/SVB-SW	169	EP-400948	P3-80/M4/SVB	78			
908107	T5B-2-SOND*/EA/SVB-SW	169	EP-400949	P3-80/M4/SVB/HI11	80			
908108	T5B-3-SOND*/EA/SVB-SW	169	EP-400950	P3-80/M4/SVB/N/HI11	80			
908109	T5B-4-SOND*/EA/SVB-SW	169	EP-400951	P3-80/M4/SVB-SW	77			
908110	T5B-5-SOND*/EA/SVB-SW	170	EP-400954	P3-80/M4/SVB-SW/N/HI11	79			
908111	T5B-6-SOND*/EA/SVB-SW	170	EP-400955	P3-80/SE3	117			
908112	T5B-7-SOND*/EA/SVB-SW	170	EP-400956	P3-80/SE3/N	117			
908113	T5B-8-SOND*/EA/SVB-SW	170	EP-400957	P3-80/SE3/SVB	128			
908114	T5B-1-SOND*/V/SVB-SW	169	EP-400958	P3-80/SE3/SVB/HI11	134			
908115	T5B-2-SOND*/V/SVB-SW	169	EP-400963	P3-80/V/SVB	74			
908116	T5B-3-SOND*/V/SVB-SW	169	EP-400959	P3-80/SE3/SVB/N	128			
908117	T5B-4-SOND*/V/SVB-SW	169	EP-400960	P3-80/SE3/SVB-SW	125			
908118	T5B-5-SOND*/V/SVB-SW	170	EP-400961	P3-80/SE3/SVB-SW/HI11	131			
908119	T5B-6-SOND*/V/SVB-SW	170	EP-400962	P3-80/SE3/SVB-SW/N	125			
908120	T5B-7-SOND*/V/SVB-SW	170	EP-400965	P3-80/V/SVB/HI11	76			
908121	T5B-8-SOND*/V/SVB-SW	170	EP-400966	P3-80/V/SVB/N	74			
908126	T5-1-SOND*/EA/SVB-SW	171	EP-400967	P3-80/V/SVB/N/HI11	76			
908127	T5-2-SOND*/EA/SVB-SW	171	EP-400973	P3-80/XM	93			
908128	T5-3-SOND*/EA/SVB-SW	171	EP-400969	P3-80/V/SVB-SW	73			
908129	T5-4-SOND*/EA/SVB-SW	171	EP-400970	P3-80/V/SVB-SW/HI11	75			
908130	T5-5-SOND*/EA/SVB-SW	172	EP-400971	P3-80/V/SVB-SW/N	73			
908131	T5-6-SOND*/EA/SVB-SW	172	EP-400972	P3-80/V/SVB-SW/N/HI11	75			
908132	T5-7-SOND*/EA/SVB-SW	172	EP-400975	P3-80/Z	70			
908133	T5-8-SOND*/EA/SVB-SW	172	EP-400978	P3-80/Z/N	70			
908134	T5-1-SOND*/V/SVB-SW	171	EP-400979	P3-80/I5	116			
908135	T5-2-SOND*/V/SVB-SW	171	EP-400981	P3-80/I5/N	116			
908136	T5-3-SOND*/V/SVB-SW	171	EP-400982	P3-80/I5/SVB	126			
908137	T5-4-SOND*/V/SVB-SW	171	EP-400984	P3-80/I5/SVB/HI11	132			
908138	T5-5-SOND*/V/SVB-SW	172	EP-400985	P3-80/I5/SVB/N	126			
908139	T5-6-SOND*/V/SVB-SW	172	EP-400986	P3-80/I5/SVB/N/HI11	132			
908140	T5-7-SOND*/V/SVB-SW	172	EP-400987	P3-80/I5/SVB-SW	123			

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
AB-CI-K4/5	206914	151, 163	H3-T0	093828	46, 161	N-P5-250/315Z	280972	91, 159
BS45X14-T0	029416	156	HI11-PI/P3UE	EP-400893	45, 160	P1/P3-M400	172844	93
BS84X24-P3	031789	156	HI11-PI/P3UZ	EP-400892	91, 113, 152, 160	P1/P3-M600	172845	93
CI-K1H-T0-2	105854	94, 162	HI21-P5-125/160E	280963	45, 160	P1-25/E	038724	18
CI-K1H-T0-4	105855	94, 162	HI21-P5-125/160Z	280964	92, 160	P1-25/E/N	076845	18
CI-K1-T0-2	207435	94, 162	HI21-P5-250/315E	280965	45, 160	P1-25/E/SA(S)	050966	21
CI-K1-T0-4	207436	94, 162	HI21-P5-250/315Z	280966	92, 160	P1-25/E/SVA(A)	050965	20
CI-K2H-T3-2	269462	94, 162	H-P1	017253	161	P1-25/E/SVA(S)-RT	050967	22
CI-K2H-T3-4	105859	94, 162	H-P14	019626	161	P1-25/E/SVC(S)-RT	044974	22
CI-K2H-T3-5	105860	94, 162	H-P3	021999	161	P1-25/EA/SVB	041097	25
CI-K2-T3-2	207437	94, 162	H-P5-125/160	293977	161	P1-25/EA/SVB/HI11	091080	27
CI-K2-T3-4	225325	94, 162	H-P5-250/315	293978	161	P1-25/EA/SVB/N	081587	25
CI-K2-T3-5	207438	94, 162	HS-SA(*)-T0	256151	158	P1-25/EA/SVB/N/HI11	048367	27
CI-K4-T5B-2	207439	46, 162	H-T8	200184	161	P1-25/EA/SVB-SW	048365	24
CI-K4-T5B-4	207440	94, 162	HZ-T5	045063	161	P1-25/EA/SVB-SW/HI11	070194	26
CI-K5-T5-2	207441	94, 162	I1H	105870	151, 162	P1-25/EA/SVB-SW/N	083960	24
CI-K5-T5-4	207442	94, 162	I2H	105871	151, 162	P1-25/EA/SVB-SW/N/HI11	050740	26
DE-P3	093972	160	IVS/S-A	232034	113	P1-25/E-RT	002388	22
DE-T0	093487	160	IVS/S-B	232036	113	P1-25/EZ	041250	49
ES-KMS(*)-T0	231973	158	IVS/S-E	232040	113	P1-25/EZ/N	079218	49
ES-KMS1-T0	231972	158	IVS/S-F	232038	113	P1-25/I2	207299	116
EZ/S-A	045458	67	IVS/S-G	232043	113	P1-25/I2/N	207303	116
EZ/S-A-TM	046991	67	IVS/S-R	232042	113	P1-25/I2/SVA(A)	207304	118
EZ/S-B	045459	67	IVS-T0	091114	113	P1-25/I2/SVA(S)	207305	118
EZ/S-B-TM	046992	67	K1DB/P	1818029	93	P1-25/I2/SVA(S)-RT	207306	120
EZ/S-D	045461	67	K1DG/P	1818031	93	P1-25/I2/SVB	207293	126
EZ/S-E	045462	67	K1DR/P	1818030	93	P1-25/I2/SVB/HI11	207297	132
EZ/S-E-TM	046995	67	K2SDB/C	1818038	93	P1-25/I2/SVB/N	207298	126
EZ/S-F	045463	67	K2SDB/P	1818032	93	P1-25/I2/SVB-SW	207294	123
EZ/S-F-TM	046996	67	K2SDG/C	1818040	93	P1-25/I2/SVB-SW/HI11	207295	129
EZ/S-G	045464	67	K2SDG/P	1818034	93	P1-25/I2/SVB-SW/N	207296	123
EZ/S-G-TM	046997	67	K2SDR/C	1818039	93	P1-25/I2/SVC(S)-RT	207307	120
EZ/S-H	045465	67	K2SDR/P	1818033	93	P1-25/I2H	226898	116
EZ/S-J	045466	67	K-CI-K1/2	207451	151, 163	P1-25/I2H/MBS/SVB	182413	127
EZ/S-N	045468	67	K-CI-K4	206916	151, 163	P1-25/I2H/MBS/SVB/HI11	182415	133
EZ/S-R	045471	67	K-CI-K5	218488	151, 163	P1-25/I2H/MBS/SVB-SW	182414	124
EZ/S-R-TM	047004	67	KNB-P1/M	172838	93	P1-25/I2H/MBS/SVB-SW/HI11	182416	130
EZ-P1	091455	46	KNB-P3	041282	154	P1-25/I2H/N	226901	116
EZ-T0	081622	46	KNB-P3/M	172839	93	P1-25/I2H/SVB	226900	126
FORKTERM-P1	400136	159	KNB-RT-P3	046028	154	P1-25/I2H/SVB/HI11	226902	129, 132
FS(*)-P3	231895	155	KNB-RT-T0	043655	154	P1-25/I2H/SVB/N	227860	126
FS(*)-T0	231893	155	KNB-T0	038909	154	P1-25/I2H/SVB-SW	227861	123
FS908GE-P3	031475	155	KNK-P3	000649	92	P1-25/I2H/SVB-SW/HI11	227862	129
FS908GE-T0	003198	155	KNK-T0	000650	92	P1-25/I2H/SVB-SW/N	227863	123
FS-ALU980-P3	266906	155	KT-M25	207603	151	P1-25/I2-RT	207300	120
FS-ALU980-T0	266905	155	MBS-I2	290191	152	P1-25/I2-SI	207313	144
H1-T5	045062	161	MBS-I4	118742	152	P1-25/I2-SI/HI11	207310	144
H3-T0	093828	46, 161	N-P1E	000651	45, 159	P1-25/I2-SI/HI11-SW	207311	143
FS(*)-T0	231893	155	N-P1E	062432	45, 159	P1-25/I2-SI/N	207312	144
FS908GE-P3	031475	155	N-P1Z	000652	91, 113, 152, 159	P1-25/I2-SI/N-SW	207313	143
FS908GE-T0	003198	155	N-P3Z	064805	91, 113, 159	P1-25/I2-SI-SW	207309	143
FS-ALU980-P3	266906	155	N-P5-125/160E	280969	45, 159	P1-25/IVS	052962	97
FS-ALU980-T0	266905	155	N-P5-125/160Z	280970	91, 159	P1-25/IVS/N	083964	97
H1-T5	045062	161	N-P5-250/315E	280971	45, 159	P1-25/IVS-RT	013140	99

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
P1-25/M4/K1-PG	172772	77	P1-32/I2	207320	116	P1-32/V/SVB	095676	74
P1-25/M4/K1-PG/HI11	172781	79	P1-32/I2/N	207324	116	P1-32/V/SVB/HI11	015145	76
P1-25/M4/K1-PG/N	172774	77	P1-32/I2/SVA(A)	207325	118	P1-32/V/SVB/N	095825	74
P1-25/M4/K1-PG/N/HI11	172864	79	P1-32/I2/SVA(S)	207326	118	P1-32/V/SVB/N/HI11	062605	76
P1-25/M4/K1-PR	172771	78	P1-32/I2/SVB	207314	126	P1-32/V/SVB-SW	055484	73
P1-25/M4/K1-PR/HI11	172775	80	P1-32/I2/SVB/HI11	207318	132	P1-32/V/SVB-SW/HI11	017518	75
P1-25/M4/K1-PR/N	172773	78	P1-32/I2/SVB/N	207319	126	P1-32/V/SVB-SW/N	098198	73
P1-25/M4/K1-PR/N/HI11	172777	80	P1-32/I2/SVB-SW	207315	123	P1-32/V/SVB-SW/N/HI11	064978	75
P1-25/M4/SVB/HI11	172767	80	P1-32/I2/SVB-SW/HI11	207316	129	P1-32/XM	172835	93
P1-25/M4/SVB/N	172877	78	P1-32/I2/SVB-SW/N	207317	123	P1-32/Z	098049	70
P1-25/M4/SVB/N/HI11	172769	80	P1-32/I2/SVC(S)-RT	207328	120	P1-32/Z/N	015148	70
P1-25/M4/SVB-SW	172876	77	P1-32/I2H	227866	116	P1-32-I2H/HI11	227867	121
P1-25/M4/SVB-SW/HI11	172768	79	P1-32/I2H/MBS/SVB	182417	127	P1-40/E	199889	18
P1-25/M4/SVB-SW/N	172878	77	P1-32/I2H/MBS/SVB/HI11	182419	133	P1-40/E/N	199891	18
P1-25/M4/SVB-SW/N/HI11	172770	79	P1-32/I2H/MBS/SVB-SW	182418	124	P1-40/EA/SVB	199894	25
P1-25/M4/SVB-SW/N/HI11	172770	79	P1-32/I2H/MBS/SVB-SWHI11	182420	130	P1-40/EA/SVB/HI11	199895	27
P1-25/SE1	197344	117	P1-32/I2H/N	227869	116, 123	P1-40/EA/SVB/N	199896	25
P1-25/SE1/N	197345	117	P1-32/I2H/SVB	227868	126	P1-40/EA/SVB/N/HI11	199897	27
P1-25/SE1/SVB	197346	128	P1-32/I2H/SVB/HI11	227870	132	P1-40/EA/SVB-SW	199898	24
P1-25/SE1/SVB/HI11	197347	134	P1-32/I2H/SVB/N	227871	126	P1-40/EA/SVB-SW/HI11	199899	26
P1-25/SE1/SVB/N	197348	128	P1-32/I2H/SVB-SW	227872	123	P1-40/EA/SVB-SW/N	199900	24
P1-25/SE1/SVB-SW	197349	125	P1-32/I2H/SVB-SW/HI11	227873	129	P1-40/EA/SVB-SW/N/HI11	199901	26
P1-25/SE1/SVB-SW/HI11	197350	131	P1-32/I2H/SVB-SW/N	227874	123	P1-40/E-RT	199902	22
P1-25/SE1/SVB-SW/N	197351	125	P1-32/I2-RT	207321	120	P1-40/EZ	199903	49
P1-25/V/SVB	055335	74	P1-32/I2-SI	207329	144	P1-40/EZ/N	199904	49
P1-25/V/SVB/HI11	095826	76	P1-32/I2-SI/HI11	207331	144	P1-40/I2	199906	116
P1-25/V/SVB/N	086333	74	P1-32/I2-SI/HI11-SW	207332	143	P1-40/I2/SVB	199909	126
P1-25/V/SVB/N/HI11	053113	76	P1-32/I2-SI/N	207333	144	P1-40/I2/SVB/HI11	199910	132
P1-25/V/SVB-SW	050738	73	P1-32/I2-SI/N-SW	207334	143	P1-40/I2/SVB/N	199911	126
P1-25/V/SVB-SW/HI11	098199	75	P1-32/I2-SI-SW	207330	143	P1-40/I2/SVB-SW	199912	123
P1-25/V/SVB-SW/N	088706	73	P1-32/IVS	093303	97	P1-40/I2/SVB-SW/HI11	199913	129
P1-25/XM	172834	93	P1-32/IVS/N	010402	97	P1-40/I2/SVB-SW/N	199914	123
P1-25/Z	057708	70	P1-32/IVS-RT	022632	99	P1-40/I2H	199915	116
P1-25/Z/N	088710	70	P1-32/M4/K1-PG	172874	77	P1-40/I2H/MBS/SVB	199917	127
P1-25/Z/SVA(A)	050969	71	P1-32/M4/K1-PG/HI11	172776	79	P1-40/I2H/MBS/SVB/HI11	199918	133
P1-25-I2H/HI11	226899	121	P1-32/M4/K1-PG/N	172779	77	P1-40/I2H/MBS/SVB-SW	199919	124
P1-32/E	079065	18	P1-32/M4/K1-PG/N/HI11	172783	79	P1-40/I2H/MBS/SVB-SWHI11	199920	130
P1-32/E/N	093456	18	P1-32/M4/K1-PR	172873	78	P1-40/I2H/N	199921	116
P1-32/E/SA(S)	044977	21	P1-32/M4/K1-PR/HI11	172780	80	P1-40/I2H/SVB	199922	126
P1-32/E/SVA(A)	050970	20	P1-32/M4/K1-PR/N	172778	78	P1-40/I2H/SVB/HI11	199923	132
P1-32/E/SVA(S)-RT	050971	22	P1-32/M4/K1-PR/N/HI11	172782	80	P1-40/I2H/SVB/N	199924	126
P1-32/E/SVC(S)-RT	044975	22	P1-32/M4/SVB	172865	78	P1-40/I2H/SVB-SW	199925	123
P1-32/EA/SVB	081438	25	P1-32/M4/SVB/HI11	172869	80	P1-40/I2H/SVB-SW/HI11	199926	129
P1-32/EA/SVB/HI11	072567	27	P1-32/M4/SVB/N	172867	78	P1-40/I2H/SVB-SW/N	199927	123
P1-32/EA/SVB/N	091079	25	P1-32/M4/SVB/N/HI11	172871	80	P1-40/I2-RT	199930	120
P1-32/EA/SVB/N/HI11	057859	27	P1-32/M4/SVB-SW	172866	77	P1-40/IVS	199931	97
P1-32/EA/SVB-SW	053111	24	P1-32/M4/SVB-SW/N	172868	77	P1-40/IVS/N	199933	97
P1-32/EA/SVB-SW/HI11	012772	26	P1-32/SE1	197352	117	P1-40/IVS-RT	199935	99
P1-32/EA/SVB-SW/N	093452	24	P1-32/SE1/N	197353	117	P1-40/M4/SVB	199936	78
P1-32/EA/SVB-SW/N/HI11	060232	26	P1-32/SE1/SVB/HI11	197355	134	P1-40/M4/SVB/HI11	199937	80
P1-32/E-RT	003197	22	P1-32/SE1/SVB-SW	197357	125	P1-40/M4/SVB/N	199938	78
P1-32/EZ	048369	49	P1-32/SE1/SVB-SW/HI11	197358	131	P1-40/M4/SVB/N/HI11	199939	80
P1-32/EZ/N	095829	49	P1-32/SE1/SVB-SW/N	197359	125	P1-40/M4/SVB-SW	199940	77

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
P1-40/M4/SVB-SW/N	199942	77	P3-100/M4/K2-PG/N	172829	77	P3-63/I4-RT	207357	120
P1-40/N	199908	116	P3-100/M4/K2-PR	172826	78	P3-63/I4-SI	207361	144
P1-40/SE1	199944	117	P3-100/M4/K2-PR/HI11	172830	80	P3-63/I4-SI/HI11	207363	144
P1-40/SE1/N	199945	117	P3-100/M4/K2-PR/N	172828	78	P3-63/I4-SI/HI11-SW	207364	143
P1-40/SE1/SVB/HI11	199947	134	P3-100/M4/K2-PR/N/HI11	172832	80	P3-63/I4-SI/N	207365	144
P1-40/SE1/SVB-SW	199949	125	P3-100/M4/SVB	172818	78	P3-63/I4-SI/N-SW	207366	143
P1-40/SE1/SVB-SW/HI11	199950	131	P3-100/M4/SVB/HI11	172822	80	P3-63/I4-SI-SW	207362	143
P1-40/SE1/SVB-SW/N	199951	125	P3-100/M4/SVB/N/HI11	172824	80	P3-63/IVS	041099	97
P1-40/V/SVB	199952	74	P3-100/M4/SVB-SW	172819	77	P3-63/IVS/N	022267	97
P1-40/V/SVB/HI11	199953	76	P3-100/SE1/SVB/HI11	197371	134	P3-63/IVS-RT	045845	99
P1-40/V/SVB/N	199955	74	P3-100/SE3	197368	117	P3-63/M4/K1-PG/N/HI11	172815	79
P1-40/V/SVB/N/HI11	199956	76	P3-100/SE3/N	197369	117	P3-63/M4/K1-PG/N/HI11	172817	79
P1-40/V/SVB-SW	199958	73	P3-100/SE3/SVB	197370	128	P3-63/M4/K2-PG	172811	77
P1-40/V/SVB-SW/HI11	199959	75	P3-100/SE3/SVB/N	197372	128	P3-63/M4/K2-PG/N	172813	77
P1-40/V/SVB-SW/N	199961	73	P3-100/SE3/SVB-SW	197373	125	P3-63/M4/K2-PR	172810	78
P1-40/V/SVB-SW/N/HI11	199962	75	P3-100/SE3/SVB-SW/HI11	197374	131	P3-63/M4/K2-PR/HI11	172814	80
P1-40/Z	199964	70	P3-100/SE3/SVB-SW/N	197375	125	P3-63/M4/K2-PR/N	172812	78
P1-40/Z/N	199966	70	P3-100/V/SVB	088558	74	P3-63/M4/K2-PR/N/HI11	172816	80
P1-40-I2H/HI11	199916	121	P3-100/V/SVB/HI11	034129	76	P3-63/M4/SVB	172784	78
P3-100/E	067201	18	P3-100/V/SVB/N	024636	74	P3-63/M4/SVB/HI11	172788	80
P3-100/E/N	031759	18	P3-100/V/SVB/N/HI11	081589	76	P3-63/M4/SVB-SW	172785	77
P3-100/EA/SVB	074320	25	P3-100/V/SVB-SW	064976	73	P3-63/M4/SVB-SW/HI11	172807	79
P3-100/EA/SVB/HI11	029383	27	P3-100/V/SVB-SW/HI11	036502	75	P3-63/M4/SVB-SW/N/HI11	172809	79
P3-100/EA/SVB/N	019890	25	P3-100/V/SVB-SW/N	027009	73	P3-63/SE1/SVB/HI11	197363	134
P3-100/EA/SVB/N/HI11	076843	27	P3-100/V/SVB-SW/N/HI11	083962	75	P3-63/SE3	197360	117
P3-100/EA/SVB-SW	062603	24	P3-100/XM	172837	93	P3-63/SE3/N	197361	117
P3-100/EA/SVB-SW/HI11	031756	26	P3-100/Z	280920	70	P3-63/SE3/SVB	197362	128
P3-100/EA/SVB-SW/N	022263	24	P3-100/Z/N	038878	70	P3-63/SE3/SVB/N	197364	128
P3-100/EA/SVB-SW/N/HI11	079216	26	P3-63/E	026861	18	P3-63/SE3/SVB-SW	197365	125
P3-100/E-RT	007189	22	P3-63/E/N	019894	18	P3-63/SE3/SVB-SW/HI11	197366	131
P3-100/I5	207381	116	P3-63/EA/SVB	031607	25	P3-63/SE3/SVB-SW/N	197367	125
P3-100/I5/N	207385	116	P3-63/EA/SVB/HI11	019891	27	P3-63/V/SVB	048218	74
P3-100/I5/SVB	207373	126	P3-63/EA/SVB/N	010398	25	P3-63/V/SVB/HI11	024637	76
P3-100/I5/SVB/HI11	207378	132	P3-63/EA/SVB/N/HI11	067351	27	P3-63/V/SVB/N	015144	74
P3-100/I5/SVB/N	207379	126	P3-63/EA/SVB-SW	057857	24	P3-63/V/SVB/N/HI11	072097	76
P3-100/I5/SVB/N/HI11	207380	132	P3-63/EA/SVB-SW/HI11	022264	26	P3-63/V/SVB-SW	060230	73
P3-100/I5/SVB-SW	207374	123	P3-63/EA/SVB-SW/N	012771	24	P3-63/V/SVB-SW/HI11	027010	75
P3-100/I5/SVB-SW/HI11	207375	129	P3-63/EA/SVB-SW/N/HI11	069724	26	P3-63/V/SVB-SW/N	017517	73
P3-100/I5/SVB-SW/N	207376	123	P3-63/E-RT	005743	22	P3-63/V/SVB-SW/N/HI11	074470	75
P3-100/I5/SVB-SW/N/HI11	207377	129	P3-63/I4	207356	116	P3-63/XM	172836	93
P3-100/I5-RT	207382	120	P3-63/I4/MBS/SVB	182421	127	P3-63/Z	050591	70
P3-100/I5-SI	207386	144	P3-63/I4/MBS/SVB/HI11	182423	133	P3-63/Z/N	027013	70
P3-100/I5-SI/HI11	207388	144	P3-63/I4/MBS/SVB-SW	182422	124	P3-80/E	EP-400919	18
P3-100/I5-SI/HI11-SW	207389	143	P3-63/I4/MBS/SVB-SW/HI11	182424	130	P3-80/E/N	EP-400921	18
P3-100/I5-SI/N	207390	144	P3-63/I4/N	207360	116	P3-80/EA/SVB	EP-400924	25
P3-100/I5-SI/N-SW	207391	143	P3-63/I4/SVB	207343	126	P3-80/EA/SVB/HI11	EP-400926	27
P3-100/I5-SI-SW	207387	143	P3-63/I4/SVB/HI11	207348	132	P3-80/EA/SVB/N	EP-400927	25
P3-100/IVS	081439	97	P3-63/I4/SVB/N	207349	126	P3-80/EA/SVB/N/HI11	EP-400928	27
P3-100/IVS/N	034132	97	P3-63/I4/SVB/N/HI11	207350	132	P3-80/EA/SVB-SW	EP-400929	24
P3-100/IVS-RT	086185	99	P3-63/I4/SVB-SW	207344	123	P3-80/EA/SVB-SW/N/HI11	EP-400931	26
P3-100/M4/K1-PG/N/HI11	172831	79	P3-63/I4/SVB-SW/HI11	207345	129	P3-80/E-RT	EP-400932	22
P3-100/M4/K1-PG/N/HI11	172833	79	P3-63/I4/SVB-SW/N	207346	123	P3-80/I5	EP-400979	116
P3-100/M4/K2-PG	172827	77	P3-63/I4/SVB-SW/N/HI11	207347	129	P3-80/I5/N	EP-400981	116

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
P3-80/I5/SVB	EP-400982	126	P5-125/EA/SVB/N	280910	25	PE-P5-125/160E	280973	45, 159
P3-80/I5/SVB/HI11	EP-400984	132	P5-125/EA/SVB-SW	280911	24	PE-P5-125/160Z	280974	91, 159
P3-80/I5/SVB/N	EP-400985	126	P5-125/EA/SVB-SW/HI10	280912	26	PE-P5-250/315E	280975	45, 159
P3-80/I5/SVB/N/HI11	EP-400986	132	P5-125/EA/SVB-SW/N	280913	24	PE-P5-250/315Z	280976	91, 159
P3-80/I5/SVB-SW	EP-400987	123	P5-125/V/SVB	280914	74	PI-25/M4/SVB	172875	78
P3-80/I5/SVB-SW/HI11	EP-400988	129	P5-125/V/SVB/HI10	280915	76	PI-25/V/SVB-SW/N/HI11	055486	75
P3-80/I5/SVB-SW/N	EP-400989	123	P5-125/V/SVB/N	280916	74	PI-32/M4/SVB-SW/HI11	172870	79
P3-80/I5/SVB-SW/N/HI11	EP-400990	129	P5-125/V/SVB-SW	280917	73	PI-32/M4/SVB-SW/N/HI11	172872	79
P3-80/I5-RT	EP-400991	120	P5-125/V/SVB-SW/HI10	280918	75	PI-32/SE1/SVB	197354	128
P3-80/I5-SI	EP-400993	144	P5-125/V/SVB-SW/N	280919	73	PI-32/SE1/SVB/N	197356	128
P3-80/I5-SI/HI11	EP-400994	144	P5-125/Z	090931	70	PI-40//SE1/SVB/N	199948	128
P3-80/I5-SI/HI11-SW	EP-400995	143	P5-160/E	280921	18	PI-40/M4/SVB-SW/HI11	199941	79
P3-80/I5-SI/N	EP-400996	144	P5-160/EA/SVB	280922	25	PI-40/M4/SVB-SW/N/HI11	199943	79
P3-80/I5-SI/N-SW	EP-400997	143	P5-160/EA/SVB/HI10	280923	27	PI-40/SE1/SVB	199946	128
P3-80/I5-SI-SW	EP-400998	143	P5-160/EA/SVB/N	280924	25	PI-40/XM	199888	93
P3-80/IVS	EP-400934	97	P5-160/EA/SVB-SW	280925	24	S(*)-SOND-SA(*)-T0	231965	157
P3-80/IVS/N	EP-400936	97	P5-160/EA/SVB-SW/HI10	280926	26	S(*)-T0	231959	157
P3-80/IVS-RT	EP-400938	99	P5-160/EA/SVB-SW/N	280927	24	S-SOND-KMS(*)-T0	231957	157
P3-80/M4/K2-PG	EP-400940	77	P5-160/V/SVB	280928	74	S-T0	086709	157
P3-80/M4/K2-PG/HI11	EP-400941	79	P5-160/V/SVB/HI10	280929	76	ST-P5-250/314	280978	162
P3-80/M4/K2-PG/N	EP-400942	77	P5-160/V/SVB/N	280930	74	SVA(*)-SOND-SA(*)-T3	231971	157
P3-80/M4/K2-PG/N/HI11	EP-400943	79	P5-160/V/SVB-SW	280931	73	SVA(*)-T3	907745	157
P3-80/M4/K2-PR	EP-400944	78	P5-160/V/SVB-SW/HI10	280932	75	SVA-SOND-KMS(*)-T3	231967	157
P3-80/M4/K2-PR/HI11	EP-400945	80	P5-160/V/SVB-SW/N	280933	73	SVA-T3	050974	157
P3-80/M4/K2-PR/N	EP-400946	78	P5-160/Z	280934	70	SVB-P1/M	172840	93
P3-80/M4/K2-PR/N/HI11	EP-400947	80	P5-250/E	280935	18	SVB-P3	052999	153
P3-80/M4/SVB	EP-400948	78	P5-250/EA/SVB	280936	25	SVB-P3/M	172841	93
P3-80/M4/SVB/HI11	EP-400949	80	P5-250/EA/SVB/HI10	280937	27	SVB-SW-P1/M	172842	93
P3-80/M4/SVB/N/HI11	EP-400950	80	P5-250/EA/SVB/N	280938	25	SVB-SW-P3	062491	153
P3-80/M4/SVB-SW	EP-400951	77	P5-250/EA/SVB-SW	280939	24	SVB-SW-P3/M	172843	93
P3-80/M4/SVB-SW/N/HI11	EP-400954	79	P5-250/EA/SVB-SW/HI10	280940	26	SVB-SW-T0	060265	153
P3-80/SE3	EP-400955	117	P5-250/EA/SVB-SW/N	280941	24	SVB-T0	057892	153
P3-80/SE3/N	EP-400956	117	P5-250/V/SVB	280942	74	SVC(*)-T3	907748	158
P3-80/SE3/SVB	EP-400957	128	P5-250/V/SVB/HI10	280943	76	SVC-T3	050975	158
P3-80/SE3/SVB/HI11	EP-400958	134	P5-250/V/SVB/N	280944	74	T0-10-SOND*/E	907774	166
P3-80/SE3/SVB/N	EP-400959	128	P5-250/V/SVB-SW	280945	73	T0-10-SOND*/EZ	907796	166
P3-80/SE3/SVB-SW	EP-400960	125	P5-250/V/SVB-SW/HI10	280946	75	T0-10-SOND*/IVS	907815	166
P3-80/SE3/SVB-SW/HI11	EP-400961	131	P5-250/V/SVB-SW/N	280947	73	T0-1-102/E	088709	18
P3-80/SE3/SVB-SW/N	EP-400962	125	P5-250/Z	280948	70	T0-1-102/EA/SVB	091078	25
P3-80/V/SVB	EP-400963	74	P5-315 kW/V/SVB	280956	74	T0-1-102/EA/SVB-SW	093451	24
P3-80/V/SVB/HI11	EP-400965	76	P5-315 kW/V/SVB/N	280958	74	T0-1-102/E-RT	009046	22
P3-80/V/SVB/N	EP-400966	74	P5-315/E(	280949	18	T0-1-102/EZ	091082	49
P3-80/V/SVB/N/HI11	EP-400967	76	P5-315/EA/SVB	280950	25	T0-1-102/EZ/S	014933	20
P3-80/V/SVB-SW	EP-400969	73	P5-315/EA/SVB/HI10	280951	27	T0-1-102/I1	207061	116
P3-80/V/SVB-SW/HI11	EP-400970	75	P5-315/EA/SVB/N	280952	25	T0-1-102/I1/S	207063	118
P3-80/V/SVB-SW/N	EP-400971	73	P5-315/EA/SVB-SW	280953	24	T0-1-102/I1/SVB	207143	126
P3-80/V/SVB-SW/N/HI11	EP-400972	75	P5-315/EA/SVB-SW/HI10	280954	26	T0-1-102/I1/SVB-SW	207144	123
P3-80/XM	EP-400973	93	P5-315/EA/SVB-SW/N	280955	24	T0-1-102/I1-RT	207062	120
P3-80/Z	EP-400975	70	P5-315/V/SVB/HI10	280957	76	T0-1-102/IVS	015147	97
P3-80/Z/N	EP-400978	70	P5-315/V/SVB-SW	280959	73	T0-1-102/IVS-RT	079583	99
P5-125/E	280897	18	P5-315/V/SVB-SW/HI10	280960	75	T0-1-102/SE1	197379	117
P5-125/EA/SVB	280898	25	P5-315/V/SVB-SW/N	280961	73	T0-1-102/SE1/SVB	197380	128
P5-125/EA/SVB/HI10	280899	27	P5-315/Z	280962	70	T0-1-102/SE1/SVB-SW	197381	125

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T0-1-102/V/SVB	095824	74	T0-11-SOND*/E	907775	166	T0-1-SOND*/EA/SVB-SW	908043	165
T0-1-102/V/SVB-SW	022330	73	T0-11-SOND*/EZ	907797	166	T0-1-SOND*/EZ	907787	165
T0-1-102/Z	095828	70	T0-11-SOND*/IVS	907816	166	T0-1-SOND*/I1	207480	165
T0-1-102/Z/S	014971	71	T0-11-SOND*/Z	907848	166	T0-1-SOND*/I1/SVB	207481	165
T0-1-15321/E	086317	21	T0-11-SOND*/Z	907849	166	T0-1-SOND*/I1/SVB-SW	207482	165
T0-1-15321/EZ	088690	50	T0-1-8200/E	067352	18	T0-1-SOND*/IVS	907806	165
T0-1-15321/I1	207064	119	T0-1-8200/EA/SVB	053110	25	T0-1-SOND*/V/SVB	907817	165
T0-1-15321/IVS	093436	98	T0-1-8200/EA/SVB-SW	055483	24	T0-1-SOND*/V/SVB-SW	908054	165
T0-1-15321/Z	095809	71	T0-1-8200/E-RT	009474	22	T0-1-SOND*/Z	907839	165
T0-1-15322/E	010382	21	T0-1-8200/EZ	069725	49	T0-2-1/E	024639	18
T0-1-15322/EZ	012755	50	T0-1-8200/I1	207074	116	T0-2-1/E/SVA(A)	050976	20
T0-1-15322/I1	207065	119	T0-1-8200/I1/RT	207075	120	T0-2-1/E/SVA(S)	050977	21
T0-1-15322/IVS	017501	98	T0-1-8200/I1/SVB	207145	126	T0-2-1/E/SVA(S)-RT	228291	22
T0-1-15366/E	081572	21	T0-1-8200/I1/SVB-SW	207146	123	T0-2-1/E/SVC(S)-RT	044973	22
T0-1-15366/EZ	083945	50	T0-1-8200/IVS	074471	97	T0-2-1/EA/SVB	038873	25
T0-1-15401/E	038854	19	T0-1-8200/IVS-RT	081956	99	T0-2-1/EA/SVB-SW	041246	24
T0-1-15401/EZ	041227	49	T0-1-8200/SE1	197383	117	T0-2-1/E-RT	011082	22
T0-1-15401/I1	207067	119	T0-1-8200/SE1/SVB	197384	128	T0-2-1/EZ	027012	49
T0-1-15401/IVS	045973	97	T0-1-8200/SE1/SVB-SW	197385	125	T0-2-1/I1	207081	116
T0-1-15401/Z	048346	70	T0-1-8200/V/SVB	057856	74	T0-2-1/I1/SVA(A)	207083	118
T0-1-15402/E	053092	19	T0-1-8200/V/SVB-SW	060229	73	T0-2-1/I1/SVA(S)	207084	118
T0-1-15402/EZ	055465	49	T0-1-8200/Z	076844	70	T0-2-1/I1/SVA(S)-RT	207085	120
T0-1-15402/I1	207068	119	T0-1-8210/E	012742	29	T0-2-1/I1/SVB	207147	126
T0-1-15402/IVS	060211	97	T0-1-8210/EZ	048337	52	T0-2-1/I1/SVB-SW	207148	123
T0-1-15402/Z	062584	70	T0-1-8210/I1	207076	135	T0-2-1/I1/SVC(S)-RT	207086	120
T0-1-15421/E	095806	29	T0-1-8210/IVS	074440	101	T0-2-1/I1-RT	207082	120
T0-1-15421/EZ	098179	52	T0-1-8210/SE1	197386	137	T0-2-1/I2H/MBS/SVB	182425	127
T0-1-15421/I1	207069	135	T0-1-8210/Z	019862	81	T0-2-1/I2H/MBS/SVB-SW	182426	124
T0-1-15421/IVS	012752	101	T0-1-8214/E	019863	30	T0-2-1/IVS	031758	97
T0-1-15421/Z	015125	81	T0-1-8214/EZ	076815	52	T0-2-1/IVS-RT	084329	99
T0-1-15431/E	019872	33	T0-1-8214/I1	207077	136	T0-2-1/SE1	197376	117
T0-1-15431/EZ	022245	58	T0-1-8214/IVS	045967	101	T0-2-1/SE1/SVB	197377	128
T0-1-15431/I1	207070	140	T0-1-8214/SE1	197390	137	T0-2-1/SE1/SVB-SW	197378	125
T0-1-15431/IVS	026991	104	T0-1-8214/Z	050720	82	T0-2-1/V/SVB	043619	74
T0-1-15431/SE1	197430	137	T0-1-8220/E	031728	31, 42	T0-2-1/V/SVB-SW	045992	73
T0-1-15431/Z	029364	83	T0-1-8220/EZ	095799	54, 65	T0-2-1/Z	036504	70
T0-1-15434/E	062586	33	T0-1-8220/I1	207078	136, 148	T0-2-1/Z/SVA(A)	050978	71
T0-1-15434/EZ	018053	58	T0-1-8220/IVS	055459	102, 110	T0-2-15323/E	024620	21
T0-1-15434/I1	207071	140	T0-1-8220/SE1	197393	138	T0-2-15323/EZ	026993	50
T0-1-15434/IVS	069705	104	T0-1-8220/Z	086312	82, 89	T0-2-15323/I1	207087	119
T0-1-15434/Z	072078	83	T0-1-8240/E	034105	41	T0-2-15323/IVS	031739	98
T0-1-15451/E	076824	33	T0-1-8240/EZ	043597	64	T0-2-1540/IVS	088687	97
T0-1-15451/EZ	079197	58	T0-1-8240/I1	207079	148	T0-2-15403/E	067330	19
T0-1-15451/I1	207072	140	T0-1-8240/IVS	027076	109	T0-2-15403/EZ	069703	49
T0-1-15451/IVS	083943	104	T0-1-8240/Z	060208	88	T0-2-15403/I1	207088	116
T0-1-15451/Z	086316	83	T0-1-91/E	072082	43	T0-2-15403/IVS	074449	97
T0-1-15511/E	019875	20	T0-1-91/EZ	074455	67	T0-2-15403/Z	076822	70
T0-1-15511/EZ	022248	50	T0-1-91/I1	207080	149	T0-2-15404/E	081568	19
T0-1-15511/I1	207073	119	T0-1-91/IVS	079201	111	T0-2-15404/EZ	083941	49
T0-1-15511/IVS	026994	98	T0-1-SOND*/E	907765	165	T0-2-15404/Z	091060	70
T0-1-15511/Z	029367	71	T0-1-SOND*/EA/SVB	907776	165	T0-2-1540-I1	207089	116

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T0-2-15422/E	019871	29	T0-2-15921/E	067337	37	T0-2-8900/E-RT	207399	22
T0-2-15422/EZ	022244	52	T0-2-15921/EZ	069710	62	T0-2-8900/EZ	207402	49
T0-2-15422/I1	207090	135	T0-2-15921/IVS	074456	107	T0-2-8900/I1	207109	116
T0-2-15422/IVS	026990	101	T0-2-15921/Z	076829	86	T0-2-8900/I1/SVB	207151	126
T0-2-15422/Z	029363	81	T0-2-15922/E	053099	37	T0-2-8900/I1/SVB-SW	207152	123
T0-2-15432/E	034110	33	T0-2-15922/EZ	055472	62	T0-2-8900/I1-RT	207110	120
T0-2-15432/EZ	036483	58	T0-2-15922/IVS	060218	107	T0-2-8900/I2H/MBS/SVB	182427	127
T0-2-15432/I1	207091	140	T0-2-15922/Z	062591	86	T0-2-8900/I2H/MBS/SVB-SW	182428	124
T0-2-15432/IVS	041229	104	T0-2-8177/E	015130	20	T0-2-8900/IVS	207403	97
T0-2-15432/SE1	197431	137	T0-2-8177/EZ	017503	50	T0-2-8900/IVS-RT	207404	99
T0-2-15432/Z	043602	83	T0-2-8177/I1	207101	119	T0-2-8900/SE1	197420	117
T0-2-15435/E	003191	33	T0-2-8177/IVS	022249	98	T0-2-8900/SE1/SVB	197421	128
T0-2-15435/EZ	003192	58	T0-2-8177/Z	024622	71	T0-2-8900/SE1/SVB-SW	197422	125
T0-2-15435/I1	218971	140	T0-2-8211/E	022234	29	T0-2-8900/V/SVB	207405	74
T0-2-15435/IVS	003195	104	T0-2-8211/EZ	053083	52	T0-2-8900/V/SVB-SW	207406	73
T0-2-15435/Z	003196	83	T0-2-8211/I1	207102	135	T0-2-8900/Z	207407	70
T0-2-15452/E	091062	33	T0-2-8211/IVS	076813	101	T0-2-SOND*/E	907766	165
T0-2-15452/EZ	093435	58	T0-2-8211/SE1	197387	137	T0-2-SOND*/EA/SVB	907777	165
T0-2-15452/I1	207092	140	T0-2-8211/Z	029354	81	T0-2-SOND*/EA/SVB-SW	908044	165
T0-2-15452/IVS	098181	104	T0-2-8215/E	022236	30	T0-2-SOND*/EZ	907788	165
T0-2-15452/Z	010381	83	T0-2-8215/EZ	081561	52	T0-2-SOND*/I1	207483	165
T0-2-15512/E	034113	20	T0-2-8215/I1	207103	136	T0-2-SOND*/I1/SVB	207484	165
T0-2-15512/EZ	036486	50	T0-2-8215/IVS	048340	101	T0-2-SOND*/I1/SVB-SW	207485	165
T0-2-15512/I1	207093	119	T0-2-8215/SE1	197391	137	T0-2-SOND*/IVS	907807	165
T0-2-15512/Z	043605	71	T0-2-8221/E	038847	31	T0-2-SOND*/V/SVB	907818	165
T0-2-15679/E	029387	23	T0-2-8221/EZ	010372	54	T0-2-SOND*/V/SVB-SW	908055	165
T0-2-15679/EA/SVB	081588	27	T0-2-8221/I1	207104	136	T0-2-SOND*/Z	907840	165
T0-2-15679/EA/SVB-SW	083961	26	T0-2-8221/IVS	057832	102	T0-3-15391/E	029365	44
T0-2-15679/EZ	031760	51	T0-2-8221/SE1	197394	138	T0-3-15391/EZ	031738	56
T0-2-15679/I1	207094	121	T0-2-8221/Z	074450	82	T0-3-15391/I1	207112	150
T0-2-15679/I1/SVB	207149	132	T0-2-8230/E	088685	42	T0-3-15391/IVS	036484	112
T0-2-15679/I1/SVB-SW	207150	129	T0-2-8230/EZ	091058	54, 65	T0-3-15394/E	072079	44
T0-2-15679/I2H/MBS/SVB	182429	133	T0-2-8230/I1	207105	148	T0-3-15394/EZ	074452	56
T0-2-15679/I2H/MBS/SVB-SW	182430	130	T0-2-8230/IVS	095804	110	T0-3-15394/I1	207113	150
T0-2-15679/IVS	036506	100	T0-2-8230/Z	098177	89	T0-3-15394/IVS	079198	112
T0-2-15679/SE1	197440	122	T0-2-8231/E	012750	42	T0-3-15394/Z	081571	90
T0-2-15679/SE1/SVB	197441	134	T0-2-8231/EZ	015123	65	T0-3-15423/E	034109	29
T0-2-15679/SE1/SVB-SW	197442	131	T0-2-8241/Z	062581	88	T0-3-15423/EZ	036482	52
T0-2-15679/V/SVB	086334	76	T0-2-8242/E	067327	41	T0-3-15423/I1	207114	135
T0-2-15679/V/SVB-SW	088707	75	T0-2-8242/EZ	069700	64	T0-3-15423/IVS	041228	101
T0-2-15679/Z	041252	72	T0-2-8242/I1	207108	148	T0-3-15423/Z	043601	81
T0-2-15683/EZ	016658	51	T0-2-8242/IVS	074446	109	T0-3-15433/E	048348	33
T0-2-15907/E	066931	33	T0-2-8242/Z	076819	88	T0-3-15433/EZ	050721	58
T0-2-15907/EZ	069304	58	T0-2-8400/E	053079	35	T0-3-15433/I1	207115	140
T0-2-15907/I1	207095	140	T0-2-8400/EZ	055452	60	T0-3-15433/IVS	055467	104
T0-2-15907/IVS	076423	104	T0-2-8400/I1	207111	142	T0-3-15433/SE1	197432	137
T0-2-15907/Z	078796	83	T0-2-8400/IVS	060198	106	T0-3-15433/Z	057840	83
T0-2-15920/E	038861	37	T0-2-8400/Z	062571	85	T0-3-15453/E	015127	33
T0-2-15920/EZ	041234	62	T0-2-8900/E	207398	18	T0-3-15453/EZ	017500	58
T0-2-15920/IVS	029452	107	T0-2-8900/EA/SVB	207400	25	T0-3-15453/I1	207116	140
T0-2-15920/Z	048353	86	T0-2-8900/EA/SVB-SW	207401	24	T0-3-15453/IVS	022246	104

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T0-3-15453/Z	024619	83	T0-3-8216/Z	055466	82	T0-3-8342/V/SVB	034128	74
T0-3-15513/E	048351	20	T0-3-8222/E	048339	31, 42	T0-3-8342/V/SVB-SW	036501	73
T0-3-15513/EZ	050724	50	T0-3-8222/EZ	015118	54, 65	T0-3-8342/Z	055489	70
T0-3-15513/I1	207117	119	T0-3-8222/I1	207124	136, 148	T0-3-8342-SE1/SVB	197409	128
T0-3-15680/EA/SVB	038875	27	T0-3-8222/IVS	060205	102, 110	T0-3-8401/E	091047	35
T0-3-15680/EA/SVB-SW	041248	26	T0-3-8222/SE1	197395	138	T0-3-8401/EZ	093420	60
T0-3-15680/I1/SVB	207153	132	T0-3-8222/Z	088686	82	T0-3-8401/I1	207132	142
T0-3-15680/I1/SVB-SW	207154	129	T0-3-8223/SE2	197396	138	T0-3-8401/IVS	098166	106
T0-3-15680/I2H/MBS/SVB	182431	133	T0-3-8228/E	015112	35	T0-3-8401/Z	010366	85
T0-3-15680/I2H/MBS/SVB-SW	182432	130	T0-3-8228/EZ	048334	60	T0-3-8451/E	038849	34
T0-3-15680/SE1	197443	122	T0-3-8228/I1	207125	142	T0-3-8451/EZ	083936	59
T0-3-15680/SE1/SVB	197444	134	T0-3-8228/IVS	062572	106	T0-3-8451/I1	207133	141
T0-3-15680/SE1/SVB-SW	197445	131	T0-3-8228/Z	074437	85	T0-3-8451/IVS	026985	105
T0-3-15680/V/SVB	043621	76	T0-3-8232/E	026988	42	T0-3-8451/Z	043596	84
T0-3-15680/V/SVB-SW	045994	75	T0-3-8232/EZ	029361	65	T0-3-8901/E	231938	23
T0-3-15683/E	016619	23	T0-3-8232/I1	207126	148	T0-3-8901/EA/SVB	231932	27
T0-3-15683/EA/SVB	015571	27	T0-3-8232/IVS	034107	110	T0-3-8901/EA/SVB-SW	231933	26
T0-3-15683/EA/SVB-SW	015600	26	T0-3-8232/Z	036480	89	T0-3-8901/EZ	231939	51
T0-3-15683/I1	207118	121	T0-3-8233/E	041226	42	T0-3-8901/I1	231941	121
T0-3-15683/I1/SVB	207157	132	T0-3-8233/EZ	043599	65	T0-3-8901/I1/SVB	231934	132
T0-3-15683/I1/SVB-SW	207158	129	T0-3-8233/I1	207127	148	T0-3-8901/I1/SVB-SW	231935	129
T0-3-15683/I2H/MBS/SVB	182433	133	T0-3-8233/IVS	048345	110	T0-3-8901/IVS	231940	100
T0-3-15683/I2H/MBS/SVB-SW	182434	130	T0-3-8233/Z	050718	89	T0-3-SOND*/E	907767	165
T0-3-15683/IVS	016722	100	T0-3-8243/E	081565	41	T0-3-SOND*/EA/SVB	907778	165
T0-3-15683/SE1	197449	122	T0-3-8243/EZ	083938	64	T0-3-SOND*/EA/SVB-SW	908045	165
T0-3-15683/SE1/SVB	197450	134	T0-3-8243/I1	207128	148	T0-3-SOND*/EZ	907789	165
T0-3-15683/SE1/SVB-SW	197451	131	T0-3-8243/IVS	088684	109	T0-3-SOND*/I1	207486	165
T0-3-15683/V/SVB	015634	76	T0-3-8243/Z	091057	88	T0-3-SOND*/I1/SVB	207487	165
T0-3-15683/V/SVB-SW	015664	75	T0-3-8244/E	095803	41	T0-3-SOND*/I1/SVB-SW	207488	165
T0-3-15924/E	019878	37	T0-3-8244/EZ	098176	64	T0-3-SOND*/IVS	907808	165
T0-3-15924/EZ	022251	62	T0-3-8244/I1	207129	148	T0-3-SOND*/V/SVB	907819	165
T0-3-15924/I1	207119	146	T0-3-8244/IVS	012749	109	T0-3-SOND*/V/SVB-SW	908056	165
T0-3-15924/IVS	026997	107	T0-3-8244/Z	015122	88	T0-3-SOND*/Z	907841	165
T0-3-15924/Z	029370	86	T0-3-8251/EZ	013972	65	T0-4-15602/E	029368	32
T0-3-8007/E	095813	37	T0-3-8251/IVS	013974	110	T0-4-15602/EZ	031741	55
T0-3-8007/EZ	098186	62	T0-3-8251/Z	013976	89	T0-4-15602/I1	207134	139
T0-3-8007/I1	207120	146	T0-3-8280/E	034106	41	T0-4-15602/IVS	036487	103
T0-3-8007/IVS	012759	107	T0-3-8280/EZ	036479	64	T0-4-15682/E	010405	23
T0-3-8007/Z	015132	86	T0-3-8280/I1	207130	148	T0-4-15682/EA/SVB	019892	27
T0-3-8048/E	034116	37	T0-3-8280/IVS	041225	109	T0-4-15682/EA/SVB-SW	022265	26
T0-3-8212/E	029353	29	T0-3-8280/Z	043598	88	T0-4-15682/EZ	012778	51
T0-3-8212/EZ	057829	52	T0-3-8342/E	043624	18	T0-4-15682/I1	207135	121
T0-3-8212/I1	207123	135	T0-3-8342/EA/SVB	029382	25	T0-4-15682/I1/SVB	207161	132
T0-3-8212/IVS	079186	101	T0-3-8342/EA/SVB-SW	031755	24	T0-4-15682/I1/SVB-SW	207162	129
T0-3-8212/SE1	197388	137	T0-3-8342/EZ	045997	49	T0-4-15682/I2H/MBS/SVB	182435	133
T0-3-8212/Z	036473	81	T0-3-8342/I1	207131	116	T0-4-15682/I2H/MBS/SVB-SW	182436	130
T0-3-8216/E	024609	30	T0-3-8342/I1/SVB	207159	126	T0-4-15682/IVS	017524	100
T0-3-8216/EZ	086307	52	T0-3-8342/I1/SVB-SW	207160	123	T0-4-15682/SE2	197446	122
T0-3-8216/I1	207434	136	T0-3-8342/IVS	050743	97	T0-4-15682/SE2/SVB	197447	134
T0-3-8216/IVS	050713	101	T0-3-8342/SE1	197408	117	T0-4-15682/SE2/SVB-SW	197448	131
T0-3-8216/SE1	197392	137	T0-3-8342/SE1/SVB-SW	197410	125	T0-4-15682/V/SVB	024638	76

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T0-4-15682/V/SVB-SW	027011	75	T0-4-SOND*/EA/SVB-SW	908046	165	T0-7-SOND*/Z	907845	166
T0-4-15682/Z	022270	72	T0-4-SOND*/EZ	907790	165	T0-8-8372/E	064950	31
T0-4-74949GB/E	400000	35	T0-4-SOND*/I1	207489	165	T0-8-8372/EZ	034102	54
T0-4-8213/E	031726	29	T0-4-SOND*/I1/SVB	207490	165	T0-8-8372/IVS	069697	102
T0-4-8213/EZ	062575	52	T0-4-SOND*/I1/SVB-SW	207491	165	T0-8-8372/Z	012753	82
T0-4-8213/I1	207136	135	T0-4-SOND*/IVS	907809	165	T0-8-SOND*/E	907772	166
T0-4-8213/IVS	081559	101	T0-4-SOND*/V/SVB	907820	165	T0-8-SOND*/EZ	907794	166
T0-4-8213/SE2	197389	137	T0-4-SOND*/V/SVB-SW	908057	165	T0-8-SOND*/IVS	907813	166
T0-4-8213/Z	043592	81	T0-4-SOND*/Z	907842	165	T0-8-SOND*/Z	907846	166
T0-4-8223/E	050712	31	T0-5-15876/E	000893	36	T0-9-SOND*/E	907773	166
T0-4-8223/EZ	019864	54	T0-5-15876/EZ	000900	60	T0-9-SOND*/EZ	907795	166
T0-4-8223/I1	207137	136	T0-5-15876/IVS	000902	106	T0-9-SOND*/IVS	907814	166
T0-4-8223/IVS	062578	102	T0-5-15876/Z	000942	85	T0-9-SOND*/Z	907847	166
T0-4-8223/Z	086315	82	T0-5-8270/E	091059	42	T3-10-SOND*/E	907859	168
T0-4-8251/E	013971	42	T0-5-8270/EZ	093432	65	T3-10-SOND*/EZ	907881	168
T0-4-8251/I1	218984	148	T0-5-8270/IVS	098178	110	T3-10-SOND*/Z	907922	168
T0-4-8294/E	010371	29	T0-5-8270/Z	010378	89	T3-1-102/E	076073	18
T0-4-8294/EZ	072069	52	T0-5-8281/E	048344	41	T3-1-102/EA/SVB	014374	25
T0-4-8294/I1	207138	135	T0-5-8281/EZ	050717	64	T3-1-102/EA/SVB-SW	016747	24
T0-4-8294/IVS	043594	101	T0-5-8281/IVS	055463	109	T3-1-102/E-RT	016318	22
T0-4-8344/E	014000	18	T0-5-8281/Z	057836	88	T3-1-102/EZ	078446	49
T0-4-8344/EA/SVB	008267	25	T0-5-8369/E	060204	31	T3-1-102/I2	207165	116
T0-4-8344/EA/SVB-SW	008268	24	T0-5-8369/EZ	024610	54	T3-1-102/I2/SVB	207198	126
T0-4-8344/EZ	014002	49	T0-5-8369/IVS	064951	102	T3-1-102/I2/SVB-SW	207199	123
T0-4-8344/I1	207139	116	T0-5-SOND*/E	907769	166	T3-1-102/I2-RT	207166	120
T0-4-8344/I1/SVB	207163	126	T0-5-SOND*/EZ	907791	166	T3-1-102/V/SVB	019120	74
T0-4-8344/I1/SVB-SW	207164	123	T0-5-SOND*/IVS	907810	166	T3-1-102/V/SVB-SW	021493	73
T0-4-8344/IVS	014006	97	T0-5-SOND*/Z	907843	166	T3-1-102/Z	083192	70
T0-4-8344/SE2	197411	117	T0-6-15866/E	055460	36	T3-11-SOND*/E	907860	168
T0-4-8344/SE2/SVB	197412	128	T0-6-15866/EZ	012747	60	T3-11-SOND*/EZ	907882	168
T0-4-8344/SE2/SVB-SW	197413	125	T0-6-15866/IVS	036477	106	T3-11-SOND*/Z	907923	168
T0-4-8344/V/SVB	014007	74	T0-6-15866/Z	067326	85	T3-1-8200/E	064208	18
T0-4-8344/V/SVB-SW	008272	73	T0-6-8271/E	015124	42	T3-1-8200/EA/SVB	066576	25
T0-4-8344/Z	014009	70	T0-6-8271/EZ	017497	65	T3-1-8200/EA/SVB-SW	068949	24
T0-4-8410/E	024604	38	T0-6-8271/IVS	022243	110	T3-1-8200/E-RT	017025	22
T0-4-8410/EZ	053080	61	T0-6-8271/Z	024616	89	T3-1-8200/EZ	066581	49
T0-4-8410/I1	207140	147	T0-6-8282/E	062582	41	T3-1-8200/I2	207167	116
T0-4-8410/IVS	064945	108	T0-6-8282/EZ	064955	64	T3-1-8200/I2/SVB	207200	126
T0-4-8410/Z	083929	87	T0-6-8282/IVS	069701	109	T3-1-8200/I2/SVB-SW	207201	123
T0-4-8440/E	041222	34	T0-6-8282/Z	072074	88	T3-1-8200/V/SVB	007255	74
T0-4-8440/EZ	088682	59	T0-6-8370/E	062577	31	T3-1-8200/V/SVB-SW	004882	73
T0-4-8440/I1	207141	141	T0-6-8370/EZ	029356	54	T3-1-8200/Z	071327	70
T0-4-8440/IVS	029358	105	T0-6-8370/IVS	067324	102	T3-1-8210/E	054718	29
T0-4-8440/Z	048342	84	T0-6-8370/Z	010380	82	T3-1-8210/EZ	003072	52
T0-4-8441/E	043595	34	T0-6-SOND*/E	907770	166	T3-1-8210/I2	207169	135
T0-4-8441/EZ	093428	59	T0-6-SOND*/EZ	907792	166	T3-1-8210/Z	057091	81
T0-4-8441/I1	207142	141	T0-6-SOND*/IVS	907811	166	T3-1-8214/E	009632	30
T0-4-8441/IVS	031731	105	T0-6-SOND*/Z	907844	166	T3-1-SOND*/E	907852	167
T0-4-8441/Z	053088	84	T0-7-SOND*/E	907771	166	T3-2-8211/E	061837	29
T0-4-SOND*/E	907768	165	T0-7-SOND*/EZ	907793	166	T3-2-8211/EZ	003075	52
T0-4-SOND*/EA/SVB	907779	165	T0-7-SOND*/IVS	907812	166	T3-2-8211/I2	207178	135

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T3-2-8211/Z	064210	81	T3-3-8342/V/SVB	076072	74	T3-4-8344/V/SVB	020598	74
T3-2-8215/E	016751	30	T3-3-8342/V/SVB-SW	078445	73	T3-4-8344/V/SVB-SW	008967	73
T3-2-8215/I2	207179	136	T3-3-8342/Z	052344	70	T3-4-8344/Z	020600	70
T3-2-8221/E	045227	31	T3-3-8401/E	030992	35	T3-4-8410/E	009657	38
T3-2-8221/EZ	001025	54	T3-3-8401/EZ	000694	60	T3-4-8410/EZ	000721	61
T3-2-8221/I2	207180	136	T3-3-8401/I2	207188	142	T3-4-8410/I2	207195	147
T3-2-8221/Z	047600	82	T3-3-8401/Z	035739	85	T3-4-8410/Z	012030	87
T3-2-8400/E	073695	35	T3-3-8451/E	028641	34	T3-4-8440/E	035760	34
T3-2-8400/EZ	000687	60	T3-3-8451/EZ	000956	59	T3-4-8440/EZ	000959	59
T3-2-8400/I2	207181	142	T3-3-8451/I2	207189	141	T3-4-8440/I2	207196	141
T3-2-8400/Z	095060	85	T3-3-8451/Z	031014	84	T3-4-8440/Z	038133	84
T3-3-15680/EA/SVB	012002	27	T3-3-8901/E	231949	23	T3-4-8441/E	042879	34
T3-3-15680/EA/SVB-SW	014375	26	T3-3-8901/EA/SVB	231945	27	T3-4-8441/I2	207197	141
T3-3-15680/EA/SVB-SW	231946	26	T3-3-8901/EZ	231950	51	T3-4-8441/Z	045252	84
T3-3-15680/I2/SVB	207202	132	T3-3-8901/I2	231951	121	T3-4-8902/E	215222	29
T3-3-15680/I2/SVB-SW	207203	129	T3-3-8901/I2/SVB	218987	132	T3-4-8902/EZ	215223	52
T3-3-15680/V/SVB	016748	76	T3-3-8901/I2/SVB-SW	218988	129	T3-4-8902/I2	215224	135
T3-3-15680/V/SVB-SW	019121	75	T3-3-8901/Z	231952	72	T3-4-8902/Z	215225	81
T3-3-15683/E	014377	23	T3-4-15682/E	023869	23	T3-5-15876/E	016776	36
T3-3-15683/EA/SVB	040478	27	T3-4-15682/EA/SVB	054716	27	T3-5-15876/EZ	000797	60
T3-3-15683/EA/SVB-SW	042851	26	T3-4-15682/EA/SVB-SW	057089	26	T3-5-15876/I2	207537	142
T3-3-15683/I2	207182	121	T3-4-15682/I2	207190	121	T3-5-15876/Z	019149	85
T3-3-15683/I2/SVB	207206	132	T3-4-15682/I2/SVB	207210	132	T3-5-8369/E	066584	31
T3-3-15683/I2/SVB-SW	207207	129	T3-4-15682/I2/SVB-SW	207211	129	T3-5-8369/I2	207536	136
T3-3-15683/SE2	197475	122	T3-4-15682/SE2	197472	122	T3-5-8369/Z	068957	82
T3-3-15683/SE2/SVB	197476	134	T3-4-15682/SE2/SVB-SW	197474	131	T3-5-SOND*/E	907850	167, 168
T3-3-15683/SE2/SVB-SW	197477	131	T3-4-15682/SE2-SVB	197473	134	T3-5-SOND*/EA/SVB	907861	167, 168
T3-3-15683/V/SVB	045224	76	T3-4-15682/V/SVB	059462	76	T3-5-SOND*/EA/SVB-SW	908080	167, 168
T3-3-8212/E	068956	29	T3-4-15682/V/SVB-SW	061835	75	T3-5-SOND*/EZ	907872	167, 168
T3-3-8212/EZ	003080	52	T3-4-15682/Z	030988	72	T3-5-SOND*/I2	207492	167, 168
T3-3-8212/I2	207183	135	T3-4-74949GB/E	400001	35	T3-5-SOND*/I2/SVB	207493	167, 168
T3-3-8212/Z	071329	81	T3-4-8213/E	076075	29	T3-5-SOND*/I2/SVB-SW	207494	167, 168
T3-3-8216/E	023870	30	T3-4-8213/EZ	003079	52	T3-5-SOND*/V/SVB	907891	167, 168
T3-3-8216/I2	207184	136	T3-4-8213/I2	207191	135	T3-5-SOND*/V/SVB-SW	908091	167, 168
T3-3-8222/E	052346	31	T3-4-8213/Z	078448	81	T3-5-SOND*/Z	907913	167, 168
T3-3-8222/EZ	001069	54	T3-4-8223/E	059465	31	T3-6-15866/E	054744	36
T3-3-8222/I2	207185	136	T3-4-8223/I2	207192	136	T3-6-15866/Z	057117	85
T3-3-8222/Z	057092	82	T3-4-8223/Z	061838	82	T3-6-8370/E	073703	31
T3-3-8228/E	002538	35	T3-4-8294/E	002513	29	T3-6-8370/EZ	004506	54
T3-3-8228/EZ	000695	60	T3-4-8294/I2	207193	135	T3-6-SOND*/E	907855	168
T3-3-8228/I2	207186	142	T3-4-8294/Z	004886	81	T3-6-SOND*/EA/SVB	907866	168
T3-3-8228/Z	004911	85	T3-4-8344/E	020593	18	T3-6-SOND*/EA/SVB-SW	908085	168
T3-3-8342/E	045225	18	T3-4-8344/EA/SVB	008964	25	T3-6-SOND*/EZ	907877	168
T3-3-8342/EA/SVB	071326	25	T3-4-8344/EA/SVB-SW	008965	24	T3-6-SOND*/V/SVB	907896	168
T3-3-8342/EA/SVB-SW	073699	24	T3-4-8344/EZ	020595	49	T3-6-SOND*/V/SVB-SW	908096	168
T3-3-8342/I2	207187	116	T3-4-8344/I2	207194	116	T3-6-SOND*/Z	907918	168
T3-3-8342/I2/SVB	207208	126	T3-4-8344/I2/SVB	207212	126	T3-7-SOND*/E	907856	168
T3-3-8342/I2/SVB-SW	207209	123	T3-4-8344/I2/SVB-SW	207213	123	T3-7-SOND*/EZ	907878	168
T3-3-8342/SE1	197456	117	T3-4-8344/SE2	197459	117	T3-7-SOND*/Z	907919	168
T3-3-8342/SE1/SVB-SW	197458	125	T3-4-8344/SE2/SVB	197460	128	T3-8-8372/E	080822	31
T3-3-8342/SE2/SVB	197457	128	T3-4-8344/SE2/SVB-SW	197461	125	T3-8-8372/Z	083195	82

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T3-8-SOND*/E	907857	168	T5-3-8901/I5/SVB-SW	207278	129	T5-6-SOND*/E	907983	172
T3-8-SOND*/EZ	907879	168	T5-3-SOND*/E	907980	171	T5-6-SOND*/EA/SVB	908992	172
T3-8-SOND*/Z	907920	168	T5-3-SOND*/EA/SVB	907989	171	T5-6-SOND*/EA/SVB-SW	908131	172
T3-9-SOND*/E	907858	168	T5-3-SOND*/EA/SVB-SW	908128	171	T5-6-SOND*/V/SVB	908008	172
T3-9-SOND*/EZ	907880	168	T5-3-SOND*/I4	207530	171	T5-6-SOND*/V/SVB-SW	908139	172
T3-9-SOND*/Z	907921	168	T5-3-SOND*/I4/SVB	207531	171	T5-6-SOND*/Z	908026	172
T4-1-SOND*/EA/SVB	907863	167	T5-3-SOND*/I4/SVB-SW	207532	171	T5-7-SOND*/E	907984	172
T4-1-SOND*/EA/SVB-SW	908082	167	T5-3-SOND*/V/SVB-SW	908136	171	T5-7-SOND*/EA/SVB	908993	172
T4-1-SOND*/EZ	907874	167	T5-3-SOND*/Z	908023	171	T5-7-SOND*/EA/SVB-SW	908132	172
T4-1-SOND*/I2	207498	167	T5-4-15682/E(	207412	23	T5-7-SOND*/V/SVB	908009	172
T4-1-SOND*/I2/SVB	207499	167	T5-4-15682/EA/SVB	207413	27	T5-7-SOND*/V/SVB-SW	908140	172
T4-1-SOND*/I2/SVB-SW	207500	167	T5-4-15682/EA/SVB-SW	207414	26	T5-7-SOND*/Z	908027	172
T4-1-SOND*/V/SVB	907893	167	T5-4-15682/I5	207269	121	T5-8-SOND*/E	907985	172
T4-1-SOND*/V/SVB-SW	908093	167	T5-4-15682/I5/SVB	207281	132	T5-8-SOND*/EA/SVB	908994	172
T4-1-SOND*/Z	907915	167	T5-4-15682/I5/SVB-SW	207282	129	T5-8-SOND*/EA/SVB-SW	908133	172
T5-1-102/EA/SVB	098808	25	T5-4-15682/I5-SI	207285	144	T5-8-SOND*/V/SVB	908010	172
T5-1-102/EA/SVB-SW	098807	24	T5-4-15682/I5-SI-SW	207286	143	T5-8-SOND*/V/SVB-SW	908141	172
T5-1-102/I5/SVB	207273	126	T5-4-15682/V/SVB	207415	76	T5-8-SOND*/Z	908028	172
T5-1-8200/E-RT	097225	22	T5-4-15682/V/SVB-SW	207416	75	T5-9-SOND*/E	907986	172
T5-1-SOND*/E	907978	171	T5-4-15682/Z	207417	72	T5-9-SOND*/EA/SVB	908029	172
T5-1-SOND*/EA/SVB	908031	171	T5-4-8213/E	096014	29	T5-9-SOND*/EA/SVB-SW	907987	172
T5-1-SOND*/EA/SVB-SW	908126	171	T5-4-8213/I5	207270	135	T5-9-SOND*/V/SVB	908030	172
T5-1-SOND*/I4	207524	171	T5-4-8213/Z	096012	81	T5B-10-SOND*/E	907933	170
T5-1-SOND*/I4/SVB	207525	171	T5-4-8294/E	095986	29	T5B-10-SOND*/Z	907977	170
T5-1-SOND*/I4/SVB-SW	207526	171	T5-4-8294/I5	207433	135	T5B-1-102/E	094471	18
T5-1-SOND*/V/SVB	908003	171	T5-4-8294/Z	095984	81	T5B-1-102/EA/SVB	094469	25
T5-1-SOND*/V/SVB-SW	908134	171	T5-4-8344/EA/SVB	095961	25	T5B-1-102/EA/SVB-SW	094468	24
T5-1-SOND*/Z	908021	171	T5-4-8344/EA/SVB-SW	095960	24	T5B-1-102/E-RT	094470	22
T5-2-SOND*/E	907979	171	T5-4-8344/I5/SVB	207283	126	T5B-1-102/I4	207215	116
T5-2-SOND*/EA/SVB	907988	171	T5-4-8344/I5/SVB-SW	207284	123	T5B-1-102/I4/SVB	207238	126
T5-2-SOND*/EA/SVB-SW	908127	171	T5-4-8344/V/SVB	095959	74	T5B-1-102/I4/SVB-SW	207239	123
T5-2-SOND*/I4	207527	171	T5-4-8344/V/SVB-SW	095958	73	T5B-1-102/V/SVB	094463	74
T5-2-SOND*/I4/SVB	207528	171	T5-4-8902/E	207418	29	T5B-1-102/V/SVB-SW	094462	73
T5-2-SOND*/I4/SVB-SW	207529	171	T5-4-8902/I5	207214	135	T5B-1-102/Z	094460	70
T5-2-SOND*/V/SVB	908004	171	T5-4-8902/Z	207419	81	T5B-1-8200/E	094281	18
T5-2-SOND*/V/SVB-SW	908135	171	T5-4-8903/I5-SI	207289	144	T5B-1-8200/EA/SVB	094279	25
T5-2-SOND*/Z	908022	171	T5-4-8903/I5-SI-SW	207290	143	T5B-1-8200/EA/SVB-SW	094278	24
T5-3-8212/E	096466	29	T5-4-SOND*/E	907981	171	T5B-1-8200/E-RT	094280	22
T5-3-8212/I5	207266	135	T5-4-SOND*/EA/SVB	907990	171	T5B-1-8200/I4	207218	116
T5-3-8212/Z	096464	81	T5-4-SOND*/EA/SVB-SW	908129	171	T5B-1-8200/I4/SVB	207240	126
T5-3-8342/EA/SVB	096383	25	T5-4-SOND*/I4	207533	171	T5B-1-8200/I4/SVB-SW	207241	123
T5-3-8342/EA/SVB-SW	096382	24	T5-4-SOND*/I4/SVB	207534	171	T5B-1-8200/V/SVB	094273	74
T5-3-8342/I5/SVB	207279	126	T5-4-SOND*/I4/SVB-SW	207535	171	T5B-1-8200/Z	094270	70
T5-3-8342/I5/SVB-SW	207280	123	T5-4-SOND*/V/SVB	908005	171	T5B-1-8210/E	094261	29
T5-3-8342/I5-SI	207447	144	T5-4-SOND*/V/SVB-SW	908137	171	T5B-1-8210/I4	207432	135
T5-3-8342/I5-SI-SW	207448	143	T5-5-SOND*/E	907982	172	T5B-1-8210/Z	094258	81
T5-3-8342/V/SVB	096381	74	T5-5-SOND*/EA/SVB	908991	172	T5B-1-SOND*/E	907924	169
T5-3-8342/V/SVB-SW	096380	73	T5-5-SOND*/EA/SVB-SW	908130	172	T5B-1-SOND*/EA/SVB	907934	169
T5-3-8901/EA/SVB	207408	27	T5-5-SOND*/V/SVB	908007	172	T5B-1-SOND*/EA/SVB-SW	908106	169
T5-3-8901/EA/SVB-SW	207409	26	T5-5-SOND*/V/SVB-SW	908138	172	T5B-1-SOND*/I4	207510	169
T5-3-8901/I5/SVB	207277	132	T5-5-SOND*/Z	908025	172	T5B-1-SOND*/I4/SVB	207511	169

Index - By part number

Part number	Article number	Page	Part number	Article number	Page	Part number	Article number	Page
T5B-1-SOND*/I4/SVB-SW	207512	169	T5B-3-8901/I4/SVB-SW	207245	129	T5B-4-8903/I4-SI-SW	207259	143
T5B-1-SOND*/V/SVB	907950	169	T5B-3-8901/V/SVB	207422	76	T5B-4-SOND*/E	907927	169
T5B-1-SOND*/V/SVB-SW	908114	169	T5B-3-8901/V/SVB-SW	207423	75	T5B-4-SOND*/EA/SVB	907937	169
T5B-1-SOND*/Z	907968	169	T5B-3-SOND*/E	907926	169	T5B-4-SOND*/EA/SVB-SW	908109	169
T5B-2-8211/E	093094	29	T5B-3-SOND*/EA/SVB	907936	169	T5B-4-SOND*/I4	207521	169
T5B-2-8211/I4	207220	135	T5B-3-SOND*/EA/SVB-SW	908108	169	T5B-4-SOND*/I4/SVB	207522	169
T5B-2-8211/Z	093082	81	T5B-3-SOND*/I4	207518	169	T5B-4-SOND*/I4/SVB-SW	207523	169
T5B-2-8221/E	093047	31	T5B-3-SOND*/I4/SVB	207519	169	T5B-4-SOND*/V/SVB	907953	169
T5B-2-8221/I4	207221	136	T5B-3-SOND*/I4/SVB-SW	207520	169	T5B-4-SOND*/V/SVB-SW	908117	169
T5B-2-8221/Z	093044	82	T5B-3-SOND*/V/SVB	907952	169	T5B-4-SOND*/Z	907971	169
T5B-2-8400/E	092918	35	T5B-3-SOND*/V/SVB-SW	908116	169	T5B-5-15876/E	214785	36
T5B-2-8400/I4	207222	142	T5B-3-SOND*/Z	907970	169	T5B-5-15876/Z	214786	85
T5B-2-SOND*/E	907925	169	T5B-4-15682/E	207424	23	T5B-5-SOND*/E	907928	170
T5B-2-SOND*/EA/SVB	907935	169	T5B-4-15682/EA/SVB	207425	27	T5B-5-SOND*/EA/SVB	907938	170
T5B-2-SOND*/EA/SVB-SW	908107	169	T5B-4-15682/EA/SVB-SW	207426	26	T5B-5-SOND*/EA/SVB-SW	908110	170
T5B-2-SOND*/I4	207514	169	T5B-4-15682/I4	207229	121	T5B-5-SOND*/V/SVB	907954	170
T5B-2-SOND*/I4/SVB	207515	169	T5B-4-15682/I4/SVB	207246	132	T5B-5-SOND*/V/SVB-SW	908118	170
T5B-2-SOND*/I4/SVB-SW	207516	169	T5B-4-15682/I4/SVB-SW	207247	129	T5B-5-SOND*/Z	907972	170
T5B-2-SOND*/V/SVB	907951	169	T5B-4-15682/I4-SI	207254	144	T5B-6-SOND*/E	907929	170
T5B-2-SOND*/V/SVB-SW	908115	169	T5B-4-15682/I4-SI-SW	207255	143	T5B-6-SOND*/EA/SVB	907939	170
T5B-2-SOND*/Z	907969	169	T5B-4-15682/V/SVB	207427	76	T5B-6-SOND*/EA/SVB-SW	908111	170
T5B-3-8212/E	092386	29	T5B-4-15682/V/SVB-SW	207428	75	T5B-6-SOND*/V/SVB	907955	170
T5B-3-8212/I4	207223	135	T5B-4-15682/Z	207429	72	T5B-6-SOND*/V/SVB-SW	908119	170
T5B-3-8212/Z	092383	81	T5B-4-74949GB/E	400002	35	T5B-6-SOND*/Z	907973	170
T5B-3-8222/E	092378	31	T5B-4-8213/E	092112	29	T5B-7-15866/E	214788	36
T5B-3-8222/I4	207224	136	T5B-4-8213/I4	207230	135	T5B-7-SOND*/E	907930	170
T5B-3-8222/Z	092375	82	T5B-4-8213/Z	092109	81	T5B-7-SOND*/EA/SVB	907940	170
T5B-3-8223/I4	207231	136	T5B-4-8223/E	092108	31	T5B-7-SOND*/EA/SVB-SW	908112	170
T5B-3-8228/E	092374	35	T5B-4-8223/Z	092105	82	T5B-7-SOND*/V/SVB	907956	170
T5B-3-8228/I4	207225	142	T5B-4-8294/E	092084	29	T5B-7-SOND*/V/SVB-SW	908120	170
T5B-3-8342/E	092310	18	T5B-4-8294/I4	207232	135	T5B-7-SOND*/Z	907974	170
T5B-3-8342/EA/SVB	092308	25	T5B-4-8294/Z	092081	81	T5B-8-SOND*/E	907931	170
T5B-3-8342/EA/SVB-SW	092307	24	T5B-4-8344/EA/SVB	092062	25	T5B-8-SOND*/EA/SVB	907941	170
T5B-3-8342/I4	207226	116	T5B-4-8344/EA/SVB-SW	092061	24	T5B-8-SOND*/EA/SVB-SW	908113	170
T5B-3-8342/I4/SVB	207242	126	T5B-4-8344/I4/SVB	207248	126	T5B-8-SOND*/V/SVB	907957	170
T5B-3-8342/I4/SVB-SW	207243	123	T5B-4-8344/I4/SVB-SW	207249	123	T5B-8-SOND*/V/SVB-SW	908121	170
T5B-3-8342/I4-SI	207250	144	T5B-4-8344/V/SVB	092056	74	T5B-8-SOND*/Z	907975	170
T5B-3-8342/I4-SI-SW	207251	143	T5B-4-8344/V/SVB-SW	092055	73	T5B-9-SOND*/E	907932	170
T5B-3-8342/V/SVB	092300	74	T5B-4-8410/E	092052	38	T5B-9-SOND*/Z	907976	170
T5B-3-8342/V/SVB-SW	092299	73	T5B-4-8410/I4	207234	147	T6-160-15682/V/SVB/HI11	200619	76
T5B-3-8342/Z	092297	70	T5B-4-8410/Z	092049	87	T6-160-15682/V/SVB-SW/HI11	200127	75
T5B-3-8344/E	092064	18	T5B-4-8440/E	092032	34	T6-160-6/I45/SVB/HI11	201448	132
T5B-3-8344/I4	207233	116	T5B-4-8440/I4	207235	141	T6-160-6/I45/SVB-SW/HI11	201447	129
T5B-3-8401/E	092296	35	T5B-4-8440/Z	092029	84	T6-3-8212/E/HI12	214781	29
T5B-3-8401/I4	207227	142	T5B-4-8441/E	092028	34	T8-3-8212/E/HI12	214782	29
T5B-3-8401/Z	092293	85	T5B-4-8441/I4	207236	141	T8-3-8342/I48/SVB/HI11	201450	132
T5B-3-8451/E	092288	34	T5B-4-8441/Z	092025	84	T8-3-8342/I48/SVB-SW/HI11	201449	129
T5B-3-8451/I4	207228	141	T5B-4-8902/E	207430	29	T8-3-8342/V/SVB/HI11	200620	76
T5B-3-8901/EA/SVB	207420	27	T5B-4-8902/I4	207237	135	T8-3-8342/V/SVB-SW/HI11	200128	75
T5B-3-8901/EA/SVB-SW	207421	26	T5B-4-8902/Z	207431	81	TM-1-15431/E	025045	33
T5B-3-8901/I4/SVB	207244	132	T5B-4-8903/I4-SI	207258	144	TM-1-15431/EZ	000691	58

Index - By part number

Part number	Article number	Page	Part number	Article number	Page
TM-1-15431/IVS	225342	104	TM-2-SOND-ERSTBESTELLUNG/IVS	225349	173
TM-1-8175/EZ	015690	50	TM-3-15433/E	029791	33
TM-1-8178/E	098608	19	TM-3-15433/EZ	045490	58
TM-1-8178/EZ	016786	50	TM-3-8212/E	010807	28
TM-1-8210/E	096234	28	TM-3-8212/EZ	045491	53
TM-1-8210/EZ	015137	53	TM-3-8222/E	086742	28
TM-1-8214/E	032164	30	TM-3-8222/EZ	045493	53
TM-1-8220/E	081996	28	TM-3-8232/E	039298	39
TM-1-8220/EZ	000692	53	TM-3-8232/EZ	015592	66
TM-1-8220F88/EZ	016925	58	TM-3-8233/E	053521	39
TM-1-8240/E	058267	40	TM-3-8233/EZ	015630	66
TM-1-8240/EZ	015226	63	TM-3-8242/E	072505	40
TM-1-8290/E	070131	18	TM-3-8242/EZ	015506	63
TM-1-8290/EZ	000693	49	TM-3-8243/E	079624	40
TM-1-8291/E	072504	18	TM-3-8243/EZ	015537	63
TM-1-8291/EZ	015073	49	TM-3-8244/E	081997	40
TM-1-8310/EZ	045479	57	TM-3-8244/EZ	045495	63
TM-1-8311/EZ	045487	57	TM-3-8256/E	079623	18
TM-1-SOND*/E	907749	173	TM-3-8261/E	067759	40
TM-1-SOND*/E	907755	173	TM-3-8261/EZ	000698	63
TM-1-SOND*/IVS	225346	173	TM-3-8280/E	063013	40
TM-1-SOND-ERSTBESTELLUNG/E	208261	173	TM-3-8280/EZ	045496	63
TM-1-SOND-ERSTBESTELLUNG/EZ	208262	173	TM-3-8299/E	020299	28
TM-1-SOND-ERSTBESTELLUNG/IVS	225347	173	TM-3-8401/E	015554	35
TM-2-15432/E	027418	33	TM-3-SOND*/E	907750	173
TM-2-15432/EZ	016878	58	TM-3-SOND*/EZ	907757	173
TM-2-8211/E	098607	28	TM-3-SOND-ERSTBESTELLUNG/E	208265	173
TM-2-8211/EZ	015166	53	TM-3-SOND-ERSTBESTELLUNG/EZ	208266	173
TM-2-8215/E	034537	30	TM-4-8213/E	013180	28
TM-2-8219/E	017926	28	TM-4-8213/EZ	045847	53
TM-2-8221/E	084369	28	TM-4-8223/E	089115	28
TM-2-8221/EZ	015197	53	TM-4-8223/EZ	046119	53
TM-2-8230/E	039283	39	TM-4-8262/E	074878	40
TM-2-8230/EZ	000701	66	TM-4-8262/EZ	046120	63
TM-2-8231/E	044029	39	TM-4-8552/E	025046	32
TM-2-8231/EZ	000700	66	TM-4-SOND*/E	907751	173
TM-2-8241/E	065386	40	TM-4-SOND*/EZ	907758	173
TM-2-8241/EZ	015256	63	TM-4-SOND-ERSTBESTELLUNG/E	208267	173
TM-2-8260/E	060640	40	TM-4-SOND-ERSTBESTELLUNG/EZ	208268	173
TM-2-8260/EZ	045483	63	TM-5-8237/E	069150	39
TM-2-8292/E	074877	18	TM-5-8237/EZ	015661	66
TM-2-8292/EZ	015096	49	TM-5-8247/E	009741	40
TM-2-8293/E	077250	18	TM-5-8247/EZ	015565	63
TM-2-8293/EZ	045486	49	TM-5-8252/E	041671	39
TM-2-8550/E	020300	32	TM-5-8252/EZ	046123	66
TM-2-8550/EZ	000699	55	TM-5-8270/E	041656	39
TM-2-SOND*/E	907763	173	TM-5-8270/EZ	046124	66
TM-2-SOND*/EZ	907756	173	TM-5-8281/E	070132	40
TM-2-SOND*/IVS	225348	173	TM-5-8281/EZ	046125	63
TM-2-SOND-ERSTBESTELLUNG/E	208263	173	TM-5-8369/E	091488	28
TM-2-SOND-ERSTBESTELLUNG/EZ	208264	173	TM-5-8369/EZ	046126	53

Index - By part number

Part number	Article number	Page
TM-5-SOND*/E	907764	173
TM-5-SOND*/EZ	907759	173
TM-5-SOND-ERSTBESTELLUNG/E	208269	173
TM-5-SOND-ERSTBESTELLUNG/EZ	208270	173
TM-6-8253/E	046127	66
TM-6-8253/E	055894	39
TM-6-8271/E	046402	39
TM-6-8271/EZ	046128	66
TM-6-8282/E	077251	40
TM-6-8370/E	093861	28
TM-6-SOND*/E	907752	173
TM-6-SOND*/EZ	907760	173
TM-6-SOND-ERSTBESTELLUNG/E	208271	173
TM-6-SOND-ERSTBESTELLUNG/EZ	208272	173
TM-7-SOND*/E	907753	173
TM-7-SOND*/EZ	907761	173
TM-7-SOND-ERSTBESTELLUNG/E	208273	173
TM-7-SOND-ERSTBESTELLUNG/EZ	208274	173
TM-8-SOND*/E	907754	173
TM-8-SOND*/EZ	907762	173
TM-8-SOND-ERSTBESTELLUNG/E	208275	173
TM-8-SOND-ERSTBESTELLUNG/EZ	208276	173
UV-P3	048289	161
UV-T0	019925	161
V/EA/SVB/T5	045065	154
V/EA/SVB-SW/T5	045064	154
V/EA/SVB-SW-T0	065011	154
V/EA/SVB-T0	062638	154
V-M25	206911	151
VR-T0	089082	158
VR-T3	050987	158
ZAV(X1)+ZVV(X1)-T0/P3	254546	92
ZAV-P3	029417	92
ZAV-P5	280979	92
ZAV-T0	027044	92
ZFS(*)-P5	105225	156
ZFS60-P3	022297	156
ZFS60-T0	019924	156
ZFS61/62/P3	065739	156
ZFS61/62-T0	030170	156
ZFS63-P3	047423	156
ZFS63-T0	047424	156
ZFS68-T0	065751	156
ZFS77-P3	047422	156
ZFS77-T0	065752	156
ZFS80-P3	205565	156
ZFS80-T0	205548	156
ZFSX-P3	027043	156
ZFSX-T0	024670	156
ZVV-P3	024671	92
ZVV-T0	022298	92

Notes

[illegible]



We make what matters work.*



At Eaton, we believe that power is a fundamental part of just about everything people do. That's why we're dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because this is what really matters. And we're here to make sure it works.

To learn more go to: Eaton.com/WhatMatters



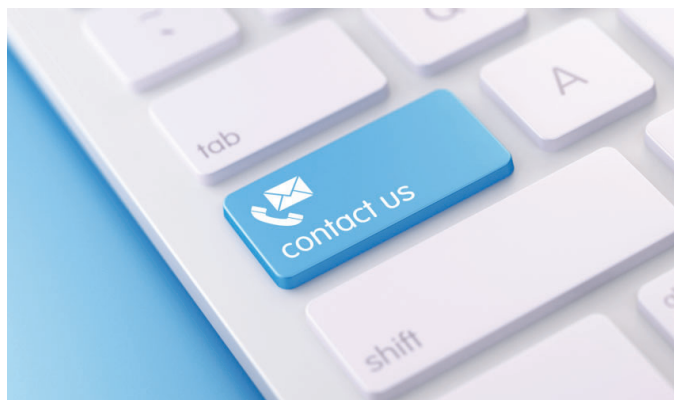
We make what matters work.

Eaton is an intelligent power management company dedicated to protecting the environment and improving the quality of life for people everywhere. We make products for the data center, utility, industrial, commercial, machine building, residential, aerospace and mobility markets. We are guided by our commitment to do business right, to operate sustainably and to help our customers manage power today and well into the future. By capitalizing on the global growth trends of electrification and digitalization, we're helping to solve the world's most urgent power management challenges and building a more sustainable society for people today and generations to come.

Founded in 1911, Eaton has continuously evolved to meet the changing and expanding needs of our stakeholders. With revenues of nearly \$25 billion in 2024, the company serves customers in more than 160 countries. For more information, visit www.eaton.com. Follow us on [LinkedIn](#).

Contact your local Eaton office

Eaton Electrical Products Limited
Unit 1, Hawker Business Park
Melton Road
Burton-on-the-Wolds
LE12 5TH
Leicestershire
United Kingdom
GBBURSales@eaton.com
www.eaton.com



Eaton Industries GmbH

Hein-Moeller-Str. 7-11
D-53115 Bonn/Germany

Eaton Electrical Products Limited

Unit 1, Hawker Business Park
Melton Road
Burton-on-the-Wolds
LE12 5TH

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

© 2022 Eaton
All Rights Reserved
PDF Only
Publication No. CA042001 EN
May 2025

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

