

## Power distribution components

- MCB Distribution boards and enclosures
- MCCB Panelboards
- Switch and protection devices
- Industrial switch and fusegear

- Enclosed motor, heating and lighting control
- HRC cartridge fuses & fuse units

# Smart solutions for electrical distribution in commercial and industrial applications



*Powering Business Worldwide*





We make what matters work.\*



At Eaton, we believe that power is a fundamental part of just about everything people do. That's why we're dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because this is what really matters. And we're here to make sure it works.

To learn more go to: [Eaton.com/whatmatters](https://www.eaton.com/whatmatters)



*Powering Business Worldwide*

**We make what matters work.**



## Contents

1	Product overview	4
2	Memshield 3 MCB distribution boards and enclosures	26
3	Distribution board switch and protection devices	41
4	Modular control and switching devices	48
5	Memshield 3 MCCB panelboards	59
6	Memshield 4 MCCB panelboards	86
7	Industrial switch & fusegear	97
8	HRC cartridge fuselinks & fuse units	109
9	Enclosed motor, heating and lighting control	118
10	Technical data	121
	Indices	179



Eaton's comprehensive range of power distribution solutions have been developed to meet today's challenging electrical sub-distribution applications in commercial and industrial buildings. Through a proven competency in electrical distribution, Eaton delivers an innovative approach to aid compliance with the wider regulatory requirements associated with modern buildings.

1.1	TYPE A, SPN 125A DISTRIBUTION BOARDS AND PAN ASSEMBLIES .....	5
1.2	TYPE B, TPN 125A/250A DISTRIBUTION BOARDS AND PAN ASSEMBLIES .....	7
1.3	TYPE B, TPN 250A DISTRIBUTION BOARDS .....	10
1.4	DISTRIBUTION BOARD METERING SOLUTIONS .....	12
1.5	DISTRIBUTION BOARD SWITCH AND PROTECTION DEVICES .....	13
1.6	MODULAR CONTROL AND SWITCHING DEVICES .....	15
1.7	MCCB PANELBOARDS AND PAN ASSEMBLIES .....	16
1.8	SURGE PROTECTION DEVICES .....	17
1.9	INDUSTRIAL SWITCH & FUSEGEAR .....	18
	Glasgow fuse-switch-disconnectors & switch-disconnectors .....	18
	Glasgow busbar chamber system .....	19
	Exel 2 switch-disconnectors & switch-disconnector fuses.....	20
	Rotary isolators and changeover switches .....	21
	Exel – distribution fuseboards .....	22
	HRC cartridge fuselinks, carriers and bases .....	23
1.10	ENCLOSED MOTOR, HEATING AND LIGHTING CONTROL .....	25





## Features & benefits


- Unique 'full form' blanking modules for unused MCB ways. Provides secure shrouding of unused busbar stabs for increased electrical safety. Blanking modules have interlinking form for improved positional security.
- Main busbar is removable for flexible installation.
- Fully shrouded Neutral busbar for increased safety.
- Choice of metering option to suit application needs and aid compliance with latest Building Regulation – part L2.
- Door opens 180° to provide easy access and device operation.
- Standard incomer Switch Disconnector rating of 125A provides higher rated solution for commercial buildings.
- Optional coupling kit available to electrically connect two distribution boards together vertically from a single supply cable to expand number of MCB ways.

## General characteristics

Eaton's Memshield 3 MCB Distribution boards have evolved through an intimate knowledge and feedback from Electrical Contractors to provide solutions to a wide range of electrical distribution applications in commercial buildings. Memshield 3 delivers safe, reliable and high performance protection of electrical power distribution systems.

Type A Distribution boards are fully type tested with a conditional short circuit rating of 15kA to BS EN 61439. Associated devices are high performance MCBs, developed for Commercial and Industrial applications, dual rated at 10kA IEC – 60898 & 15kA IEC 60947-2 in B, C or D curves.



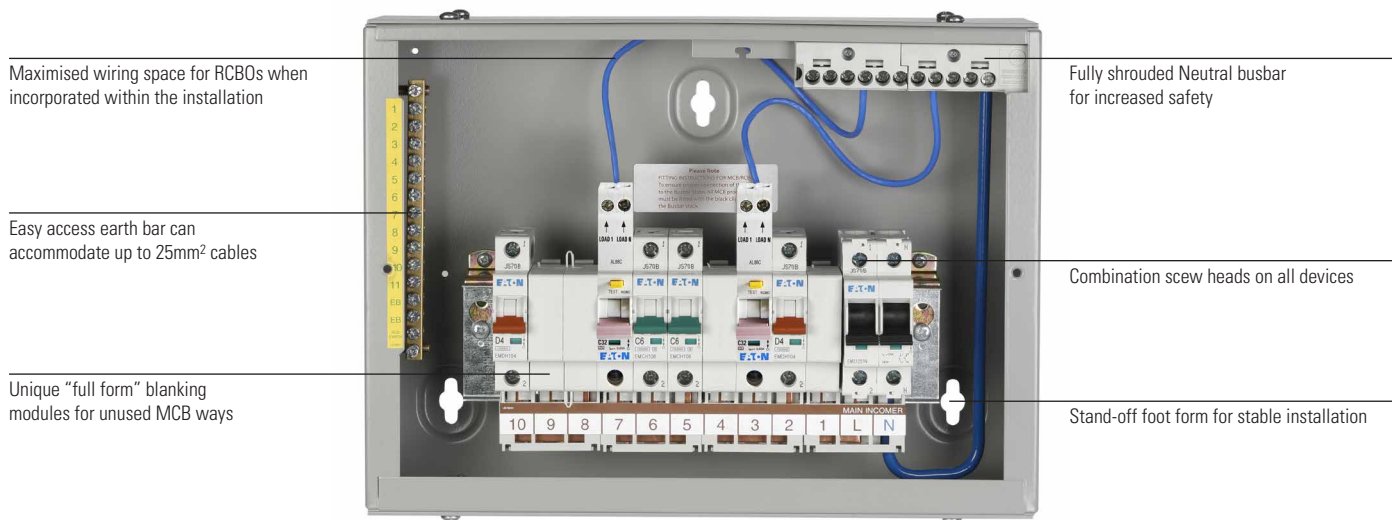

### Type A SPN distribution boards

The SPN boards are rated at 125A as standard and available in 5 sizes with a choice of 4, 7, 10, 13 and 16 single pole outgoing ways. A choice of metering solutions are available as standard, providing clear electrical consumption information as well as a permanent capability of visualising information on a variety of other electrical parameters. The metering options have been developed to provide simple solutions to aid compliance with part L2 of the Building Regulations of England and Wales. A wide range of accessories including full profile blanking modules for unused MCB ways and door locking options, enhance electrical safety, whilst clean earth kits and vertical inter-connection kits to join two boards together, improves versatility of the range.

### Type A SPN pan assemblies


The SPN pan assemblies offer a high degree of flexibility for custom applications and inclusion in other factory built assemblies. SPN types are rated at 125A and available with 4, 7, 10, 13, and 16 single pole outgoing ways.

### Incoming devices

A range of incoming options are available, with the 125A SPSN switch disconnector being the most popular. In addition, there are a number of 100A RCCB options, which provide the added security of earth fault protection, covering 30mA–300mA applications. A direct connection terminal arrangement is also available for applications not requiring local isolation. Type A distribution boards can be stacked vertically to expand the number of outgoing ways using the vertical interconnection kit. For larger SP applications, requiring more outgoing ways – see our type B distribution boards with Single phase kit options.

### Outgoing devices

For type A distribution boards, there is a choice of single pole MCBs plus RCBOs. MCBs are available in current ratings from 1A–63A, with trip types B, C and D, 10kA to IEC 60898 and 15kA to IEC 60947-2. RCBOs to IEC EN 61009 10kA are also available in a choice of trip sensitivity options from 10mA–100mA.

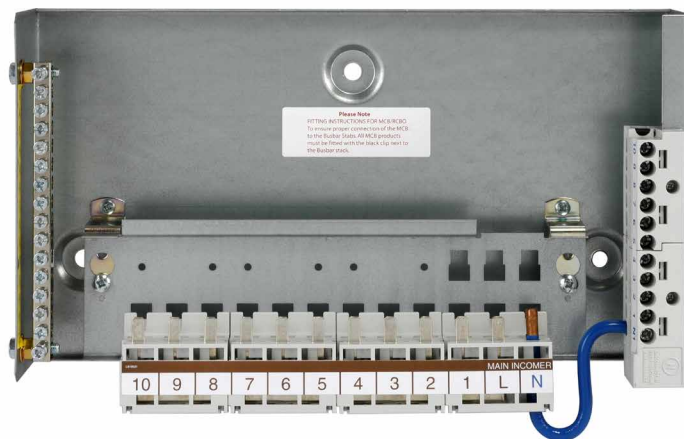





### Features & benefits

- Welded 'case end' design board with removable gland plates provides super 'stiff' construction, even with gland plates removed. Construction virtually eliminates distortion during installation, ensuring final assembly fit and alignment.
- Unique cable trunking interface kit simplifies mounting of cable trunking and protects cables.
- Improved Neutral cable clamp design for simple & secure cable connection.
- Unique 'full form' blanking modules for unused MCB ways, provides secure shrouding of unused busbar stubs for increased safety. Blanking modules have interlinking form for improved positional security.
- Removable busbar assembly to assist installation.
- Additional Functional Earthing options and Clean Earth options available.
- Auto-formed, curved construction of main cover adds to board rigidity, with improved appearance.
- Removable door aids installation and 'easy hang' hinge design makes re-attachment of door simple.
- 125A Switch Disconnecter Incomer for general commercial building applications.
- 250A options on 18 and 24 way boards.
- Compact 250A options on 18 and 24 way boards, where used with cable trunking.



### Type B, TPN 125A/250A distribution boards

## 8





#### 125A AFDD type B TPN distribution board

- The optimised design for 125A TPN applications provides a choice of boards in sizes – 14, 24 and 36 AFDD ways and are fully type tested to BS EN 61439.
- Associated devices are high performance AFDDs to IEC/EN-62606, developed for commercial and industrial applications, trip rated at 10kA up to 25A and trip rated a 6kA for 32A and 40A.
- A wide range of accessories including optional internal SPD, multi board separation kits and alignment spacer, full profile blanking modules for unused AFDD ways and door locking options.
- A choice of metering solutions are available as standard including the multi meter pack.



High performance AFDDs to IEC/EN-62606

- trip rated at 10kA up to 25A
- trip rated a 6kA for 32A and 40A

2 x 80A EVG busbars which accommodates  
incomer and AFDD feeders

125A incomer kits available as  
standard (TP and TPSN)


Boards sizes combined to  
align top and bottom

Same width (440mm) and depth (130mm)  
as the Type B Distribution board

Optional internal SPD:

- type 1&2
- type 2

## Type B, TPN 250A distribution board solutions

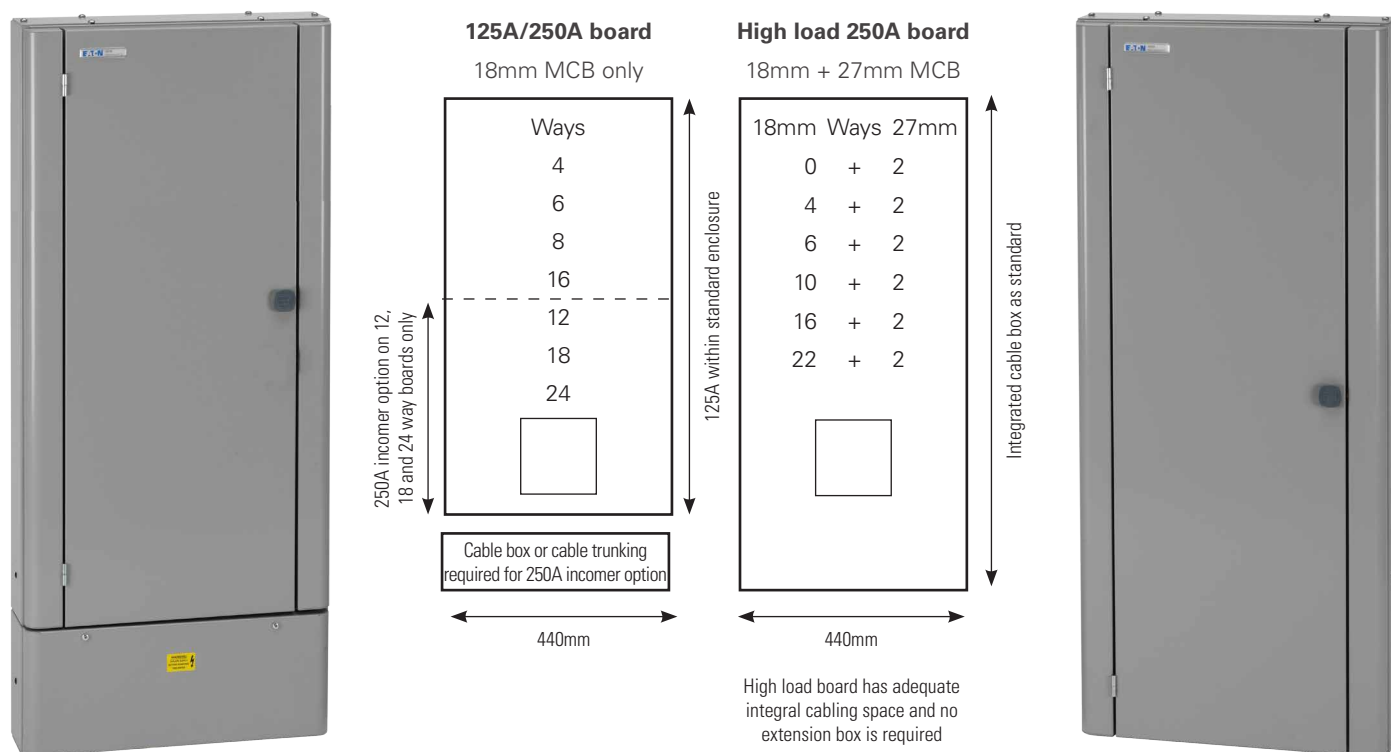

## Type B TPN 250A High Load distribution boards

Removable gland plates are provided top/bottom for ease of installation

Removable front door to aid accessibility to devices

Covers fit within enclosure dimensions allowing adjacent mounting



Modern, curved edges enhance appearance of board

Choice of SP & TP 18mm dual rated MCBs 10/15kA to IEC 60898 and IEC 60947-2 from 1A–63A

Two TP 27mm MCB ways, rated up to 125A

Secondary cover, slides over two location screws at bottom of board for easier fastening



### Type B TPN 250A High Load distribution boards

Developed to respond to the needs of modern commercial building applications, a new 250A TPN range of MCB boards delivers increased versatility by having the ability to supply and protect sub loads up to 125A. Based principally around standard 18mm MCBs and RCBOs, this range has provision for two TP 27mm MCBs, up to 125A.

Available in sizes 2, 6, 8, 12, 18 and 24 TP ways, of which two ways are dedicated to the 27mm MCBs. 27mm MCBs are available SP or TP with ratings from 20A–125A.

### Incoming devices – 250A TPN board and 18/24 way 125A board

These incomer options can be used with the 250A board or with the 18 or 24 way variant of the 125A board to provide a greater choice of solutions at 250A.

The most popular choice will be the 250A TPN switch disconnector incomer option, but other choices include a 4-pole TPN switch disconnector, a choice of MCCB incomers from 160A to 250A and a contactor controlled incomer pack. There is also a direct connection option available for applications that do not require local isolation.

### Outgoing devices

For type B distribution boards, there is a choice of single pole or triple pole MCBs plus SP and TP RCBOs. MCBs are available in current ratings from 1A–63A, with trip types B, C and D, 10kA to IEC 60898 and 15kA to IEC 60947-2. RCBOs to IEC 61009 10kA are also available in a choice of trip sensitivity options from 10mA–100mA. For the 250A “High Load” board, provision is given to accommodate a number of 27mm MCBs available in SP or TP sizes from 20A–125A to IEC 60947-2.





#### 200A TPN type B distribution board, with integrated split meter for power/lighting

- TPN distribution board with 'smart' meter for power and lighting loads.
- Unique meter design calculates net values for each busbar section and total board load.
- Meter has both Pulsed and Modbus outputs as standard.
- Embedded vt technology and RJ 11 connections at meter minimises visible wiring.
- Supplied complete with factory fitted 200A Switch Disconnector incomer switch.
- Suitable for TPN and SPN applications as supplied (shorting link included).
- Increased earthing options supplied as standard.



#### The feature packed Eaton meter packs and boards

To meet the needs of part L2 of the Building Regulations introduced in England and Wales in 2006, Eaton's Memshield 3 meter packs provide simple integration with matched aesthetics. The EBMMPCT250 employs a multi-function, DIN rail mounted meter to measure electrical parameters on LV supplies to TPN distribution boards. It can also be used to meter single-phase loads. The unit is supplied complete with CTs and wiring terminals. This version is suitable for 100A–250A applications and as well as a pulsed output for kWh, the meter can be used to monitor other parameters, including line voltage and current. Electrical connection to the associated distribution board does not occupy any of the outgoing circuits. Modbus and MID certified meter versions are also available – see page 32.

The **EBMMPDC120** is supplied as a 120A direct connection solution, not requiring CTs. Cabling is simple and the meter provides a pulsed output for kWh. The meter is an MID certified unit, providing clear kWh information.

Double meter pack for two standard TPN distribution boards facilitate separate monitoring of "small power" and "lighting" from one main supply.

For single phase EAM boards, a 65A meter pack provides simple integration. (Amps, kW, kWh, kVar and kVarh pulsed output, MID compliant. See page 28 for single phase EAM boards with factory fitted meters, including split power and lighting boards.)



#### Metering solutions – type A metered boards

- Type A SPN boards with integrated meter.
- Split load versions utilise a two channel meter, feeding two independent busbars and groups of MCB/RBBOs.
- Split load versions provide independent monitoring of "Power" and "Lighting" loads and total load.
- Aids compliance with Part L2 of the Building Regulations (England & Wales).
- See page 129 for dimensions.

#### Metering solutions – type B meter pack assemblies

Eaton's Memshield 3 meter packs provide simple integration with matched aesthetics. Split metering for separate small power and lighting has been added to the range to meet the needs of the L2 Regulations introduced in England and Wales in 2006. The meters provide a pulsed output for kWh and display other useful parameters, including line voltage and current. Modbus versions are also available and provide remote access to additional electrical parameters. For details refer to page 32. For dimensions refer to page 129.

#### Energy Monitoring Solutions (EMS)

EMS solutions in standard and Memshield3 enclosures can electronically capture energy data from a number of meters in an installation. These need to be ordered as factory built assemblies.



#### Multi Meter Pack

- The Multi meter pack allows a 250A supply to be split between multiple EBM boards, but still be metered as a single or combined supply. This allows a single supply to be split and metered between power, lighting, mechanical services, etc. at different customer required currents. As many as 4 load cables per phase can be fitted which then pass through the CTs and on to their prospective EBM boards.
- Optional MCB Load Protection. Protective devices EM\*S and EM\*H can be added to protect the load circuits. The board can disperse a maximum current of 250A which can be split between a combination of load protecting MCBs.
- The double meter pack is set up with a single plug and play double input meter, 2 CTs and the voltage tap off fuse block, all pre-wired.
- The quad meter pack is setup as the double but with an extra CT and a quad input meter instead of the double input meter. (A further CT can be added if required).
- Optional internal SPD kit available.





### Miniature circuit breakers (MCBs)















The Eaton range of 10kA/15kA high performance miniature circuit breakers (MCBs) have been designed to meet the latest UK, European and international standards, with ratings from 1A up to 63A.

The Eaton miniature circuit breakers are designed and tested in accordance with BS EN 60898 and are available in B, C and D characteristic curve as standard.

Technical characteristics

- Modular design, DIN rail mountable.
- 1, 2, 3, and 4-pole MCBs for commercial and Industrial applications.
- Rated breaking capacity 10kA to IEC 60898 and 15kA to IEC 60947-2.
- Rated currents from 1–63A in B, C and D characteristics.
- Positive contact indication.
- Box clamp barrier to prevent incorrect cable/busbar insertion.
- Calibrated at 40° C.
- Can be used with both pin and comb type busbars.
- Suitable for use in Eaton Memshield 3 distribution boards and a wide range of other applications.

Toggle colour for commercial MCBs changes dependant on the rating as shown below:

	< 2A		16A
	2A		20A
	4A		25A
	6A		32A
	8A		40A
	10A		50A
	13A		63A



### Residual current circuit breakers with overcurrent protection (RCBOs)

The Eaton range of combined residual current circuit breakers with integral overload protection (RCBOs), combine the highest level of protection for both people and circuits for both single phase / single module and three phase / four module devices. Fully comply to IEC 61009.

Technical characteristics – single phase RCBOs

- Available from 6A to 45A in types B and C trip characteristics with a choice of 10mA, 30mA, and 100mA trip sensitivities.
- Compact modular design, DIN rail mountable, one module wide.
- Suitable for use in Memshield 3 single and three phase distribution boards.
- Unswitched neutral.
- Positive contact indication.
- Rated breaking capacity 10kA.
- Trip test button.



### Residual current circuit breakers (RCCBs)

The Eaton range of residual current circuit breakers without integral overload protection (RCCBs), provide protection solutions to a wide range of applications.

The Eaton range of 2 and 4-pole RCDs are available with 10mA, 30mA, 100mA and 300mA sensitivities, and can be equipped with a wide range of modular accessories

Technical characteristics

- Modular design, DIN rail mountable, 2 or 4 modules wide.
- Double and four pole RCD for commercial and industrial applications.
- Rated short circuit capacity 10kA with fuse back up.
- Trip sensitivities 10, 30, 100 and 300mA.
- Positive contact indication.
- Test trip button.
- Rated currents from 16–100A.

Technical characteristics – three phase RCBOs

- Options from 6A to 32A in type B, C, and D trip characteristics with a choice of 30mA, 100mA, and 300mA trip sensitivities.
- Compact modular design, DIN rail mountable, four modules wide.
- Suitable for use in Memshield 3 three phase distribution boards.
- Unswitched neutral.
- Positive contact and earth fault trip indication.
- Rated breaking capacity 10kA.
- Trip test button.



The RCBO takes up 4 pole ways in a 3-phase distribution board, i.e. L1 / L2 / L3 and the 4th pole of the device fits over, and is insulated from, the L1 phase position of the neighbour circuit. Therefore the neighbour circuit only has two phase circuits available for single phase circuit feeds.



### Arc Fault Detection Devices (AFDD+)

Eaton's range of AFDD's combine the functionality of an MCB, RCD and AFDD in one package designed in accordance to IEC/EN 62606 & IEC/EN 61009. Ratings are available up to 40A with B & C curve characteristics and 30mA sensitivity. Devices are available in current types A.

#### Features include:

- Variable installation of N on either left or right
- Tripped indication : MCB, RCCB or AFDD with LED indication of arc faults
- Permanent self monitoring including over heating and over voltage
- Rated breaking capacity up to 10kA (6kA above 25A)





### Switches and Twilight Switches

Timers & Twilight Switches are applied in any residential, commercial and industrial buildings wherever automatic control is required on predefined times and/or depending on daylight intensity.

The Eaton range comprises of a wide variety of different products which include analogue Timers, digital Timers, Twilight Switches and Staircase Timers.

These Timers can either be controlled by a 50 Hz netsynchronisation, quartz control and time synchronisation or using the DCF signal or GPS antenna, which guarantees 100% accuracy at all times. Except for net-synchronised timers all units do have self power reserve to secure the time setting and program storage in case a power interruption does occur.

Dedicated computer software and memory cards are available to support the programming of our most advanced timers.

Automatic summer and winter time, holiday and random switching programs complete the functionality of our range.

Twilight Switches are supplied with a remote light sensor, which can be easily installed on the outside wall where the required light intensity threshold can be simply adjusted on the modular device itself.

### Technical characteristics (depending on type)

- Modular design.
- Analogue and digital timers.
- Time adjustment by 50 Hz net, quartz control, DCF<sup>1)</sup> or GPS signal reception<sup>2)</sup>
- Manual override switching function.
- Power reserve for all quartz and DCF or GPS driven switches.
- Remote Light Sensor for Twilight Switching.

### Benefits

- Easily programmable on front of device.
- Computer aided programming software available.
- Compact 18 mm design for restricted space opportunities.
- Separate IP40 covers are available for direct wall mounting.
- High level of accuracy.
- Automatic summer and winter time adjustment.
- Holiday & Random program settings.
- High power reserve up to 10 years.

**Notes:** 1) Automatic calculation of sunrise and sunset times throughout the year, including the possibility of astro times + / -2 hour shift.  
2) The DCF-signal can only be received within a 1000 km radius.



### Contactors and impulse switches

Contactors are frequently applied for switching of lamp loads, fans or pumps in both utility as well as industrial areas.

Eaton's "CR" contactors are very specific due to the applied operating coil and the construction of the main contacts. All contactors with ac/dc coils ensure silent operation which is further enhanced by a low power consumption.

Optimal contacts and low heat dissipation guarantee a long lifetime of the contactor which is available in a wide range of characteristics.

### Technical characteristics

- Designed according to IEC 60947-4-1 and IEC 61095 standards.
- Suitable for applications in general control, heating & lighting applications.
- Available in 20, 25, 40 & 63 A ratings with up to 4-pole contacts.
- Optional add-on auxiliary contact available.
- DIN modular profile.
- Spacers available to extend lifetime (it is recommended to use 1 spacer between every 2 contactors installed).
- Day/night contactors available with manual override function.

### Advantages of Eaton contactors

- Low inrush power for all ac/dc types.
- Availability of combined ac/dc type contactors ensure silent operation.
- Contactors of ac/dc coil type are operable on both ac and dc voltage. The 20 A and 25 A versions are also available with ac coil. All combined ac/dc type versions are equipped with surge protection on the operating coil.
- Equipped with contact indication.
- Optimal quality of contacts and low heat dissipation ensure a long life time.

### The feature packed Memshield 3 MCCB panelboard distribution system

A complete range of MCCB panelboards and pan assemblies providing all the options you need from a straightforward panelboard to a comprehensive panelboard system. The range now offers a variety of incoming devices and a greater choice of outgoing ways to provide more flexibility and choice to the user.

- 250A, 400A, 630A & 800A panelboard versions available.
- Can be configured for incomer device at top of panelboard.
- 3 or 4 pole incoming devices can be fitted.
- 4 to 18 outgoing TP ways.
- Outgoing MCCBs up to 400A, available in 25, 36 and 50kA breaking capacity.
- All TP & 4P MCCBs have adjustable thermal and magnetic trip units as standard except for 630A and 800A incomer MCCBs which are fixed thermal / adjustable magnetic trip. MCCBs with additional trip unit functionality are available to special order:
  - Distribution circuit protection, electronic.
  - Motor protection, thermal/magnetic.
  - Motor protection, electronic.
  - Motor protection without overload release.
  - Selective (discriminative) and generator protection, electronic.
- Enclosure degree of protection IP3X (wall-mounted)
- Form 2b type 2 segregation.
- Form 3b type 2 segregation - with finger guards fitted.
- Tin-plated busbar systems throughout the range.
- Incoming and outgoing metering options to ensure Part L2 Building Regulations compliance. Plug-in cabling system provides for faster and error-proof installation.
- Reliable & safe operation assured through DEKRA testing & certification.
- Wide range of extension boxes, metering, surge protection, and earth leakage incomer options available.
- Versatile solution, accommodating different frame size outgoing MCCBs to best match application needs.
- Enhanced safety through fully shrouded incoming devices, to protect against contact with live parts.
- Blanking plates finger protect unused outgoing ways.



Option to remove top and bottom cross rails provides the ability to lay cables into the board instead of feeding them through the gland plate aperture, resulting in big time savings.



### The brand-new Memshield 4 MCCB 4-pole panelboard system up to Form 4 / Type 6

A Eaton's 4-pole panelboard system combines highest levels of electrical safety in a late stage with increased efficiency and reduced downtime thanks to system components available off the shelf.

Memshield 4 is cost effective, customizable and optimized to speed up change-over time and the fitting of additional circuits. High levels of separation and compartmentalisation enabling increased operator safety. Design and layout are perfectly coordinated with the existing Memshield 3 panelboard range.

- 400A and 800A panelboard versions available.
- The design suits for top or bottom incomer configuration.
- 4-pole fully shrouded IPXXB plug-in busbar assembly.
- Efficient design enables multiple number of outgoing options (SPN, TPN, 4P) of different frame sizes
- Compact off the shelf panelboard system as well as MCCBs.
- Minimize the gap between small switchboards / factory-built-assemblies and well established Memshield 3 MCCB 3-pole panelboard system







### Surge protection devices (SPD) for MCB distribution boards and MCCB panelboards

In order to enable designers, specifiers, and installers to comply with surge protection requirements in BS 7671:2018 - IET Wiring Regulations - 18th Edition (Section 534), Eaton has a combined lightning current and surge arrester, as well as an individual surge arrester to provide a coordinated solution for lightning protection and surge suppression fully tested to BS EN 62305. This range of coordinated enclosed kits provides peace of mind that all equipment has comprehensive transient overvoltage protection caused by lightning strokes and switching in low voltage systems.

#### Surge arrester protection for distribution boards

**EM3SSK1T2** (SPN distribution boards) & **EM3SSK3T2 / EBMAFDDSPDT2 / EBMMPSLSPDT2** (PN distribution boards) technical summary:

- For the protection of low voltage distribution systems against transient overvoltage caused by indirect lightning strike and switching operations.
- The 3+1 circuit offers a universal solution for surge protection in low voltage distribution systems.
- Suitable for TT- and TN-S systems according to IEC 60364-5-53 Clause 534.
- IEC 61643-11 class II tested SPD.
- EN 61643-11 type 2 SPD



#### Combined lightning arrester and surge arrester protection for distribution boards and panelboards

**EM3SSK3T12 / EBMAFDDSPDT12 / EBMMPSLSPDT12** (TPN distribution boards) & **EPBN1SPD123 / EM4PBSPD34** (panelboards) technical summary:

- Lightning protection classes III and IV in accordance with IEC 62305.
- For the protection of low voltage distribution systems against transient overvoltage caused by direct and indirect lightning strike and switching operations.
- Application according to IEC 60364-5-53 Clause 534.
- IEC 61643-11 combined class I and II tested SPD.
- EN 61643-11 combined type 1 and 2 SPD.

#### Combined lightning arrester and surge arrester protection for panelboards

**EPBN1SPD1234 / EM4PBSPD1234** (panelboards) technical summary:

- Lightning protection classes I, II, III and IV in accordance with IEC 62305.
- For the protection of low voltage distribution systems against direct lightning strike into the overhead power supply line or external lightning protection system and against indirect lightning stroke and switching operations.
- Application according to IEC 60364-5-53 Clause 534.
- IEC 61643-11 combined class I and II tested SPD.
- EN 61643-11 combined type 1 and 2 SPD.
- No discharge of ionised gases during operation.



### Glasgow fuse-switch-disconnectors & switch-disconnectors

For many years, the Glasgow product name has been synonymous with quality, trust and reliability and as part of our long standing commitment to its tried and tested design we've reinvested for the future by re-tooling the whole range. All units are supplied with fuselinks or switchlinks fitted. Glasgow fuse switch disconnectors and switch disconnectors meet the constructional requirements for isolation of and are type tested to BS EN 60947-3. Conditional short circuit current rating tests at a value of 80kA rms Ue 415V have been carried out with Eaton HRC fuses fitted. Five frame sizes are available to provide a range from 63A to 800A, with utilisation category AC22A and AC23A Ue 415V ratings. Switch-disconnectors fitted with copper links give assigned AC20A Ui 660V and AC21A Ue 415V ratings. All units have retractable operating handles which drive overcentre mechanisms incorporating powerful operating springs. Opening and closing of the switches is thus independent of the action of the operator. Moving contact assemblies can be removed to facilitate installation or for contact inspection or renewal. Flag "on-off" indication is provided and terminal cover shields prevent contact with live metal. TPSN indicates triple-pole and switched neutral, the neutral pole making first and breaking last. Rated Insulation Voltage Ui 660V.

### Enclosures

Surface-mounting enclosures comprise heavy gauge steel body plates incorporating cast iron frame members and are rustprotected, with a light grey paint finish (RAL7004). Front access doors, which are detachable, are fitted with dust-excluding gaskets and are interlocked to prevent opening when the switch is 'on'. The interlock can be defeated by a competent person for maintenance purposes. Operating handles may be locked in both the 'on' and 'off' positions. Castell type interlocks can be supplied to special order. Internal fixing holes allow units to be mounted closely side by side and all models have removable top and bottom end plates. These are pierced for connections, divided into front and rear (fixed) portions to simplify cabling using Eaton's MEM series split-type cable boxes, and provided with undrilled cover plates.

### Fuses

Glasgow units are designed for use with HRC cartridge fuse links to BS88: Part 2. 63A and 100A units employ off-set contact fuse links. Details of suitable types of HRC cartridge fuse links are listed on page 101. All performance tests have been carried out using Eaton BS88 fuselinks.

### Motor ratings

The motor ratings assigned to TPN switch-disconnector units are utilisation category AC23A (frequent operation) to BS EN 60947-3, which calls for make and break testing at 10 and 8 times rated current respectively for units having a motor rating up to and including 100 Amps. Ratings for switch-disconnector-fuses are dependent on suitable HRC fuses being fitted.

### Auxiliary equipment

A comprehensive range of extension boxes and spreader boxes is available. Units are fitted with HRC Fuselinks of maximum rating but will accept fuselinks of a lower rating, refer to the Paramount HRC Fuselinks section on page 101. SPSN and TPSN indicate switched neutral. Neutral makes first and breaks last. If DP fuse-switch-disconnectors are required, use SPSN and replace the supplied switch link with a compatible fuselink.

### Definitions of utilisation category

AC20a – Connecting and disconnecting under no load condition.

AC21a – Switching of resistive loads including moderate overloads.

AC22a – Switching of mixed resistive and inductive loads including moderate overloads.

AC23a – Switching of motor, or other high inductive loads.

### Cable extension boxes

Fabricated sheet steel boxes can be fitted top/bottom of Glasgow switch units to provide additional space for spreading multi-core PVC insulated cables with solid aluminium conductors and for some larger cables with stranded copper conductors. For 1–3PCB, a plain flame retardant plywood plate is provided for fitting between the box and switch unit, the steel endplate supplied fitted to the switch unit being used on the box's cable entry side. For 4PCB, a plain steel plate is provided for cable entry on box. The switch enclosure has 8mm thick insulated endplates fitted both ends. For 5–6PCB, a 10mm thick insulated plate is provided for cable entry on box. The switch enclosure has 10mm thick insulated endplates fitted both ends, 5PCB includes a flame-retardant plywood packer for fitting between PCB and switch unit's endplate to provide lid flange clearance.

### Spreader boxes

Cast metal split pattern, supplied with fixing bolts and plain bushes. Two types are available, suitable for straight or angled entry. They permit conductor spreading of larger PVC cables and fit directly on to Glasgow fuse-switch-disconnectors and switch-disconnectors.

### Glasgow busbar chamber system

Eaton's busbar chamber system is designed to provide either compact, wall-mounting installations or – by using optional pedestal sets – easily assembled switchboards. Every facility is provided to enable Eaton's switchgear and distribution gear to be mounted easily and economically to busbar chambers which can be applied either to a suitable load-bearing vertical surface; or, by means of a pedestal set, affixed to a vertical surface which need not be load-bearing.

### Busbar chambers

These are produced in 100, 200, 400, 630 and 800 Amp. ratings and in four nominal lengths. 100, 200 and 400 Amp units are available in all four sizes; 630 and 800 Amp ratings are offered in the three longest units only. All units in the range share the same height and depth dimensions. Similarly the twin busbars are located in precisely the same positions throughout the range and vary in size only in their front-to-back dimensions according to rating. Detachable end plates enable all units to be extended by coupling to a second busbar chamber using extension sets. Both top and bottom plates are also readily detachable so that marking out and machining can be carried out conveniently on a bench to accommodate Eaton's switchgear either above or below the chamber. Complete mounting kits, including templates, are available for mounting all Exel and Glasgow switchgear. Eaton chambers are fabricated from rust-protected sheet steel with a light grey paint finish. They have been type tested to BS EN 61439 with a rated conditional short circuit current rating of 63kA at Ue 550V and a rated short-time withstand current Icw 20 times nominal rated current for one second. They are designed for use in factory-built assemblies to BS EN 61439. All chambers are subjected to an on-line dielectric test unit which provides a high voltage test between poles; and from poles to earth. Earth continuity is also tested. Rated insulation voltage 660V.

### Connection sets for Glasgow fuse-switch-disconnectors & switch-disconnectors

Cable clamps covering all ratings are available for switchgear up to 200A. For connecting Glasgow units of 160A and above, solid copper connection sets are recommended as cost effective and convenient. These comprise pre-formed, insulated links in 4-pole sets supplied with all necessary clamps and fasteners. The appropriate switchgear mounting set (41, 51 or 61 BBMS) must be used with connection sets for 160–800A Glasgow units.

### Busbar cable clamps and sockets

Incoming main cable clamps or sockets are not supplied due to the wide range which would be necessary to meet all requirements. Busbar cable clamps comprise plated brass U-clamps and steel slides with all bolts and washers. They are suitable for the connection of small solid or stranded copper conductors and also aluminium conductors using a barrier grease. Busbar cable sockets are plated brass castings complete with clamps and fixings, suitable for the termination of either copper or aluminium conductors. Both clamps and sockets allow for clamping on the busbars without drilling. For cabling direct on to busbars of 630–800A rating a special cable extension is required which can be made to special order.

### Switchgear mounting sets

Available for all ratings of Exel switch-disconnectors/switchdisconnector fuses and Glasgow fuse-switch disconnectors and switchdisconnectors enabling these units to be mounted simply and efficiently either above or below the busbar chamber. Each mounting set comprises a template with instructions for machining the top/bottom plate of the busbar chamber; clamping channels, ready pierced for fasteners; all necessary fastenings; and, for Glasgow units, insulated shields and switch filler plates where appropriate.







### Exel 2 switch-disconnectors & switch-disconnector fuses

Exel 2 switch disconnectors and switch-disconnector fuses meet the constructional requirements for isolation of and are type tested to BS EN 60947-3. Switches are of the quick make and break type, suitable for use on AC or DC. Units have removable moving contact assemblies to facilitate wiring. Exel 2 surface-mounting enclosures are fabricated from rust-protected sheet steel with a light grey paint finish. Removable blank top and bottom end plates (except for 20 and 32A top end plates which incorporate knockouts) and gasket doors give IP41 protection. Chromium-plated front operated handles, with “ON (I) OFF (O)” indication, and internal fixing enabling units to be mounted closely side by side. Interiors comprise porcelain bases fitted with non-ferrous conducting components.

### Fuses and fuse carriers

HRC fuse carriers are designed for offset contact fuse links to BS 88: Part 2. Eaton HRC fuse links fitted to switch-disconnector-fuses are suitable on systems up to 415V AC. Eaton fuses used in these products are also suitable for 250V DC systems. All performance tests have been carried out using Eaton BS88 fuselinks. Units are fitted with HRC Fuselinks of maximum rating but will accept fuselinks of a lower rating, refer to the Paramount HRC Fuselinks section on page 101. HRC pattern switchfuses are fitted with type SCH carriers (20A, 32A, 63A-moulded; 100A, 125A-porcelain).

### Motor ratings

The motor ratings assigned to TPN switch-disconnector units are utilisation category AC23A (frequent operation) to BS EN 60947-3, which calls for make and break testing at 10 and 8 times rated current respectively for units having a motor rating up to and including 100 Amps. Ratings for switch-disconnector-fuses are dependent on suitable HRC fuses being fitted.

### Cable size

Maximum cable sizes are: 20A–6mm<sup>2</sup>, 32A–10mm<sup>2</sup>, 63A–35mm<sup>2</sup>, 100/125A–70mm<sup>2</sup>.

### Type test compliance with standards

This range has been satisfactorily type-tested in accordance with BS EN 60947-3 with Eaton HRC fuselinks fitted.



### Rotary isolators

#### Local switch-disconnectors standard duty, 20–63A, IP65, 3, 3+N, 6, and 8 poles

Complying with IEC/EN 60947-3, VDE 0660, and IEC/EN 60204, the surface mounting range of rotary switch disconnectors are suitable for on load switching of general distribution a.c. power circuits and infrequent duty motor isolation.

Light grey, moulded silicon and halogen free thermoplastic enclosures provide protection to IP65 making them suitable for most indoor and outdoor environmental conditions.

These compact isolators are fitted with red/yellow operating handles padlockable in the 'OFF' position with up to three padlocks.

The enclosure design allows for easy access for cabling. Solid neutral and earth termination points are a standard feature.



### Changeover switches

#### 20-63A, IP65, 4 pole

Suitable for on-load control of alternative supplies. Surface mounted, 4 pole on-load changeover switches have a rated voltage of 690V.

Switches comply with IEC/EN 60947-3, VDE 0660, IEC/EN 60204.

In all cases ample cable space is provided for both incoming and outgoing cables. Each unit is provided with an insulated IP65 black handle which may be padlocked in the 'OFF' position. Clear 'ON' (I) and 'OFF' (O) indication is provided.



## Exel – distribution fuseboards

The Exel fuseboard range is available with standard enclosures to IP4X for the complete range of 20A to 200A distribution boards. A variety of extra features have been incorporated in the range including increased cabling space, superior door latches and locking devices (there is a choice of barrel lock or padlocking device), improved lid hinges and a unique safety carrier which effectively blanks off a single fuse-way allowing the circuit to be worked on in safety. Safety carriers have no provision for accepting a fuselink. The Exel distribution fuse boards are designed to comply with the requirements of BSEN 61439-2. All phase parts are fully shrouded so that additional circuits may be wired and connected in safety whilst the existing circuits remain live and on load. The type of enclosure available gives protection to IP4X and is supplied with removable endplates. The range covers a wide variety of ratings from 20–200A; 20A and 32A with up to 12 ways in SPN and TPN configurations; 63A up to 8 ways, 100A up to 8 ways and 200A 4 way in TPN configurations. All ratings available with moulded HRC carriers to BS88: Part 2. Testing has been carried out using Eaton 'S' type HRC fuselinks. Fuse base mouldings are of high quality thermosetting material. The fuse units have skirted fuse carriers to prevent accidental contact with live parts when inserting or withdrawing a carrier. Separate shields are provided for the base contacts to prevent accidental contact when the carrier has been withdrawn. All fuseboards are suitable for systems with a rated insulation voltage  $U_e$  660V AC, 500V DC.

## Safety carriers

A range of safety carriers are available for insertion in a fusebase when its normal fuse carrier has been removed for isolation. The safety carriers are marked yellow for identification and have no provision for fuselink fixing.

## Enclosures

Rust protected sheet steel IP4X enclosures have a light grey paint finish and are fitted with internal fixing holes. Enclosures have a robust, reliable construction. Enclosures for units from 20A to 100A are of all welded construction, 200A IP4X units have cast corner pieces. Removable top and bottom endplates incorporate knockouts on 20A and 32A units while 63–200A boards have blank endplates. Blank endplates are available on request for 20A and 32A boards. The enclosure allows gasketed access doors to be reversed for left hand or right hand opening. All sides are free from external projections and fuseboards can be mounted in inverted form if required.

## Main terminations

32A, 2-way fuseboards have the main phase termination (tunnel type) attached to the fusebanks. All other fuseboards have the main terminations mounted on the back of the enclosure and are intended for use with cable sockets (sweating or crimp type) which are not provided. Busbar and main terminals are fully shrouded. A cable shroud to cover the cable socket is provided.

## Earthing and neutral bars

Multi-way earthing bars are fitted with an integral earth bolt and have an outgoing terminal per fuse. They are rail mounted adjacent to the fully rated neutral bars. Neutral bars have main terminals of the same capacity as the phase terminals and have one outgoing terminal per fuse. Earth/neutral bar rails are fitted at the bottom of enclosures on 20A and 32A fuseboards and at the top on all others.



### HRC cartridge fuselinks, carriers and bases



Eaton's comprehensive range offers a selection of fuses to cater for many applications: Compact 415V a.c. S type industrial fuselinks complying with BS EN 60269-1 (BS88 – 1) or BS88 – 2 with ratings from 2 to 1250A. Skilful design techniques have meant that power dissipation has frequently been reduced despite the significant reduction in barrel size. Many ratings have also been tested for use in circuits up to 250V d.c.

Compact 415V a.c. S type motor circuit protection fuselinks complying with BS EN 60269-1 (BS88 – 1) or BS88 – 2 with ratings from 20M25A to 400M500A. This extended range of fuselinks is designed to withstand the inrush current associated with direct on line start motors whilst saving cost on the size of equipment to which they are fitted by virtue of their small dimensions.

Compact 240V and 415V a.c. SS, SN and SP type offset blade contact fuselinks complying with BS EN 60269-1 (BS88 – 1) or BS88 – 6 with ratings from 2 to 63A for use in industrial and commercial installations.

Compact 415V a.c. J type feeder pillar fuselinks complying with BS88 – 2 (formerly BS88: Part 5) for use by the Electricity Supply Industry in distribution systems. Ratings from 63–400A with 82mm fixing centres and 63–800A with 92mm fixing centres for wedge tightening contacts and 63–250A in ferrule form for single phase pole mounted cut outs.

Eaton HRC fuselinks are manufactured to exacting standards using precision assembly methods and undergo rigorous quality checking before dispatch including resistance testing all production. This ensures that performance will be consistent and conform with published characteristics within close tolerances. Type tests on Eaton equipment have been performed using Eaton fuselinks.

Eaton industrial and general purpose fuselinks have a breaking range and utilisation category gG which replaces the old class Q1 fusing factor. "g" indicates a full range breaking capacity fuselink and "G" indicates a fuselink for general application.

Eaton motor circuit protection fuselinks have a breaking range and utilisation category gM indicating a full range breaking capacity fuselink for the protection of motor circuits. These fuselinks have a dual current rating separated by the letter "M".

The lower current rating is the maximum continuous rating which also determines the rating and size of equipment to which the fuse is fitted. The higher current rating is the time current characteristic of the fuselink which determines its ability to withstand the motor starting current. Their selection frequently permits the use of lower rated switch and/or fusegear than would be the case using gG fuselinks with a consequent cost saving. Type gG fuselinks however may still be used and are the preferred option for assisted start motors where starting currents are reduced.

Eaton fuselinks are designed and manufactured in accordance with a Quality Management System in accordance with ISO 9001. Most fuselinks are ASTA Certified for a breaking capacity of 80kA at 415V a.c. and are endorsed ASTA 20 CERT showing compliance with the rules of the ASTA 20 scheme which includes assessment of the Quality Management System to ISO 9002 and detailed auditing of fuselink manufacture.

Eaton have for many years participated in developing and influencing fuse standards through BEAMA and BSI at national level and IEC at international level and therefore are able to produce designs incorporating forthcoming changes to standards.

**Fuse carriers and bases – specification**

A range of moulded HRC fuse units designed to accept bolt-in and clip-in HRC fuselinks.

Each unit is fully shrouded to prevent accidental contact with live parts when inserting or withdrawing a carrier and once the carrier has been removed completely.

The carrier and base mouldings are manufactured from high quality thermosetting material.

Units accepting bolt-in HRC fuselinks are available in ratings of 20, 32, 63, 100 and 200A and can be supplied in front connected, front/busbar connected, front/back connected and back connected versions.

They are designed to comply with BS88 – 2 and are suitable for systems up to 660V. Suitable HRC fuselinks are also to BS88 – 2. A full range of neutral links is available.

Those units which accept the clip-in fuselinks are rated at 32A and 63A, 415V.

They comply with BS88 – 2 and accept clip-in HRC fuselinks to the same standard.

Clip-in type units allow fuselinks to be replaced very simply – no tools are required. Fuselinks are removed from the carrier using side pressure on the fuselink end tags while replacement involves a simple push fit only.

Terminal capacities: 20A 6mm<sup>2</sup>, 32A 16mm<sup>2</sup>, 63A 35mm<sup>2</sup>, 100A 70mm<sup>2</sup>, 200A 150mm<sup>2</sup>.

Fuse units are available in four types:

Type A – providing for busbar connection at one end and cable termination at the other.

Type B – providing for cable connection at each end.

Type C – with back connecting studs.

Type D – providing for cable connection at one end with back connecting stud at the other.

Fuse units have been ASTA certified to BS88 – 2 and are suitable for systems up to 660V.

100A fuse units may be fitted with AAO, BAO or OSD fuselinks having 73mm fixing centres if used with adaptor **100MFLK**.

Eaton's wide range of Motor Control Gear and Heating and Lighting Control equipment is an integral part of our single source commitment.

Since the late 1920's we have built countless motor starters, fitted and trusted by generations of contractors, while the increasing requirements of our markets have led us to constantly update and expand our ADS range to allow for an increased choice of current ratings and ingress protection.

This wealth of experience and expertise in the design and manufacture of Motor Control Gear is mirrored by our Heating and Lighting range which offers a versatile and comprehensive choice.

#### Standards

- IEC 60947-4-1
- VDE 0660
- IEC 60269
- BS EN 60947-4-1

#### ADS8 AC motor starters



##### Enclosures – moulded

- 9kW DOL max
- Tough polycarbonate in grey provides high IP protection to IP65
- Start and stop pushbuttons
- Internal earth terminals
- Cable entries – 20mm knockouts for M20 threaded glands

##### Enclosures – metalclad

- Attractively styled rust protected pressed steel finished in grey polyester powder paint
- Start and mushroom-headed stop pushbuttons
- Substantial earth terminal
- Cable entries – 20mm knockouts for M20 threaded glands

##### Switch-disconnectors

- Means of isolation and switching for mechanical maintenance
- Padlocking facility available
- Isolators type tested for on-load disconnection
- Interlocked with main cover

##### Overload relays

- Adjustable thermal pattern connected directly to contactor
- Ambient temperature compensated between -40°C to +60°C
- Phase failure sensitive relays
- Changeover trip contact
- Simple Auto-reset

##### Contactors

- Modern block type
- 6–15 x 106 mechanical and 1.5 x 106 electrical operations – AC3 duty.
- Provisions for fitting additional auxiliary contacts either N/O or N/C – depending on version

##### Optional fittings and specials

- Provision for various optional fitments on standard starters
- Special starter arrangements





Eaton's Memshield 3 MCB distribution boards have evolved through an intimate knowledge and feedback from electrical contractors, consulting engineers and end users to provide solutions to a wide range of electrical distribution applications in commercial buildings. Memshield 3 delivers safe, reliable and high performance protection of electrical power distribution systems in accordance with BS EN 61439.

## 2.1 TYPE A SPN DISTRIBUTION BOARDS

125A SPN, type A distribution boards .....	27
Incoming devices .....	27
Meterpack assemblies .....	27
Surge protection devices .....	27
Outgoing devices, MCBs & RCBOs .....	28
General accessories .....	29

## 2.2 TYPE B TPN DISTRIBUTION BOARDS

125A TPN, type B distribution boards .....	30
125A Incomer kits .....	30
250A TPN, type B distribution boards .....	30
250A Incomer kits .....	31
Split metered power and lighting board .....	31
Surge protection devices .....	31
125 TPN, type B AFDD distribution boards .....	32
Meterpack assemblies .....	33
Multi meterpack assemblies .....	33
Outgoing devices, MCBs, RCBOs & AFDDs .....	34
General accessories .....	37

## 2.3 MODULAR ENCLOSURES

Enclosure accessories .....	38
-----------------------------	----

## 2.4 MCB PAN ASSEMBLIES

.....	39
-------	----

See page 128 for technical data and overall dimensions

EAM10



### 125A SPN, type A distribution boards

- When more than 16 SP ways are required, see our TPN board ranges, complete with single phase kit options
- Enclosure degree of protection IP3X (wall-mounted)

Description	Rating (A)	Total no. of outgoing ways	Eaton list number
4 way SPN, type A distribution board	125	4	<b>EAM4</b>
7 way SPN, type A distribution board	125	7	<b>EAM7</b>
10 way SPN, type A distribution board	125	10	<b>EAM10</b>
13 way SPN, type A distribution board	125	13	<b>EAM13</b>
16 way SPN, type A distribution board	125	16	<b>EAM16</b>

EAMS1251N



### Incoming devices for SPN, type A distribution boards

- Incoming devices supplied separate to distribution board

Description	Rating (A)	Poles	Sensitivity (mA)	Eaton list number
Switch-disconnector	125	SPSN	—	<b>EAMS1251N</b>
RCCB incoming device for SPN, type A distribution board	90	1P+N	30	<b>EAMS100HE</b>
RCCB incoming device for SPN, type A distribution board	90	1P+N	100	<b>EAMS100ME</b>
RCCB incoming device for SPN, type A distribution board	90	1P+N	300	<b>EAMS100LE</b>
Direct connection kit for SPN, type A distribution board	100	1P+N	—	<b>EAMBT1002</b>

EAMMP65



### Metered SPN, type A distribution boards & standard meter packs

- Type A SPN boards, fitted with multifunction meters, can display; Amps, kW, kWh, kVar and kVarh pulsed output etc.
- Split load versions utilise a two channel meter, feeding two independent busbars and groups of MCB/RCBOs
- Split load versions provide independent monitoring of “Power” and “Lighting” loads and total load.
- Aids compliance with Part L2 of the building regulations (England & Wales and Section 6 Scotland)
- Enclosure degree of protection IP3X (wall-mounted)

Description	Rating (A)	Total no. of outgoing ways	Installed meter, characteristics <sup>3)</sup>	Eaton list number
Meterpack for SPN, type A distribution boards	65	—	Pulsed output, kWh	<b>EAMMP65</b>
9 way SPN, type A distribution board <sup>1)</sup>	65	9	Pulsed output, kWh	<b>EAM9M</b>
9 way SPN, type A distribution board <sup>1)</sup>	65	9	Modbus	<b>EAM9MB</b>
12 way SPN, type A distribution board <sup>1)</sup>	65	12	Pulsed output, kWh	<b>EAM12M</b>
12 way SPN, type A distribution board <sup>1)</sup>	65	12	Modbus	<b>EAM12MB</b>
Split metered SPN, type A distribution board <sup>1), 2)</sup>	100	9 + 3	Pulsed output, kWh	<b>EAMSL93M</b>
Split metered SPN, type A distribution board <sup>1), 2)</sup>	100	9 + 3	Modbus	<b>EAMSL93MB</b>
Split metered SPN, type A distribution board <sup>1), 2)</sup>	100	6 + 6	Pulsed output, kWh	<b>EAMSL66M</b>
Split metered SPN, type A distribution board <sup>1), 2)</sup>	100	6 + 6	Modbus	<b>EAMSL66MB</b>

<sup>1)</sup> Includes factory fitted switch disconnector and single channel meter

<sup>2)</sup> Includes two channel meter, 65A max load per channel

<sup>3)</sup> Output type is Pulsed or Modbus

EM3SSK1T2



### Surge protection device for SPN, type A distribution boards

- See page 133 for technical data

Description	Eaton list number
Enclosed surge protection kit for SPN boards – type 2	<b>EM3SSK1T2</b>

EMDH104

**Outgoing devices, MCBs – 10/15kA, single pole**

- Trip types B, C and D
- Dual rated, 10kA to IEC 60898 and 15kA to IEC 60947-2

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	18	10/15	<b>EMBH101</b>	<b>EMCH101</b>	<b>EMDH101</b>
Miniature circuit breaker	2	18	10/15	<b>EMBH102</b>	<b>EMCH102</b>	<b>EMDH102</b>
Miniature circuit breaker	4	18	10/15	<b>EMBH104</b>	<b>EMCH104</b>	<b>EMDH104</b>
Miniature circuit breaker	6	18	10/15	<b>EMBH106</b>	<b>EMCH106</b>	<b>EMDH106</b>
Miniature circuit breaker	8	18	10/15	<b>EMBH108</b>	<b>EMCH108</b>	<b>EMDH108</b>
Miniature circuit breaker	10	18	10/15	<b>EMBH110</b>	<b>EMCH110</b>	<b>EMDH110</b>
Miniature circuit breaker	13	18	10/15	<b>EMBH113</b>	<b>EMCH113</b>	<b>EMDH113</b>
Miniature circuit breaker	16	18	10/15	<b>EMBH116</b>	<b>EMCH116</b>	<b>EMDH116</b>
Miniature circuit breaker	20	18	10/15	<b>EMBH120</b>	<b>EMCH120</b>	<b>EMDH120</b>
Miniature circuit breaker	25	18	10/15	<b>EMBH125</b>	<b>EMCH125</b>	<b>EMDH125</b>
Miniature circuit breaker	32	18	10/15	<b>EMBH132</b>	<b>EMCH132</b>	<b>EMDH132</b>
Miniature circuit breaker	40	18	10/15	<b>EMBH140</b>	<b>EMCH140</b>	<b>EMDH140</b>
Miniature circuit breaker	50	18	10/15	<b>EMBH150</b>	<b>EMCH150</b>	<b>EMDH150<sup>1)</sup></b>
Miniature circuit breaker	63	18	10/15	<b>EMBH163</b>	<b>EMCH163</b>	<b>EMDH163<sup>1)</sup></b>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMCH116R30C

**Outgoing devices, RCBOs single pole – trip type C – 30mA sensitivity**

- Eaton's range of residual current circuit breakers with integral overload protection (RCBOs), are manufactured to IEC/ EN 61009 and meet the latest European and international standards.
- For other RCBO sensitivity options refer to full details on page 45.

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type C SP	6	C	30	<b>EMCH106R30C</b>
Eaton RCBO 10A 10kA type C SP	10	C	30	<b>EMCH110R30C</b>
Eaton RCBO 16A 10kA type C SP	16	C	30	<b>EMCH116R30C</b>
Eaton RCBO 20A 10kA type C SP	20	C	30	<b>EMCH120R30C</b>
Eaton RCBO 25A 10kA type C SP	25	C	30	<b>EMCH125R30C</b>
Eaton RCBO 32A 10kA type C SP	32	C	30	<b>EMCH132R30C</b>
Eaton RCBO 40A 10kA type C SP	40	C	30	<b>EMCH140R30C</b>
Eaton RCBO 45A 10kA type C SP	45	C	30	<b>EMCH145R30C</b>

EMBH116R30C

**Outgoing devices, RCBOs single pole – trip type B – 30mA sensitivity**

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type B SP	6	B	30	<b>EMBH106R30C</b>
Eaton RCBO 10A 10kA type B SP	10	B	30	<b>EMBH110R30C</b>
Eaton RCBO 16A 10kA type B SP	16	B	30	<b>EMBH116R30C</b>
Eaton RCBO 20A 10kA type B SP	20	B	30	<b>EMBH120R30C</b>
Eaton RCBO 32A 10kA type B SP	32	B	30	<b>EMBH132R30C</b>
Eaton RCBO 40A 10kA type B SP	40	B	30	<b>EMBH140R30C</b>
Eaton RCBO 45A 10kA type B SP	45	B	30	<b>EMBH145R30C</b>

EMDL



## General accessories for SPN, type A distribution boards

### Description

Eaton list  
number

MCB blanking module – 18mm

**EMBP**

Half MCB blanking strip – 9mm

**EMABP**

Universal device lockout attachment – fits MCBs, RCCBs and RCBOs

**ASPDL**

Padlock suitable for ASPDL

**PD2**

Door barrel lock with 2 keys

**EMDL**

Door padlocking kit

**EMPL**

Padlock suitable for EMPL

**PD1**

Vertical coupling kit for connecting 2 SPN Distribution boards (125A max. total load)<sup>1)</sup>

**EAMCK**

Clean earth for A board 5 terminals

**EAME5**

Clean earth for A board 11 terminals

**EAME11**

One pole 100A single module direct connection device

**ASLTT1001**

<sup>1)</sup> Incoming device required for each linked distribution boards

EMPL





See page 128 for technical data and overall dimensions

EBM81



### 125A/250A TPN, type B distribution boards

- Enclosure degree of protection IP4X (wall-mounted)

Description	Rating (A)	Total no. of outgoing ways	Eaton list number
4 way TPN, type B distribution board	125	4	<b>EBM41</b>
6 way TPN, type B distribution board	125	6	<b>EBM61</b>
8 way TPN, type B distribution board	125	8	<b>EBM81</b>
12 way TPN, type B distribution board	125	12	<b>EBM121</b>
16 way TPN, type B distribution board	125	16	<b>EBM161</b>
12 way TPN, type B distribution board	125/225 <sup>1)</sup>	12	<b>EBM122</b>
18 way TPN, type B distribution board	125/250 <sup>1)</sup>	18	<b>EBM182</b>
24 way TPN, type B distribution board	125/250 <sup>1)</sup>	24	<b>EBM242</b>

<sup>1)</sup> 225A/250A options – if used with cable extension box or with cable trunking. See 250A incomer options below

**Note:** Maximum loading EBM122 -225A

EBM121D



### 125A SPSN, type B distribution board

- SPSN main switch disconnecter fitted
- Enclosure degree of protection IP4X (wall-mounted)

Description	Rating (A)	Total no. of outgoing ways	Eaton list number
12 way SPSN type B distribution board	125	12	<b>EBM121D</b>

EBMS1253



### 125A incomer options for type B distribution boards

- Incoming devices supplied separate to distribution board.
- Maximum Cable capacity 50mm<sup>2</sup>

Description	Rating (A)	Pole configuration	Eaton list number
Switch disconnecter	125	TP	<b>EBMS1253</b>
Switch disconnecter kit (including single phasing link)	125	SPSN	<b>EBMS1251N</b>
Switch disconnecter	125	TPSN	<b>EBMS1253N</b>
Direct connection (lugs connector)	125/250	TP	<b>EBMBT2503</b>
30mA RCCB <sup>1)</sup>	100	TPSN	<b>EBMR30</b>
100mA RCCB <sup>1)</sup>	100	TPSN	<b>EBMR100</b>
300mA RCCB <sup>1)</sup>	100	TPSN	<b>EBMR300</b>
300mA RCCB with time delay	100	TPSN	<b>EBMR300T</b>
Switch disconnecter feeding 125A TP AC1 contactor, housed in extension box	125	TP	<b>EBMCC1253</b>

<sup>1)</sup> Includes 50mm<sup>2</sup> terminal adapter

EBM62H



### 250A TPN, type B high load distribution board

- These boards include 2 TPN outgoing ways for 27mm MCB (upto 125A)
- Adequate integral cabling space means that no extension box is required.
- Enclosure degree of protection IP4X (wall-mounted)
- Fitted with door lock as standard.

Description	Rating (A)	Total no. of 18mm TP outgoing ways (63A max)	Total no. of 27mm TP outgoing ways (125A max)	Total no. of outgoing ways	Eaton list number
2 way TPN, type B distribution board	200	0	2	2	<b>EBM22H</b>
6 way TPN, type B distribution board	250	4	2	6	<b>EBM62H</b>
8 way TPN, type B distribution board	250	6	2	8	<b>EBM82H</b>
12 way TPN, type B distribution board	250	10	2	12	<b>EBM122H</b>
18 way TPN, type B distribution board	250	16	2	18	<b>EBM182H</b>
24 way TPN, type B distribution board	250	22	2	24	<b>EBM242H</b>

EBMMB250



## 250A incomer options for type B distribution boards

- Incoming devices supplied separate to distribution board.
- Where used with **EBM122** or **EBM242**, a separate cable extension box or suitable cable trunking is required
- Maximum Cable capacity 120mm<sup>2</sup>

Description	Rating (A)	Pole configuration	Eaton list number
Switch-disconnector	250	TP	<b>EBMS2503</b>
Direct connection (lugs connector)	250	TP	<b>EBMBT2503</b>
MCCB incomer kit (includes MCCB)	250	TP	<b>EBMMB250</b>
MCCB incomer kit (includes MCCB)	200	TP	<b>EBMMB200</b>
MCCB incomer kit (includes MCCB)	160	TP	<b>EBMMB160</b>
Switch disconnector feeding 250A TP AC1 contactor, housed in extension box	250	TP	<b>EBMCC2503</b>
Single phase conversion kit for 250A rated board only (requires <b>EBMS2503</b> to be ordered separately)			<b>EBMS25</b>

EBMSL642MB



## Split metered power and lighting board – 200A TPN, type B

- Includes factory fitted 200A switch disconnector and two channel meter
- Adequate integral cabling space means that no extension box is required.
- Enclosure degree of protection IP4X (wall-mounted)
- Meter has both pulsed and Modbus outputs as standard.
- Fitted with door lock as standard.
- Single phasing kit included to be used if required

Description	Rating (A)	Total no. of outgoing ways	Installed meter, characteristics	Eaton list number
Split metered TPN, type B distribution board	200	6+4	Modbus + pulsed output, kWh	<b>EBMSL642MPMB</b>
Split metered TPN, type B distribution board	200	8+6	Modbus + pulsed output, kWh	<b>EBMSL862MPMB</b>
Split metered TPN, type B distribution board	200	10+8	Modbus + pulsed output, kWh	<b>EBMSL1082MPMB</b>
Split metered TPN, type B distribution board	200	14+10	Modbus + pulsed output, kWh	<b>EBMSL14102MPMB</b>

EM3SSK3T12



## Surge protection device for type B distribution boards

- See page 133 for technical data
- Includes 63A TP type C MCB for protection/isolation

Description	Eaton list number
Enclosed surge protection kit for TPN boards – type 1&2	<b>EM3SSK3T12</b>
Enclosed surge protection kit for TPN boards – type 2	<b>EM3SSK3T2</b>

EBMAFDD141

**125A AFDD type B TPN distribution board**

- Enclosure will accept Eaton 2-pole, 3 module, AFDDs
- Optional internal SPD
- Enclosure degree of protection IP4X (wall mounted)
- Short circuit rating 10kA

see page 122 for technical data and page 125 for overall dimensions


Description	Rating (A)	Total no. of AFDD outgoing ways	Eaton List number
14 way AFDD, TPN, type B distribution board	125	14	<b>EBMAFDD141</b>
24 way AFDD, TPN, type B distribution board	125	24	<b>EBMAFDD241</b>
36 way AFDD, TPN, type B distribution board	125	36	<b>EBMAFDD361</b>

**Incomer options**

- Incomer devices supplied separately to distribution boards
- Maximum cable capacity 50mm<sup>2</sup>

Description	Rating (A)	Pole configuration	Eaton List number
Switch Disconnecter - 4 pole	125	TPSN	<b>EMS1253N</b>
Switch Disconnecter - 3 pole	125	TP	<b>EMS1253</b>
Neutral link kit - required when using 3 pole device	125		<b>EBMAFDDN</b>

EBMAFDDSPDT2

**Surge Protection Device for AFDD distribution board**

- Includes 63A TPN type C MCB for protection and isolation
- Includes all connecting cables and fixings

Description	Eaton List number
Surge protection kit for AFDD DB - type 2	<b>EBMAFDDSPDT2</b>
Surge protection kit for AFDD DB - type 1&2	<b>EBMAFDDSPDT12</b>

**Accessories for AFDD distribution board**

Description	Eaton List number
Separation shield - to separate boards mounted on top of each other.	<b>EBMAFDDSS</b>
Single phasing kit	<b>EBMAFDDSP</b>
Multi board alignment spacer - 20mm	<b>EBMAFDDSS20</b>

EBMMPCT250



## Meterpack assemblies – TPN, type B distribution boards

Description	Rating (A) (total load)	Installed meter, characteristics	Eaton list number
Meterpack for TPN, type B distribution boards	250	Pulsed output, kWh	<b>EBMMPCT250</b>
Meterpack for TPN, type B distribution boards	250	Modbus + pulsed output, kWh	<b>EBMMPCT250M</b>
Meterpack for TPN, type B distribution boards	250	MID certified meter	<b>EBMMPCT250MID</b>
Double meterpack for 2 x TPN, type B distribution boards	250	Pulsed output, kWh	<b>EBMMPSL250</b>
Double meterpack for 2 x TPN, type B distribution boards	250	Modbus + pulsed output, kWh	<b>EBMMPSL250M</b>
Double meterpack for 2 x TPN, type B distribution boards	250	MID certified meter	<b>EBMMPSL250MID</b>
Double meterpack for 2 x TPN, type B distribution boards	125	Pulsed output, kWh	<b>EBMMPSL125</b>
Double meterpack for 2 x TPN, type B distribution boards	125	Modbus + pulsed output, kWh	<b>EBMMPSL125M</b>
Double meterpack for 2 x TPN, type B distribution boards	125	MID certified meter	<b>EBMMPSL125MID</b>
Meterpack for TPN, type B distribution boards	120	MID certified meter	<b>EBMMPDC120</b>

EBMMPSL250MID



## Multi meterpack assemblies

- Delivered as 250A lugs incomer
- Feed off load side terminals with up to 4 load cables per phase to multiple boards (not supplied).
- Optional load side protective devices EM\*S and EM\*H can be added to the load circuits (not supplied).
- Load cables can be grouped and passed through the CTs to suit metering requirements which allows a 250A supply to be split between multiple boards but still be metered as single or combined load.
- 2 or 4 channel input meter provided.
- 2 or 3 CTs provided (can add 4th in RH side of Multi meter pack or in adjoining boards).
- Optional internal SPD
- Short circuit rating 10kA

see page 122 for technical data and page 130 for overall dimensions

Description	Rating (A) (Total Load)	Installed meter characteristics	Eaton List number
Multi meterpack - double	250	MID certified meter	<b>EBMMPSL250DMID</b>
Multi meterpack - quad	250	Modbus + pulsed output	<b>EBMMPSL250QM</b>

EBMMPSLSPDT12



## Surge protection device for MMP

- Includes 63A TP type C MCB for protection and isolation and all connecting cables and fixings

Description	Eaton List number
Surge protection kit for Multi meter packs - type 2	<b>EBMMPSLSPDT2</b>
Surge protection kit for Multi meter packs - type 1&2	<b>EBMMPSLSPDT12</b>

## Accessories

Description	Eaton List number
Bridging spacer H50xW880 - to provide larger cabling space to feed parallel boards	<b>EBMMPSLS50</b>

## Optional 3P MCB load protection

Protective devices EM\*S and EM\*H can be added to protect the load circuits. The board can disperse a maximum current of 250A which can be split between a combination of MCBs – see table below.

EM\*S - 125A 27mm 3P MCB = 81mm wide

EM\*H - 63A 18mm 3P MCB = 54mm wide

Available space on din rail = 272mm.

### Maximum Thermal Ratings

LUGS Incomer = 250A max

EM\*S - 125A 27mm MCB = 102A max

EM\*H - 63A 18mm MCB = 55A max

Required Load cables: Tri-Rated to BS 6231

125A MCB = 50mm<sup>2</sup>

63A MCB = 16mm<sup>2</sup>

## Possible 3P MCB Combinations:

Number of protected circuits

2	3	3	3	3	4	4	4	5
EM*S +	EM*S	EM*S	EM*S	EM*H	EM*S	EM*S	EM*H	EM*H
EM*S +	EM*S	EM*S	EM*H	EM*H	EM*S	EM*H	EM*H	EM*H
	EM*S	EM*H	EM*H	EM*H	EM*H	EM*H	EM*H	EM*H
					EM*H	EM*H	EM*H	EM*H
212A	250A	250A	212A	165A	250A	250A	220A	250A

Protective device's maximum combined current

+ 106A if only 2 devices (this includes all load MCBs)



EMDH104

**Outgoing devices – MCBs – 10/15kA, single pole**

- Trip types B, C and D
- Dual rated, 10kA to IEC 60898 and 15kA to IEC 60947-2

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	18	10 /15	<b>EMBH101</b>	<b>EMCH101</b>	<b>EMDH101</b>
Miniature circuit breaker	2	18	10 /15	<b>EMBH102</b>	<b>EMCH102</b>	<b>EMDH102</b>
Miniature circuit breaker	4	18	10 /15	<b>EMBH104</b>	<b>EMCH104</b>	<b>EMDH104</b>
Miniature circuit breaker	6	18	10 /15	<b>EMBH106</b>	<b>EMCH106</b>	<b>EMDH106</b>
Miniature circuit breaker	8	18	10 /15	<b>EMBH108</b>	<b>EMCH108</b>	<b>EMDH108</b>
Miniature circuit breaker	10	18	10 /15	<b>EMBH110</b>	<b>EMCH110</b>	<b>EMDH110</b>
Miniature circuit breaker	13	18	10 /15	<b>EMBH113</b>	<b>EMCH113</b>	<b>EMDH113</b>
Miniature circuit breaker	16	18	10 /15	<b>EMBH116</b>	<b>EMCH116</b>	<b>EMDH116</b>
Miniature circuit breaker	20	18	10 /15	<b>EMBH120</b>	<b>EMCH120</b>	<b>EMDH120</b>
Miniature circuit breaker	25	18	10 /15	<b>EMBH125</b>	<b>EMCH125</b>	<b>EMDH125</b>
Miniature circuit breaker	32	18	10 /15	<b>EMBH132</b>	<b>EMCH132</b>	<b>EMDH132</b>
Miniature circuit breaker	40	18	10 /15	<b>EMBH140</b>	<b>EMCH140</b>	<b>EMDH140</b>
Miniature circuit breaker	50	18	10 /15	<b>EMBH150</b>	<b>EMCH150</b>	<b>EMDH150<sup>1)</sup></b>
Miniature circuit breaker	63	18	10 /15	<b>EMBH163</b>	<b>EMCH163</b>	<b>EMDH163<sup>1)</sup></b>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMCH310

**Outgoing devices – MCBs – 10/15kA, three pole**

- Trip types B, C and D
- Dual rated, 10kA to IEC 60898 and 15kA to IEC 60947-2

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	54	10/15	<b>EMBH301</b>	<b>EMCH301</b>	<b>EMDH301</b>
Miniature circuit breaker	2	54	10/15	<b>EMBH302</b>	<b>EMCH302</b>	<b>EMDH302</b>
Miniature circuit breaker	4	54	10/15	<b>EMBH304</b>	<b>EMCH304</b>	<b>EMDH304</b>
Miniature circuit breaker	6	54	10/15	<b>EMBH306</b>	<b>EMCH306</b>	<b>EMDH306</b>
Miniature circuit breaker	8	54	10/15	<b>EMBH308</b>	<b>EMCH308</b>	<b>EMDH308</b>
Miniature circuit breaker	10	54	10/15	<b>EMBH310</b>	<b>EMCH310</b>	<b>EMDH310</b>
Miniature circuit breaker	13	54	10/15	<b>EMBH313</b>	<b>EMCH313</b>	<b>EMDH313</b>
Miniature circuit breaker	16	54	10/15	<b>EMBH316</b>	<b>EMCH316</b>	<b>EMDH316</b>
Miniature circuit breaker	20	54	10/15	<b>EMBH320</b>	<b>EMCH320</b>	<b>EMDH320</b>
Miniature circuit breaker	25	54	10/15	<b>EMBH325</b>	<b>EMCH325</b>	<b>EMDH325</b>
Miniature circuit breaker	32	54	10/15	<b>EMBH332</b>	<b>EMCH332</b>	<b>EMDH332</b>
Miniature circuit breaker	40	54	10/15	<b>EMBH340</b>	<b>EMCH340</b>	<b>EMDH340</b>
Miniature circuit breaker	50	54	10/15	<b>EMBH350</b>	<b>EMCH350</b>	<b>EMDH350<sup>1)</sup></b>
Miniature circuit breaker	63	54	10/15	<b>EMBH363</b>	<b>EMCH363</b>	<b>EMDH363<sup>1)</sup></b>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMCS1100

**Outgoing devices (for 250A high load distribution board only) – MCBs, single pole**

Rated current In (A)	Width (mm)	Short circuit rating (IEC/EN 60947-2)	Eaton list number Trip type B	Trip type C	Trip type D
20	27	25kA	<b>EMBS120</b>	<b>EMCS120</b>	<b>EMDS120</b>
32	27	25kA	<b>EMBS132</b>	<b>EMCS132</b>	<b>EMDS132</b>
40	27	25kA	<b>EMBS140</b>	<b>EMCS140</b>	<b>EMDS140</b>
50	27	25kA	<b>EMBS150</b>	<b>EMCS150</b>	<b>EMDS150</b>
63	27	25kA	<b>EMBS163</b>	<b>EMCS163</b>	<b>EMDS163</b>
80	27	20kA	<b>EMBS180</b>	<b>EMCS180</b>	<b>EMDS180</b>
100	27	20kA	<b>EMBS1100</b>	<b>EMCS1100</b>	<b>EMDS1100</b>
125	27	15kA	<b>EMBS1125</b>	<b>EMCS1125</b>	–

EMCS3125



## Outgoing devices (for 250A high load distribution board only) – MCBs, three pole

Rated current In (A)	Width (mm)	Short circuit rating (IEC/EN 60947-2)	Eaton list number Trip type B	Trip type C	Trip type D
20	81	25kA	EMBS320	EMCS320	EMDS320
32	81	25kA	EMBS332	EMCS332	EMDS332
40	81	25kA	EMBS340	EMCS340	EMDS340
50	81	25kA	EMBS350	EMCS350	EMDS350
63	81	25kA	EMBS363	EMCS363	EMDS363
80	81	20kA	EMBS380	EMCS380	EMDS380
100	81	20kA	EMBS3100	EMCS3100	EMDS3100
125	81	15kA	EMBS3125	EMCS3125	–

EMCH116R30C



## Outgoing devices, RCBOs single pole – trip type C – 30mA sensitivity

- Eaton's range of residual current circuit breakers with integral overload protection (RCBOs), are manufactured to IEC/EN 61009 and meet the latest European and international standards.
- For other RCBO sensitivity options refer to full details on page 45.

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type C SP	6	C	30	EMCH106R30C
Eaton RCBO 10A 10kA type C SP	10	C	30	EMCH110R30C
Eaton RCBO 16A 10kA type C SP	16	C	30	EMCH116R30C
Eaton RCBO 20A 10kA type C SP	20	C	30	EMCH120R30C
Eaton RCBO 25A 10kA type C SP	25	C	30	EMCH125R30C
Eaton RCBO 32A 10kA type C SP	32	C	30	EMCH132R30C
Eaton RCBO 40A 10kA type C SP	40	C	30	EMCH140R30C
Eaton RCBO 45A 10kA type C SP	45	C	30	EMCH145R30C

EMBH116R30C



## Outgoing devices, RCBOs single pole – trip type B – 30mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type B SP	6	B	30	EMBH106R30C
Eaton RCBO 10A 10kA type B SP	10	B	30	EMBH110R30C
Eaton RCBO 16A 10kA type B SP	16	B	30	EMBH116R30C
Eaton RCBO 20A 10kA type B SP	20	B	30	EMBH120R30C
Eaton RCBO 25A 10kA type B SP	25	B	30	EMBH125R30C
Eaton RCBO 32A 10kA type B SP	32	B	30	EMBH132R30C
Eaton RCBO 40A 10kA type B SP	40	B	30	EMBH140R30C
Eaton RCBO 45A 10kA type B SP	45	B	30	EMBH145R30C

187204



## Outgoing AFDD 2-pole (3 Module)

- Arc Fault Detection Device acc. to IEC/EN-62606
- Trip types B and C
- Fully combined with residual current circuit breaker (RCCB) and miniature circuit breaker (MCB)

Description	Rating (A)	Short circuit rating (kA)	Trip type	Eaton article number
10A B 2P 30mA Type A	10	10	B	187168
13A B 2P 30mA Type A	13	10	B	187180
16A B 2P 30mA Type A	16	10	B	187204
20A B 2P 30mA Type A	20	10	B	187219
25A B 2P 30mA Type A	25	10	B	187225
32A B 2P 30mA Type A	32	6	B	187231
40A B 2P 30mA Type A	40	6	B	187237
10A C 2P 30mA Type A	10	10	C	187174
13A C 2P 30mA Type A	13	10	C	187186
16A C 2P 30mA Type A	16	10	C	187210
20A C 2P 30mA Type A	20	10	C	187222
25A C 2P 30mA Type A	25	10	C	187228
32A C 2P 30mA Type A	32	6	C	187234
40A C 2P 30mA Type A	40	6	C	187240

169639

**Outgoing devices, 10kA 3P +N RCBOs**


- Conditionally surge current-proof 250A.
- Sensitivity type A, providing protection against AC and pulsating DC earth fault currents.
- Trip types B, C, and D
- Trip sensitivity 30mA, 100mA or 300mA

Description Characteristic B	Rating (A)	Sensitivity (mA)	Type designation	Eaton list number
3P+N RCBO 10A 10kA trip B	10	30	mRBM4-10/3/B/003-A-UK-PT	<b>169636</b>
3P+N RCBO 13A 10kA trip B	13	30	mRBM4-13/3/B/003-A-UK-PT	<b>169637</b>
3P+N RCBO 16A 10kA trip B	16	30	mRBM4-16/3/B/003-A-UK-PT	<b>169638</b>
3P+N RCBO 20A 10kA trip B	20	30	mRBM4-20/3/B/003-A-UK-PT	<b>169639</b>
3P+N RCBO 10A 10kA trip B	10	100	mRBM4-10/3/B/01-A-UK-PT	<b>169670</b>
3P+N RCBO 13A 10kA trip B	13	100	mRBM4-13/3/B/01-A-UK-PT	<b>169671</b>
3P+N RCBO 16A 10kA trip B	16	100	mRBM4-16/3/B/01-A-UK-PT	<b>169584</b>
3P+N RCBO 20A 10kA trip B	20	100	mRBM4-20/3/B/01-A-UK-PT	<b>169585</b>
3P+N RCBO 10A 10kA trip B	10	300	mRBM4-10/3/B/03-A-UK-PT	<b>169598</b>
3P+N RCBO 13A 10kA trip B	13	300	mRBM4-13/3/B/03-A-UK-PT	<b>169599</b>
3P+N RCBO 16A 10kA trip B	16	300	mRBM4-16/3/B/03-A-UK-PT	<b>169600</b>
3P+N RCBO 20A 10kA trip B	20	300	mRBM4-20/3/B/03-A-UK-PT	<b>169601</b>

Description Characteristic C	Rating (A)	Sensitivity (mA)	Type designation	Eaton list number
3P+N RCBO 6A 10kA trip C	6	30	mRBM4-6/3/C/003-A-UK-PT	<b>169640</b>
3P+N RCBO 10A 10kA trip C	10	30	mRBM4-10/3/C/003-A-UK-PT	<b>169641</b>
3P+N RCBO 13A 10kA trip C	13	30	mRBM4-13/3/C/003-A-UK-PT	<b>169642</b>
3P+N RCBO 16A 10kA trip C	16	30	mRBM4-16/3/C/003-A-UK-PT	<b>169643</b>
3P+N RCBO 20A 10kA trip C	20	30	mRBM4-20/3/C/003-A-UK-PT	<b>169644</b>
3P+N RCBO 25A 10kA trip C	25	30	mRBM4-25/3/C/003-A-UK-PT	<b>169645</b>
3P+N RCBO 32A 10kA trip C	32	30	mRBM4-32/3/C/003-A-UK-PT	<b>169646</b>
3P+N RCBO 6A 10kA trip C	6	100	mRBM4-6/3/C/01-A-UK-PT	<b>169586</b>
3P+N RCBO 10A 10kA trip C	10	100	mRBM4-10/3/C/01-A-UK-PT	<b>169587</b>
3P+N RCBO 13A 10kA trip C	13	100	mRBM4-13/3/C/01-A-UK-PT	<b>169588</b>
3P+N RCBO 16A 10kA trip C	16	100	mRBM4-16/3/C/01-A-UK-PT	<b>169589</b>
3P+N RCBO 20A 10kA trip C	20	100	mRBM4-20/3/C/01-A-UK-PT	<b>169590</b>
3P+N RCBO 25A 10kA trip C	25	100	mRBM4-25/3/C/01-A-UK-PT	<b>169591</b>
3P+N RCBO 32A 10kA trip C	32	100	mRBM4-32/3/C/01-A-UK-PT	<b>169592</b>
3P+N RCBO 6A 10kA trip C	6	300	mRBM4-6/3/C/03-A-UK-PT	<b>169602</b>
3P+N RCBO 10A 10kA trip C	10	300	mRBM4-10/3/C/03-A-UK-PT	<b>169603</b>
3P+N RCBO 13A 10kA trip C	13	300	mRBM4-13/3/C/03-A-UK-PT	<b>169604</b>
3P+N RCBO 16A 10kA trip C	16	300	mRBM4-16/3/C/03-A-UK-PT	<b>169605</b>
3P+N RCBO 20A 10kA trip C	20	300	mRBM4-20/3/C/03-A-UK-PT	<b>169606</b>
3P+N RCBO 25A 10kA trip C	25	300	mRBM4-25/3/C/03-A-UK-PT	<b>169607</b>
3P+N RCBO 32A 10kA trip C	32	300	mRBM4-32/3/C/03-A-UK-PT	<b>169608</b>

Description Characteristic D	Rating (A)	Sensitivity (mA)	Type designation	Eaton list number
3P+N RCBO 6A 10kA trip D	6	30	mRBM4-6/3/D/003-A-UK-PT	<b>169647</b>
3P+N RCBO 10A 10kA trip D	10	30	mRBM4-10/3/D/003-A-UK-PT	<b>169648</b>
3P+N RCBO 13A 10kA trip D	13	30	mRBM4-13/3/D/003-A-UK-PT	<b>169649</b>
3P+N RCBO 16A 10kA trip D	16	30	mRBM4-16/3/D/003-A-UK-PT	<b>169650</b>
3P+N RCBO 20A 10kA trip D	20	30	mRBM4-20/3/D/003-A-UK-PT	<b>169651</b>
3P+N RCBO 25A 10kA trip D	25	30	mRBM4-25/3/D/003-A-UK-PT	<b>169652</b>
3P+N RCBO 6A 10kA trip D	6	100	mRBM4-6/3/D/01-A-UK-PT	<b>169593</b>
3P+N RCBO 10A 10kA trip D	10	100	mRBM4-10/3/D/01-A-UK-PT	<b>169594</b>
3P+N RCBO 13A 10kA trip D	13	100	mRBM4-13/3/D/01-A-UK-PT	<b>169618</b>
3P+N RCBO 16A 10kA trip D	16	100	mRBM4-16/3/D/01-A-UK-PT	<b>169619</b>
3P+N RCBO 20A 10kA trip D	20	100	mRBM4-20/3/D/01-A-UK-PT	<b>169620</b>
3P+N RCBO 25A 10kA trip D	25	100	mRBM4-25/3/D/01-A-UK-PT	<b>169621</b>
3P+N RCBO 6A 10kA trip D	6	300	mRBM4-6/3/D/03-A-UK-PT	<b>169609</b>
3P+N RCBO 10A 10kA trip D	10	300	mRBM4-10/3/D/03-A-UK-PT	<b>169610</b>
3P+N RCBO 13A 10kA trip D	13	300	mRBM4-13/3/D/03-A-UK-PT	<b>169611</b>
3P+N RCBO 16A 10kA trip D	16	300	mRBM4-16/3/D/03-A-UK-PT	<b>169612</b>
3P+N RCBO 20A 10kA trip D	20	300	mRBM4-20/3/D/03-A-UK-PT	<b>169613</b>
3P+N RCBO 25A 10kA trip D	25	300	mRBM4-25/3/D/03-A-UK-PT	<b>169614</b>

EMBP



## General accessories, type B

Description	Eaton list number
MCB blanking module – 18mm	<b>EMBP</b>
Half MCB blanking strip – 9mm	<b>EMABP</b>
MCB blanking module – 27mm	<b>EMBPH</b>
Universal device lockout attachment – fits MCBs, RCCBs and RCBOs	<b>ASPD</b>
Lockout attachment for 27mm MCBs	<b>ASPD27</b>
Lockout attachment for 250A switch/MCCB	<b>131669</b>
Shunt trip 230-240V AC for 250A switch/MCCB	<b>158056</b>
Undervoltage release 230-240V AC for 250A switch/MCCB	<b>158053</b>
Padlock suitable for ASPD & ASPD27	<b>PD2</b>
Door barrel lock with 2 keys	<b>EMDL</b>
Door padlocking kit	<b>EMPL</b>
Padlock suitable for EMPL	<b>PD1</b>
Top/bottom gland plate	<b>EBMGP4</b>
IP42 gland plate kit	<b>EMGP142</b>
Cable trunking interface kit	<b>EBMTK</b>
Spare way label 12 way – pack of 5	<b>EBLB1</b>
Spare way label 18 way – pack of 5	<b>EBLB2</b>

EBMTK



EBMXPC1



## Cable extension boxes, type B

Description	Box height	Eaton list number
Cable spreader extension box	180mm	<b>EBMXPC1</b>
Cable spreader extension box	250mm	<b>EBMXPC2</b>

EBMNE8



## High integrity/clean earth kit

Description	No. of ways	Eaton list number
High integrity/clean earth kit for type B Board	8	<b>EBMNE8</b>

**Note:** Up to 4 high integrity earth bars can be fitted to a type B distribution board



EBMXDC9



### Modular enclosures

- Modular enclosures will accept MCBs, RCCBs, RCBOs, fuse modules and command control products.
- Modular enclosures **EBMXDC6** to **EBMXDC45** are fitted with earth and neutral bars as standard.
- Modular enclosures **EBMXDC15** and **EBMXDCG15** have same profile width suitable for mounting onto type A, SPN distribution board **EAM13** or any type B, TPN distribution board.

See page 129 for technical data and overall dimensions.

Description	Capacity in 18mm modules	Glazed door	Eaton list number
Modular enclosure, 15 module din rail – glazed door	15	Yes	<b>EBMXDCG15</b>
Modular enclosure, 6 module din rail – unglazed door	6	No	<b>EBMXDC6</b>
Modular enclosure, 9 module din rail – unglazed door	9	No	<b>EBMXDC9</b>
Modular enclosure, 15 module din rail – unglazed door	15	No	<b>EBMXDC15</b>
Modular enclosure, 18 module din rail – unglazed door	18	No	<b>EBMXDC18</b>
Modular enclosure, 2 x 15 module din rail – unglazed door	30	No	<b>EBMXDC30</b>
Modular enclosure, 3 x 15 module din rail – unglazed door	45	No	<b>EBMXDC45</b>
Half MCB blanking strip – 9mm	–	–	<b>EMABP</b>

EBMXE15



### Enclosure accessories

Description	Eaton list number
Additional earth bar (15 additional holes)	<b>EBMXE15</b>
Door barrel lock with 2 keys	<b>EMDL</b>
Door padlocking kit	<b>EMPL</b>
Padlock suitable for <b>EMPL</b>	<b>PD1</b>

### Distribution boards type A and type B – cable capacities

Cable capacities	Type A	Type B
125A switch disconnecter	50mm <sup>2</sup>	50mm <sup>2</sup>
100A RCCB (type A = 90A)	35mm <sup>2</sup>	50mm <sup>2</sup>
250A switch disconnecter	–	120mm <sup>2</sup> (+ M8 lugs)
160A–250A MCCB incomer	–	250A = 120mm <sup>2</sup> (+ M8 lugs)
100A direct connection kit	35mm <sup>2</sup>	–
250A direct connection lugs	–	120mm <sup>2</sup> (+ M8 lugs)
125A contactor incomer	–	50mm <sup>2</sup>
250A contactor incomer	–	120mm <sup>2</sup> (+ M8 lugs)
Enclosure earth stud	M6	M8
Incoming earth terminal	25mm <sup>2</sup>	125A = 25mm <sup>2</sup> , 250A = 70mm <sup>2</sup>
Incoming neutral terminal	90/100A = 35mm <sup>2</sup> , 125A = 50mm <sup>2</sup>	125A = 50mm <sup>2</sup> , 250A = 120mm <sup>2</sup> (+ M8 lugs)
Outgoing earth terminal	25mm <sup>2</sup>	25mm <sup>2</sup>
Outgoing neutral terminal	25mm <sup>2</sup>	25mm <sup>2</sup>

**Interiors & incoming devices for single phase and three phase**

Eaton MCB pan assemblies offer a high degree of flexibility for custom applications. SPN types are available with 4, 7, 10, 13, and 16 ways. TPN types are available with 4, 6, 8, 12, 18 and 24 ways.

**Technical characteristics**

- Eaton MCB pan assemblies are suitable for inclusion in other factory built assemblies and as replacements for distribution board interiors.
- MCB pan assemblies feature fully shrouded busbars.

See pages 131 for the technical details of Eaton MCB pan assemblies.

EAMP10

**125A SPN type A pan assemblies with earth & neutral bars**

Description	Rating (A)	Total no. of outgoing ways	Eaton list number
4 way SPN, type A pan assembly	125	4	<b>EAMP4</b>
7 way SPN, type A pan assembly	125	7	<b>EAMP7</b>
10 way SPN, type A pan assembly	125	10	<b>EAMP10</b>
13 way SPN, type A pan assembly	125	13	<b>EAMP13</b>
16 way SPN, type A pan assembly	125	16	<b>EAMP16</b>

EAMS1251N

**Incoming devices for SPN, type A pan assemblies**

- Incoming devices supplied separate to pan assembly

Description	Rating (A)	Poles	Sensitivity (mA)	Eaton list number
Switch-disconnector	125	SPSN	—	<b>EAMS1251N</b>
RCCB	100	1P+N	30	<b>EAMS100HE</b>
RCCB	100	1P+N	100	<b>EAMS100ME</b>
RCCB	100	1P+N	300	<b>EAMS100LE</b>
Direct connection kit	100	1P+N	—	<b>EAMBT1002</b>

EBMP61

**125A/250A TPN type B pan assemblies with earth & neutral bars**

Description	Rating (A)	Total no. of outgoing ways	Eaton list number
4 way TPN, type B pan assembly	125	4	<b>EBMP41</b>
6 way TPN, type B pan assembly	125	6	<b>EBMP61</b>
8 way TPN, type B pan assembly	125	8	<b>EBMP81</b>
12 way TPN, type B pan assembly	125	12	<b>EBMP121</b>
12 way TPN, type B pan assembly	225	12	<b>EBMP122</b>
18 way TPN, type B pan assembly	250	18	<b>EBMP182</b>
24 way TPN, type B pan assembly	250	24	<b>EBMP242</b>

EBMS1253

**125A incomer options for type B pan assemblies**

- Incoming devices supplied separate to pan assembly
- Maximum cable capacity Isolator 50mm<sup>2</sup> and RCCB 35mm<sup>2</sup>

Description	Rating (A)	Pole configuration	Eaton list number
Switch disconnector	125	TP	<b>EBMS1253</b>
Switch disconnector kit (including single phasing link)	125	SPSN	<b>EBMS1251N</b>
Switch disconnector	125	TPSN	<b>EBMS1253N</b>
Direct connection (lugs connector)	250	TP	<b>EBMBT2503</b>
30mA RCCB	100	TPSN	<b>EBMR30</b>
100mA RCCB	100	TPSN	<b>EBMR100</b>
300mA RCCB	100	TPSN	<b>EBMR300</b>
300mA RCCB with time delay	100	TPSN	<b>EBMR300T</b>

EBMMB250

**250A incomer options for type B pan assemblies**

- Incoming devices supplied separate to pan assembly
- Maximum Cable capacity 120mm<sup>2</sup>

Description	Rating (A)	Pole configuration	Eaton list number
Switch-disconnector	250	TP	<b>EBMS2503</b>
Direct connection (lugs connector)	250	TP	<b>EBMBT2503</b>
MCCB incomer kit (includes mCCB)	250	TP	<b>EBMMB250</b>
MCCB incomer kit (includes MCCB)	200	TP	<b>EBMMB200</b>
MCCB incomer kit (includes mCCB)	160	TP	<b>EBMMB160</b>
Single phase conversion kit for 250A rated board only (requires <b>EBMS2503</b> to be ordered separately)			<b>EBMS25</b>

**Memshield Spares**

Description	Art.no.	Eaton list number
MSHD3 BUSBAR END SHIELD	Y7-195812	<b>EBMSH4083SP</b>
MSHD3 B N/E 4/6/8W SHIELD	Y7-195813	<b>EBMSH4084SP</b>
MSHD3 B 250A MCCB INT SHIELD	Y7-195814	<b>EBMSH4087SP</b>
MSHD3 B 250A MCCB TERM SHIELD	Y7-195815	<b>EBMSH4088SP</b>
MSHD3 B N/E 12/18W SHIELD	Y7-195816	<b>EBMSH4091SP</b>
MSHD3 B N/E 24W SHIELD	Y7-195817	<b>EBMSH4092SP</b>
MSHD3 B 250A SMART METER LINK SHIELD	Y7-195818	<b>EBMSH4099SP</b>
MSHD3 DOOR HANDLE	Y7-195819	<b>EBMDHSP</b>
M3 COMBINED METER -PULSED AND MODBUS	Y7-195820	<b>EBMMT39SP</b>
M3 3-PH ENERGY METER EM210 M045 PULSED	Y7-195821	<b>EBMMT45SP</b>
M3 3-PH ENERGY METER EM210 M046 MODBUS	Y7-195822	<b>EBMMT46SP</b>
M3 3-PH ENERGY METER EM210 PFBID MID	Y7-195823	<b>EBMMT47SP</b>
M3 TAPTITE SCREWS M5x8 S/SLOT PHD ENIB ST	Y7-195824	<b>EBMSC3844SP</b>



Eaton provides a comprehensive range of modular solutions for circuit protection and control. Eaton's 10/15kA MCBs are high performance current limiting devices with the ability to disconnect overloads and short circuits. They are available with trip types B, C and D with many features of benefit to all customers. RCBOs with overload protection combine protection for people and circuits in a single module width device where space is at a premium.

Double pole and four pole RCCBs are available in a range of current ratings and four trip sensitivities, 10, 30, 100 and 300mA.

3.1	MINIATURE CIRCUIT BREAKERS (MCBs) .....	42
3.2	RESIDUAL CURRENT CIRCUIT BREAKERS (RCCBs) .....	44
3.3	RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION (RCBOs) .....	45
3.4	ACCESSORIES .....	47



# 3.1

## Distribution board switch and protection devices

Miniature circuit breakers, MCBs, 18mm, 1A-63A

MCBs are available in current ratings from 1A–63A, with trip types B, C and D, 10kA to IEC 60898 and 15kA to IEC 60947-2  
See page 136 for technical data and overall dimensions

EMDH104



### Miniature circuit breakers – dual rated 10/15kA, single pole

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	18	10/15	EMBH101	EMCH101	EMDH101
Miniature circuit breaker	2	18	10/15	EMBH102	EMCH102	EMDH102
Miniature circuit breaker	4	18	10/15	EMBH104	EMCH104	EMDH104
Miniature circuit breaker	6	18	10/15	EMBH106	EMCH106	EMDH106
Miniature circuit breaker	8	18	10/15	EMBH108	EMCH108	EMDH108
Miniature circuit breaker	10	18	10/15	EMBH110	EMCH110	EMDH110
Miniature circuit breaker	13	18	10/15	EMBH113	EMCH113	EMDH113
Miniature circuit breaker	16	18	10/15	EMBH116	EMCH116	EMDH116
Miniature circuit breaker	20	18	10/15	EMBH120	EMCH120	EMDH120
Miniature circuit breaker	25	18	10/15	EMBH125	EMCH125	EMDH125
Miniature circuit breaker	32	18	10/15	EMBH132	EMCH132	EMDH132
Miniature circuit breaker	40	18	10/15	EMBH140	EMCH140	EMDH140
Miniature circuit breaker	50	18	10/15	EMBH150	EMCH150	EMDH150 <sup>1)</sup>
Miniature circuit breaker	63	18	10/15	EMBH163	EMCH163	EMDH163 <sup>1)</sup>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMBH125N



### Miniature circuit breakers – dual rated 10/15kA, single pole + neutral

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	36	10/15	EMBH101N	EMCH101N	EMDH101N
Miniature circuit breaker	2	36	10/15	EMBH102N	EMCH102N	EMDH102N
Miniature circuit breaker	4	36	10/15	EMBH104N	EMCH104N	EMDH104N
Miniature circuit breaker	6	36	10/15	EMBH106N	EMCH106N	EMDH106N
Miniature circuit breaker	8	36	10/15	EMBH108N	EMCH108N	EMDH108N
Miniature circuit breaker	10	36	10/15	EMBH110N	EMCH110N	EMDH110N
Miniature circuit breaker	13	36	10/15	EMBH113N	EMCH113N	EMDH113N
Miniature circuit breaker	16	36	10/15	EMBH116N	EMCH116N	EMDH116N
Miniature circuit breaker	20	36	10/15	EMBH120N	EMCH120N	EMDH120N
Miniature circuit breaker	25	36	10/15	EMBH125N	EMCH125N	EMDH125N
Miniature circuit breaker	32	36	10/15	EMBH132N	EMCH132N	EMDH132N
Miniature circuit breaker	40	36	10/15	EMBH140N	EMCH140N	EMDH140N
Miniature circuit breaker	50	36	10/15	EMBH150N	EMCH150N	EMDH150N <sup>1)</sup>
Miniature circuit breaker	63	36	10/15	EMBH163N	EMCH163N	EMDH163N <sup>1)</sup>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMCH220



### Miniature circuit breakers – dual rated 10/15kA, double pole

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	36	10/15	EMBH201	EMCH201	EMDH201
Miniature circuit breaker	2	36	10/15	EMBH202	EMCH202	EMDH202
Miniature circuit breaker	4	36	10/15	EMBH204	EMCH204	EMDH204
Miniature circuit breaker	6	36	10/15	EMBH206	EMCH206	EMDH206
Miniature circuit breaker	8	36	10/15	EMBH208	EMCH208	EMDH208
Miniature circuit breaker	10	36	10/15	EMBH210	EMCH210	EMDH210
Miniature circuit breaker	13	36	10/15	EMBH213	EMCH213	EMDH213
Miniature circuit breaker	16	36	10/15	EMBH216	EMCH216	EMDH216
Miniature circuit breaker	20	36	10/15	EMBH220	EMCH220	EMDH220
Miniature circuit breaker	25	36	10/15	EMBH225	EMCH225	EMDH225
Miniature circuit breaker	32	36	10/15	EMBH232	EMCH232	EMDH232
Miniature circuit breaker	40	36	10/15	EMBH240	EMCH240	EMDH240
Miniature circuit breaker	50	36	10/15	EMBH250	EMCH250	EMDH250 <sup>1)</sup>
Miniature circuit breaker	63	36	10/15	EMBH263	EMCH263	EMDH263 <sup>1)</sup>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMCH363



### Miniature circuit breakers – dual rated 10/15kA, three pole

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	54	10/15	EMB301	EMCH301	EMDH301
Miniature circuit breaker	2	54	10/15	EMB302	EMCH302	EMDH302
Miniature circuit breaker	4	54	10/15	EMB304	EMCH304	EMDH304
Miniature circuit breaker	6	54	10/15	EMB306	EMCH306	EMDH306
Miniature circuit breaker	8	54	10/15	EMB308	EMCH308	EMDH308
Miniature circuit breaker	10	54	10/15	EMB310	EMCH310	EMDH310
Miniature circuit breaker	13	54	10/15	EMB313	EMCH313	EMDH313
Miniature circuit breaker	16	54	10/15	EMB316	EMCH316	EMDH316
Miniature circuit breaker	20	54	10/15	EMB320	EMCH320	EMDH320
Miniature circuit breaker	25	54	10/15	EMB325	EMCH325	EMDH325
Miniature circuit breaker	32	54	10/15	EMB332	EMCH332	EMDH332
Miniature circuit breaker	40	54	10/15	EMB340	EMCH340	EMDH340
Miniature circuit breaker	50	54	10/15	EMB350	EMCH350	EMDH350 <sup>1)</sup>
Miniature circuit breaker	63	54	10/15	EMB363	EMCH363	EMDH363 <sup>1)</sup>

<sup>1)</sup> 15kA to IEC60947-2 rating only

EMCH410



### Miniature circuit breakers – dual rated 10/15kA, four pole

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	1	72	10/15	EMB401	EMCH401	EMDH401
Miniature circuit breaker	2	72	10/15	EMB402	EMCH402	EMDH402
Miniature circuit breaker	4	72	10/15	EMB404	EMCH404	EMDH404
Miniature circuit breaker	6	72	10/15	EMB406	EMCH406	EMDH406
Miniature circuit breaker	8	72	10/15	EMB408	EMCH408	EMDH408
Miniature circuit breaker	10	72	10/15	EMB410	EMCH410	EMDH410
Miniature circuit breaker	13	72	10/15	EMB413	EMCH413	EMDH413
Miniature circuit breaker	16	72	10/15	EMB416	EMCH416	EMDH416
Miniature circuit breaker	20	72	10/15	EMB420	EMCH420	EMDH420
Miniature circuit breaker	25	72	10/15	EMB425	EMCH425	EMDH425
Miniature circuit breaker	32	72	10/15	EMB432	EMCH432	EMDH432
Miniature circuit breaker	40	72	10/15	EMB440	EMCH440	EMDH440
Miniature circuit breaker	50	72	10/15	EMB450	EMCH450	EMDH450 <sup>1)</sup>
Miniature circuit breaker	63	72	10/15	EMB463	EMCH463	EMDH463 <sup>1)</sup>

<sup>1)</sup> 15kA to IEC60947-2 rating only

### Miniature circuit breakers, MCBs, 27mm, 20A-125A

MCBs are available in current ratings from 20A–125A, with trip types B, C and D, 15kA to 25kA to IEC 60947-2

See page 138 for technical data and overall dimensions

#### Miniature circuit breakers - single pole

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	20	27	25kA	EMBS120	EMCS120	EMDS120
Miniature circuit breaker	32	27	25kA	EMBS132	EMCS132	EMDS132
Miniature circuit breaker	40	27	25kA	EMBS140	EMCS140	EMDS140
Miniature circuit breaker	50	27	25kA	EMBS150	EMCS150	EMDS150
Miniature circuit breaker	63	27	25kA	EMBS163	EMCS163	EMDS163
Miniature circuit breaker	80	27	20kA	EMBS180	EMCS180	EMDS180
Miniature circuit breaker	100	27	20kA	EMBS1100	EMCS1100	EMDS1100
Miniature circuit breaker	125	27	15kA	EMBS1125	EMCS1125	–

#### Miniature circuit breakers - three pole

Description	Rated current (A)	Width (mm)	Short circuit rating (kA)	Eaton list number Trip type B	Trip type C	Trip type D
Miniature circuit breaker	20	81	25kA	EMBS320	EMCS320	EMDS320
Miniature circuit breaker	32	81	25kA	EMBS332	EMCS332	EMDS332
Miniature circuit breaker	40	81	25kA	EMBS340	EMCS340	EMDS340
Miniature circuit breaker	50	81	25kA	EMBS350	EMCS350	EMDS350
Miniature circuit breaker	63	81	25kA	EMBS363	EMCS363	EMDS363
Miniature circuit breaker	80	81	20kA	EMBS380	EMCS380	EMDS380
Miniature circuit breaker	100	81	20kA	EMBS3100	EMCS3100	EMDS3100
Miniature circuit breaker	125	81	15kA	EMBS3125	EMCS3125	–

See page 139 for technical data and overall dimensions

EAM162H



### RCCBs – 2-pole double module – 10mA–30mA sensitivity

Description	Poles	Rating (A)	Sensitivity (mA)	Eaton list number
16A 2-pole RCCB 10mA	2P	16	10	EAM162V
16A 2-pole RCCB 30mA	2P	16	30	EAM162H
25A 2-pole RCCB 30mA	2P	25	30	EAM252H
40A 2-pole RCCB 30mA	2P	40	30	EAM402H
63A 2-pole RCCB 30mA	2P	63	30	EAM632H
80A 2-pole RCCB 30mA	2P	80	30	EAM802H
100A 2-pole RCCB 30mA	2P	100	30	EAM1002H

EAM402M



### RCCBs – 2-pole double module – 100mA sensitivity

Description	Poles	Rating (A)	Sensitivity (mA)	Eaton list number
25A 2-pole RCCB 100mA	2P	25	100	EAM252M
40A 2-pole RCCB 100mA	2P	40	100	EAM402M
63A 2-pole RCCB 100mA	2P	63	100	EAM632M
80A 2-pole RCCB 100mA	2P	80	100	EAM802M
100A 2-pole RCCB 100mA	2P	100	100	EAM1002M

EAM802L



### RCCBs – 2-pole double module – 300mA sensitivity

Description	Poles	Rating (A)	Sensitivity (mA)	Eaton list number
25A 2-pole RCCB 300mA	2P	25	300	EAM252L
40A 2-pole RCCB 300mA	2P	40	300	EAM402L
80A 2-pole RCCB 300mA	2P	80	300	EAM802L
100A 2-pole RCCB 300mA	2P	100	300	EAM1002L

EAM404H



### RCCBs – 4-pole – 30mA sensitivity

Description	Poles	Rating (A)	Sensitivity (mA)	Eaton list number
40A 4-pole RCCB 30mA	4P	40	30	EAM404H
63A 4-pole RCCB 30mA	4P	63	30	EAM634H
80A 4-pole RCCB 30mA	4P	80	30	EAM804H
100A 4-pole RCCB 30mA	4P	100	30	EAM1004H

EAM404M



### RCCBs – 4-pole – 100mA sensitivity

Description	Poles	Rating (A)	Sensitivity (mA)	Eaton list number
40A 4-pole RCCB 100mA	4P	40	100	EAM404M
63A 4-pole RCCB 100mA	4P	63	100	EAM634M
80A 4-pole RCCB 100mA	4P	80	100	EAM804M
100A 4-pole RCCB 100mA	4P	100	100	EAM1004M

EAM404L



### RCCBs – 4-pole – 300mA sensitivity

Description	Poles	Rating (A)	Sensitivity (mA)	Eaton list number
40A 4-pole RCCB 300mA	4P	40	300	EAM404L
63A 4-pole RCCB 300mA	4P	63	300	EAM634L
80A 4-pole RCCB 300mA	4P	80	300	EAM804L
100A 4-pole RCCB 300mA	4P	100	300	EAM1004L
100A 4-pole RCCB 300mA	4P	100	300, trip time delay	EAM1004LT

See page 140 for technical data and overall dimensions

EMBH106R10C



### RCBOs single pole – trip type B – 10mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type B SP	6	B	10	EMBH106R10C
Eaton RCBO 10A 10kA type B SP	10	B	10	EMBH110R10C
Eaton RCBO 16A 10kA type B SP	16	B	10	EMBH116R10C
Eaton RCBO 20A 10kA type B SP	20	B	10	EMBH120R10C
Eaton RCBO 32A 10kA type B SP	32	B	10	EMBH132R10C

EMBH110R30C



### RCBOs single pole – trip type B – 30mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type B SP	6	B	30	EMBH106R30C
Eaton RCBO 10A 10kA type B SP	10	B	30	EMBH110R30C
Eaton RCBO 16A 10kA type B SP	16	B	30	EMBH116R30C
Eaton RCBO 20A 10kA type B SP	20	B	30	EMBH120R30C
Eaton RCBO 25A 10kA type B SP	25	B	30	EMBH125R30C
Eaton RCBO 32A 10kA type B SP	32	B	30	EMBH132R30C
Eaton RCBO 40A 10kA type B SP	40	B	30	EMBH140R30C
Eaton RCBO 45A 10kA type B SP	45	B	30	EMBH145R30C

EMBH116R100C



### RCBOs single pole – trip type B – 100mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type B SP	6	B	100	EMBH106R100C
Eaton RCBO 10A 10kA type B SP	10	B	100	EMBH110R100C
Eaton RCBO 16A 10kA type B SP	16	B	100	EMBH116R100C
Eaton RCBO 20A 10kA type B SP	20	B	100	EMBH120R100C
Eaton RCBO 32A 10kA type B SP	32	B	100	EMBH132R100C

EMCH120R10C



### RCBOs single pole – trip type C – 10mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type C SP	6	C	10	EMCH106R10C
Eaton RCBO 10A 10kA type C SP	10	C	10	EMCH110R10C
Eaton RCBO 16A 10kA type C SP	16	C	10	EMCH116R10C
Eaton RCBO 20A 10kA type C SP	20	C	10	EMCH120R10C
Eaton RCBO 32A 10kA type C SP	32	C	10	EMCH132R10C

EMCH110R30C



### RCBOs single pole – trip type C – 30mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type C SP	6	C	30	EMCH106R30C
Eaton RCBO 10A 10kA type C SP	10	C	30	EMCH110R30C
Eaton RCBO 16A 10kA type C SP	16	C	30	EMCH116R30C
Eaton RCBO 20A 10kA type C SP	20	C	30	EMCH120R30C
Eaton RCBO 25A 10kA type C SP	25	C	30	EMCH125R30C
Eaton RCBO 32A 10kA type C SP	32	C	30	EMCH132R30C
Eaton RCBO 40A 10kA type C SP	40	C	30	EMCH140R30C
Eaton RCBO 45A 10kA type C SP	45	C	30	EMCH145R30C

EMCH132R100C



### RCBOs single pole – trip type C – 100mA sensitivity

Description	Rating (A)	Trip type	Sensitivity (mA)	Eaton list number
Eaton RCBO 6A 10kA type C SP	6	C	100	EMCH106R100C
Eaton RCBO 10A 10kA type C SP	10	C	100	EMCH110R100C
Eaton RCBO 16A 10kA type C SP	16	C	100	EMCH116R100C
Eaton RCBO 20A 10kA type C SP	20	C	100	EMCH120R100C
Eaton RCBO 32A 10kA type C SP	32	C	100	EMCH132R100C

169608

**RCBOs 3P+N 10kA**

- Conditionally surge current-proof 250A.
- Sensitivity type A, providing protection against AC and pulsating DC earth fault currents.
- Trip types B, C, and D
- Trip sensitivity 30mA, 100mA or 300mA

Description Characteristic B	Rating (A)	Sensitivity (mA)	Type designation	Eaton list number
3P+N RCBO 10A 10kA trip B	10	30	mRBM4-10/3/B/003-A-UK-PT	<b>169636</b>
3P+N RCBO 13A 10kA trip B	13	30	mRBM4-13/3/B/003-A-UK-PT	<b>169637</b>
3P+N RCBO 16A 10kA trip B	16	30	mRBM4-16/3/B/003-A-UK-PT	<b>169638</b>
3P+N RCBO 20A 10kA trip B	20	30	mRBM4-20/3/B/003-A-UK-PT	<b>169639</b>
3P+N RCBO 10A 10kA trip B	10	100	mRBM4-10/3/B/01-A-UK-PT	<b>169670</b>
3P+N RCBO 13A 10kA trip B	13	100	mRBM4-13/3/B/01-A-UK-PT	<b>169671</b>
3P+N RCBO 16A 10kA trip B	16	100	mRBM4-16/3/B/01-A-UK-PT	<b>169584</b>
3P+N RCBO 20A 10kA trip B	20	100	mRBM4-20/3/B/01-A-UK-PT	<b>169585</b>
3P+N RCBO 10A 10kA trip B	10	300	mRBM4-10/3/B/03-A-UK-PT	<b>169598</b>
3P+N RCBO 13A 10kA trip B	13	300	mRBM4-13/3/B/03-A-UK-PT	<b>169599</b>
3P+N RCBO 16A 10kA trip B	16	300	mRBM4-16/3/B/03-A-UK-PT	<b>169600</b>
3P+N RCBO 20A 10kA trip B	20	300	mRBM4-20/3/B/03-A-UK-PT	<b>169601</b>

Description Characteristic C	Rating (A)	Sensitivity (mA)	Type designation	Eaton list number
3P+N RCBO 6A 10kA trip C	6	30	mRBM4-6/3/C/003-A-UK-PT	<b>169640</b>
3P+N RCBO 10A 10kA trip C	10	30	mRBM4-10/3/C/003-A-UK-PT	<b>169641</b>
3P+N RCBO 13A 10kA trip C	13	30	mRBM4-13/3/C/003-A-UK-PT	<b>169642</b>
3P+N RCBO 16A 10kA trip C	16	30	mRBM4-16/3/C/003-A-UK-PT	<b>169643</b>
3P+N RCBO 20A 10kA trip C	20	30	mRBM4-20/3/C/003-A-UK-PT	<b>169644</b>
3P+N RCBO 25A 10kA trip C	25	30	mRBM4-25/3/C/003-A-UK-PT	<b>169645</b>
3P+N RCBO 32A 10kA trip C	32	30	mRBM4-32/3/C/003-A-UK-PT	<b>169646</b>
3P+N RCBO 6A 10kA trip C	6	100	mRBM4-6/3/C/01-A-UK-PT	<b>169586</b>
3P+N RCBO 10A 10kA trip C	10	100	mRBM4-10/3/C/01-A-UK-PT	<b>169587</b>
3P+N RCBO 13A 10kA trip C	13	100	mRBM4-13/3/C/01-A-UK-PT	<b>169588</b>
3P+N RCBO 16A 10kA trip C	16	100	mRBM4-16/3/C/01-A-UK-PT	<b>169589</b>
3P+N RCBO 20A 10kA trip C	20	100	mRBM4-20/3/C/01-A-UK-PT	<b>169590</b>
3P+N RCBO 25A 10kA trip C	25	100	mRBM4-25/3/C/01-A-UK-PT	<b>169591</b>
3P+N RCBO 32A 10kA trip C	32	100	mRBM4-32/3/C/01-A-UK-PT	<b>169592</b>
3P+N RCBO 6A 10kA trip C	6	300	mRBM4-6/3/C/03-A-UK-PT	<b>169602</b>
3P+N RCBO 10A 10kA trip C	10	300	mRBM4-10/3/C/03-A-UK-PT	<b>169603</b>
3P+N RCBO 13A 10kA trip C	13	300	mRBM4-13/3/C/03-A-UK-PT	<b>169604</b>
3P+N RCBO 16A 10kA trip C	16	300	mRBM4-16/3/C/03-A-UK-PT	<b>169605</b>
3P+N RCBO 20A 10kA trip C	20	300	mRBM4-20/3/C/03-A-UK-PT	<b>169606</b>
3P+N RCBO 25A 10kA trip C	25	300	mRBM4-25/3/C/03-A-UK-PT	<b>169607</b>
3P+N RCBO 32A 10kA trip C	32	300	mRBM4-32/3/C/03-A-UK-PT	<b>169608</b>

Description Characteristic D	Rating (A)	Sensitivity (mA)	Type designation	Eaton list number
3P+N RCBO 6A 10kA trip D	6	30	mRBM4-6/3/D/003-A-UK-PT	<b>169647</b>
3P+N RCBO 10A 10kA trip D	10	30	mRBM4-10/3/D/003-A-UK-PT	<b>169648</b>
3P+N RCBO 13A 10kA trip D	13	30	mRBM4-13/3/D/003-A-UK-PT	<b>169649</b>
3P+N RCBO 16A 10kA trip D	16	30	mRBM4-16/3/D/003-A-UK-PT	<b>169650</b>
3P+N RCBO 20A 10kA trip D	20	30	mRBM4-20/3/D/003-A-UK-PT	<b>169651</b>
3P+N RCBO 25A 10kA trip D	25	30	mRBM4-25/3/D/003-A-UK-PT	<b>169652</b>
3P+N RCBO 6A 10kA trip D	6	100	mRBM4-6/3/D/01-A-UK-PT	<b>169593</b>
3P+N RCBO 10A 10kA trip D	10	100	mRBM4-10/3/D/01-A-UK-PT	<b>169594</b>
3P+N RCBO 13A 10kA trip D	13	100	mRBM4-13/3/D/01-A-UK-PT	<b>169618</b>
3P+N RCBO 16A 10kA trip D	16	100	mRBM4-16/3/D/01-A-UK-PT	<b>169619</b>
3P+N RCBO 20A 10kA trip D	20	100	mRBM4-20/3/D/01-A-UK-PT	<b>169620</b>
3P+N RCBO 25A 10kA trip D	25	100	mRBM4-25/3/D/01-A-UK-PT	<b>169621</b>
3P+N RCBO 6A 10kA trip D	6	300	mRBM4-6/3/D/03-A-UK-PT	<b>169609</b>
3P+N RCBO 10A 10kA trip D	10	300	mRBM4-10/3/D/03-A-UK-PT	<b>169610</b>
3P+N RCBO 13A 10kA trip D	13	300	mRBM4-13/3/D/03-A-UK-PT	<b>169611</b>
3P+N RCBO 16A 10kA trip D	16	300	mRBM4-16/3/D/03-A-UK-PT	<b>169612</b>
3P+N RCBO 20A 10kA trip D	20	300	mRBM4-20/3/D/03-A-UK-PT	<b>169613</b>
3P+N RCBO 25A 10kA trip D	25	300	mRBM4-25/3/D/03-A-UK-PT	<b>169614</b>



ASPDL

**Padlocking devices**

For MCBs, RCCBs, RCBOs & switch disconnectors

- The wide range of Eaton devices are complimented by a range of padlocking devices.
- For MCBs and RCCBs the device mechanism is trip free which allows it to be padlocked 'ON' for security, but in the event of a fault condition the device will still operate to disconnect the fault. The device will move to the tripped position when the lock is removed. These devices can also be padlocked in the 'OFF' position.

Description	Eaton list number
Universal device lockout attachment – fits MCBs, RCCBs and RCBOs	<b>ASPDL</b>
Lockout attachment for 27mm MCBs	<b>ASPDL27</b>
Padlock	<b>PD2</b>

ASALMSN

**Auxiliary and alarm contacts including test function**

For 18mm MCB & RCBO

Auxiliary and alarm contact devices can be fitted together on one MCB. Each is incorporated in a 1/2 module (9 mm) casing with terminals protected to IP 20 capable of accepting cable up to 2.5 mm<sup>2</sup>. These devices are designed and manufactured to IEC 60947-5-1 and incorporate a changeover switch providing remote indication of an MCB which has tripped under fault conditions.

**Technical characteristics**

- This auxiliary switch allows remote indication of the position of the MCB contacts.
- Auxiliary and Alarm contact ratings:
  - AC14 240 Vac 50Hz, 6A.
  - DC14 125 Vdc, 1A.
- The auxiliary contact will not differentiate between an MCB that is "off" or "tripped".
- The auxiliary contact can be used in conjunction with a remote supply and signal lamps, bells or buzzers.

Description	Quantity per carton	Eaton list number
Auxiliary switch incorporating a test function	1	<b>ASAXSN<sup>(1)</sup></b>
Alarm switch incorporating reset and test function	1	<b>ASALMSN<sup>(1)</sup></b>

<sup>(1)</sup> Not suitable for use in distribution boards

ASSNTSN415

**Shunt trips**

For 18mm MCB & RCBO

**Technical characteristics**

- Suitable for all Eaton MCBs including those with either auxiliary or alarm contacts.
- A shunt trip and undervoltage release can be fitted together on one MCB.
- Each is incorporated in a 1 module (18 mm) casing with terminals protected to IP 20 capable of accepting cable up to 2.5 mm<sup>2</sup>.
- The shunt trip and UVR are simply clipped to the left hand side of an MCB and have terminals at one end to allow connection to pan assemblies and comb busbar.
- A shunt release provides remote tripping of an MCB with three voltage options for AC & DC applications.

Description	dc characteristics	ac characteristics	Quantity per carton	Eaton list number
MCB shunt trip	48 V–60 Vdc	48 V–110 Vac	1	<b>ASSNTSN110<sup>(1)</sup></b>
MCB shunt trip	110 Vdc	240 Vac	1	<b>ASSNTSN415<sup>(1)</sup></b>

<sup>(1)</sup> Not suitable for use in distribution boards  
Other voltages are available.

ASUVRSC230

**Under voltage release**

For 18mm MCB & RCBO

- Under voltage release (UVR) for remote tripping of an emergency stop loop.
- The UVR is simply clipped to the left hand side of an MCB and have terminals at one end to allow connection to pan assemblies and comb busbar.

Description	ac characteristics	Quantity per carton	Eaton list number
Under voltage release	240 Vac	1	<b>ASUVRSC230<sup>(1)</sup></b>

<sup>(1)</sup> Not suitable for use in distribution boards



Eaton's wide range of modular timers and twilight switches are suitable for any residential or commercial application offering automatic lighting control. Contactors are frequently applied for switching of lamp loads, fans or pumps in both utility as well as industrial areas.

## 4.1 MODULAR SWITCHES / TIMERS AND TWILIGHT SWITCHES

Universal declaration type coding .....	49
Analogue time switches - 50 Hz mains synchronised .....	50
Analogue time switches - Quartz controlled .....	50
Analogue weekly time switches - Quartz controlled .....	50
Digital weekly time switches, 1 channel .....	51
Digital weekly time switches, 2 channel .....	52
Twilight switches for DIN rail mounting .....	53
Twilight switch for surface mounting .....	54
Antenna for DCF signal reception .....	55
Antenna including power supply for GPS signal reception .....	55
Programming software kit including memory card .....	55

## 4.2 CONTACTORS

Contactors, 20A .....	56
Contactors, 25A .....	56
Contactors, 40A .....	56
Contactors, 63A .....	57
Day/night contactors .....	57
Auxiliary contacts .....	57

## 4.3 TRANSFORMERS AND EARTH LEAKAGE RELAYS

Transformer 8/12v 1.0A .....	58
Earth leakage relays and current transformers .....	58

Timers & Twilight Switches are applied in any residential, commercial and industrial buildings wherever automatic control is required on predefined times and/or depending on daylight intensity.

The Eaton range comprises of a wide variety of different products which include analogue Timers, digital Timers, Twilight Switches and Staircase Timers.

These Timers can either be controlled by a 50Hz net-synchronisation, quartz control and time synchronisation or using the DCF signal or GPS antenna, which guarantees 100% accuracy at all times. Except for net-synchronised timers all units do have self power reserve to secure the time setting and program storage in case a power interruption does occur.

Dedicated computer software and memory cards are available to support the programming of our most advanced timers. Automatic summer and winter time, holiday and random switching programs complete the functionality of our range.

Twilight Switches are supplied with a remote light sensor, which can be easily installed on the outside wall where the required light intensity threshold can be simply adjusted on the modular device itself.

### Technical characteristics (depending on type)

- Modular design.
- Analogue and digital timers.
- Time adjustment by 50 Hz net, quartz control, DCF1) or GPS signal reception 2).
- Manual override switching function.
- Power reserve for all quartz and DCF or GPS driven switches.
- Remote light sensor for twilight switching.

### Benefits

- Easily programmable on front of device.
- Computer aided programming software available.
- Compact 18 mm design for restricted space opportunities.
- Separate IP40 covers are available for direct wall mounting.
- High level of accuracy.
- Automatic summer and winter time adjustment.
- Holiday & Random program settings.
- High power reserve up to 10 years.

### Notes:

<sup>1)</sup> Automatic calculation of sunrise and sunset times throughout the year, including the possibility of astro times + / -2 hour shift.

<sup>2)</sup> The DCF-signal can only be received within a 1000 km radius.

### Universal declaration type coding

#### Type coding - analogue switches

<b>TS</b>	<b>Q</b>	<b>D</b>	<b>1NO</b>
<b>TS</b>	<b>S</b>	<b>D</b>	<b>1NO</b>
<b>TS</b>	<b>Q</b>	<b>D</b>	<b>1CO</b>
<b>TS</b>	<b>S</b>	<b>D</b>	<b>1CO</b>
<b>TS</b>	<b>Q</b>	<b>W</b>	<b>1CO</b>

**TS** = Switch  
**Q / S** = Quartz / 50 Hz net-synchronisation  
**D / W** = Day / week programme  
**1NO / 1CO** = Create / change (contact configuration)

#### Type coding - digital switches and accessories

<b>TS</b>	<b>A</b>	<b>DCF</b>
<b>TS</b>	<b>A</b>	<b>GPSKIT</b>
<b>TS</b>	<b>A</b>	<b>MEMKIT</b>
<b>TS</b>	<b>A</b>	<b>MEM</b>

**TS** = Switch  
**A** = Accessory  
**DCF** = DCF-antenna  
**GPSKIT** = Antenna for GPS signal reception including power supply  
**MEMKIT** = Programming software kit  
**MEM** = Memory

#### Type coding - digital switches

<b>TS</b>	<b>D</b>	<b>W</b>	<b>1CO</b>	<b>-</b>
<b>TS</b>	<b>D</b>	<b>W</b>	<b>2CO</b>	<b>-</b>
<b>TS</b>	<b>D</b>	<b>W</b>	<b>1CO</b>	<b>A</b>
<b>TS</b>	<b>D</b>	<b>W</b>	<b>1CO</b>	<b>DG</b>
<b>TS</b>	<b>D</b>	<b>W</b>	<b>1CO</b>	<b>MIN</b>

**TS** = Switch  
**D** = Digital  
**W** = Week programme  
**1CO / 2CO** = Exchange / 2 x changeover (contact configuration)  
**A** = Astroclock  
**DG** = DCF or GPS controlled  
**MIN** = Compact 18mm design version

#### Type coding - twilight switches

<b>SR</b>	<b>S</b>	<b>D</b>	<b>1NO</b>	<b>-</b>
<b>SR</b>	<b>S</b>	<b>W</b>	<b>1NO</b>	<b>-</b>
<b>SR</b>	<b>C</b>	<b>D</b>	<b>1CO</b>	<b>-</b>
<b>SR</b>	<b>S</b>	<b>D</b>	<b>1CO</b>	<b>W</b>

**SR** = Twilight switch  
**S / C** = With or without sensor  
**D / W** = DIN rail mounting / surface mounting  
**1NO / 1CO** = Create / change (contact configuration)  
**W** = Wide adjustable sensitivity (2 - 50000 lux)

**Technical characteristics (dependant of type)**

- Supply voltage 230 V / 50 - 60 Hz (50 Hz for just synchronised versions)
- 50 Hz-mains synchronised or Quartz controlled.
- Daily or weekly programme.
- Manual override switching function.
- Compact 18mm design for restricted space opportunities.

See page 56 for accessories

See page 141 for technical data

167391

**Analogue time switches - 50 Hz mains synchronised****Standard version**

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Day	50 Hz-net	1	CO	-	15 min.	52.5 mm	TSSD1CO	1	<b>167391</b>

167389

**Analogue time switches - 50 Hz mains synchronised****18 mm compact design**

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Day	50 Hz-net	1	NO	-	15 min.	17.5mm	TSSD1NO	1	<b>167389</b>

167390

**Analogue time switches - Quartz controlled****Standard version**

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Day	Quartz	1	CO	200 hrs	15 min.	52.5 mm	TSQD1CO	1	<b>167390</b>

167388

**Analogue time switches - Quartz controlled****18 mm compact design**

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Day	Quartz	1	NO	3 y rs	15 min.	17.5 mm	TSQD1NO	1	<b>167388</b>

167392

**Analogue weekly timer switches - Quartz controlled****Standard version**

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Week	Quartz	1	CO	200 hrs	2 hrs	52.5 mm	TSQW1CO	1	<b>167392</b>

## Technical characteristics

- Operating voltage 230 V / 50 - 60 Hz.
- 1 or 2 channel.
- Quartz controlled.
- 3 to 10 year power reserve.
- Weekly programme.
- Manual ON (and depending on type OFF) switching.
- Text-oriented user guidance in display.
- Display back light (switchable).
- Compact 18mm design for restricted space.
- Automatic summer and winter adjustment.
- Holiday programme.
- Zero crossing switching relay for longer life.
- Integrated operating hour counter.
- TSDW1CO, TSDW2CO, TSDW1COA, TSDW1CODG:
- Interface for memory.

See page 143 for technical data

167379



### Digital weekly time switches, 1 channel

#### Standard version

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Week	Quartz	1	CO	10 year	1 min.	35.8 mm	TSDW1CO	1	<b>167379</b>

167383



### Digital weekly time switches, 1 channel

#### 1TE wide version

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Week	Quartz	1	CO	3 year	1 min.	17.5 mm	TSDW1COMIN	1	<b>167383</b>

167382



### Digital weekly time switches, 1 channel

#### Version with Antenna connection

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Week	Quartz, DCF / GPS	1	CO	10 year	1 sec.	35.8 mm	TSDW1CODG	1	<b>167382</b>

167381



### Digital weekly time switches, 1 channel

#### Astronomical

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Week	Quartz with astronomical	1	CO	10 year	1 min.	35.8 mm	TSDW1COA	1	<b>167381</b>



# 4.1

## Modular control and switching devices

Digital timers

167380



### Digital weekly time switches, 2 channels

#### Standard version

Program range	Type	Channels	Contact configuration	Power reserve	Min. cycling time	Width	Type	QPC	Eaton list number
Week	Quartz	2	2 x CO	10 year	1 min.	35.8 mm T	TSDW2CO	1	<b>167380</b>

### Technical characteristics

- Operating voltage 220 - 240 V / 50 - 60 Hz.
- 1 channel.
- Controlled by external light sensor (supplied).
- Built-in time delay included for unwanted switching e.g. due to car lamp influences (adjustable to type SRSD1COW and SRCD1CO). Manual ON (and depending on type OFF) switching.
- Text-oriented user guidance in display.
- Switching status indication.
- Adjustable light intensity level.

### SRCD1CO

- Manual ON and OFF switching.
- Back lit display.
- Automatic summer and winter time adjustment.
- Holiday programme.
- Zero crossing switching relay for longer life.
- Integrated operating hour counter.
- Memory interface.
- Test function.

See page 56 for accessories

See page 145 for the technical data

167375



### Twilight switches for DIN rail mounting

#### 18 mm compact design

Description	Channels	Adjustable sensitivity	Contact configuration	Width	Type	QPC	Eaton list number
Twilight switch with light sensor	1	2 - 100 lux	NO	17.5 mm	SRSD1NO	1	<b>167375</b>

167378



### Twilight switches for DIN rail mounting

#### Advanced version, 1 channel

Description	Channels	Adjustable sensitivity	Contact configuration	Width	Type	QPC	Eaton list number
Twilight switch with light sensor	1	2 - 200 lux	CO	54 mm	SRSD1COW	1	<b>167378</b>

167377



### Twilight switches for DIN rail mounting

#### Combined version

Program range	Channels	Adjustable sensitivity	Contact configuration	Width	Type	QPC	Eaton list number
Week	1	2 - 200 lux	CO	72 mm	SRCD1CO	1	<b>167377</b>

# 4.1

## Modular control and switching devices

Twilight switch for surface mounting

### Technical characteristics

- Operating voltage 220 - 230 V / 50 - 60 Hz.
- 1 channel.
- Integrated light sensor.
- Time delay included for unwanted switching, adjustable (e.g. due to car lamp influences).
- Back or bottom cable entry.
- Adjustable light intensity on the outside.
- Large light level (180 degrees).
- Test button.
- Degree of protection: IP55.

See page 56 for accessories

See page 145 for technical data

167376



### Twilight switch for surface mounting

#### 1 channel

Program range	Channels	Adjustable sensitivity	Contact configuration	Width	Type	QPC	Eaton list number
Week	1	2 - 2.000 lux	NO	85 mm	SRSW1NO	1	<b>167376</b>

167384



## Antenna for DCF signal reception

- By using DCF reception 100% accuracy is obtained. A DCF antenna is required to be mounted on an outside wall. The DCF signal reception is only operable when the timer is connected to the remote DCF antenna and fed by a DCF power supply.
- DCF antenna for digital TSDW1CODG.

Description	Type	QPC	Eaton list number
DCF-antenna 1	TSADCF	1	<b>167384</b>

167385



## Antenna includes power supply for GPS signal reception

- Antenna includes power supply for TSDW1CODG.

Description	Type	QPC	Eaton list number
Antenna for GPS signal reception, includes power supply	TSAGPSKIT	1	<b>167385</b>

167387



## Programming software kit

- For SRCD1CO, TSDW1CO, TSDW2CO, TSDW1COA, TSDW1CODG.

Description	Type	QPC	Eaton list number
Programming software kit including adaptor cable, software and memory card	TSAMEMKIT	1	<b>167386</b>
Memory card	TSAMEM	1	<b>167387</b>

See pages 141-146 for timers and twilight switches technical data and overall dimensions.

- For other coil voltages contact technical support

See pages 147-148 for contactors technical data and overall dimensions.

CR2011230A



### Contactors, 20 A – ac coil

When several contactors are mounted it is advisable to fit a blanking module, List number **EMBP**, every two contactors.

Description	Rating (A)	Coil voltage (Vac)	Coil voltage (Vdc)	Width (mm)	Contacts	Eaton list number
Contactors	20	230	—	18	1 NO + 1 NC	<b>CR2011230A</b>
Contactors	20	230	—	18	2 NC	<b>CR2002230A</b>
Contactors	20	230	—	18	2 NO	<b>CR2020230A</b>

CR2020024



### Contactors, 20 A – ac/dc coil

When several contactors are mounted it is advisable to fit a blanking module, List number **EMBP**, every two contactors.

Description	Rating (A)	Coil voltage (Vac)	Coil voltage (Vdc)	Width (mm)	Contacts	Eaton list number
Contactors	20	230	220	18	1 NO + 1 NC	<b>CR2011230</b>
Contactors	20	230	220	18	2 NC	<b>CR2002230</b>
Contactors	20	230	220	18	2 NO	<b>CR2020230</b>

CR2540230A



### Contactors, 25 A – ac coil

When several contactors are mounted it is advisable to fit a blanking module, List number **EMBP**, every two contactors.

Description	Rating (A)	Coil voltage (Vac)	Coil voltage (Vdc)	Width (mm)	Contacts	Eaton list number
Contactors	25	230	—	36	2 NO + 2 NC	<b>CR2522230A</b>
Contactors	25	230	—	36	3 NO	<b>CR2530230A</b>
Contactors	25	230	—	36	4 NC	<b>CR2504230A</b>
Contactors	25	230	—	36	4 NO	<b>CR2540230A</b>

CR2504024



### Contactors, 25 A – ac/dc coil

When several contactors are mounted it is advisable to fit a blanking module, List number **EMBP**, every two contactors.

Description	Rating (A)	Coil voltage (Vac)	Coil voltage (Vdc)	Width (mm)	Contacts	Eaton list number
Contactors	25	230	220	36	2 NO + 2 NC	<b>CR2522230</b>
Contactors	25	230	220	36	3 NO	<b>CR2530230</b>
Contactors	25	230	220	36	4 NC	<b>CR2504230</b>
Contactors	25	230	220	36	4 NO	<b>CR2540230</b>

CR4030024



### Contactors, 40 A – ac/dc coil

When several contactors are mounted it is advisable to fit a blanking module, List number **EMBP**, every two contactors.

Description	Rating (A)	Coil voltage (Vac)	Coil voltage (Vdc)	Width (mm)	Contacts	Eaton list number
Contactors	40	230	220	54	2 NC	<b>CR4002230</b>
Contactors	40	230	220	54	2 NO	<b>CR4020230</b>
Contactors	40	230	220	54	3 NO	<b>CR4030230</b>
Contactors	40	230	220	54	4 NO	<b>CR4040230</b>



CR6320230

**Contactors, 63 A – ac/dc coil**

When several contactors are mounted it is advisable to fit a blanking module, List number **EMBP**, every two contactors.

Description	Rating (A)	Coil voltage (Vac)	Coil voltage (Vdc)	Width (mm)	Contacts	Eaton list number
Contactors	63	230	220	54	2 NO	<b>CR6320230</b>
Contactors	63	230	220	54	4 NO	<b>CR6340230</b>

CRM2540230A

**Day/night contactors, 20–25 A – ac coil**

When several contactors are mounted it is advisable to fit a blanking module or spacer every two contactors. Day/night contactors do have a manual override function, which enables the user to bring the contactor in either a forced “ON” or “OFF” position. The contactor can only be brought into the forced “ON” position when it is de-energised. When the contactor is energised the operation will return into the normal/automatic position.

Description	Rating (A)	Coil voltage (Vac)	Width (mm)	Contacts	Eaton list number
Contactors	20	230	18	2 NO	<b>CRM2020230A</b>
Contactors	25	230	36	4 NO	<b>CRM2540230A</b>

CRA611

**Auxiliary contacts**

Can be connected at the right-side of the contactor.

Description	Rating (A)	Width (mm)	Contacts	Eaton list number
Auxiliary	6	9	1 NO + 1 NC	<b>CRA611</b>
Auxiliary	6	9	2 NO	<b>CRA620</b>

# 4.3

## Modular control and switching devices

Transformers and earth leakage relays

TR-G3/8



### Transformers

Description	Volts	Amps	Width (mm)	Module	Eaton list number
Bell Transformer 2 module	12	0.6	36	2	<b>TR-G3/8</b>
	4/8	1.0	36	2	<b>TR-G3/8</b>

### Earth leakage relays & CTs

Suitable for use with all Eaton MCCBs & MCBs to provide add-on earth leakage protection functionality. The earth leakage relay is used with an **ELRCT** series current transformer (core balance) and an appropriate MCB/MCCB shunt trip or undervoltage release. Power supply required 220-240V ac,

50/60Hz. Output contacts (volt-free) rated at 250V ac, 6A. Power and system LEDs show status of the relay, CT continuity, level of earth leakage, earth leakage trip. Eaton earth leakage relays are designed & tested in accordance with IEC61008-1.

See page 149 for dimensional details.

PFR-5



### Earth leakage relays – adjustable trip

Description	Sensitivity	Time delay	Width	Eaton list number
Earth leakage relay	Adjustable 30mA, 100mA, 300mA, 500mA, 1A, 3A, 5A	Adjustable 0.02, 0.1, 0.3, 0.5, 1, 3, 5s	36mm	<b>PFR-5</b>

PFR-003



### Earth leakage relays – fixed trip

Description	Sensitivity	Time delay	Width	Eaton list number
Earth leakage relay	Fixed 30mA	Instantaneous (0.02s)	36mm	<b>PFR-003</b>
Earth leakage relay	Fixed 300mA	Instantaneous (0.02s)	36mm	<b>PFR-03</b>

PFR-W-20–  
PFR-W-105



### Current transformers (core balance)

- One current transformer required per relay.

Description	Inner dimension	Eaton list number
Current Transformer	20mm diameter	<b>PFR-W-20</b>
	30mm diameter	<b>PFR-W-30</b>
	35mm diameter	<b>PFR-W-35</b>
	70mm diameter	<b>PFR-W-70</b>
	105mm diameter	<b>PFR-W-105</b>
	140mm diameter	<b>PFR-W-140</b>
	210mm diameter	<b>PFR-W-210</b>



A complete range of MCCB panelboards and pan assemblies providing all the options you need from a straightforward panelboard to a comprehensive panelboard system. The range now offers a variety of incoming devices and a greater choice of outgoing ways to provide more flexibility and choice to the user.

5.1	INCOMING DEVICE RATINGS UP TO 250A – OUTGOING DEVICE RATINGS UP TO 160A .....	60
5.2	INCOMING DEVICE RATINGS UP TO 400A – OUTGOING DEVICE RATINGS UP TO 160A .....	64
5.3	INCOMING DEVICE RATINGS UP TO 400A – OUTGOING DEVICE RATINGS UP TO 250A .....	68
5.4	INCOMING DEVICE RATINGS UP TO 630A – OUTGOING DEVICE RATINGS UP TO 250A .....	72
5.5	INCOMING DEVICE RATINGS UP TO 800A – OUTGOING DEVICE RATINGS UP TO 400A .....	76
5.6	PLUG-IN INCOMING METERING .....	80
5.7	PLUG-IN OUTGOING METERING .....	82
5.8	LIGHTNING & SURGE SUPPRESSION FOR MCCB PANELBOARDS .....	84
5.9	MCCB PAN ASSEMBLIES .....	85

# 5.1

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 250A – outgoing device ratings up to 160A

### Specification

- Panelboards to IEC61439-2
- Form 3b Type 2 - with finger guards fitted
- Busbar system KEMA certified 50kA Icc, Icw 25kA 1s
- Enclosure degree of protection IP3X (wall-mounted)
- MCCBs to IEC60947-2. kA ratings shown are Ics=Icu at 400V ac
- Switch disconnectors to IEC60947-3

### Features

- 4, 6, 8, or 12 outgoing TP ways
- Outgoing devices; NZM1 16A–125A SP & 20A–160A TP
- Tin-plated busbars
- Can be configured for incomer device at top of panelboard
- Removable side gland plates as standard
- Wide range of extension boxes, metering, surge protection, and earth leakage incomer options available

See pages 151-153 for dimensions.

EPBN1425



- Minimum ordering requirement: panelboard + incoming device + incomer connection kit + outgoing devices + blanking plates

Description	Associated incoming device	Current rating (A)	No. of ways	Eaton list number
Incoming rating up to 250A, outgoing ratings up to 160A	NZM2 MCCB or N2 switch disconnector or direct lugs connection	250	4	<b>EPBN1425</b>
			6	<b>EPBN1625</b>
			8	<b>EPBN1825</b>
			12	<b>EPBN11225</b>

NZMC2-A250KCO



### MCCB incoming device

- 36kA or 50kA options
- Select appropriate incomer device from table below
- Maximum cable capacity 185mm<sup>2</sup>
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, Magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Poles	Incoming device type	Current rating (A)	Eaton list number	
			Short circuit rating 36kA	50kA
3-pole	NZM2 MCCB	160	<b>NZMC2-A160-KCO</b>	<b>NZMN2-A160-KCO</b>
		200	<b>NZMC2-A200-KCO</b>	<b>NZMN2-A200-KCO</b>
		250	<b>NZMC2-A250-KCO</b>	<b>NZMN2-A250-KCO</b>
4-pole (3 phase and switched neutral)	NZM2 MCCB	160	<b>NZMC2-4-A160-KCO</b>	<b>NZMN2-4-A160-KCO</b>
		200	<b>NZMC2-4-A200-KCO</b>	<b>NZMN2-4-A200-KCO</b>
		250	<b>NZMC2-4-A250-KCO</b>	<b>NZMN2-4-A250-KCO</b>

N2-250KCO



### Switch disconnector (non-automatic) incoming device

- Select appropriate incomer device from table below
- Maximum cable capacity 185mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	N2 Switch disconnector	250	<b>N2-250-KCO</b>
4-pole	N2 Switch disconnector	250	<b>N2-4-250-KCO</b>

EPBKN125L



## Incomer connection kit/metering connection kit

- See incoming metering section below to order metering components

Poles	Maximum rating (A)	Eaton list number
3-pole incomer connection kit	250	<b>EPBKN1253</b>
3-pole incomer connection kit – includes metering CT and CT to meter cable	250	<b>EPBKN1253M</b>
4-pole incomer connection kit	250	<b>EPBKN1254</b>
4-pole incomer connection kit – includes metering CT and CT to meter cable	250	<b>EPBKN1254M</b>
Direct connection lugs kit	250	<b>EPBKN125L</b>
Direct connection lugs kit – includes metering CT and CT to meter cable	250	<b>EPBKN125LM</b>
Adapter kit for use when incomer device mounted at top of panelboard	230	<b>EPBKTFSN2<sup>1)</sup></b>

<sup>1)</sup> Maximum rating of panelboard when top fed is 230A

NZMB1-1-AF63 and NZMB1-A160



## Outgoing devices – NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Single pole fixed trip. Triple pole thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Single pole 25kA	Triple pole 25kA <sup>1) 2)</sup>
16	<b>NZMB1-1-AF16</b>	–
20	<b>NZMB1-1-AF20</b>	<b>NZMB1-A20</b>
32	<b>NZMB1-1-AF32</b>	<b>NZMB1-A32</b>
40	<b>NZMB1-1-AF40</b>	<b>NZMB1-A40</b>
50	<b>NZMB1-1-AF50</b>	<b>NZMB1-A50</b>
63	<b>NZMB1-1-AF63</b>	<b>NZMB1-A63</b>
80	<b>NZMB1-1-AF80</b>	<b>NZMB1-A80</b>
100	<b>NZMB1-1-AF100</b>	<b>NZMB1-A100</b>
125	<b>NZMB1-1-AF125</b>	<b>NZMB1-A125</b>
160	–	<b>NZMB1-A160</b>

<sup>1)</sup> 36kA triple pole also available, change 'B' to 'C' in list number, ie **NZMC1-A125**

<sup>2)</sup> 50kA triple pole also available, change 'B' to 'N' in list number, ie **NZMN1-A125**

EPBN1BP1



## Accessories

Description	Eaton list number
SP blanking module NZM1 frame (i.e. order 3 per TP way)	<b>EPBN1BP1</b>
Panel door lock with 2 keys (have same key code)	<b>EPBDLK1</b>
Finger guard for outgoing NZM1 1P required for Form 3b Type 2	<b>NZM1-1-XIPK</b>
Finger guard for outgoing NZM1 3P required for Form 3b Type 2	<b>NZM1-XIPK</b>
Shunt trip 208-250AC/DC for NZM1 (excl. 1P)	<b>259744</b>
Shunt trip 208-250AC/DC for NZM3/N3	<b>259763</b>
Undervoltage release 208–240AC for NZM1 (excl. 1P)	<b>259471</b>
Undervoltage release 208–240AC for NZM3/N3	<b>259499</b>
Handle lock for MCCB type NZM1	<b>260199</b>
Handle lock for MCCB types NZM2 and NZM3	<b>260201</b>

EPBN1425SXB



## Cable extension boxes – side mounted

Description	Eaton list number
To fit 4 way panelboard <b>EPBN1425</b>	<b>EPBN1425SXB</b>
To fit 6 way panelboard <b>EPBN1625</b>	<b>EPBN1625SXB</b>
To fit 8 way panelboard <b>EPBN1825</b>	<b>EPBN1825SXB</b>
To fit 12 way panelboard <b>EPBN11225</b>	<b>EPBN11225SXB</b>



# 5.1

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 250A – outgoing device ratings up to 160A

EPBN1EX250



### Cable extension boxes – top/bottom mounted

Description	Eaton list number
250mm high	EPBN1EX250

EPBN1CX250



### Corner filler boxes

Description	Eaton list number
For use where top/bottom/meter boxes are fitted in conjunction with side cable boxes	EPBN1CX250

EPBN1EXDIN



### Din rail extension boxes

Description	Height	Number 18mm Din modules	Eaton list number
For housing din rail mounted command/control equipment, ie timers/contactors	250mm	15	EPBN1EXDIN

### Metering components – refer to pages 82-85 for more explanation

(Requires appropriate incomer connection kit with metering option selected from above)

EPBMETER1



### Incoming metering – digital

- Includes both Modbus and Pulsed outputs

Description	Eaton list number
Incomer meter enclosure (can be fitted to top or bottom of panelboard). Meter not included	EPBN1EX250M
Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)	EPBMETER1*
Voltage supply to meter tap off kit (includes protection fuses). One per panelboard required, irrespective of number of meters	EPBN1SUPM

\* MID version see page 82

# Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 250A – outgoing device ratings up to 160A

# 5.1

EPBN11225SXM



## Outgoing side mounted metering – digital

Description	Number of meter spaces in metering enclosure	Number of meter blanking plates included	Eaton list number
Side mounted metering enclosure to fit 4 way panelboard <b>EPBN1425</b>	2	1	<b>EPBN1425SXM<sup>(1)</sup></b>
Side mounted metering enclosure to fit 6 way panelboard <b>EPBN1625</b>	3	2	<b>EPBN1625SXM<sup>(1)</sup></b>
Side mounted metering enclosure to fit 8 way panelboard <b>EPBN1825</b>	4	3	<b>EPBN1825SXM<sup>(1)</sup></b>
Side mounted metering enclosure to fit 12 way panelboard <b>EPBN11225</b>	6	5	<b>EPBN11225SXM<sup>(1)</sup></b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM1 frame MCCBs. 160A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EPBCTMT160</b>
Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters			<b>EPBCTMT3P</b>
Meter includes both Modbus and Pulsed outputs Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)			<b>EPBMETER1*</b>
Voltage supply to meter tap off kit (includes protection fuses), not required if incoming metering is being used			<b>EPBN1SUPM</b>
Extra long (2m) meter to meter voltage supply linking cable with connectors			<b>EPBN3LKKTm</b>
Extra long (2.5m) CT to meter plug-in cable			<b>EPBN3LKRJ45</b>
CT supporting mount to allow CT to be fitted in side mounted cable extension box if terminal shields being fitted to MCCBs			<b>EPBSXBCTMT</b>
Spare blanking plate for unused meter ways in metering enclosure			<b>EM96BP</b>

<sup>(1)</sup> Suffix 'M' indicates cut-outs for meters and hinged door for outgoing metering suitable for left and right hand applications. Can be used with side mounted cable extension boxes if required

\* MID version see page 82

EPBN1SPD123



## Transient voltage surge suppression units, externally mounted in own enclosure

- See page 86 for full technical specification
- Includes 63A TP NZM1 MCCB for protection/isolation
- See page 133 for dimensions

Description	Eaton list number
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305	<b>EPBN1SPD123</b>
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62305	<b>EPBN1SPD1234</b>

EPBKEL250



## Earth leakage protection

- Direct bolt-on module used in conjunction with 4-pole incomer device, 250A maximum rating
- Sensitivity adjustable from 0.1A to 3A. Time delay adjustable from 60ms to 450ms

Description	Eaton list number
Earth leakage protection add-on kit for incomer device. 250mm high extension box included	<b>EPBKEL250</b>

## Cable size summary

### Incoming cables

MCCB or switch disconnector size max/type	185mm <sup>2</sup> /tunnel terminals
Direct connection lugs incomer	M8
Neutral	M8
Earth	M10

### Outgoing cables

NZM1 MCCB size max/type	70mm <sup>2</sup> /cable clamp (95mm <sup>2</sup> can be fitted depending on cable manufacturer)
Neutral size max/type	50mm <sup>2</sup> tunnel terminals and 2 x M8 bolts
Earth size max/type	50mm <sup>2</sup> tunnel terminals

# 5.2

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 400A – outgoing device ratings up to 160A

### Specification

- Panelboards to IEC61439-2. Form 3b Type 2
- Form 3b Type 2 - with finger guards fitted
- Busbar system KEMA certified 50kA Icc, Icw 30kA 1s
- Enclosure degree of protection IP3X (wall-mounted)
- MCCBs to IEC60947-2. kA ratings shown are Ics=Icu at 400V ac
- Switch disconnectors to IEC60947-3

### Features

- 6 or 12 outgoing TP ways
- Outgoing devices; NZM1 16A–125A SP & 20A–160A TP
- Tin-plated busbars
- Can be configured for incomer device at top of panelboard
- Removable side gland plates as standard
- Wide range of extension boxes, metering, surge protection, and earth leakage incomer options available

See pages 151 -153 for dimensions.

EPBN1640



- Minimum ordering requirement: panelboard + incoming device + incomer connection kit + outgoing devices + blanking plates

Description	Associated incoming device	Current rating (A)	No. of ways	Eaton list number
Incoming rating up to 400A, outgoing ratings up to 160A	NZM3 MCCB or N3 switch disconnector or direct lugs connection	400	6	<b>EPBN1640</b>
			12	<b>EPBN11240</b>

NZMN3-A400



### MCCB incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 240mm<sup>2</sup>
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, Magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Poles	Incoming device type	Current rating (A)	Eaton list number Short circuit rating
3-pole	NZM3 MCCB	250	<b>NZMN3-A250</b>
		320	<b>NZMN3-A320</b>
		400	<b>NZMN3-A400</b>
4-pole (3 phase and switched neutral)	NZM3 MCCB	250	<b>NZMN3-4-A250</b>
		320	<b>NZMN3-4-A320</b>
		400	<b>NZMN3-4-A400</b>

N3-400



### Switch disconnector (non-automatic) incoming device

- Select appropriate incomer device from table below
- Maximum cable capacity 240mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	N3 switch disconnector	400	<b>N3-400</b>
4-pole	N3 switch disconnector	400	<b>N3-4-400</b>

# Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 400A – outgoing device ratings up to 160A

# 5.2

EPBKN2403



## Incomer connection kit/metering connection kit

- See incoming metering section below to order metering components

Poles	Maximum rating (A)	Eaton list number
3-pole incomer connection kit	400	<b>EPBKN2403</b>
3-pole incomer connection kit – includes metering CT and CT to meter cable	400	<b>EPBKN2403M</b>
4-pole incomer connection kit	400	<b>EPBKN2404<sup>1)</sup></b>
4-pole incomer connection kit – includes metering CT and CT to meter cable	400	<b>EPBKN2404M</b>
Direct connection lugs kit	400	<b>EPBKN240L</b>
Direct connection lugs kit – includes metering CT and CT to meter cable	400	<b>EPBKN240LM</b>
Adapter kit for use when incomer device mounted at top of panelboard	370	<b>EPBKTFSN3<sup>2)</sup></b>

<sup>1)</sup> Requires use of cable extension box **EPBN2EX250**

<sup>2)</sup> Maximum rating of panelboard when top fed is 370A

NZMB1-1-AF63  
and NZMB1-A160



## Outgoing devices – NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Single pole fixed trip. Triple pole thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Single pole 25kA	Triple pole 25kA <sup>1) 2)</sup>
16	<b>NZMB1-1-AF16</b>	–
20	<b>NZMB1-1-AF20</b>	<b>NZMB1-A20</b>
32	<b>NZMB1-1-AF32</b>	<b>NZMB1-A32</b>
40	<b>NZMB1-1-AF40</b>	<b>NZMB1-A40</b>
50	<b>NZMB1-1-AF50</b>	<b>NZMB1-A50</b>
63	<b>NZMB1-1-AF63</b>	<b>NZMB1-A63</b>
80	<b>NZMB1-1-AF80</b>	<b>NZMB1-A80</b>
100	<b>NZMB1-1-AF100</b>	<b>NZMB1-A100</b>
125	<b>NZMB1-1-AF125</b>	<b>NZMB1-A125</b>
160	–	<b>NZMB1-A160</b>

<sup>1)</sup> 36kA triple pole also available, change 'B' to 'C' in list number, ie **NZMC1-A125**

<sup>2)</sup> 50kA triple pole also available, change 'B' to 'N' in list number, ie **NZMN1-A125**

EPBDLK1



## Accessories

Description	Eaton list number
SP blanking module NZM1 frame (i.e. order 3 per TP way)	<b>EPBN1BP1</b>
Panel door lock with 2 keys (have same key code)	<b>EPBDLK1</b>
Finger guard for outgoing NZM1 1P required for Form 3b Type 2	<b>NZM1-1-XIPK</b>
Finger guard for outgoing NZM1 3P required for Form 3b Type 2	<b>NZM1-XIPK</b>
Shunt trip 208–250AC/DC for NZM1 (excl. 1P)	<b>259744</b>
Shunt trip 208–250AC/DC for NZM3/N3	<b>259763</b>
Undervoltage release 208–240AC for NZM1 (excl. 1P)	<b>259471</b>
Undervoltage release 208–240AC for NZM3/N3	<b>259499</b>
Handle lock for MCCB type NZM1	<b>260199</b>
Handle lock for MCCB types NZM2 and NZM3	<b>260201</b>

EPBN21240SXB



## Cable extension boxes – side mounted

Description	Eaton list number
To fit 6 way panelboard <b>EPBN1640</b>	<b>EPBN2640SXB</b>
To fit 12 way panelboard <b>EPBN11240</b>	<b>EPBN21240SXB</b>

## 5.2

# Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 400A – outgoing device ratings up to 160A

EPBN2EX250



### Cable extension boxes – top/bottom mounted

Description	Eaton list number
250mm high	EPBN2EX250

EPBN2CX250



### Corner filler boxes

Description	Eaton list number
For use where top/bottom/meter boxes are fitted in conjunction with side cable boxes	EPBN2CX250

EPBN2EXDIN



### Din rail extension boxes

Description	Height	Number 18mm Din modules	Eaton list number
For housing din rail mounted command/control equipment, ie timers/contactors	250mm	15	EPBN2EXDIN

### Metering components – refer to pages 82-85 for more explanation

(Requires appropriate incomer connection kit with metering option selected from above)

EPBN2EX250M



### Incoming metering – digital

- Includes both Modbus and Pulsed outputs
- See page 82 for detailed selection guide

Description	Eaton list number
Incomer meter enclosure (can be fitted to top or bottom of panelboard). Meter not included	EPBN2EX250M
Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)	EPBMETER1*
Voltage supply to meter tap off kit (includes protection fuses). One per panelboard required, irrespective of number of meters	EPBN3SUPM

\* MID version see page 82

EPBN21240SXM



## Outgoing side mounted metering – digital

- See page 84 for detailed selection guide

Description	Number of meter spaces in metering enclosure	Number of meter blanking plates included	Eaton list number
Side mounted metering enclosure to fit 6 way panelboard EPBN1640	3	2	EPBN2640SXM <sup>1)</sup>
Side mounted metering enclosure to fit 12 way panelboard EPBN11240	6	5	EPBN21240SXM <sup>1)</sup>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM1 frame MCCBs. 160A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			EPBCTMT160
Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters			EPBCTMT3P
Meter includes both Modbus and Pulsed outputs Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)			EPBMETER1*
Voltage supply to meter tap off kit (includes protection fuses), not required if incoming metering is being used			EPBN3SUPM
Extra long (2m) meter to meter voltage supply linking cable with connectors			EPBN3LKKTM
Extra long (2.5m) CT to meter plug-in cable			EPBN3LKRJ45
CT supporting mount to allow CT to be fitted in side mounted cable extension box if terminal shields being fitted to MCCBs			EPBSXBCTMT
Spare blanking plate for unused meter ways in metering enclosure			EM96BP

<sup>1)</sup> Suffix 'M' indicates cut-outs for meters and hinged door for outgoing metering suitable for left and right hand applications. Can be used with side mounted cable extension boxes if required

\* MID version see page 82

EPBN1SPD123



## Transient voltage surge suppression units, externally mounted in own enclosure

- See page 86 for full technical specification
- Includes 63A TP NZM1 MCCB for protection/isolation
- See page 133 for dimensions

Description	Eaton list number
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305	EPBN1SPD123
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62305	EPBN1SPD1234

EPBKEL400



## Earth leakage protection

- Kit comprises 350mm high extension box fitted with earth leakage relay, core balance transformer, all cables/terminals/protection fuses, and 230V shunt trip (for tripping of incomer device). Requires 4-pole incomer device. 400A maximum rating
- Sensitivity adjustable from 30mA to 5A. Time delay adjustable from 0.02 to 5 seconds

Description	Eaton list number
Earth leakage protection add-on module for incomer device	EPBKEL400

## Cable size summary

### Incoming cables

MCCB or switch disconnector size max/type	240mm <sup>2</sup> /M12 bolt
Direct connection lugs incomer	M12
Neutral	M8
Earth	M10

### Outgoing cables

NZM1 MCCB size max/type	70mm <sup>2</sup> /cable clamp. (95mm <sup>2</sup> can be fitted depending on cable manufacturer)
Neutral size max/type	50mm <sup>2</sup> tunnel terminals and 2 x M8 bolts
Earth size max/type	50mm <sup>2</sup> tunnel terminals



# 5.3

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 400A – outgoing device ratings up to 250A

### Specification

- Panelboards to IEC61439-2
- Form 3b Type 2 - with finger guards fitted
- Busbar system KEMA certified 50kA Icc, Icw 35kA 1s
- Enclosure degree of protection IP3X (wall-mounted)
- MCCBs to IEC60947-2. kA ratings shown are Ics=Icu at 400V ac
- Switch disconnectors to IEC60947-3

### Features

- 6, 12 or 18 outgoing TP ways
- Outgoing devices; these panelboards utilise two frame sizes of MCCB: NZM2 125A–250A TP, and NZM1 SP 16A–125A or TP 20A–160A
- Tin-plated busbars
- Can be configured for incomer device at top of panelboard
- Removable side gland plates as standard
- Wide range of extension boxes, metering, surge protection, and earth leakage incomer options available

See pages 151 -153 for dimensions.

EPBN2640



- Minimum ordering requirement: panelboard + incoming device + incomer connection kit + outgoing devices + blanking plates

Description	Associated incoming device	Current rating (A)	No. of outgoing ways	Eaton list number
Incoming rating up to 400A, outgoing ratings up to 250A	NZM3 MCCB or N3 Switch Disconnector or direct lugs connection	400	6 (2 x 250A + 4 x 160A)	<b>EPBN2640</b>
			12 (2 x 250A + 10 x 160A)	<b>EPBN21240</b>
			18 (2 x 250A + 16 x 160A)	<b>EPBN21840</b>

NZMN3-A400



### MCCB incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 240mm<sup>2</sup>
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, Magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NZM3 MCCB	250	<b>NZMN3-A250</b>
		320	<b>NZMN3-A320</b>
		400	<b>NZMN3-A400</b>
4-pole (3 phase and switched neutral)	NZM3 MCCB	250	<b>NZMN3-4-A250</b>
		320	<b>NZMN3-4-A320</b>
		400	<b>NZMN3-4-A400</b>

N3-400



### Switch disconnector (non-automatic) incoming device

- Select appropriate incomer device from table below
- Maximum cable capacity 240mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	N2 switch disconnector	400	<b>N3-400</b>
4-pole	N2 switch disconnector	400	<b>N3-4-400</b>

# Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 400A – outgoing device ratings up to 250A

# 5.3

EPBKN2404



## Incomer connection kit/metering connection kit

- See incoming metering section below to order metering components

Poles	Maximum rating (A)	Eaton list number
3-pole incomer connection kit	400	<b>EPBKN2403</b>
3-pole incomer connection kit – includes metering CT and CT to meter cable	400	<b>EPBKN2403M</b>
4-pole incomer connection kit	400	<b>EPBKN2404<sup>1)</sup></b>
4-pole incomer connection kit – includes metering CT and CT to meter cable	400	<b>EPBKN2404M</b>
Direct connection lugs kit	400	<b>EPBKN240L</b>
Direct connection lugs kit – includes metering CT and CT to meter cable	400	<b>EPBKN240LM</b>
Adapter kit for use when incomer device mounted at top of panelboard	370	<b>EPBKTFNS3<sup>2)</sup></b>

<sup>1)</sup> Requires use of cable extension box **EPBN2EX250**

<sup>2)</sup> Maximum rating of panelboard when top fed is 370A

## Outgoing devices – NZM2 frame MCCBs

- Maximum cable capacity 185mm<sup>2</sup>
- Up to 2 can be fitted
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Triple pole 36kA	Triple pole 50kA
125	<b>NZMC2-A125-BT</b>	<b>NZMN2-A125-BT</b>
160	<b>NZMC2-A160-BT</b>	<b>NZMN2-A160-BT</b>
200	<b>NZMC2-A200-BT</b>	<b>NZMN2-A200-BT</b>
250	<b>NZMC2-A250-BT</b>	<b>NZMN2-A250-BT</b>

## Electronic devices options

- Adjustable trip overloads 50-100% x I<sub>n</sub>
- Instantaneous S/C release fixed 12 x I<sub>n</sub>
- Delayed S/C release 2-10 x I<sub>r</sub>

Rating (A)	Eaton list number Triple pole 50kA
100	<b>NZMN2-VE100-BT</b>
160	<b>NZMN2-VE160-BT</b>
250	<b>NZMN2-VE250-BT</b>

NZMB1-1-AF63 and NZMB1-A160



## Outgoing devices – NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Single pole fixed trip. Triple pole thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Single pole 25kA	Triple pole 25kA	Triple pole 36kA <sup>1)</sup>
16	<b>NZMB1-1-AF16</b>	–	–
20	<b>NZMB1-1-AF20</b>	<b>NZMB1-A20</b>	<b>NZMC1-A20</b>
32	<b>NZMB1-1-AF32</b>	<b>NZMB1-A32</b>	<b>NZMC1-A32</b>
40	<b>NZMB1-1-AF40</b>	<b>NZMB1-A40</b>	<b>NZMC1-A40</b>
50	<b>NZMB1-1-AF50</b>	<b>NZMB1-A50</b>	<b>NZMC1-A50</b>
63	<b>NZMB1-1-AF63</b>	<b>NZMB1-A63</b>	<b>NZMC1-A63</b>
80	<b>NZMB1-1-AF80</b>	<b>NZMB1-A80</b>	<b>NZMC1-A80</b>
100	<b>NZMB1-1-AF100</b>	<b>NZMB1-A100</b>	<b>NZMC1-A100</b>
125	<b>NZMB1-1-AF125</b>	<b>NZMB1-A125</b>	<b>NZMC1-A125</b>
160	–	<b>NZMB1-A160</b>	<b>NZMC1-A160</b>

<sup>1)</sup> 50kA triple pole also available, change 'C' to 'N' in list number, ie **NZMN1-A125**

## Accessories

EPBN1BP1 tunnel terminals



Description	Eaton list number
SP blanking module NZM1 frame (i.e. order 3 per TP way)	<b>EPBN1BP1</b>
TP blanking module NZM2 frame	<b>EPBN2BP3</b>
Panel door lock with 2 keys (have same key code)	<b>EPBDLK1</b>
Finger guard for outgoing NZM1 1P required for Form 3b Type 2	<b>NZM1-1-XIPK</b>
Finger guard for outgoing NZM1 3P required for Form 3b Type 2	<b>NZM1-XIPK</b>
Finger guard for outgoing NZM2 3P required for Form 3b Type 2	<b>NZM2-XIPK</b>
Shunt trip 208–250AC/DC for NZM1 (excl. 1P)	<b>259744</b>
Shunt trip 208–250AC/DC for NZM2/N2	<b>259763</b>
Shunt trip 208–250AC/DC for NZM3/N3	<b>259763</b>
Undervoltage release 208–240AC for NZM1 (excl. 1P)	<b>259471</b>
Undervoltage release 208–240AC for NZM2/N2	<b>259499</b>
Undervoltage release 208–240AC for NZM3/N3	<b>259499</b>
Handle lock for MCCB type NZM1	<b>260199</b>
Handle lock for MCCB types NZM2 and NZM3	<b>260201</b>

# 5.3

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 400A – outgoing device ratings up to 250A

EPBN2640SXB



### Cable extension boxes – side mounted

Description	Eaton list number
To fit 6 way panelboard <b>EPBN2640</b>	<b>EPBN2640SXB</b>
To fit 12 way panelboard <b>EPBN21240</b>	<b>EPBN21240SXB</b>
To fit 18 way panelboard <b>EPBN21840</b>	<b>EPBN21840SXB</b>

EPBN2EX250



### Cable extension boxes – top/bottom mounted

Description	Eaton list number
250mm high	<b>EPBN2EX250</b>

EPBN2CX250



### Corner filler boxes

Description	Eaton list number
For use where top/bottom/meter boxes are fitted in conjunction with side cable boxes	<b>EPBN2CX250</b>

EPBN2EXDIN



### Din rail extension boxes

Description	Height	Number 18mm Din modules	Eaton list number
For housing din rail mounted command/control equipment, ie timers/contactors	250mm	18	<b>EPBN2EXDIN</b>

### Metering components – refer to pages 82-85 for more explanation

(Requires appropriate incomer connection kit with metering option selected from above)

EPBN2EX250M



### Incoming metering – digital

- Includes both Modbus and Pulsed outputs
- See page 82 for detailed selection guide

Description	Eaton list number
Incomer meter enclosure (can be fitted to top or bottom of panelboard). Meter not included	<b>EPBN2EX250M</b>
Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)	<b>EPBMETER1*</b>
Voltage supply to meter tap off kit (includes protection fuses). One per panelboard required, irrespective of number of meters	<b>EPBN3SUPM</b>

\* MID version see page 82

EPBN21240SXM



## Outgoing side mounted metering – digital

- See page 84 for detailed selection guide

Description	Number of meter spaces in metering enclosure	Number of meter blanking plates included	Eaton list number
Side mounted metering enclosure to fit 6 way panelboard EPBN2640	3	2	EPBN2640SXM <sup>1)</sup>
Side mounted metering enclosure to fit 12 way panelboard EPBN21240	6	5	EPBN21240SXM <sup>1)</sup>
Side mounted metering enclosure to fit 18 way panelboard EPBN21840	9	8	EPBN21840SXM
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM1 frame MCCBs. 160A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			EPBCTMT160
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM2 frame MCCBs. 250A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			EPBCTMT250
Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters			EPBCTMT3P
Meter includes both Modbus and Pulsed outputs Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)			EPBMETER1
Voltage supply to meter tap off kit (includes protection fuses), not required if incoming metering is being used			EPBN3SUPM
Extra long (2m) meter to meter voltage supply linking cable with connectors			EPBN3LKKTM
Extra long (2.5m) CT to meter plug-in cable			EPBN3LKRJ45
CT supporting mount to allow CT to be fitted in side mounted cable extension box if terminal shields being fitted to MCCBs			EPBSXBCTMT
Spare blanking plate for unused meter ways in metering enclosure			EM96BP

<sup>1)</sup> Suffix 'M' indicates cut-outs for meters and hinged door for outgoing metering suitable for left and right hand applications. Can be used with side mounted cable extension boxes if required

EPBN1SPD123



## Transient voltage surge suppression units, externally mounted in own enclosure

- See page 86 for full technical specification
- Includes 63A TP NZM1 MCCB for protection/isolation
- See page 133 for dimensions

Description	Eaton list number
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305	EPBN1SPD123
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62305	EPBN1SPD1234

EPBKEL400



## Earth leakage protection

- Kit comprises 350mm high extension box fitted with earth leakage relay, core balance transformer, all cables/terminals/protection fuses, and 230V shunt trip (for tripping of incomer device). Requires 4-pole incomer device. 400A maximum rating
- Sensitivity adjustable from 30mA to 5A. Time delay adjustable from 0.02 to 5 seconds

Description	Eaton list number
Earth leakage protection add-on kit for incomer device	EPBKEL400

## Cable size summary

### Incoming cables

MCCB or switch disconnect size max/type	240mm <sup>2</sup> /M12 bolt
Direct connection lugs incomer	M12
Neutral	M8
Earth	M10

### Outgoing cables

NZM2 MCCB size max/type	185mm <sup>2</sup> /cable clamp
NZM1 MCCB size max/type	70mm <sup>2</sup> /cable clamp. (95mm <sup>2</sup> can be fitted depending on cable manufacturer)
Neutral size max/type	50mm <sup>2</sup> tunnel terminals and 4 x M8 bolts
Earth size max/type	50mm <sup>2</sup> tunnel terminals and 4 x M8 bolts

# 5.4

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 630A – outgoing device ratings up to 250A

### Specification

- Panelboards to IEC61439-2
- Form 3b Type 2 - with finger guards fitted
- Busbar system KEMA certified 50kA Icc, Icw 50kA 1s
- Enclosure degree of protection IP3X (wall-mounted)
- MCCBs to IEC60947-2. kA ratings shown are Ics=Icu at 400V ac
- Switch disconnectors to IEC60947-3

### Features

- 6, 12 or 18 outgoing TP ways
- Outgoing devices; these panelboards utilise two frame sizes of MCCB: NZM2 125A–250A TP, and NZM1 SP 16A–125A or TP 20A–160A
- Tin-plated busbars
- Can be configured for incomer device at top of panelboard
- Removable side gland plates as standard
- Wide range of extension boxes, metering, surge protection, and earth leakage incomer options available
- Door lock included

See pages 151-153 for dimensions.

EPBN2863



- Minimum ordering requirement: panelboard + incoming device + incomer connection kit + outgoing devices + blanking plates

Description	Associated incoming device	Current rating (A)	No. of outgoing ways	Eaton list number
Incoming rating 630A, outgoing ratings up to 250A	NZMLW MCCB or NLW CBS or direct lugs connection	630	8 (4 x 250A + 4 x 160A)	<b>EPBN2863</b>
			12 (4 x 250A + 8 x 160A)	<b>EPBN21263</b>
			18 (4 x 250A + 14 x 160A)	<b>EPBN21863</b>

NZMLW-630



### MCCB incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 2 x 300mm<sup>2</sup>
- Thermal trip adjustment 50 -100% In, Magnetic trip adjustment 2 to 8 x In

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NZMLW MCCB	630	<b>NZMLW-A630</b>
4-pole (3 phase and switched neutral)	NZMLW MCCB	630	<b>NZMLW-4-A630</b>

NLW-630



### Circuit breaker switch incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 2 x 300mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NLW Circuit breaker switch	630	<b>NLW-630</b>
4-pole	NLW Circuit breaker switch	630	<b>NLW-4-630</b>

EPBKN2633



### Incomer connection kit/metering connection kit

- See incoming metering section below to order metering components

Poles	Maximum rating (A)	Eaton list number
3-Pole incomer connection kit	630	<b>EPBKN2633</b>
3-Pole incomer connection kit – includes metering CT and CT to meter cable	630	<b>EPBKN2633M</b>
4-Pole incomer connection kit	630	<b>EPBKN2634</b>
4-Pole incomer connection kit – includes metering CT and CT to meter cable	630	<b>EPBKN2634M</b>
Direct connection lugs kit	630	<b>EPBKN263L</b>
Direct connection lugs kit – includes metering CT and CT to meter cable	630	<b>EPBKN263LM</b>
Adapter kit for use when incomer device mounted at top of panelboard	570	<b>EPBKTFSLW<sup>1)</sup></b>

<sup>1)</sup> Maximum rating of panelboard when top fed is 570A

NZMC2-A250-BT



## Outgoing devices – NZM2 frame MCCBs

- Maximum cable capacity 185mm<sup>2</sup>
- Up to 4 can be fitted
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Triple pole 36kA	Triple pole 50kA
125	<b>NZMC2-A125-BT</b>	<b>NZMN2-A125-BT</b>
160	<b>NZMC2-A160-BT</b>	<b>NZMN2-A160-BT</b>
200	<b>NZMC2-A200-BT</b>	<b>NZMN2-A200-BT</b>
250	<b>NZMC2-A250-BT</b>	<b>NZMN2-A250-BT</b>

## Electronic devices options

- Adjustable trip overloads 50-100% x I<sub>n</sub>
- Instantaneous S/C release fixed 12 x I<sub>n</sub>
- Delayed S/C release 2-10 x I<sub>r</sub>

Rating (A)	Eaton list number Triple pole 50kA
100	<b>NZMN2-VE100-BT</b>
160	<b>NZMN2-VE160-BT</b>
250	<b>NZMN2-VE250-BT</b>

NZMB1-1-AF63  
and NZMB1-A160



## Outgoing devices – NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Single pole fixed trip. Triple pole thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Single pole 25kA	Triple pole 25kA	Triple pole 36kA <sup>1)</sup>
16	<b>NZMB1-1-AF16</b>	–	–
20	<b>NZMB1-1-AF20</b>	<b>NZMB1-A20</b>	<b>NZMC1-A20</b>
32	<b>NZMB1-1-AF32</b>	<b>NZMB1-A32</b>	<b>NZMC1-A32</b>
40	<b>NZMB1-1-AF40</b>	<b>NZMB1-A40</b>	<b>NZMC1-A40</b>
50	<b>NZMB1-1-AF50</b>	<b>NZMB1-A50</b>	<b>NZMC1-A50</b>
63	<b>NZMB1-1-AF63</b>	<b>NZMB1-A63</b>	<b>NZMC1-A63</b>
80	<b>NZMB1-1-AF80</b>	<b>NZMB1-A80</b>	<b>NZMC1-A80</b>
100	<b>NZMB1-1-AF100</b>	<b>NZMB1-A100</b>	<b>NZMC1-A100</b>
125	<b>NZMB1-1-AF125</b>	<b>NZMB1-A125</b>	<b>NZMC1-A125</b>
160	–	<b>NZMB1-A160</b>	<b>NZMC1-A160</b>

<sup>1)</sup> 50kA triple pole also available, change 'C' to 'N' in list number, ie **NZMN1-A125**

EPBN1BP1



## Accessories

Description	Eaton list number
SP blanking module NZM1 frame (i.e. order 3 per TP way)	<b>EPBN1BP1</b>
TP blanking module NZM2 frame	<b>EPBN2BP3</b>
Finger guard for outgoing NZM1 1P required for Form 3b Type 2	<b>NZM1-1-XIPK</b>
Finger guard for outgoing NZM1 3P required for Form 3b Type 2	<b>NZM1-XIPK</b>
Finger guard for outgoing NZM2 3P required for Form 3b Type 2	<b>NZM2-XIPK</b>
Shunt trip 208–250AC/DC for NZM1 (excl. 1P)	<b>259744</b>
Shunt trip 208–250AC/DC for NZM2/N2	<b>259763</b>
Shunt trip 110V–240VAC for NZMLW/NLW	<b>SNT4LP11K</b>
Undervoltage release 208–240AC for NZM1 (excl. 1P)	<b>259471</b>
Undervoltage release 208–240AC for NZM2/N2	<b>259499</b>
Undervoltage release 240VAC for NZMLW/NLW	<b>UVH4LP11K</b>
Handle lock for MCCB type NZM1	<b>260199</b>
Handle lock for MCCB types NZM2 and NZM3	<b>260201</b>

EPBN21863SXB



## Cable extension boxes – side mounted

Description	Eaton list number
To fit 8 way panelboard <b>EPBN2863</b>	<b>EPBN21263SXB</b>
To fit 12 way panelboard <b>EPBN21263</b>	<b>EPBN21263SXB</b>
To fit 18 way panelboard <b>EPBN21863</b>	<b>EPBN21863SXB</b>



# 5.4

## Memshield 3 MCCB panelboards and associated devices

Incoming device ratings up to 630A – outgoing device ratings up to 250A

EPBN3EX250



### Cable extension boxes – top/bottom mounted

Description	Eaton list number
250mm high	EPBN3EX250

EPBNCX250



### Corner filler boxes

Description	Eaton list number
For use where top/bottom/meter boxes are fitted in conjunction with side cable boxes	EPBN2CX250

EPBN3EXDIN



### Din rail extension boxes

Description	Height	Number 18mm Din modules	Eaton list number
For housing din rail mounted command/control equipment, ie timers/contactors	250mm	30	EPBN3EXDIN

### Metering components – refer to pages 82-85 for more explanation

(Requires appropriate incomer connection kit with metering option selected from above)

EPBN3EX250M



### Incoming metering – digital

- Includes both Modbus and Pulsed outputs
- See page 82 for detailed selection guide

Description	Eaton list number
Incomer meter enclosure (can be fitted to top or bottom of panelboard). Meter not included	EPBN3EX250M
Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)	EPBMETER1*
Voltage supply to meter tap off kit (includes protection fuses). One per panelboard required, irrespective of number of meters	EPBN3SUPM

\* MID version see page 82

EPBN21263SXM



## Outgoing side mounted metering – digital

- See page 84 for detailed selection guide

Description	Number of meter spaces in metering enclosure	Number of meter blanking plates included	Eaton list number
Side mounted metering enclosure to fit 8 way panelboard <b>EPBN2863</b>	6	5	<b>EPBN21263SXM</b>
Side mounted metering enclosure to fit 12 way panelboard <b>EPBN21263</b>	6	5	<b>EPBN21263SXM</b>
Side mounted metering enclosure to fit 18 way panelboard <b>EPBN21863</b>	9	8	<b>EPBN21863SXM</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM1 frame MCCBs. 160A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EPBCTMT160</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM2 frame MCCBs. 250A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EPBCTMT250</b>
Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters			<b>EPBCTMT3P</b>
Meter includes both Modbus and Pulsed outputs Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)			<b>EPBMETER1*</b>
Voltage supply to meter tap off kit (includes protection fuses), not required if incoming metering is being used			<b>EPBN3SUPM</b>
Extra long (2m) meter to meter voltage supply linking cable with connectors			<b>EPBN3LKKTM</b>
Extra long (2.5m) CT to meter plug-in cable			<b>EPBN3LKRJ45</b>
CT supporting mount to allow CT to be fitted in side mounted cable extension box if terminal shields being fitted to MCCBs			<b>EPBSXBCTMT</b>
Spare blanking plate for unused meter ways in metering enclosure			<b>EM96BP</b>

<sup>1)</sup> Suffix 'M' indicates cut-outs for meters and hinged door for outgoing metering suitable for left and right hand applications. Can be used with side mounted cable extension boxes if required

\* MID version see page 82

EPBN1SPD123



## Transient voltage surge suppression units, externally mounted in own enclosure

- See page 86 for full technical specification
- Includes 63A TP NZM1 MCCB for protection/isolation
- See page 133 for dimensions

Description	Eaton list number
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305	<b>EPBN1SPD123</b>
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62305	<b>EPBN1SPD1234</b>

EPBKEL800



## Earth leakage protection

- Kit comprises 350mm high extension box fitted with earth leakage relay, core balance transformer, all cables/terminals/protection fuses, and 230V shunt trip (for tripping of incomer device). Requires 4-pole incomer device. 630A maximum rating
- Sensitivity adjustable from 30mA to 5A. Time delay adjustable from 0.02 to 5 seconds

Description	Eaton list number
Earth leakage protection add-on kit for incomer device	<b>EPBKEL800</b>

## Cable size summary

### Incoming cables

MCCB or switch disconnecter size max/type	2 x 300mm <sup>2</sup> /M10 bolt
Direct connection lugs incomer	M12
Neutral	M12
Earth	M10

### Outgoing cables

NZM2 MCCB size max/type	185mm <sup>2</sup> /cable clamp
NZM1 MCCB size max / type	70mm <sup>2</sup> /cable clamp. (95mm <sup>2</sup> can be fitted depending on cable manufacturer)
Neutral size max / type	50mm <sup>2</sup> tunnel terminals and 4 x M8 bolts
Earth size max / type	50mm <sup>2</sup> tunnel terminals and 8 x M8 bolts

### Specification

- Panelboards to IEC61439-2. Form 3b Type 2
- Form 3b Type 2 - with finger guards fitted
- Busbar system KEMA certified 50kA Icc, Icw 50kA 1s
- Enclosure degree of protection IP3X (wall-mounted)
- Outgoing MCCBs to IEC60947-2. kA ratings shown are Ics=Icu at 400V ac
- Incoming MCCB/circuit breaker switch to IEC60947-2 Icu 50kA, Ics 25kA

### Features

- 8, or 12 outgoing TP ways
- Outgoing devices; these panelboards utilise three frame sizes of MCCB: NZM3 250A–400A, NZM2 125A–250A TP, and NZM1 SP 16A–125A or TP 20A–160A
- Tin-plated busbars
- Can be configured for incomer device at top of panelboard
- Removable side gland plates as standard
- Wide range of extension boxes, metering, surge protection, and earth leakage incomer options available
- Door lock included

See pages 151-153 for dimensions.

EPBN31280



- Minimum ordering requirement: panelboard + incoming device + incomer connection kit + outgoing devices + blanking plates

Description	Associated incoming device	Current rating (A)	No. of outgoing ways	Eaton list number
Incoming rating 800A, outgoing ratings up to 400A	NZMLW MCCB or NLW CBS	800	8 (2 x 400A + 2 x 250A + 4 x 160A)	<b>EPBN3880</b>
			12 (2 x 400A + 4 x 250A + 6 x 160A)	<b>EPBN31280</b>

NZMLW-800



### MCCB incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 2 x 300mm<sup>2</sup>
- Thermal trip adjustment 50 - 100% In, Magnetic trip adjustment 2 to 8 x In

Poles	Incoming device type	Current rating (A)	Eaton list number Short circuit rating 50kA
3-pole	NZMLW MCCB	800	<b>NZMLW-A800</b>
4-pole (3 phase and switched neutral)	NZMLW MCCB	800	<b>NZMLW-4-A800</b>

NLW-800



### Circuit breaker switch incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 2 x 300mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NLW Circuit breaker switch	800	<b>NLW-800</b>
4-pole	NLW Circuit breaker switch	800	<b>NLW-4-800</b>

EPBKN3803



### Incomer connection kit/metering connection kit

- See incoming metering section below to order metering components

Poles	Maximum rating (A)	Eaton list number
3-Pole incomer connection kit	800	<b>EPBKN3803</b>
3-Pole incomer connection kit – includes metering CT and CT to meter cable	800	<b>EPBKN3803M</b>
4-Pole incomer connection kit	800	<b>EPBKN3804</b>
4-Pole incomer connection kit – includes metering CT and CT to meter cable	800	<b>EPBKN3804M</b>
Adapter kit for use when incomer device mounted at top of panelboard	720	<b>EPBKTFSLW<sup>1)</sup></b>

<sup>1)</sup>Maximum rating of panelboard when top fed is 720A

# Memshield 3 panelboards and associated devices

Incoming device ratings up to 800A – outgoing device ratings up to 400A

# 5.5

NZMN3-A400-BT



## Outgoing devices – NZM3 frame MCCBs.

- Maximum cable capacity 240mm<sup>2</sup>
- Up to 2 can be fitted
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Triple pole 50kA
250	NZMN3-A250-BT
320	NZMN3-A320-BT
400	NZMN3-A400-BT

## Outgoing devices – NZM2 frame MCCBs

- Maximum cable capacity 185mm<sup>2</sup>
- Up to 4 can be fitted
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Triple pole 36kA	Eaton list number Triple pole 50kA
125	NZMC2-A125-BT	NZMN2-A125-BT
160	NZMC2-A160-BT	NZMN2-A160-BT
200	NZMC2-A200-BT	NZMN2-A200-BT
250	NZMC2-A250-BT	NZMN2-A250-BT

## Outgoing devices – NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Single pole fixed trip. Triple pole thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating (A)	Eaton list number Single pole 25kA	Eaton list number Triple pole 25kA	Eaton list number Triple pole 36kA <sup>1)</sup>
16	NZMB1-1-AF16	–	–
20	NZMB1-1-AF20	NZMB1-A20	NZMC1-A20
32	NZMB1-1-AF32	NZMB1-A32	NZMC1-A32
40	NZMB1-1-AF40	NZMB1-A40	NZMC1-A40
50	NZMB1-1-AF50	NZMB1-A50	NZMC1-A50
63	NZMB1-1-AF63	NZMB1-A63	NZMC1-A63
80	NZMB1-1-AF80	NZMB1-A80	NZMC1-A80
100	NZMB1-1-AF100	NZMB1-A100	NZMC1-A100
125	NZMB1-1-AF125	NZMB1-A125	NZMC1-A125
160	–	NZMB1-A160	NZMC1-A160

<sup>1)</sup> 50kA triple pole also available, change 'C' to 'N' in list number, ie NZMN1-A125

## Accessories

Description	Eaton list number
SP blanking module NZM1 frame (i.e. order 3 per TP way)	EPBN1BP1
TP blanking module NZM2 frame	EPBN2BP3
TP blanking module NZM3 frame	EPBN3BP3
Finger guard for outgoing NZM1 1P required for Form 3b Type 2	NZM1-1-XIPK
Finger guard for outgoing NZM1 3P required for Form 3b Type 2	NZM1-XIPK
Finger guard for outgoing NZM2 3P required for Form 3b Type 2	NZM2-XIPK
Finger guard for outgoing NZM3 3P required for Form 3b Type 2	NZM3-XIPK
Shunt trip 208–250AC/DC for NZM1 (excl. 1P)	259744
Shunt trip 208–250AC/DC for NZM2/N2	259763
Shunt trip 208–250AC/DC for NZM3/N3	259763
Shunt trip 110V–240VAC for NZMLW/NLW	SNT4LP11K
Undervoltage release 208–240AC for NZM1 (excl. 1P)	259471
Undervoltage release 208–240AC for NZM2/N2	259499
Undervoltage release 208–240AC for NZM3/N3	259499
Undervoltage release 240VAC for NZMLW/NLW	UVH4LP11K
Handle lock for MCCB type NZM1	260199
Handle lock for MCCB types NZM2 and NZM3	260201

NZMB1-1-AF63  
and NZMB1-A160



EPBN3BP3



EPBN21863SXB

**Cable extension boxes – side mounted**

Description	Eaton list number
To fit 8 way panelboard <b>EPBN3880</b>	<b>EPBN21263SXB</b>
To fit 12 way panelboard <b>EPBN31280</b>	<b>EPBN21863SXB</b>

EPBN3EX250

**Cable extension boxes – top/bottom mounted**

Description	Eaton list number
250mm high	<b>EPBN3EX250</b>

EPBN2CX250

**Corner filler boxes**

Description	Eaton list number
For use where top/bottom/meter boxes are fitted in conjunction with side cable boxes	<b>EPBN2CX250</b>

EPBN3EXDIN

**Din rail extension boxes**

Description	Height	Number 18mm Din modules	Eaton list number
For housing din rail mounted command/control equipment, ie timers/contactors	250mm	30	<b>EPBN3EXDIN</b>

**Metering components – refer to pages 82-85 for more explanation**

(Requires appropriate incomer connection kit with metering option selected from above)

EPBN3EX250M

**Incoming metering – digital**

- Includes both Modbus and Pulsed outputs
- See page 82 for detailed selection guide

Description	Eaton list number
Incomer meter enclosure (can be fitted to top or bottom of panelboard). Meter not included	<b>EPBN3EX250M</b>
Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)	<b>EPBMETER1*</b>
Voltage supply to meter tap off kit (includes protection fuses). One per panelboard required, irrespective of number of meters	<b>EPBN3SUPM</b>

\* MID version see page 82

# Memshield 3 panelboards and associated devices

Incoming device ratings up to 800A – outgoing device ratings up to 400A

# 5.5

EPBN21263SXM



## Outgoing side mounted metering – digital

- See page 84 for detailed selection guide

Description	Number of meter spaces in metering enclosure	Number of meter blanking plates included	Eaton list number
Side mounted metering enclosure to fit 8 way panelboard <b>EPBN3880</b>	6	5	<b>EPBN21263SXM</b>
Side mounted metering enclosure to fit 12 way panelboard <b>EPBN31280</b>	9	8	<b>EPBN21863SXM</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM1 frame MCCBs. 160A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EPBCTMT160</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM2 frame MCCBs. 250A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EPBCTMT250</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM3 frame MCCBs. 400A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors.			<b>EPBCTMT400</b>
Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters			<b>EPBCTMT3P</b>
Meter includes both Modbus and Pulsed outputs Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)			<b>EPBMETER1*</b>
Voltage supply to meter tap off kit (includes protection fuses), not required if incoming metering is being used			<b>EPBN3SUPM</b>
Extra long (2m) meter to meter voltage supply linking cable with connectors			<b>EPBN3LKKTM</b>
Extra long (2.5m) CT to meter plug-in cable			<b>EPBN3LKRJ45</b>
CT supporting mount to allow CT to be fitted in side mounted cable extension box if terminal shields being fitted to MCCBs			<b>EPBSXBCTMT</b>
Spare blanking plate for unused meter ways in metering enclosure			<b>EM96BP</b>

<sup>1)</sup> Suffix 'M' indicates cut-outs for meters and hinged door for outgoing metering suitable for left and right hand applications. Can be used with side mounted cable extension boxes if required

\* MID version see page 82

EPBN1SPD123



## Transient voltage surge suppression units, externally mounted in own enclosure

- See page 90 for full technical specification
- Includes 63A TP NZM1 MCCB for protection/isolation
- See page 133 for dimensions

Description	Eaton list number
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305	<b>EPBN1SPD123</b>
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62305	<b>EPBN1SPD1234</b>

EPBKEL800



## Earth leakage protection

- Kit comprises 350mm high extension box fitted with earth leakage relay, core balance transformer, all cables/terminals/protection fuses, and 230V shunt trip (for tripping of incomer device). Requires 4-pole incomer device. 800A maximum rating
- Sensitivity adjustable from 30mA to 5A. Time delay adjustable from 0.02 to 5 seconds

Description	Eaton list number
Earth leakage protection add-on kit for incomer device	<b>EPBKEL800</b>

## Cable size summary

### Incoming cables

MCCB or switch disconnector size max/type	2 x 300mm <sup>2</sup> /M12 bolt
Neutral	M12
Earth	M10

### Outgoing cables

NZM3 MCCB size max/type	240mm <sup>2</sup> /cable clamp
NZM2 MCCB size max /type	185mm <sup>2</sup> /cable clamp
NZM1 MCCB size max /type	70mm <sup>2</sup> /cable clamp. (95mm <sup>2</sup> can be fitted depending on cable manufacturer)
Neutral size max/type	50mm <sup>2</sup> tunnel terminals and 4 x M8 bolts
Earth size max/type	50mm <sup>2</sup> tunnel terminals and 8 x M8 bolts

# 5.6

## Memshield 3 MCCB panelboards and associated devices

### Plug-in incoming metering

When configuring panelboard incoming metering, simply identify panelboard and incomer type, then order the following modules detailed in the selection chart below-

1. Incoming meter connection kit
2. Incoming meter enclosure
3. Meter
4. Voltage supply to meter tap-off kit
5. Top or bottom mounted cable extension box (When necessary see note)

Plug-in connectivity is provided between meter, CT and supply.

Incoming metering can be configured with outgoing metering.

Meter connection arrangement



### Incoming metering module selection

Meter module	Panelboard	EPBN1425, EPBN1625, EPBN1825, EPBN11225			EPBN1640, EPBN11240			EPBN2640, EPBN21240, EPBN21840		
		250A 3P MCCB/switch	250A 4P MCCB/switch	250A 3P lugs	400A 3P MCCB/switch	400A 4P MCCB/switch	400A 3P lugs	400A 3P MCCB/switch	400A 4P MCCB/switch	400A 3P lugs
Incoming metering connection kit	EPBKN1253M	✓								
	EPBKN1254M		✓							
	EPBKN125LM			✓						
	EPBKN2403M				✓			✓		
	EPBKN2404M					✓			✓	
	EPBKN240LM						✓			✓
Incoming meter enclosure	EPBN1EX250M	✓	✓	✓						
	EPBN2EX250M				✓	✓	✓	✓	✓	✓
Meter	EPBMETER1	✓	✓	✓	✓	✓	✓	✓	✓	✓
Meter (MID)	EMC3P-P2P1	✓	✓	✓	✓	✓	✓	✓	✓	✓
Voltage supply to meter tap-off kit	EPBN1SUPM	✓	✓	✓						
	EPBN3SUPM				✓	✓	✓	✓	✓	✓
Cable extension box <sup>1)</sup>	EPBN2EX250				✓	✓		✓	✓	
Meter module	Panelboard	EPBN2863, EPBN21263, EPBN21863			EPBN3880, EPBN31280					
		630A 3P MCCB/switch	630A 4P MCCB/switch	630A 3P lugs	800A 3P MCCB/switch	800A 4P MCCB/switch				
Incoming metering connection kit	EPBKN2633M	✓								
	EPBKN2634M		✓							
	EPBKN3803M				✓					
	EPBKN3804M					✓				
	EPBKN263LM			✓						
Incoming meter enclosure	EPBN3EX250M	✓	✓	✓	✓	✓				
Meter	EPBMETER1	✓	✓	✓	✓	✓				
Meter (MID)	EMC3P-P2P1	✓	✓	✓	✓	✓				
Voltage supply to meter tap-off kit	EPBN3SUPM	✓	✓	✓	✓	✓				
Cable extension box <sup>1)</sup>	EPBN3EX250	✓	✓		✓	✓				

<sup>1)</sup>When incoming meter enclosure is fitted at the feed end of the panelboard there is no need for a cable extension box



### Meter

Meter is available with pulsed and modbus outputs.  
Simply installed with 2 locking screws.



### Incoming meter enclosure

250mm high enclosure with hinged front door.  
Simply bolted to the top or the bottom of the panelboard.

### Supply tap-off

Provision to fit tap-off to either the left and/or right hand side of the pan assembly.  
Only 1 per panelboard is required but provision to fit two is an option.



### Incoming metering connection kit

This includes all copper connectors, CT, shielding and CT to meter cable. Can be top or bottom fed.

This does not include the incoming device, which has to be ordered separately.



### Cable extension box (when necessary)

250mm high enclosure, fitted incoming end.

When incoming meter enclosure is fitted at the feed end of the 400A/630A/800A boards there is no need for a cable extension box.



# 5.7

## Memshield 3 MCCB panelboards and associated devices

### Plug-in outgoing metering

When configuring panelboard outgoing metering, simply identify panelboard and number of outgoing breaker type, then order the following modules detailed in the selection chart below:

1. Outgoing CT kit
2. Outgoing side mounted meter extension box
3. Meter
4. Voltage supply to meter tap-off kit
5. Extra long meter to meter voltage linking kit to feed to meter extension box on other side of panelboard if necessary
6. Extra long CT to meter linking cable if required
7. Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters if required

Plug-in connectivity is provided between meter, CT and supply.

Outgoing metering can be configured with incoming metering.

Meter connection arrangement



### Outgoing metering module selection

Meter module	Panelboard	EPBN1425	EPBN1625	EPBN1825	EPBN11225	EPBN1640	EPBN11240	EPBN2640	EPBN21240	EPBN21840	EPBN2863	EPBN21263	EPBN21863	EPBN3880	EPBN31280
Outgoing CT kit (1 off required per outgoing way)	EPBCTMT160 (NZM1 160A)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	EPBCTMT250 (NZM2 250A)							✓	✓	✓	✓	✓	✓	✓	✓
	EPBCTMT400 (NZM3 400A)													✓	✓
Outgoing side mounted meter extension box	EPBN1425SXM	✓													
	EPBN1625SXM		✓												
	EPBN1825SXM			✓											
	EPBN11225SXM				✓										
	EPBN2640SXM					✓		✓							
	EPBN21240SXM						✓		✓						
	EPBN21840SXM									✓					
	EPBN21263SXM										✓	✓		✓	
	EPBN21863SXM												✓		✓
Meter	EPBMETER1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Meter (MID)	EMC3P-P2P1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Voltage supply to meter tap-off kit	EPBN1SUPM	✓	✓	✓	✓										
	EPBN3SUPM					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CT mount for outgoing meter cable way <sup>1)</sup>	EPBSXBCTMT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Extra long meter to meter voltage linking kit	EPBN3LKKTM	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Extra long CT to meter linking kit	EPBN3LKRJ45	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Three phase splitter box	EPBCTMT3P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

<sup>1)</sup> Only required when terminal shields are fitted to outgoing MCCBs. The CT can be fitted in a side-mounted cable extension box. One CT mount per outgoing CT.

<sup>2)</sup> For single phase metering use TP CT kit and just use one of the phases

## Meter

Meter is available with pulsed and modbus outputs.  
Simply installed with 2 locking screws.



## Outgoing meter kit


One kit per outgoing way, includes  
CT, CT to meter cable, and meter  
to meter voltage linking cable.

NZM1 – 160A max  
NZM2 – 250A max  
NZM3 – 400A max




## Outgoing side mounted meter extension box

Can be fitted on the left and right  
hand side of the panelboard.  
All outgoing meter apertures, except one,  
have removable blanking shields fitted.

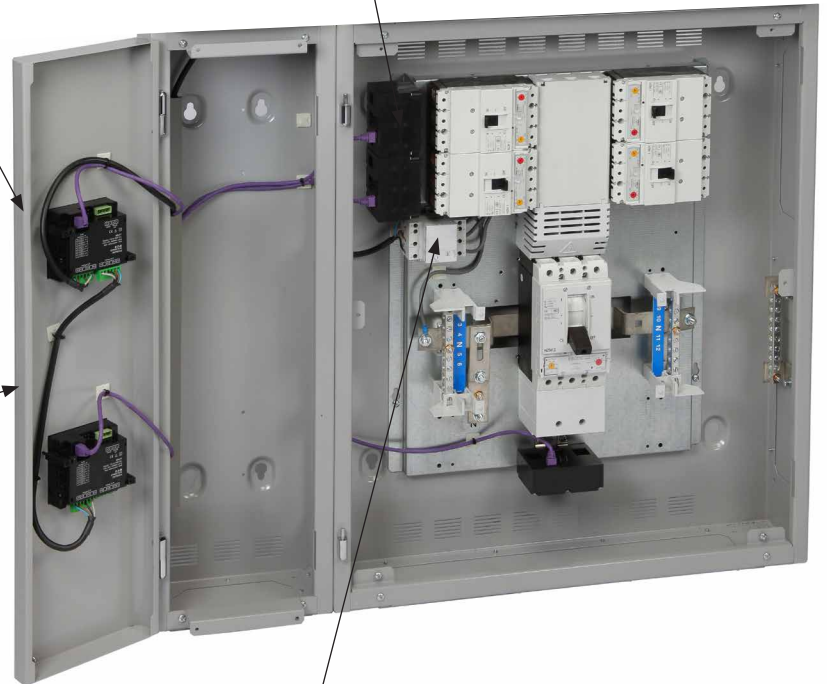

## Three phase splitter box

Allows for separate monitoring of  
a three phase current transformer  
on individual energy meters

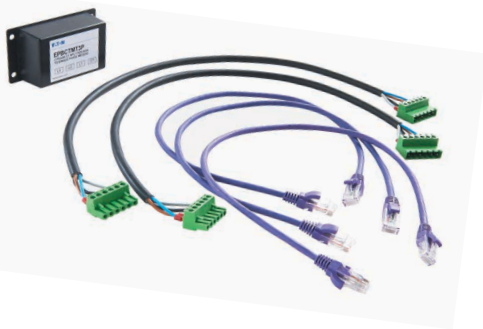

## Supply tap-off

Provision to fit tap-off to either the left and/or right hand side of the pan assembly.  
Only 1 per panelboard is required but provision to fit two is an option.



## Extra long CT to meter linking cable

Required when CT is fitted on opposite side to meter extension box. 2.5m long.



## Extra long meter to meter voltage linking kit

Required when:  
Incoming and outgoing metering on one side = 1 off  
Outgoing metering on both sides = 2 off  
Incoming and outgoing metering on both sides = 3 off  
2m long



In order to enable designers, specifiers, and installers to comply with surge protection requirements in BS 7671 - IET Wiring Regulations - 17th Edition (Section 534), these combined lightning arrester and surge suppression devices have been developed specifically for applications with MCCB panelboards ensuring outstanding product performance for all sensitive, mission critical and general purpose loads. Providing protection from direct and indirect lightning strikes, the IEC 61643 tested devices have impressive voltage protection levels ( $U_p$ ), nominal discharge current  $(8/20) \mu s I_n$  & maximum discharge current  $I_{max}$  for transient surge suppression, combined with impulse current  $I_{imp} (10/350) \mu s$  for lightning strike protection. These devices are fully compliant with BS EN 62305.

#### EPBN1SPD123 technical summary:

- For the protection of low voltage distribution systems against transient overvoltage caused by direct and indirect lightning strike and switching operations.
- Application according to IEC 60364-5-53 Clause 534.
- Test class I, II, III in accordance with IEC 61643-1.
- SPD-type T1, T2, T3 in accordance with EN 61643-11.
- Lightning protection classes III and IV in accordance with IEC 62305.

#### EPBN1SPD1234 technical summary:

- For the protection of low voltage distribution systems against direct lightning strike into the overhead power supply line or external lightning protection system and against indirect lightning strike and switching operations.
- Application according to IEC 60364-5-53 Clause 534.
- Test class I, II, III in accordance with IEC 61643-1.
- SPD-type T1, T2, T3 in accordance with EN 61643-11.
- No discharge of ionised gases during operation.
- Lightning protection classes I, II, III and IV in accordance with IEC 62305.

EPBN1SPD123



#### Description

SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305

SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62305

#### Eaton list number

**EPBN1SPD123**

**EPBN1SPD1234**

MCCB pan assemblies, interiors, three phase, with earth & neutral bars

- Eaton MCCB pan assemblies offer a high degree of flexibility, suitable for inclusion in other factory built assemblies and as replacements for panelboard interiors.
- For incoming and outgoing device compatibility see associated panelboard details.

See pages 155-156 for dimensional drawings

EPBPN31280



## Product range

Description	Current rating (A)	Total no of outgoing ways	Eaton list number
Memshield 3 panelboard pan assembly 250A, 4 Way. Outgoing up to 160A	250	4	<b>EPBPN1425</b>
Memshield 3 panelboard pan assembly 250A, 6 Way. Outgoing up to 160A	250	6	<b>EPBPN1625</b>
Memshield 3 panelboard pan assembly 250A, 8 Way. Outgoing up to 160A	250	8	<b>EPBPN1825</b>
Memshield 3 panelboard pan assembly 250A, 12 Way. Outgoing up to 160A	250	12	<b>EPBPN11225</b>
Memshield 3 panelboard pan assembly 400A, 6 Way. Outgoing up to 160A	400	6	<b>EPBPN1640</b>
Memshield 3 panelboard pan assembly 400A, 12 Way. Outgoing up to 160A	400	12	<b>EPBPN11240</b>
Memshield 3 panelboard pan assembly 400A, 6 Way. Outgoing up to 250A	400	6	<b>EPBPN2640</b>
Memshield 3 panelboard pan assembly 400A, 12 Way. Outgoing up to 250A	400	12	<b>EPBPN21240</b>
Memshield 3 panelboard pan assembly 400A, 18 Way. Outgoing up to 250A	400	18	<b>EPBPN21840</b>
Memshield 3 panelboard pan assembly 630A, 8 Way. Outgoing up to 250A	630	8	<b>EPBPN2863</b>
Memshield 3 panelboard pan assembly 630A, 12 Way. Outgoing up to 250A	630	12	<b>EPBPN21263</b>
Memshield 3 panelboard pan assembly 630A, 18 Way. Outgoing up to 250A	630	18	<b>EPBPN21863</b>
Memshield 3 panelboard pan assembly 800A, 8 Way. Outgoing up to 400A	800	8	<b>EPBPN3880</b>
Memshield 3 panelboard pan assembly 800A, 12 Way. Outgoing up to 400A	800	12	<b>EPBPN31280</b>



Eaton's 4-pole panelboard system combines highest levels of electrical safety in a late stage with increased efficiency and reduced downtime thanks to system components available off the shelf.

Memshield 4 is cost effective, customizable and optimized to speed up change-over time and the fitting of additional circuits.

High levels of separation and compartmentalisation enabling increased operator safety. Design and layout are perfectly coordinated with the existing Memshield 3 panelboard range.

Meeting the true spirit of the requirements acc.to BS EN 61439-2.

6.1	INCOMING DEVICE RATINGS UP TO 400A - OUTGOING DEVICE RATINGS UP TO 250A .....	87
6.2	INCOMING DEVICE RATINGS UP TO 800A - OUTGOING DEVICE RATINGS UP TO 400A .....	91
6.3	EXTENSION BOXES AND RELATED ACCESSORIES / SURGE SUPPRESSION AND EARTH LEAKAGE PROTECTION UNITS .....	95
6.4	INCOMING / OUTGOING METERING EQUIPMENT - DIGITAL / MCCB PAN ASSEMBLIES .....	96



## Specification

- Panelboards acc.to BS EN 61439-2
- Panelboard is supplied as Form 4 Type 6 group mounted
- 4-pole fully shrouded IPXXB plug-in busbar assembly
- Busbar system DEKRA certified at Icu 50kA / 1s
- Enclosure degree of protection IP3X (wall-mounted)
- MCCBs acc.to IEC/EN 60947-2
- Switch disconnectors acc.to IEC/EN 60947-3

See pages 157-160 for dimensions.

## Features

- 8, 14 or 18 outgoing ways
- Efficient design enables multiple number of outgoing options (SPN, TPN, 4P)
- Standard off the shelf circuit breakers fit to the assembly
- Outgoing devices: these panelboards utilise two frame sizes of MCCBs: NZM2 125-250A TPN/4P, NZM1 SPN 16-125A and/or TPN/4P 20-160A
- Easily reconfigurable to meet fully compartmentalised approach either Form 4 / Type 2 or Form 4 / Type 6
- The design suits for top or bottom (as standard) incomer configuration
- Removable end rails and gland plates for better access during installation
- Wide range of extension boxes, plinths, metering, surge protection and earth leakage incomer options available
- Provision for line side connection for sprinkler systems

EM4PB840



**Minimum ordering requirement:** Panelboard + incoming device + incomer connection kit + feeder adapters + outgoing devices + blanking modules and associated components for Group Mounted or Compartmentalised

Description	Associated incoming device	Current rating (A)	No. of outgoing ways based on NZM1 TPN/4P group mounted *)	Eaton list number
Incoming rating up to 400A, Outgoing ratings up to 250A	NZM3 MCCB or N3 Switch Disconnector or direct lugs connection kit	400	8	<b>EM4PB840</b>
			14	<b>EM4PB1440</b>
			18	<b>EM4PB1840</b>

\*) see Selection tool for permutations

NZMN3-A400



## MCCB incoming device

- 50 kA (Icu=Ics at 400/415 VAC)
- Select appropriate incomer device from table below
- Maximum cable capacity 240mm<sup>2</sup>
- Adjustable trip. Thermal trip adjustment 0.8 to 1 x In, Magnetic trip adjustment 6 to 10 x In

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NZM3 MCCB	250	<b>NZMN3-A250</b>
		320	<b>NZMN3-A320</b>
		400	<b>NZMN3-A400</b>
4-pole (3 phase and switched neutral)	NZM3 MCCB	250	<b>NZMN3-4-A250</b>
		320	<b>NZMN3-4-A320</b>
		400	<b>NZMN3-4-A400</b>

N3-400



## Switch disconnector (non-automatic) incoming device

- Select appropriate incomer device from table below
- Maximum cable capacity 240mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	N3 switch disconnector	400	<b>N3-400</b>
4-pole	N3 switch disconnector	400	<b>N3-4-400</b>




EM4PBK404



## Incoming connection kit / metering connection kit

Poles / description	Maximum rating (A)	Eaton list number
TPN / 4-pole incomer connection kit	400	<b>EM4PBK404</b>
TPN / 4-pole incomer connection kit - includes metering CT and connection cable to energy meter	400	<b>EM4PBK404M</b>
Direct connection lugs kit	400	<b>EM4PBK404L</b>
Direct connection lugs kit - includes metering CT and connection cable to energy meter	400	<b>EM4PBK404LM</b>
Neutral link incomer when using 3-pole incoming device	400	<b>EM4PBNK40</b>

EM4PBFAN14



## Feeder adaptors

- incl. carriage, copper conductors and plug-in contacts

Type of MCCB / poles	Maximum frame rating (A)	Eaton list number
NZM1 SPN phase 1 / Neutral (L1N)	125	<b>EM4PBFAN1L1N</b>
NZM1 SPN phase 2 / Neutral (L2N)	125	<b>EM4PBFAN1L2N</b>
NZM1 SPN phase 3 / Neutral (L3N)	125	<b>EM4PBFAN1L3N</b>
NZM1 TPN / 4-pole	160	<b>EM4PBFAN14</b>
NZM2 TPN / 4-pole	250	<b>EM4PBFAN24</b>

NZMN2-A250-BT



## Outgoing devices / feeders - NZM2 frame MCCBs

- Maximum cable capacity 185mm<sup>2</sup>
- Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating / description (A)	Eaton list number Triple pole 50kA ~	Eaton list number TPN/4-pole 50kA ~
125	<b>NZMN2-A125-BT</b>	<b>NZMN2-4-A125*)</b>
160	<b>NZMN2-A160-BT</b>	<b>NZMN2-4-A160-BT</b>
200	<b>NZMN2-A200-BT</b>	<b>NZMN2-4-A200-BT</b>
250	<b>NZMN2-A250-BT</b>	<b>NZMN2-4-A250-BT</b>

Group mounted/Comp. Form 4 Type 2 neutral link for outgoing section when using 3-pole outgoing device

\*) 2 sets of box terminals NZM2-4-250-XKC has to be ordered separately  
~ For 36kA variant, in the MCCB part number, replace NZMN2... with NZMC2...

## Electronic Trip Unit

- Adjustable trip overloads 50-100% x I<sub>n</sub>
- Instantaneous S/C release fixed 12 x I<sub>n</sub>
- Delayed S/C release 2-10 x I<sub>r</sub>

Rating (A)	Triple pole 50kA	4-pole 50kA
100	<b>NZMN2-VE100-BT</b>	<b>NZMN2-4-VE100-BT</b>
160	<b>NZMN2-VE160-BT</b>	<b>NZMN2-4-VE160-BT</b>
250	<b>NZMN2-VE250-BT</b>	<b>NZMN2-4-VE250-BT</b>

\*When using 3 pole device EM4PBGMN2N neutral link needs to be used.

EM4PBGMN2N



NZMB1-1-AF63 &amp; NZMN1-A160



## Outgoing devices / feeders - NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating / description (A)	Eaton list number Single pole 25kA	Eaton list number Triple pole 50kA #	Eaton list number TPN/4-pole 50kA #
16	<b>NZMB1-1-AF16</b>		
20	<b>NZMB1-1-AF20</b>	<b>NZMN1-A20</b>	<b>NZMN1-4-A20</b>
25	<b>NZMB1-1-AF25</b>	<b>NZMN1-A25</b>	<b>NZMN1-4-A25</b>
32	<b>NZMB1-1-AF32</b>	<b>NZMN1-A32</b>	<b>NZMN1-4-A32</b>
40	<b>NZMB1-1-AF40</b>	<b>NZMN1-A40</b>	<b>NZMN1-4-A40</b>
50	<b>NZMB1-1-AF50</b>	<b>NZMN1-A50</b>	<b>NZMN1-4-A50</b>
63	<b>NZMB1-1-AF63</b>	<b>NZMN1-A63</b>	<b>NZMN1-4-A63</b>
80	<b>NZMB1-1-AF80</b>	<b>NZMN1-A80</b>	<b>NZMN1-4-A80</b>
100	<b>NZMB1-1-AF100</b>	<b>NZMN1-A100</b>	<b>NZMN1-4-A100</b>
125	<b>NZMB1-1-AF125</b>	<b>NZMN1-A125</b>	<b>NZMN1-4-A125</b>
160	—	<b>NZMN1-A160</b>	<b>NZMN1-4-A160</b>

Group mounted/Comp. Form 4 Type 2 neutral link for outgoing section when using 1-pole / 3-pole outgoing device

# For 25kA variant, in the MCCB part number, replace NZMN1... with NZMB1... and for 36kA variant replace NZMN1... with NZMC1..

EM4PBGMN1N



# Memshield 4 MCCB 4-pole panelboards and associated devices

Incoming device ratings up to 400A - outgoing device ratings up to 250A

# 6.1

EM4PBGMBP



## Accessories - Group Mounted approach

Description	used for	Eaton list number
Blanking plate		<b>EM4PBGMBP</b>
Finger guards are mandatory to each outgoing device cable termination for compliance with Form 4 Type 6	NZM1 SPN	<b>NZM1-1-XIPK</b>
	NZM1 TPN (non-switched neutral)	<b>NZM1-XIPK</b>
	NZM1 4P (switched neutral)	<b>NZM1-4-XIPK</b>
Finger guards are mandatory to each outgoing device cable termination for compliance with Form 4 Type 6	NZM2 TPN (non-switched neutral)	<b>NZM2-XIPK</b>
	NZM2 4P (switched neutral)	<b>NZM2-4-XIPK</b>

NZM1-4-XIPK



Form 4 Type 6 group mounted




## Possible outgoing arrangement of NZM1/NZM2 depending on form of separation

- Note a mixture of NZM1 and NZM2 breakers can be fitted (not part of the table) - see Selection tool for permutations

Board reference / description	Type of feeder	Max. number of NZM1 (only) breakers can be fitted		Max. number of NZM2 (only) breakers can be fitted	
		Compartmentalised	Group Mounted	Compartmentalised	Group Mounted
EM4PB840 / 8-way board	NZM1 - 1P and N	12	16	—	—
	NZM1 - 3P and N / 4P	6	8	—	—
	NZM2 - 3P and N / 4P	—	—	6	6
EM4PB1440 / 14-way board	NZM1 - 1P and N	20	28	—	—
	NZM1 - 3P and N / 4P	12	14	—	—
	NZM2 - 3P and N / 4P	—	—	10	12
EM4PB1840 / 18-way board	NZM1 - 1P and N	26	36	—	—
	NZM1 - 3P and N / 4P	14	18	—	—
	NZM2 - 3P and N / 4P	—	—	12	14

Form 4 Type 6 compartmentalised



## Compartmentalised kits to upgrade the standard Form 4 Type 6 group mounted design to higher form of separation


- Minimum ordering requirement for compartmentalisation: Overall fitting + incomer + outgoer kit per device or unused way (select neutral link when 3-pole devices are used as outgoer)

Type of Compartmentalised kit	used for	Form of separation	Eaton list number
Overall fitting kit	MCCB Panelboard EM4PB... 400/800A	Form 4 Type 2 / Type 6	<b>EM4PBCK</b>
Incomer kit	NZM3 MCCB / N3 switch disconnecter	Form 4 Type 2 / Type 6	<b>EM4PB40CKINC</b>
Outgoer kit	NZM1 SPN	Form 4 Type 2	<b>EM4PBCKN122</b>
	NZM1 TPN / 4-pole		<b>EM4PBCKN142</b>
	NZM2 TPN / 4-pole		<b>EM4PBCKN242</b>
Outgoer kit	NZM1 SPN	Form 4 Type 6	<b>EM4PBCKN126</b>
	NZM1 TPN / 4-pole		<b>EM4PBCKN146</b>
	NZM2 TPN / 4-pole		<b>EM4PBCKN246</b>
Neutral link	NZM1 Neutral	Form 4 Type 6	<b>EM4PBCKN1N</b>
	NZM2 Neutral		<b>EM4PBCKN2N</b>
Unused way	—	Form 4 Type 2 / Type 6	<b>EM4PBCKUW</b>

EM4PBCK



EM4PBCKN242



EM4PBCKN246



EM4PBCKN24BK



## Accessories - Compartmentalised approach

Description	Eaton list number
Blanking plate NZM1 SPN	<b>EM4PBCKN12BK</b>
Blanking plate NZM1 TPN / 4-pole	<b>EM4PBCKN14BK</b>
Blanking plate NZM2 TPN / 4-pole	<b>EM4PBCKN24BK</b>

Incoming device ratings up to 400A - outgoing device ratings up to 250A

[illegible]

## Specification

- Panelboards acc.to BS EN 61439-2
- Panelboard is supplied as Form 4 Type 6 group mounted
- 4-pole fully shrouded IPXXB plug-in busbar assembly
- Busbar system DEKRA certified at Icw 50kA / 1s
- Enclosure degree of protection IP3X (wall-mounted)
- MCCBs acc.to IEC/EN 60947-2
- Switch disconnectors acc.to IEC/EN 60947-3

See pages 157-160 for dimensions.

## Features

- 6, 12 or 16 outgoing ways
- Efficient design enables multiple number of outgoing options (SPN, TPN, 4P)
- Standard off the shelf circuit breakers fit to the assembly
- Outgoing devices: these panelboards utilise three frame sizes of MCCBs: NZM3 250-400A TPN/4P (fixed position, lower left/right), NZM2 125-250A TPN/4P (completely variable), NZM1 SPN 16-125A and/or TPN/4P 20-160A (completely variable)
- Easily reconfigurable to meet fully compartmentalised approach either Form 4 / Type 2 or Form 4 / Type 6
- The design suits for top or bottom (as standard) incomer configuration
- Removable end rails and gland plates for better access during installation
- Wide range of extension boxes, plinths, metering, surge protection and earth leakage incomer options available
- Provision for line side connection for sprinkler systems

EM4PB680



**Minimum ordering requirement:** Panelboard + incoming device + incomer connection kit + feeder adapters + outgoing devices + blanking modules and associated components for Group Mounted or Compartmentalised

Description	Associated incoming device	Current rating (A)	No. of outgoing ways based on NZM1 TPN/4P group mounted *)	Eaton list number
Incoming rating up to 800A, Outgoing ratings up to 400A	NZMLW MCCB or NLW Switch Disconnector or direct lugs connection kit	800	6	<b>EM4PB680</b>
			12	<b>EM4PB1280</b>
			16	<b>EM4PB1680</b>

\*) see Selection tool for permutations

NZMLW-800



## MCCB incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 2 x 300mm<sup>2</sup>
- Thermal trip adjustment 0.5 to 1 x I<sub>n</sub>, Magnetic trip adjustment 2 to 8 x I<sub>n</sub>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NZMLW MCCB	630	<b>NZMLW-A630</b>
.		800	<b>NZMLW-A800</b>
4-pole (3 phase and switched neutral)	NZMLW MCCB	630	<b>NZMLW-4-A630</b>
		800	<b>NZMLW-4-A800</b>

NLW-800



## Switch disconnector (non-automatic) incoming device

- 50kA
- Select appropriate incomer device from table below
- Maximum cable capacity 2 x 300mm<sup>2</sup>

Poles	Incoming device type	Current rating (A)	Eaton list number
3-pole	NLW switch disconnector	630	<b>NLW-630</b>
.		800	<b>NLW-800</b>
4-pole	NLW switch disconnector	630	<b>NLW-4-630</b>
		800	<b>NLW-4-800</b>


EM4PBK804



## Incoming connection kit / metering connection kit

Poles / description	Maximum rating (A)	Eaton list number
TPN / 4-pole incomer connection kit	800	<b>EM4PBK804</b>
TPN / 4-pole incomer connection kit - includes metering CT and connection cable to energy meter	800	<b>EM4PBK804M</b>
Direct connection lugs kit	800	<b>EM4PBK804L</b>
Direct connection lugs kit - includes metering CT and connection cable to energy meter	800	<b>EM4PBK804LM</b>
Neutral link incomer when using 3-pole incoming device	800	<b>EM4PBNK80</b>

EM4PBFAN14



## Feeder adaptors

- incl. carriage, copper conductors and plug-in contacts

Type of MCCB / poles	Maximum frame rating (A)	Eaton list number
NZM1 SPN phase 1 / Neutral (L1N)	125	<b>EM4PBFAN1L1N</b>
NZM1 SPN phase 2 / Neutral (L2N)	125	<b>EM4PBFAN1L2N</b>
NZM1 SPN phase 3 / Neutral (L3N)	125	<b>EM4PBFAN1L3N</b>
NZM1 TPN / 4-pole	160	<b>EM4PBFAN14</b>
NZM2 TPN / 4-pole	250	<b>EM4PBFAN24</b>
NZM3 TPN / 4-pole	400	<b>EM4PBFAN34</b>

NZMN3-A400-BT



## Outgoing devices / feeders - NZM3 frame MCCBs

- Maximum cable capacity 240mm<sup>2</sup>
- Up to 2 breakers can be fitted (lower left/right)
- Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating / description (A)	Eaton list number Triple pole 50kA x	Eaton list number TPN/4-pole 50kA x
250	<b>NZMN3-A250 *</b>	<b>NZMN3-4-A250 *</b>
320	<b>NZMN3-A320 *</b>	<b>NZMN3-4-A320 *</b>
400	<b>NZMN3-A400 *</b>	<b>NZMN3-4-A400 *</b>

Group mounted/Comp. Form 4 Type 2 **EM4PBGMN3N** – neutral link for outgoing section when using 3-pole outgoing device

\*) when using finger guards to fulfill Form 4 Type 6 one set of box terminals NZM3-XKC (3-pole) or NZM3-4-XKC (4-pole) has to be ordered separately  
x For 36kA variant, in the MCCB part number, replace NZMN3... with NZMC3...

EM4PBGMN3N



## Electronic Trip Unit

- Adjustable trip overloads 50-100% x I<sub>n</sub>
- Instantaneous S/C release 2-11 x I<sub>n</sub>
- Delayed S/C release 2-10 x I<sub>r</sub>

Rating	Triple pole 50kA x	4 pole 50kA
400	<b>NZMN3-VE400*</b>	<b>NZMN3-4-VE400*</b>

When using 3 pole device EM4PBGMN3N neutral link needs to be used

\*) when using finger guards to fulfill Form 4 Type 6 one set of box terminals

NZM3-XKC (3-pole) or NZM3-4-XKC (4 pole) has to be ordered separately

NZMN2-A250-BT



## Outgoing devices / feeders - NZM2 frame MCCBs

- Maximum cable capacity 185mm<sup>2</sup>
- Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating / description (A)	Eaton list number Triple pole 50kA ~	Eaton list number TPN/4-pole 50kA ~
125	<b>NZMN2-A125-BT</b>	<b>NZMN2-4-A125 **)</b>
160	<b>NZMN2-A160-BT</b>	<b>NZMN2-4-A160-BT</b>
200	<b>NZMN2-A200-BT</b>	<b>NZMN2-4-A200-BT</b>
250	<b>NZMN2-A250-BT</b>	<b>NZMN2-4-A250-BT</b>

Group mounted/Comp. Form 4 Type **EM4PBGMN2N** – 2 neutral link for outgoing section when using 3-pole outgoing device

\*\*) 2 sets of box terminals NZM2-4-250-XKC has to be ordered separately  
~ For 36kA variant, in the MCCB part number, replace NZMN2... with NZMC2...

EM4PBGMN2N



## Electronic Trip Unit

- Adjustable trip overloads 50-100% x I<sub>n</sub>
- Instantaneous S/C release fixed 12 x I<sub>n</sub>
- Delayed S/C release 2-10 x I<sub>r</sub>

Rating (A)	Triple pole 50kA	4-pole 50kA
100	<b>NZMN2-VE100-BT</b>	<b>NZMN2-4-VE100-BT</b>
160	<b>NZMN2-VE160-BT</b>	<b>NZMN2-4-VE160-BT</b>
250	<b>NZMN2-VE250-BT</b>	<b>NZMN2-4-VE250-BT</b>

\*) When using 3 pole device EM4PBGMN2N neutral link needs to be used.

NZMB1-1-AF63  
& NZMN1-A160




## Outgoing devices / feeders - NZM1 frame MCCBs

- Maximum cable capacity 70mm<sup>2</sup>
- Thermal trip adjustment 0.8 to 1 x I<sub>n</sub>, magnetic trip adjustment 6 to 10 x I<sub>n</sub>

Rating / description (A)	Eaton list number Single pole 25kA	Eaton list number Triple pole 50kA #	Eaton list number TPN/4-pole 50kA #
16	<b>NZMB1-1-AF16</b>		
20	<b>NZMB1-1-AF20</b>	<b>NZMN1-A20</b>	<b>NZMN1-4-A20</b>
25	<b>NZMB1-1-AF25</b>	<b>NZMN1-A25</b>	<b>NZMN1-4-A25</b>
32	<b>NZMB1-1-AF32</b>	<b>NZMN1-A32</b>	<b>NZMN1-4-A32</b>
40	<b>NZMB1-1-AF40</b>	<b>NZMN1-A40</b>	<b>NZMN1-4-A40</b>
50	<b>NZMB1-1-AF50</b>	<b>NZMN1-A50</b>	<b>NZMN1-4-A50</b>
63	<b>NZMB1-1-AF63</b>	<b>NZMN1-A63</b>	<b>NZMN1-4-A63</b>
80	<b>NZMB1-1-AF80</b>	<b>NZMN1-A80</b>	<b>NZMN1-4-A80</b>
100	<b>NZMB1-1-AF100</b>	<b>NZMN1-A100</b>	<b>NZMN1-4-A100</b>
125	<b>NZMB1-1-AF125</b>	<b>NZMN1-A125</b>	<b>NZMN1-4-A125</b>
160	—	<b>NZMN1-A160</b>	<b>NZMN1-4-A160</b>

EM4PBGMN1N



Group mounted/Comp. Form 4 Type 2 neutral link  
for outgoing section  
when using 1-pole / 3-pole outgoing device

# For 25kA variant, in the MCCB part number, replace NZMN1... with NZMB1... and for 36kA variant replace NZMN1... with NZMC1...

EM4PBGMBP



## Accessories - Group Mounted approach

Description	used for	Eaton list number
Blanking plate		<b>EM4PBGMBP</b>
Finger guards are mandatory to each outgoing device cable termination for compliance with Form 4 Type 6	NZM1 SPN	<b>NZM1-1-XIPK</b>
	NZM1 TPN (non-switched neutral)	<b>NZM1-XIPK</b>
	NZM1 4P (switched neutral)	<b>NZM1-4-XIPK</b>
Finger guards are mandatory to each outgoing device cable termination for compliance with Form 4 Type 6	NZM2 TPN (non-switched neutral)	<b>NZM2-XIPK</b>
	NZM2 4P (switched neutral)	<b>NZM2-4-XIPK</b>
Finger guards are mandatory to each outgoing device cable termination for compliance with Form 4 Type 6	NZM3 TPN (non-switched neutral)	<b>NZM3-XIPK</b>
	NZM3 4P (switched neutral)	<b>NZM3-4-XIPK</b>

NZM1-4-XIPK



Form 4 Type 6  
group mounted




## Possible outgoing arrangement of NZM1/NZM2 with or without option for NZM3 depending on form of separation

- Note a mixture of NZM1 and NZM2 breakers besides the NZM3 on fixed position can be fitted (not part of the table) - see Selection tool for permutations

Board reference / description	Type of feeder	Max. number of NZM1 (only) breakers can be fitted		Max. number of NZM2 (only) breakers can be fitted					
		Compartmentalised	Group Mounted	Compartmentalised	Group Mounted	Compartmentalised	Group Mounted	Compartmentalised	Group Mounted
		(2 pcs. of NZM3 not incorporated)		(2 pcs. of NZM3 not incorporated)		(2 pcs. of NZM3 not incorporated)		(2 pcs. of NZM3 not incorporated)	
EM4PB680 / 6-way board	NZM1 - 1P and N	8	12	2	4	—	—	—	—
	NZM1 - 3P and N / 4P	4	6	2	2	—	—	—	—
	NZM2 - 3P and N / 4P	—	—	—	—	4	4	—	2
EM4PB1280 / 12-way board	NZM1 - 1P and N	18	24	12	16	—	—	—	—
	NZM1 - 3P and N / 4P	10	12	6	8	—	—	—	—
	NZM2 - 3P and N / 4P	—	—	—	—	8	10	6	6
EM4PB1680 / 16-way board	NZM1 - 1P and N	20	32	14	20	—	—	—	—
	NZM1 - 3P and N / 4P	12	16	8	10	—	—	—	—
	NZM2 - 3P and N / 4P	—	—	—	—	10	12	6	8



Form 4 Type 6  
compartmentalised

EM4PBCK



EM4PBCKN242



EM4PBCKN246



EM4PBCKN24BK

**Compartmentalised kits to upgrade the standard Form 4 Type 6 group mounted design to higher form of separation**

Minimum ordering requirement for compartmentalisation: Overall fitting + incomer + outgoer kit per device or unused way (select neutral link when 3-pole devices are used as outgoer)

Type of Compartmentalised kit	used for	Form of separation	Eaton list number
Overall fitting kit	MCCB Panelboard EM4PB... 400/800A	Form 4 Type 2 / Type 6	<b>EM4PBCK</b>
Incomer kit	NZMLW MCCB / NLW switch disconnecter	Form 4 Type 2 / Type 6	<b>EM4PB80CKINC</b>
Outgoer kit	NZM1 SPN	Form 4 Type 2	<b>EM4PBCKN122</b>
	NZM1 TPN / 4-pole		<b>EM4PBCKN142</b>
	NZM2 TPN / 4-pole		<b>EM4PBCKN242</b>
	NZM3 TPN / 4-pole		<b>EM4PBCKN342</b>
Outgoer kit	NZM1 SPN	Form 4 Type 6	<b>EM4PBCKN126</b>
	NZM1 TPN / 4-pole		<b>EM4PBCKN146</b>
	NZM2 TPN / 4-pole		<b>EM4PBCKN246</b>
	NZM3 TPN / 4-pole		<b>EM4PBCKN346</b>
Neutral link	NZM1 Neutral	Form 4 Type 6	<b>EM4PBCKN1N</b>
	NZM2 Neutral		<b>EM4PBCKN2N</b>
	NZM3 Neutral		<b>EM4PBCKN3N</b>
Unused way	—	Form 4 Type 2 / Type 6	<b>EM4PBCKUW</b>

**Accessories - Compartmentalised approach**

Description	Eaton list number
Blanking plate NZM1 SPN	<b>EM4PBCKN12BK</b>
Blanking plate NZM1 TPN / 4-pole	<b>EM4PBCKN14BK</b>
Blanking plate NZM2 TPN / 4-pole	<b>EM4PBCKN24BK</b>
Blanking plate NZM3 TPN / 4-pole	<b>EM4PBCKN34BK</b>



EM4PB68SXB



### Cable extension boxes - side mounted

Description	Eaton list number
To fit 6/8-way panelboard EM4PB680 / EM4PB840	<b>EM4PB68SXB</b>
To fit 12/14-way panelboard EM4PB1280 / EM4PB1440	<b>EM4PB1214SXB</b>
To fit 16/18-way panelboard EM4PB1680 / EM4PB1840	<b>EM4PB1618SXB</b>

EM4PB250EX



### Cable extension box - top/bottom mounted

Description	Eaton list number
250mm high	<b>EM4PB250EX</b>

EM4PB250EXDIN



### DIN-rail extension box - top/bottom mounted

Description	Number of 18mm modular units	Eaton list number
250mm high - for housing DIN rail mounted command/control equipment like timers, contactors, etc.	2 banks of 15 (30 in total)	<b>EM4PB250EXDIN</b>

EM4PB300CX



### Corner filler box - top/bottom mounted

Description	Eaton list number
250mm high / 300mm wide - for use where top/bottom or meter extension boxes are fitted in conjunction with cableways on the sides	<b>EM4PB300CX</b>

EM4PB100PL



### Plinth options - bottom mounted

Description	Eaton list number
100mm high - for entire panelboard range	<b>EM4PB100PL</b>
100mm high / 300mm wide - for use where plinth option is fitted in conjunction with cableways on the sides	<b>EM4PB100PLCX</b>

EM4PBLE



### Lifting eye kit

Description	Eaton list number
Set of 2 pieces mounted on the top of the panelboard	<b>EM4PBLE</b>

### Transient voltage surge suppression units, vertical mounted either next to main incomer or inside cable extension box (lateral)

- Includes all necessary cables and connections to install the SPD. However it DOES NOT include the 4 Pole 63A NZM1 MCCB and Feeder Adaptor - which MUST BE ordered separately

Description	Eaton list number
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes III and IV in accordance with IEC 62305	<b>EM4PBSPD34</b>
SPD-type T1, T2, T3 in accordance with EN 61643-11, lightning protection classes I, II, III and IV in accordance with IEC 62306	<b>EM4PBSPD1234</b>

EM4PBKEL404



### Earth leakage protection

- Kit comprises an adjustable Earth Leakage relay, CT and UVR to suit the incoming MCCB and associated connection cables / terminals
- Sensitivity adjustable from 30mA to 5A. Time delay adjustable from 0.02 to 5 seconds

Description	Eaton list number
Earth leakage protection add-on kit for 400A / 4-pole incomer	<b>EM4PBKEL404</b>
Earth leakage protection add-on kit for 800A / 4-pole incomer	<b>EM4PBKEL804</b>

### Live side connection kit

- Kit for enabling the connection of cables to feed an externally mounted switch-disconnector-fuse to the live side of the incoming device for sprinkler circuits

Description	Eaton list number
Live side connection kit for 400/800A MCCB incoming device	<b>EM4PBLSC</b>

EM4PB250EXM




## Incoming / outgoing metering equipment - digital

EM4PB68SXM



Description	Number of meter spaces in metering enclosure	Number of meter blanking plates included	Eaton list number
Incoming meter extension box - top/bottom mounted - 250mm high (meter not included)	1	0	<b>EM4PB250EXM</b>
Outgoing meter extension box - side mounted - to fit 6/8-way panelboard EM4PB680 / EM4PB840	6	5	<b>EM4PB68SXM</b>
Outgoing meter extension box - side mounted - to fit 12/14-way panelboard EM4PB1280 / EM4PB1440	8	7	<b>EM4PB1214SXM</b>
Outgoing meter extension box - side mounted - to fit 16/18-way panelboard EM4PB1680 / EM4PB1840	10	9	<b>EM4PB1618SXM</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM1 frame MCCBs. 160A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EM4PBCTMT160</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM2 frame MCCBs. 250A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors			<b>EM4PBCTMT250</b>
Outgoing CT Kit (1 off required per metered outgoing TP way) to suit NZM3 frame MCCBs. 400A maximum rating. Includes CT to meter plug-in cable and meter to meter voltage supply linking cable with connectors.			<b>EM4PBCTMT400</b>
Voltage supply to meter tap off kit (includes protection fuses), one per panelboard required, irrespective of number of meters			<b>EM4PBVT</b>
Meter includes both Modbus and Pulsed outputs (MID certified) Multifunction meter measuring parameters: Voltage (P-P / P/N) (individual/average) Current (I1, I2, I3) (individual/average) Frequency Power factor (individual/average) Active, reactive, apparent power (individual/total) Active, reactive, apparent energy (total)			<b>EMC3P-P2P1</b>
Multifunction meter - as above but NOT MID certified			<b>EPBMETER1</b>
Three phase splitter box to allow separate monitoring of a three phase current transformer on individual energy meters			<b>EPBCTMT3P</b>
Extra long (2m) meter to meter voltage supply linking cable with connectors			<b>EPBN3LKKTM</b>
Extra long (2.5m) CT to meter plug-in cable			<b>EPBN3LKRJ45</b>
Spare blanking plate for unused meter ways in metering enclosure			<b>EM96BP</b>

EM4PBP680



## MCCB pan assemblies

- Eaton MCCB pan assemblies offer a high degree of flexibility, suitable for inclusion in other factory built assemblies and as replacement for panelboard interiors.
- For incoming and outgoing device compatibility see associated panelboard details.

Description	Current rating (A)	No. of outgoing ways based on NZM1 TPN/4P group mounted *)	Eaton list number
Memshield 4 panelboard pan assembly 400A, 8-way, outgoing up to 250A	400	8	<b>EM4PBP840</b>
Memshield 4 panelboard pan assembly 400A, 14-way, outgoing up to 250A		14	<b>EM4PBP1440</b>
Memshield 4 panelboard pan assembly 400A, 18-way, outgoing up to 250A		18	<b>EM4PBP1840</b>
Memshield 4 panelboard pan assembly 800A, 6-way, outgoing up to 400A	800	6	<b>EM4PBP680</b>
Memshield 4 panelboard pan assembly 800A, 12-way, outgoing up to 400A		12	<b>EM4PBP1280</b>
Memshield 4 panelboard pan assembly 800A, 16-way, outgoing up to 400A		16	<b>EM4PBP1680</b>

\*) see Selection tool for permutations



Eaton’s MEM series products have earned a worldwide reputation for reliable high quality switch and fusegear – and above all market leading status.

Constantly updated and refined to comply with the very latest international standards, the market leading switchgear range, specialist heavy duty items and dedicated distribution and control equipment fulfils the diverse requirements of the contractor, specifier, OEM and distributor alike.

7.1	GLASGOW FUSE-SWITCH-DISCONNECTORS & SWITCH-DISCONNECTORS.....	98
7.2	GLASGOW BUSBAR CHAMBER SYSTEM .....	102
7.3	EXEL 2 SWITCH-DISCONNECTORS & SWITCH-DISCONNECTOR FUSES.....	104
7.4	ROTARY ISOLATORS AND CHANGEOVER SWITCHES .....	106
7.5	EXEL – DISTRIBUTION FUSEBOARDS.....	107

See page 161 for technical data and overall dimensions.

## 103GNL



## Glasgow switch-disconnector

- All listed are TPN

Nominal unit	Nominal rating, rating, Ie AC21 (A)	Copper switch links fitted	Motor ratings AC23A Ue 415V kW	HP	Eaton list number
63	125	63MLK	22	30	<b>63GNL</b>
100	125	100MLK	22	30	<b>103GNL</b>
160 (use 200A switch-disconnector)	—	—	—	—	—
200	315	200MLK	90	125	<b>203GNL</b>
315 (use 400A switch-disconnector)	—	—	—	—	—
400	630	400MLK	110	150	<b>403GNL</b>
500 (use 630A switch-disconnector)	—	—	—	—	—
630	1000	630MLK	225	300	<b>603GNL</b>
800	1000	800MLK	300	400	<b>803GNL</b>

Stud size: 63/100A = tunnel terminal, 160/200A = M10, 300/400 = M14, 500/800A = see page 162, "copper terminal plate"

**Note:** A Glasgow Switch-Disconnector can be fitted with fuselinks to change it into a fuse-switch-disconnector

## 203GNC



## Glasgow fuse-switch-disconnector

- Units are fitted with HRC Fuselinks of maximum rating but will accept fuselinks of a lower rating, refer to the HRC Fuselinks section on page 114.
- SPSN and TPSN indicate switched neutral.
- Neutral makes first and breaks last.

Nominal unit rating, Ie (A)	Eaton 415V fuse(s) fitted	Suitable fuselinks	Suitable copper switch links	Motor ratings AC23A Ue 415V kW	HP	Poles	Eaton list number
63	BA063	AAO & BAO	63MLK	22	30	SPSN	<b>61GNC</b>
						DP <sup>1)</sup>	
						TPN	<b>63GNC</b>
						TPSN	<b>64GC</b>
100	CE0100	CEO	100MLK	22	30	SPSN	<b>101GNC</b>
						DP <sup>1)</sup>	
						TPN	<b>103GNC</b>
						TPSN	<b>104GC</b>
160	DD160	AD, BD, CD & DD	200MLK	90	125	SPSN	<b>151GNC</b>
						DP <sup>1)</sup>	
						TPN	<b>153GNC</b>
						TPSN	<b>154GC</b>
200	DD200	AD, BD, CD & DD	200MLK	90	125	SPSN	<b>201GNC</b>
						DP <sup>1)</sup>	
						TPN	<b>203GNC</b>
						TPSN	<b>204GC</b>
315	ED315	AD, BD, CD, DD & ED	400MLK	110	150	TPN	<b>303GNC</b>
						TPSN	<b>304GC</b>
400	ED400	AD, BD, CD, DD & ED	400MLK	110	150	TPN	<b>403GNC</b>
						TPSN	<b>404GC</b>
500	FF500	EF & FF	630MLK	225	300	TPN	<b>503GNC</b>
630	FF630	EF & FF	630MLK	225	300	TPN	<b>603GNC</b>
						TPSN	<b>604GC</b>
800	GF800	EF, FF & GF	800MLK	300	400	TPN	<b>803GNC</b>
						TPSN	<b>804GC</b>

<sup>1)</sup> If DP fuse-switch-disconnectors are required, use SPSN and replace the supplied switch link with a compatible fuselink.

Stud size: 63/100A = tunnel terminal, 160/200A = M10, 300/400 = M14, 500/800A = see page 162, "copper terminal plate"

**Note:** A Glasgow Fuse Switch-Disconnector can be fitted with copper links to change it into a Switch-disconnector

50CSB



## Spreader boxes

- Provide additional space for spreading multi-core PVC insulated cables
- Supplied with fixing bolts and plain bushes
- Adapter plates required for each unit, see page 104

Nominal unit rating, I <sub>e</sub> (A)	Eaton list number	
	Straight	45° angled
63	<b>50CSB</b>	<b>50CSBA</b>
100	<b>50CSB</b>	<b>50CSBA</b>
160/200	<b>60CSB</b>	<b>60CSBA</b>
315/400	<b>70CSB</b>	<b>70CSBA</b>
500/630	<b>90CSB</b>	
800	<b>90CSB</b>	

## Extension boxes

- For fitting to Glasgow switch units to provide additional space for spreading multi-core PVC insulated cables with solid aluminium conductors and for some larger cables with stranded copper conductors

Nominal unit rating (A)	Fuse switch-disconnector/switch-disconnector	Eaton list number
63	61GNC	<b>1PCB<sup>1)</sup></b>
	63GNC/63GNL	<b>2PCB<sup>1)</sup></b>
	64GC	
100	101GNC	<b>1PCB<sup>2)</sup></b>
	103GNC/103GNL	<b>2PCB<sup>2)</sup></b>
	104GC	
160	151GNC	<b>2PCB<sup>3)</sup></b>
	153GNC	<b>3PCB<sup>3)</sup></b>
	154GC	
200	201GNC	<b>2PCB</b>
	203GNC/203GNL (315A AC21)	<b>3PCB</b>
	204GC	
315	303GNC	<b>4PCB</b>
	304GC	
400	403GNC/use 403GNL (630A AC21)	
	404GC	
500	503GNC	<b>5PCB<sup>4)</sup></b>
630	603GNC/use 603GNL (1000A, AC21)	
	604GC	
800	803GNC/use 803GNL (1000A, AC21)	
	804GC	

<sup>1)</sup> Not required for copper cables or al. below 35mm<sup>2</sup>

<sup>2)</sup> Not required for copper cables or al. below 50mm<sup>2</sup>

<sup>3)</sup> Not required for copper cables

<sup>4)</sup> For parallel cables use 6 PCB + 802 GCC + 2 x 90 CSB or CSBA (see diagram on page 148)

## Glasgow maximum cable capacity

Glasgow Nominal Rating (A)	Maximum Cable capacity mm <sup>2</sup>
63	35
100	50
160	95
200	150
315/400	300
500/630	400 or 2/240
800	2/300

506APL

**Adapter plate to fit spreader boxes**

- Available for fitting to spreader boxes, tapped to receive Type B compression glands to BS6121-1.  
Supplied complete with fixing bolts

Nominal unit rating, I <sub>e</sub> (A)	Straight spreader box	45° angled spreader box	Cable mm <sup>2</sup>	PVC SWA stranded cables:		Eaton list number
63	50CSB	50CSBA	16	2-core	4-core	<sup>1)</sup>
			25	2-core	4-core	<sup>1)</sup>
			35	2-core	4-core	<sup>1)</sup>
100	50CSB	50CSBA	25	2-core	4-core	<sup>1)</sup>
			35	2-core	4-core	<sup>1)</sup>
			50	2-core		<sup>1)</sup>
160	50CSB	50CSBA	50	2-core	4-core	<b>405 APL</b>
						<sup>1)</sup>
			70	2-core	4-core	<b>405 APL</b>
						<sup>1)</sup>
						<b>405 APL</b>
	60CSB	60CSBA	50	2-core	4-core	<b>405 APL</b>
						<sup>1)</sup>
			70	2-core	4-core	<b>406 APL</b>
						<sup>1)</sup>
						<b>406 APL</b>
200	50CSB	50CSBA	70	2-core	4-core	<b>405 APL</b>
						<sup>1)</sup>
			95	2-core	4-core	<b>405 APL</b>
						<sup>1)</sup>
						<b>405 APL</b>
	60CSB	60CSBA	70	2-core	4-core	<b>405 APL</b>
						<sup>1)</sup>
			95	2-core	4-core	<b>406 APL</b>
						<sup>1)</sup>
						<b>406 APL</b>
300/400	70CSB	70CSBA	150	—	4-core	<b>507 APL</b>
						<sup>1)</sup>
			185	—	4-core	<b>637 APL</b>
						<sup>1)</sup>
						<b>637 APL</b>
	90CSB	90CSBA	240	—	4-core	<b>757 APL</b>
						<sup>1)</sup>
			300	—	4-core	<b>639 APL</b>
						<sup>1)</sup>
						<b>639 APL</b>
500/630	90CSB	90CSBA	240	—	4-core	<b>639 APL</b>
			300	—	4-core	<b>759 APL</b>
			400	—	4-core	<b>759 APL</b>
	Parallel cables <sup>2)</sup>	Parallel cables <sup>2)</sup>	2/150	—	4-core	2 x <b>509 APL</b> <sup>2)</sup>
			2/185	—	4-core	2 x <b>639 APL</b> <sup>2)</sup>
			2/240	—	4-core	2 x <b>639 APL</b> <sup>2)</sup>
800	90CSB	90CSBA	2/300	—	4-core	2 x <b>759 APL</b> <sup>2)</sup>

<sup>1)</sup> Sufficient spreading space in switch-disconnector units to mount 'B' gland on to enclosure.

<sup>2)</sup> For 500 / 630 & 800A unit applications where parallel cables are used you need to order;  
**6PCB + 802GCC** (copper connection piece) + 2x **90CSB** see configuration on page 162.

EBK110SP



## Glasgow spares

Nominal unit rating, Ie (A)	Eaton list number
<b>Moving contact fuse carrier; 1 per pole*</b>	
63	<b>EBK110SP</b>
100	<b>OBK103SP</b>
160...200	<b>EBK105SP</b>
315...400	<b>EBK113SP</b>
<b>Fixed contact base complete; 1 per pole</b>	
63...100	<b>102GCEBSP</b>
160...200	<b>202GCEBSP</b>
315...400 (2 per pole)	<b>402GCEBSP</b>

\*Not suitable for neutral pole

PD1



## Handle locking devices

- Facilities are provided for locking off operating handles

Current rating (A)	Eaton list number
Handle locking 63–800	<b>PD1<sup>1)</sup></b>

<sup>1)</sup> Operating handles of all units can be locked 'ON' or 'OFF' using padlock only.



See page 163 for technical data and overall dimensions.

142BBC



## Busbar chambers

Nominal unit rating, I <sub>e</sub> (A)	Nominal length, mm	Eaton list number
100	550	142 BBC
	900	143 BBC
	1350	144 BBC
	1800	146 BBC
200	550	242 BBC
	900	243 BBC
	1350	244 BBC
	1800	246 BBC
400	550	442 BBC
	900	443 BBC
	1350	444 BBC
	1800	446 BBC
630	900	643 BBC
	1350	644 BBC
	1800	646 BBC
800	900	843 BBC
	1350	844 BBC
	1800	846 BBC

81BBL



## Busbar chamber extension sets

Nominal rating, I <sub>e</sub> (A)	Eaton list number
630	81 BBL
800	81 BBL

400FSCS



## Connection sets for Glasgow fuse-switch-disconnectors & switch-disconnectors

Nominal rating, I <sub>e</sub> (A)	Eaton list number
160, 200	200 FSCS
315, 400	400 FSCS
500, 630, 800	800 FSCS

62BBSK



## Busbar clamps and sockets – 100–200A Busbars

Type	Nominal rating, Ie (A)	Bore diameter mm	Capacity mm <sup>2</sup>	Eaton list	mm	Bolt Size
U-Clamps	20–63	—	25	<b>2 BBCL</b>	19	M6
	63–100	—	70	<b>3 BBCL</b>	22	M8
	100–200	—	120	<b>6 BBCL</b>	38	—

## Busbar clamps and lugs connection – 400–800A Busbars

Type	Nominal rating, Ie (A)	Bore diameter mm	Capacity mm <sup>2</sup>	Eaton list number	mm	Bolt Size
U-Clamps	20–63	—	25	<b>4 BBCL</b>	19	M6
	63–100	—	70	<b>5 BBCL</b>	22	M8
	100–200	—	120	<b>6 BBCL</b>	38	—
Lugs connection	315–400	22.5	240	<b>82 BBSK</b>	133	M14

21BBMS



## Switchgear mounting sets

Description	Nominal rating, Ie (A)	Eaton list number
Exel Switch-disconnector-fuses/ Switch-disconnectors	20, 32	<b>11 BBMS</b>
	63, 100, 125	<b>21 BBMS</b>
Glasgow Fuse-switch-disconnectors/ Switch-disconnectors	63, 100	<b>31 BBMS</b>
	160, 200	<b>41 BBMS</b>
	315, 400	<b>51 BBMS</b>
	500, 630, 800	<b>61 BBMS</b>

- The difference between 2BBCL/4BBCL is the bolt length(30mm and 50mm respectively).
- The difference between 3BBCL/5BBCL is the bolt length(40mm and 55mm respectively).

See page 165 for technical data and overall dimensions.

15AXTN2



### Exel 2 switch-disconnector

Nominal rating, I <sub>e</sub> (A)	Utilisation category at U <sub>e</sub> 415V to BS EN 60947-3		250V DC rating to BS5419 DC23 (A)	Blank endplate	Poles	Eaton list number
	AC22A (A)	AC23A (A)				
20	20	—	20 <sup>1)</sup>	EP 842	SPSN	—
		11	—		DP	<b>15AXD2</b>
		—	—		TPN	<b>15AXTN2</b>
32	32	—	32		SPSN	—
		22	—		DP	<b>30AXD2</b>
		—	—		TPN	<b>30AXTN2</b>
63	63	—	63	EP 539	SPSN	—
		39	—		DP	<b>60AXD2</b>
		—	—		TPN	<b>60AXTN2</b>
100	100	—	100		SPSN	—
		52	—		DP	<b>100AXD2</b>
		—	—		TPN	<b>100AXTN2</b>
125	125	52	—		TPN	<b>125AXTN2</b>

SPSN indicates switched neutral. <sup>1)</sup>20A units are DC22.

100KXSC2F



### Exel 2 switch-disconnector-fuse

Nominal rating, I <sub>e</sub> (A)	Utilisation category at U <sub>e</sub> 415V to BS EN 60947-3		250V DC rating to BS5419 (A)	Blank endplate fitted	Eaton HRC fuses DC23	Poles	Eaton list number
	AC22A (A)	AC23A (A)					
20	20	—	20 <sup>1)</sup>	EP 842	NITD20	SPSN	<b>15KXSC2F<sup>2)</sup></b>
		11	—			DP	<b>15KXDC2F</b>
		—	—			TPN	<b>15KXTNC2F</b>
32	32	—	32	—	AA032	SPSN	<b>30KXSC2F</b>
		22	—			DP	<b>30KXDC2F</b>
		—	—			TPN	<b>30KXTNC2F</b>
63	63	—	63	EP 539	BA063	SPSN	<b>60KXSC2F</b>
		39	—			DP	<b>60KXDC2F</b>
		—	—			TPN	<b>60KXTNC2F</b>
100	100	—	100	—	CE0100	SPSN	<b>100KXSC2F</b>
		52	—			DP	<b>100KXDC2F</b>
		—	—			TPN	<b>100KXTNC2F</b>
125	125	52	—	—	DE0125 <sup>2)</sup>	TPN	<b>125KXTNC2F</b>

SPSN indicates switched neutral. <sup>1)</sup>20A units are DC22.

<sup>2)</sup>These units have dual fixings to accept AA0, BAO and OSD fuselinks. 2x M5 screws required

Maximum cable sizes are: 20A–6mm<sup>2</sup>, 32A–10mm<sup>2</sup>, 63A–35mm<sup>2</sup>, 100/125A–70mm<sup>2</sup>.

## Exel 2 Spares

Description	Rating (A)	Quantity required	Eaton list number
Moving contact assembly	20	1	<b>OLV727SP</b>
	32	1	<b>OLV728SP</b>
	63	1	<b>OLV725SP</b>
	100/125	1	<b>OLV726SP</b>
Switch base with arc shroud	32	1 per pole	<b>230AXEBSP<sup>1)</sup></b>
	63	1 per pole	<b>260AXEBSP<sup>1)</sup></b>
	100/125	1 per pole	<b>2100AXEBSP<sup>1)</sup></b>
	100/125	1 per pole	<b>2100AXDEBSP</b>
Combined switch/fusebase with arc shroud	32	1 per pole	<b>230KXEBSP</b>
	63	1 per pole	<b>260KXEBSP</b>
Fusebase only	100/125	1 per pole	<b>100MBDEBSP</b>
Arc shroud only	32	1 per pole	<b>#SH265SP</b>
	63	1 per pole	<b>#SH754SP</b>
	100/125	1 per pole	<b>CV1109SP</b>
Neutral Blocks	20/32	1	<b>30NLX</b>
	63	1	<b>60NLX</b>
	100/125	1	<b>100NLX</b>
Exel end plates	20/32		<b>EP842</b>
	63/100/125		<b>#EP539</b>

<sup>1)</sup> 1 required for switched neutral pole on SPSN switchfuses.

600MEB



## Main earthing terminal bars

- Memform terminal bars are intended for the connection of circuit protective conductors, main bonding conductors and functional earthing conductors, etc., as referred to in IEE Wiring Regulation 542-04 (BS7671)
- A bolted link facilitates testing of earthing resistance
- Manufactured from solid hard drawn copper and mounted on painted steel supports complete with fixing holes and warning labels
- For ease of installation all terminals are captive
- Extra terminals are provided for supplementary bonding

Maximum incoming, I <sub>e</sub> (A)	Size and number of terminals		Overall length mm	Overall width mm	Copper thickness mm	Eaton list number
	Earthing	Protective bonding				
600	1 x M10	3 x M10 2 x M6	320	32	31.75 x 6.35	<b>600MEB</b>
1000	2 x M12 1 x M8	3 x M12 8 x M8	665	51	50.8 x 6.35	<b>1000MEB</b>

See pages 169-170 for technical data and overall dimensions.

207149-GV



### Rotary isolators

- 20A to 63 A
- IP65
- Red/yellow handle
- Lockable in the 0 (Off) position
- Surface mounting
- IEC 60947-3

Rated current I <sub>n</sub> (A)	Motor rating AC-23A, 400V, 50 - 60 Hz (kW)	Poles	Auxiliary contact	Eaton List Number
20	6.5	3	1 NO	<b>207149</b>
20	6.5	3+N		<b>207151</b>
20	6.5	3+N	1 NO + 1 NC	<b>207153</b>
20	6.5	6	1 NO + 1 NC	<b>207161</b>
25	13	3	1 NO + 1 NC	<b>226902</b>
25	13	3+N		<b>227860</b>
32	13	3+N	1 NO + 1 NC	<b>207202</b>
32	13	6	1 NO + 1 NC	<b>207210</b>
32	13	8		<b>207212</b>
63	30	3	1 NO + 1 NC	<b>207348</b>
63	30	3+N		<b>207349</b>
63	30	3+N	1 NO + 1 NC	<b>207350</b>
63	22	6	1 NO + 1 NC	<b>207246</b>
63	22	8		<b>207248</b>

### Changeover switches

- 20A to 63 A
- IP65
- Black handle
- Surface mounting
- IEC 60947-3

Rated current I <sub>n</sub> (A)	Motor rating AC-23A, 400V, 50 - 60 Hz (kW)	Poles	Eaton List Number
20	6.5	4	<b>207136</b>
32	13	4	<b>207191</b>
63	22	4	<b>207230</b>

See page 166 for technical data and overall dimensions.

304XTNC



## Exel distribution fuseboards

Nominal rating, Ie (A)	Poles	No. of ways	Max. terminal capacity mm² (copper cables)		Outgoing terminal bore diameter, mm	Suitable HRC fuselinks	Spare fuse carrier	Eaton list number (without fuselinks)
			Main	Outgoing				
IP4X enclosures								
20	SPN	4	95	6	4	NITD	20 MFH	204XSNC
		6	95	6	4	NITD	20 MFH	206XSNC
		8	120	6	4	NITD	20 MFH	208XSNC
		12	120	6	4	NITD	20 MFH	212XSNC
	TPN	4	95	6	4	NITD	20 MFH	204XTNC
		6	95	6	4	NITD	20 MFH	206XTNC
		8	120	6	4	NITD	20 MFH	208XTNC
32	SPN	4	95	16	5.5	AAO	32 MFH	304XSNC
		6	95	16	5.5	AAO	32 MFH	306XSNC
		8	150	16	5.5	AAO	32 MFH	308XSNC
		12	150	16	5.5	AAO	32 MFH	312XSNC
	TPN	4	95	16	5.5	AAO	32 MFH	304XTNC
		6	95	16	5.5	AAO	32 MFH	306XTNC
		8	150	16	5.5	AAO	32 MFH	308XTNC
		12	150	16	5.5	AAO	32 MFH	312XTNC
63	TPN	2	240	35	8	AAO & BAO	63 MFH	602XTNC
		4	240	35	8	AAO & BAO	63 MFH	604XTNC
		6	240	35	8	AAO & BAO	63 MFH	606XTNC
		8	240	35	8	AAO & BAO	63 MFH	608XTNC
100	TPN	4	240	70	12	CEO <sup>1)</sup>	100 MFH	1004XTNC
		6	500 <sup>2)</sup>	70	12	CEO <sup>1)</sup>	100 MFH	1006XTNC
		8	500 <sup>2)</sup>	70	12	CEO <sup>1)</sup>	100 MFH	1008XTNC
200	TPN	4	630 <sup>2)</sup>	150	18	DD	200 MFH	2004XTNC

All units are supplied without fuselinks which must be ordered separately.

<sup>1)</sup> AAO, BAO & OSD fuselinks may be fitted if used with adaptor – Eaton list number **100MFLK**.

<sup>2)</sup> Can be adapted to allow fitment of 2–240mm<sup>2</sup> max.

8LD



## Lid locking facilities

- A choice of locking device is available

Description	Eaton list number
Barrel lock for 20A to 100A units	<b>1CLX</b>
Padlock bracket for 20A to 100A units	<b>9LD</b>
Padlock for use with above	<b>PD1</b>

ETM2209SP

**Exel distribution fuseboard – spares**

Description	Boards	SP outgoing ways number	Eaton list
Earth bars – 20/32A fuseboards	–	up to 12	<b>ETM2209SP</b>
	–	up to 18	<b>ETM2210SP</b>
	–	up to 24	<b>ETM2211SP</b>
	–	up to 36	<b>ETM2212SP</b>
Neutral bars – 20/32A fuseboards	–	up to 12	<b>ETM2223SP</b>
	–	up to 18	<b>ETM2224SP</b>
	–	up to 24	<b>ETM2225SP</b>
	–	up to 36	<b>ETM2226SP</b>





- Options to suit every application
- Compact 415V fuselinks
- Breaking capacity of 80kA at 415V
- Motor rated fuselinks
- Compact moulded HRC fuse units
- Fully shrouded for safety
- For bolt-in & clip-in fuselinks

8.1	HRC FUSELINKS .....	110
8.2	FUSE CARRIERS & BASES .....	116

# 8.1

## HRC cartridge fuselinks and fuse units

See page 167 for overall dimensions.

NITD10



### 415V industrial fuselinks – offset bolted contacts

- Compact industrial bolted pattern fuselinks with offset contacts. ASTA 20 Certified BS EN 60269-1 (BS88 – 1) or BS88 – 2 for a breaking capacity of 80 kA at 415V a.c.

Fixing centres, mm	BS88 ref	Rating, In Normal (A)	Motor (A)	Dimensional equivalents		EATON Paramount	EATON Bussmann
				GEC/Lawson	Brush/Hawker		
44.5	A1	2	–	NIT2	2F21	2SA2	NITD2
		4	–	NIT4	4F21	4SA2	NITD4
		6	–	NIT6	6F21	6SA2	NITD6
		10	–	NIT10	10F21	10SA2	NITD10
		16	–	NIT16	16F21	16SA2	NITD16
		20	–	NIT20	20F21	20SA2	NITD20
	–	25	–	NIT20M25	20M25F21	20SA2M25	NITD20M25
				NIT20M32	20M32F21	20SA2M32	NITD20M32
		25	–	NIT25	25F21	25SA2	NITD25
		32	–	NIT32	32F21	32SA2	NITD32
		40	–	NIT32M40	–	32SA2M40	NITD32M40
				NIT32M50	–	32SA2M50	NITD32M50
				NIT32M63	–	32SA2M63	NITD32M63
		63	–	NIT32M63	–	32SA2M63	NITD32M63
73	A2	2	–	TIA2	2H07	2SB3	AA02
		4	–	TIA4	4H07	4SB3	AA04
		6	–	TIA6	6H07	6SB3	AA06
		10	–	TIA10	10H07	10SB3	AA010
		16	–	TIA16	16H07	16SB3	AA016
		20	–	TIA20	20H07	20SB3	AA020
		25	–	TIA25	25H07	25SB3	AA025
		32	–	TIA32	32H07	32SB3	AA032
	–	40	–	TIA32M40	32M40H07	32SB3M40	AA032M40
				TIA32M50	32M50H07	32SB3M50	AA032M50
		63	–	TIA32M63	32M63H07	32SB3M63	AA032M63
				TIS35	–	35SB4	BA035
	A3	40	–	TIS40	40K07	40SB4	BA040
		50	–	TIS50	50K07	50SB4	BA050
		63	–	TIS63	63K07	63SB4	BA063
		80	–	TIS63M80	63M80K07	63SB4M80	BA063M80
				TIS63M100	63M100K07	63SB4M100	BA063M100
		100	–	OS80/TIS80	80K07R	80SO	OSD80
				OS100/TIS100	100K07R	100SO	OSD100
		125	–	OS100M125/TIS100M125	–	100SOM125	OSD100M125
94	A4	32	–	TCP32	32L14	32SD5	CE032
				TCP40	40L14	40SD5	CE040
				TCP50	50L14	50SD5	CE050
				TCP63	63L14	63SD5	CE063
				TCP80	80L14	80SD5	CE080
				TCP100	100L14	100SD5	CE0100
94	–	125	–	TCP100M125	100M125L14	100SD5M125	CE0100M125
				TCP100M160	100M160L14	100SD5M160	CE0100M160
				TCP100M200	100M200L14	100SD5M200	CE0100M200
				TCP100M250	100M250L14	100SD5M250	CE0100M250

AA020



BA063



CE0100



**415V industrial fuselinks – offset bolted contacts (contd)**

Fixing centres, mm	BS88 ref	Rating, In Normal (A)	Motor (A)	Dimensional equivalents GEC/Lawson	Brush/Hawker	EATON Paramount	EATON Bussmann
–	–	125	–	TFP125	125M14	125SD6	<b>DE0125</b>
		160	–	TFP160	160M14	160SD6	<b>DE0160</b>
		200	–	TFP200	200M14	200SD6	<b>DE0200</b>
			250	TFP200M250	200M250M14	200SD6M250	<b>DE0200M250</b>
			315	–	–	200SD6M315	<b>DE0200M315</b>

These industrial bolted pattern fuselinks are of two types – with offset contacts of ratings 2–200A and with centre contacts of ratings 2–1250A.

They are available to BS references A1 to A4, B1 to B4, C1 to C3, D1 and in certain other sizes.

**415V industrial fuselinks – centre bolted contacts**

- Compact industrial bolted pattern fuselinks with centre contacts. ASTA 20 Certified or tested to BS EN 60269-1 (BS88-1) or BS88-2 for a breaking capacity of 80 kA at 415V a.c.

Fixing centres, mm	BS88 ref	Rating In Normal (A)	Motor	Dimensional equivalents GEC/Lawson	Brush/Hawker	EATON Paramount	EATON Bussmann
97	–	2	–	TB2	2K08	2SE3	<b>AC2</b>
		4	–	TB4	4K08	4SE3	<b>AC4</b>
		6	–	TB6	6K08	6SE3	<b>AC6</b>
		10	–	TB10	10K08	10SE3	<b>AC10</b>
		16	–	TB16	16K08	16SE3	<b>AC16</b>
		20	–	TB20	20K08	20SE3	<b>AC20</b>
		25	–	TB25	25K08	25SE3	<b>AC25</b>
		32	–	TB32	32K08	32SE3	<b>AC32</b>
111	–	2	–	TBC2	2K09	2SF3	<b>AD2</b>
		4	–	TBC4	4K09	4SF3	<b>AD4</b>
		6	–	TBC6	6K09	6SF3	<b>AD6</b>
		10	–	TBC10	10K09	10SF3	<b>AD10</b>
		16	–	TBC16	16K09	16SF3	<b>AD16</b>
		20	–	TBC20	20K09	20SF3	<b>AD20</b>
		25	–	TBC25	25K09	25SF3	<b>AD25</b>
		32	–	TBC32	32K09	32SF3	<b>AD32</b>
97	–	40	–	TB40	40K08	40SE4	<b>BC40</b>
		50	–	TB50	50K08	50SE4	<b>BC50</b>
		63	–	TB63	63K08	63SE4	<b>BC63</b>
97	–	63	80	–	–	63SE4M80	<b>BC63M80</b>
			100	–	–	63SE4M100	<b>BC63M100</b>
111	B1	40	–	TBC40	40K09	40SF4	<b>BD40</b>
		50	–	TBC50	50K09	50SF4	<b>BD50</b>
		63	–	TBC63	63K09	63SF4	<b>BD63</b>
			80	–	–	63SF4M80	<b>CD80</b>
			100	–	–	63SF4M100	<b>CD100</b>
		80	–	TC80	80L09	80SF5	<b>CD80</b>
		100	–	TC100	100L09	100SF5	<b>CD100</b>
			125	TC100M125	100M125L09	100SF5M125	<b>CD100M125</b>
			160	TC100M160	100M160L09	100SF5M160	<b>CD100M160</b>
			200	TC100M200	100M200L09	100SF5M200	<b>CD100M200</b>
	B2	125	–	TF125	125M09	125SF6	<b>DD125</b>
		160	–	TF160	160M09	160SF6	<b>DD160</b>
		200	–	TF200	200M09	200SF6	<b>DD200</b>
			250	TF200M250	200M250M09	200SF6M250	<b>DD200M250</b>
			315	–	–	200SF6M315	<b>DD200M315</b>
	B3	250	–	TKF250	250N09	250SF7	<b>ED250</b>
		315	–	TKF315	315N09	315SF7	<b>ED315</b>
			400	–	–	315SF7M400	<b>ED315M400</b>
133	–	250	–	TKM250	250N11	250SG7	<b>EF250</b>
		315	–	TKM315	315N11	315SG7	<b>EF315</b>

AC20



AD32



DD200



# 8.1

## HRC cartridge fuselinks and fuse units

EF400



FF630



GH1250



### 415V industrial fuselinks – centre bolted contacts (contd)

Fixing centres, mm	BS88 ref	Rating In Normal (A)	Motor (A)	Dimensional equivalents		EATON Paramount	EATON Bussmann
				GEC/Lawson	Brush/Hawker		
111	B4	355	—	TMF355	355P09	355SF8	<b>ED355</b>
		400	—	TMF400	400P09	400SF8	<b>ED400</b>
		500	—	TMF400M500	—	400SF8M500	<b>ED400M500</b>
133/184	C1	355	—	TM355	355P11	355SH8	<b>EF355</b>
		400	—	TM400	400P11	400SH8	<b>EF400</b>
133/184	C2	450	—	TTM450	450R11	450SH9	<b>FF450</b>
		500	—	TTM500	500R11	500SH9	<b>FF500</b>
		560	—	TTM560	560R11	560SH9	<b>FF560</b>
		630	—	TTM630	630R11	630SH9	<b>FF630</b>
		165/229	—	TT450	450R12	450SY9	<b>FG450</b>
133/184	C3	500	—	TT500	500R12	500SY9	<b>FG500</b>
		630	—	TT630	630R12	630SY9	<b>FG630</b>
		710	—	TLM710	700S11	710SH10	<b>GF710</b>
165/229	—	800	—	TLM800	800S11	800SH10	<b>GF800</b>
		710	—	TLT710	700S12	710SY10	<b>GG710</b>
		800	—	TLT800	800S12	800SY10	<b>GG800</b>
149	D1	1000	—	TXU1000	1000U44	1000SJ11	<b>GH1000</b>
		1250	—	TXU1250	1250U44	1250SJ11	<b>GH1250</b>

NSD20



### NSD type offset blade fuselinks

- ASTA 20 Certified or tested to BS EN 60269-1 (BS88-1) and BS88-6 for a breaking capacity of 80 kA at 415V a.c. For use in industrial and commercial installations.

Overall length, mm	Overall dia. mm	Rating In Normal (A)	Motor (A)	Equivalents GEC/Lawson	Brush/Hawker	EATON Paramount	EATON Bussmann
60	14	2	—	NS2	2FO6	2SN2	<b>NSD2</b>
		4	—	NS4	4FO6	4SN2	<b>NSD4</b>
		6	—	NS6	6FO6	6SN2	<b>NSD6</b>
		10	—	NS10	10FO6	10SN2	<b>NSD10</b>
		16	—	NS16	16FO6	16SN2	<b>NSD16</b>
		20	—	NS20	20FO6	20SN2	<b>NSD20</b>
		25	—	NS20M25	20M25FO6	20SN2M25	<b>NSD20M25</b>
		32	—	NS20M32	20M32FO6	20SN2M32	<b>NSD20M32</b>
		25	—	NS25	25FO6	25SN2	<b>NSD25</b>
		32	—	NS32	32FO6	32SN2	<b>NSD32</b>
		32	40	NS32M40	—	32SN2M40	<b>NSD32M40</b>
		50	—	NS32M50	—	32SN2M50	<b>NSD32M50</b>
58	17.5	63	—	NS32M63	—	32SN2M63	<b>NSD32M63</b>

ESD63

**ESD type offset blade fuselinks**

- ASTA 20 Certified to BS EN 60269-1 (BS88 – 1) and BS88 – 6 for a breaking capacity of 80 kA at 415V a.c. For use in industrial and commercial installations.

Overall length, mm	Overall dia. mm	Rating In (A)	Equivalents GEC/Lawson	Brush/Hawker	EATON Paramount	EATON Bussmann
68	17	16	—	—	16SP	<b>ESD16</b>
		20	—	—	20SP	<b>ESD20</b>
		25	—	—	25SP	<b>ESD25</b>
		32	—	—	32SP	<b>ESD32</b>
		40	40ES	40G05	40SP	<b>ESD40</b>
		50	50ES	50G05	50SP	<b>ESD50</b>
		63	63ES	63G05	63SP	<b>ESD63</b>

60KR85

**KR85 and LR85 type house service cut-out fuselinks**

- Type IIa (KR) and IIb (LR) house service cut-out fuselinks. ASTA 20 Certified or tested to BS88-3 for a breaking capacity of 33 kA at 415V a.c. For use in domestic and commercial installations mainly in supply authorities cut-outs.

Overall length, mm	Overall dia. mm	Rating, In Normal (A)	Equivalents GEC/Lawson	Brush/Hawker	EATON Paramount	EATON Bussmann
57	22.23	15	RHF15	15KR85	154R	<b>15KR85</b>
		20	RHF20	20KR85	204R	<b>20KR85</b>
		30	RHF30	30KR85	304R	<b>30KR85</b>
		40	RHF40	40KR85	404R	<b>40KR85</b>
		45	—	45KR85	454R	<b>45KR85</b>
		50	RHF50	50KR85	504R	<b>50KR85</b>
		60	RHF60	60KR85	604R	<b>60KR85</b>
		80	RHF80	80KR85	804R	<b>80KR85</b>
		100	—	100KR85	1004R	<b>100KR85</b>
57	30	30	RHL30	30LR85	304RL	<b>30LR85</b>
		60	RHL60	60LR85	604RL	<b>60LR85</b>
		80	RHL80	80LR85	804RL	<b>80LR85</b>
		100	RHL100	100LR85	1004RL	<b>100LR85</b>

STD6

**ST type street lighting fuselinks**

- ASTA 20 Certified to BS EN 60269-1 (BS88-1) for a breaking capacity of 50kA at 240V a.c.  
Also complies with BS7654 for use in street lighting cut-out.

Fixing centres, mm	Overall length, mm	Overall dia. mm	Rating, In (A)	Equivalents <sup>1)</sup> GEC	Brush	EATON Paramount	EATON Bussmann
<b>ST-Type, offset contacts</b>							
38	47	14	2	LST2	2D19L	2LS	<b>STD2</b>
			4	LST4	4D19L	4LS	<b>STD4</b>
			6	LST6	6D19L	6LS	<b>STD6</b>
			10	LST10	10D19L	10LS	<b>STD10</b>
			16	LST16	16D19L	16LS	<b>STD16</b>
			20	LST20	20D19L	20LS	<b>STD20</b>
			25	LST25	25D19L	25LS	<b>STD25</b>
			32	LST32	32D19L	32LS	<b>STD32</b>

<sup>1)</sup>Equivalent columns list fuselinks having similar ratings and fixing centres.

20SSD

**SSD type offset blade fuselinks**

- ASTA 20 Certified to BS EN 60269-1 (BS88-1) for a breaking capacity of 50kA at 240V a.c.  
Also complies with BS7654 for use in street lighting cut-out.

Fixing centres, mm	Overall length, mm	Overall dia. mm	Rating, In (A)	Equivalents <sup>1)</sup> GEC	Brush	EATON Paramount	EATON Bussmann
—	51	12	2	SS2	2D04	2SS	<b>SSD2</b>
			4	SS4	4D04	4SS	<b>SSD4</b>
			6	SS6	6D04	6SS	<b>SSD6</b>
			10	SS10	10D04	10SS	<b>SSD10</b>
			16	SS16	16D04	16SS	<b>SSD16</b>
			20	SS20	20D04	20SS	<b>SSD20</b>
			25	SS25	25D04	25SS	<b>SSD25</b>
			32	SS32	32D04	32SS	<b>SSD32</b>

<sup>1)</sup>Equivalent columns list fuselinks having similar ratings and fixing centres.

315MJ30-7

**J type feeder pillar fuselinks**

- ASTA 20 Certified or tested to BS88 – 2 (formerly BS88: Part 5) for a breaking capacity of 80 kA at 415V a.c.
- Available in standard 82mm and 92mm fixing centres up to 400A and 800A respectively for wedge tightening contacts. Also available in ferrule form up to 250A for pole mounted cut-outs.
- For use by the Electricity Supply Industry in distribution systems.
- Available with silver elements, details on request.

Fixing centres, mm	Equivalents Fluvent	Lawson	SIBA	GEC	EMP	Dorman	Rating, In (A)	EATON Bussmann List number
82	DL2-2	JPU	5002301	JP	2/EJA	JPD	63	<b>63MJ30-8</b>
							80	<b>80MJ30-7</b>
							100	<b>100MJ30-7</b>
							125	<b>125MJ30-7</b>
							160	<b>160MJ30-7</b>
							200	<b>200MJ30-7</b>
							250	<b>250MJ30-7</b>
							315	<b>315MJ30-7</b>
							355	<b>355PJ30-7</b>
							400	<b>400PJ30-7</b>
92	DL3-2	JSU	5002601	JS	3/EJB	JSD	63	<b>63MJ31-8</b>
							80	<b>80MJ31-7</b>
							100	<b>100MJ31-7</b>
							125	<b>125MJ31-7</b>
							160	<b>160MJ31-7</b>
							200	<b>200MJ31-7</b>
							250	<b>250MJ31-7</b>
							315	<b>315MJ31-7</b>
							355	<b>355PJ31-7</b>
							400	<b>400PJ31-7</b>
							450	<b>450RJ31-7</b>
							500	<b>500RJ31-7</b>
							560	<b>560SJ31-7</b>
							630	<b>630SJ31-6</b>
							800	<b>800SJ28</b>

400PJ31-7





See page 168 for overall dimensions.

3SCHF



### Fuse carriers

Nominal rating, In (A)	Fuse type fitted	Eaton list number HRC Fuse Carrier
10	NITD10	<b>1 SCHF</b>
20	NITD20	<b>2 SCHF</b>
32	AA032	<b>3 SCHF</b>
63	BA063	<b>6 SCHF</b>
100	CEO100	<b>100SCHF</b>

20MFA



### Complete fuse units (carriers and bases) – bolt-in type A (front/busbar)

Nominal rating, In (A)	Colour	Neutral link	Suitable Eaton HRC fuselinks	Eaton list number
20	Black	20MLK	NITD	<b>20MFA</b>
32	Black	32MLK	AA0	<b>32MFA</b>
63	Black	63MLK	AA0 & BAO	<b>63MFA</b>
100	Black	100MLK	CEO <sup>1)</sup>	<b>100MFA</b>

<sup>1)</sup>AA0, BAO & OSD fuselinks may be fitted if used with adaptor – Eaton list number: **100MFLK**.

32MFB



### Complete fuse units (carriers and bases) – bolt-in type B (front/front)

Nominal rating, In (A)	Colour	Neutral link	Suitable Eaton HRC fuselinks	Eaton list number
20	Black	20MLK	NITD	<b>20MFB</b>
32	Black	32MLK	AA0	<b>32MFB</b>
63	Black	63MLK	AA0 & BAO	<b>63MFB</b>
100	Black	100MLK	CEO <sup>1)</sup>	<b>100MFB</b>
<b>Compact range</b>				
32	Black	20MLK	NITD	<b>32CMFB</b>
63	Black	32MLK	AA0 & BAO	<b>63CMFB</b>
100	Black	63MLK	BA0 & OSD	<b>100CMFB</b>
200	Black	100MLK	CEO & DEO	<b>200CMFB</b>

<sup>1)</sup>AA0, BAO & OSD fuselinks may be fitted if used with adaptor – Eaton list number: **100MFLK**.

63MFC



### Complete fuse units (carriers and bases) – bolt-in type C (back/back)

Nominal rating, In (A)	Colour	Neutral link	Suitable Eaton HRC fuselinks	Eaton list number
20	Black	20MLK	NITD	<b>20MFC</b>
63	Black	63MLK	AA0 & BAO	<b>63MFC</b>
100	Black	100MLK	CEO <sup>1)</sup>	<b>100MFC</b>
<b>Compact range</b>				
100	Black	63MLK	BA0 & OSD	<b>100CMFC</b>

<sup>1)</sup>SB3, SB4 or SO fuselinks may be fitted if used with adaptor – Eaton list number: **100MFLK**.

63MFD

**Complete fuse units (carriers and bases) – bolt-in type D (front/back)**

Nominal rating, In (A)	Colour	Neutral link	Suitable Eaton HRC fuselinks	Eaton list number
32	Black	32MLK	AA0	<b>32MFD</b>
63	Black	63MLK	AA0 & BAO	<b>63MFD</b>

32CFF

**Complete fuse units (carriers and bases) –clip-in type**

Nominal rating, In (A)	Colour	Suitable Eaton HRC fuselinks	Eaton list number
<b>Front/Front</b>			
32	Black	NSD	<b>32CFF</b>
	White	NSD	<b>32CFFW</b>
63	Black	ESD	<b>63CFF</b>
	White	ESD	<b>63CFFW</b>



Since the late 1920's we have built countless motor starters, fitted and trusted by generations of contractors, while the increasing requirements of our markets have led us to constantly update and expand our ADS range to allow for an increased choice of current ratings and ingress protection.

9.1

ADS8 AC CONTACTORS, STARTERS AND ASSEMBLIES .....

119

This chapter covers the ADS8 range of DOL, DOL Reversing and Star Delta starters with associated overload relays. Overload relays are supplied separately and enclosures are IP54 metal clad. A higher rated IP65 moulded 9kW DOL starter is also available.

- IEC / EN60947-4

See page 125 for overload relays.

See page 179 for trip and electrical life curves.

See page 172 for dimensional drawings.

28ADSM1X



### 9kW DOL starter without switch disconnect

- IP 65 moulded surface mounting enclosure, less overload relay

Maximum current rating (AC3) A	Maximum kW rating AC3 415v 3ph	Control coil voltage 50Hz Vac	Eaton list number
18	9	220–240	<b>28ADSM1X</b>
		380–415	<b>48ADSM1X</b>

28ADS2X



### 11kW DOL starter without switch disconnect

- IP 54 metalclad surface mounting enclosure, less overload relay

Maximum current rating (AC3) A	Maximum kW rating AC3 415v 3ph	Control coil voltage 50Hz Vac	Eaton list number
18	9	220–240	<b>28ADS1X</b>
		380–415	<b>48ADS1X</b>
25	11	220–240	<b>28ADS2X</b>
		380–415	<b>48ADS2X</b>

28ADSA1X



### 11kW DOL starter with switch disconnect

- IP 54 metalclad surface mounting enclosure, less overload relay

Maximum current rating (AC3) A	Maximum kW rating AC3 415v 3ph	Control coil voltage 50Hz Vac	Eaton list number
18	9	220–240	<b>28ADSA1X</b>
		380–415	<b>48ADSA1X</b>
25	11	220–240	<b>28ADSA2X</b>
		380–415	<b>48ADSA2X</b>

8TT92

**DOL, DOL reversing, line connected thermal overload relays**

Full load current A	Motor rating kW	Eaton list number
0.63–1	0.37	8TT87
1–1.6	0.55	8TT88
1.6–2.5	1.1	8TT89
2.5–4	1.5	8TT90
4–6	2.2	8TT91
5.5–8	3.7	8TT98
7–10	4	8TT92
10–13	5.5	8TT93
13–18	9	8TT94
18–25	11	8TT104

8TT92SD

**Star Delta, phase connected thermal overload relays**

Full load current A	Motor rating kW	Eaton list number
4.3–6.9	3	8TT90SD
6.9–10.4	5.5	8TT91SD
9.5–13.8	7	8TT98SD
12.1–17.3	9	8TT92SD
17.3–22.5	11	8TT93SD
22.5–31	15	8TT94SD
31–43	22	8TT104SD

10.1	MEMSHIELD 3 TYPE A SPN, TYPE B TPN DISTRIBUTION BOARDS .....	122
	MEMSHIELD 3 TYPE A SPN, TYPE B TPN PAN ASSEMBLIES .....	126
	SURGE PROTECTION DEVICES .....	128
	METER PACK ASSEMBLIES .....	129
	18MM MINIATURE CIRCUIT BREAKERS (MCBS) .....	131
	27MM MINIATURE CIRCUIT BREAKERS (FOR 250A HIGH LOAD DISTRIBUTION BOARDS) .....	133
	RESIDUAL CURRENT CIRCUIT BREAKERS (RCCBS) .....	134
	RESIDUAL CURRENT CIRCUIT BREAKERS – WITH OVERLOAD (RCBOS) .....	135
	ARC FAULT DETECTION DEVICE (AFDD) .....	136
	CONTROL AND SWITCHING DEVICES DIMENSIONS AND DATA .....	137
	EARTH LEAKAGE RELAYS AND CTS .....	145
10.2	MCCBS, MAX ZS (OHMS) FIGURES .....	146
	PANELBOARD DIMENSIONAL DRAWINGS .....	147
	PANELBOARD MULTIFUNCTION METER, TECHNICAL CHARACTERISTICS AND SPECIFICATION .....	150
	MCCB PAN ASSEMBLIES, DIMENSIONS .....	151
	PANELBOARD DIMENSIONAL DRAWINGS (MEMSHIELD 4) .....	154
	MCCB PAN ASSEMBLIES, DIMENSIONS (MEMSHIELD 4) .....	155
10.3	ENCLOSED SWITCH & FUSEGEAR .....	157
	Glasgow fuse-switch-disconnectors & switch-disconnectors .....	158
	Glasgow busbar chamber system .....	159
	Exel 2 switch-disconnectors & switch-disconnector fuses .....	161
	Exel distribution fuseboards .....	162
	HRC cartridge fuselinks, carriers and bases .....	163
	Rotary isolators .....	165
10.4	ADS8 STARTERS AND ASSEMBLIES .....	167
10.5	DEGREES OF PROTECTION – IP .....	178

**Distribution boards type A and type B, technical overview**

	Type A	Type B
IP Rating	IP3X (when correctly installed on the wall)	IP4X (when correctly installed on the wall)
Enclosure body type	Steel – welded case end with cable glad plate	Steel – welded case end with cable glad plate
Paint specification	RAL 7004 epoxy polyester	RAL 7004 epoxy polyester
Conditional short circuit rating	15kA to BS EN 61439	25kA to BS EN 61439
Busbar short time withstand (Icw)	5kA 0.1s	10kA 0.5s / 17kA 0.25s
<b>Cable capacities</b>		
125A switch disconnecter	50mm <sup>2</sup>	50mm <sup>2</sup>
100A RCCB (type A = 90A)	35mm <sup>2</sup>	50mm <sup>2</sup>
250A switch disconnecter	–	120mm <sup>2</sup> (+ M8 lugs)
160A – 250A MCCB incomer	–	250A = 120mm <sup>2</sup> (+ M8 lugs)
100A direct connection kit	35mm <sup>2</sup>	–
250A direct connection lugs	–	120mm <sup>2</sup> (+ M8 lugs)
125A contactor incomer	–	50mm <sup>2</sup>
250A contactor incomer	–	120mm <sup>2</sup> (+ M8 lugs)
Enclosure earth stud	M6	M8
Incoming earth terminal	25mm <sup>2</sup>	125A = 25mm <sup>2</sup> , 250A = 70mm <sup>2</sup>
Incomming neutral terminal	90/100A = 35mm <sup>2</sup> , 125A = 50mm <sup>2</sup>	125A = 50mm <sup>2</sup> , 250A = 120mm <sup>2</sup> (+ M8 lugs)
Outgoing earth terminal	25mm <sup>2</sup>	25mm <sup>2</sup>
Outgoing neutral terminal	25mm <sup>2</sup>	25mm <sup>2</sup>

**Distribution boards AFDD type B, technical overview**

IP Rating	IP4X (when correctly installed on the wall)
Enclosure body type	Steel – welded case end with cable glad plate
Paint specification	RAL 7004 epoxy polyester
Conditional short circuit rating Icc	10kA to BS EN 61439
<b>Cable capacities</b>	
125A switch disconnecter	50mm <sup>2</sup> (box terminal)
250A direct connection lugs	-
125A MCB	-
63A MCB	-
Enclosure earth stud	M8
Incomming neutral Kit terminal	50mm <sup>2</sup> (box terminal)

**Multi Meter Pack, technical overview**

IP Rating	IP4X (when correctly installed on the wall)
Enclosure body type	Steel – welded case end with cable glad plate
Paint specification	RAL 7004 epoxy polyester
Conditional short circuit rating Icc	10kA to BS EN 61439
<b>Cable capacities</b>	
125A switch disconnecter	-
250A direct connection lugs	120mm <sup>2</sup> (+M8 lugs)
125A MCB	50mm <sup>2</sup>
63A MCB	35mm <sup>2</sup>
Enclosure earth stud	M8
Incomming neutral Kit terminal	120mm <sup>2</sup> (+M8 lugs)



Type 1/type 2 combined lightning/surge arrester, technical data

Electrical		EM3SSK3T12 / EPBN1SPD123 / EM4PBSPD34	EPBN1SPD124 / EM4PBSPD1234
		EBMAFDDSPDT12 / EBMMPSLSPDT12	
Lightning protection	L-N/L-PE /N-PE	system class III, IV	system class I, II, III, IV
Voltage protection level Up	L-N/N-PE	<1.5kV	≤1.5kV/≤2.5kV/≤1.5kV
Maximum continuous operating voltage Uc	L-N/L-PE	280 VAC/260 VAC	350 V AC
Temporary overvoltage test value UT (5 s)	N-PE	348 VAC/370 VAC	415 VAC
Temporary overvoltage test value UT (200ms)	L-N/N-PE	1200 VAC	1200 VAC
Maximum Discharge current (8/20 μs)	L-N/L-PE/N-PE	50 kA / 100 kA	50 kA / 50kA
Nominal discharge current (8/20 μs)	L-N/N-PE	25 kA/50 kA	25 kA/ 25kA/ 100 kA
Impulse discharge current (10/350 μs)	L-N/N-PE	12,5 kA / 50 kA	25kA / 100kA
Total discharge current (10/350 μs)	N-PE	50 kA	100kA
Follow current interrupt rating I <sub>fi</sub>		100 A r.m.s	100 A r.m.s
Maximum back-up fuse		160 A (gG)	125 A(gG)
Maximum short circuit current (with fuse)		50 kA rms	100 kA

Type 2 surge arrester technical data


Electrical		EM3SSK1T2	EM3SSK3T2
			EBMAFDDSPDT2 / EBMMPSLSPDT2
Voltage protection level Up	L-N/N-PE/L-PE	≤1600V/≤1000V/≤1650V	≤1000V/≤1000V/≤1300V
Maximum continuous operating voltage Uc	L-N/N-PE	335VAC/260VAC	280VAC/260VAC
Temporary overvoltage test value UT (5 s)	L-N/L-PE	415 VAC	350 VAC
Temporary overvoltage test value UT (200ms)	N-PE	1200 VAC	1200 VAC
Maximum Discharge current (8/20 μs)	L-N/N-PE/L-PE	40 kA (8/20)μs	40 kA (8/20)μs
Nominal discharge current (8/20 μs)	L-N/N-PE/L-PE	20 kA (8/20)μs	20 kA (8/20)μs
Follow current interrupt rating I <sub>fi</sub>	N-PE	100 A r.m.s	100 A r.m.s
Maximum back-up fuse		125 A (gG)	125 A(gG)
Maximum short circuit current (with fuse)		50 kA rms	125 A(gG)
Maximum back-up MCB		PLHT-C100	PLHT-C100
Maximum short circuit current (with fuse)		20 kA rms	20 kA rms

# 10.1

## Technical data


Memshield 3 type A SPN, type B TPN distribution boards

**Memshield 3 type A SPN Distribution Board, dimensional drawing**

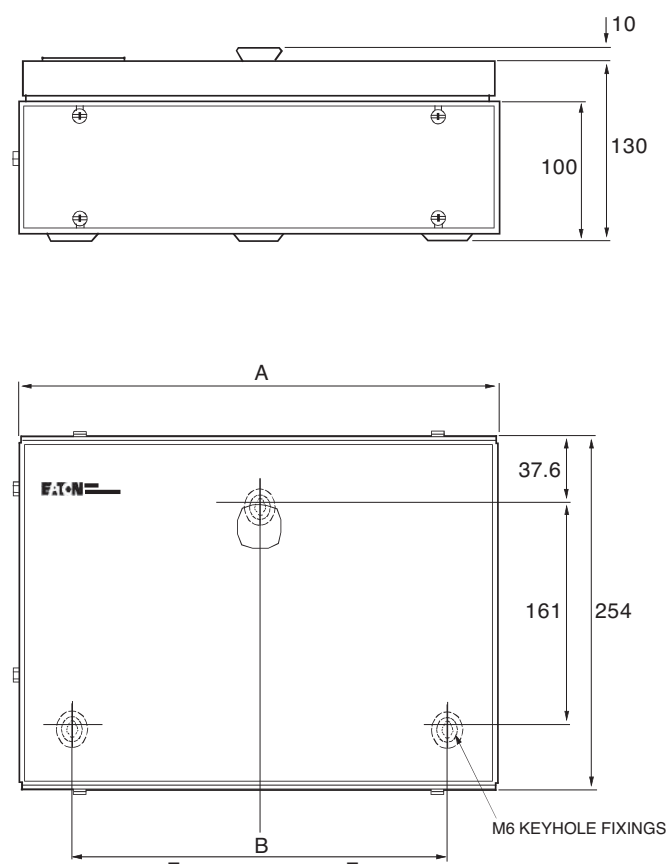

List No.	A (mm)	B (mm)
EAM4, EBMXDC6	238	163
EAMMP65	238	163
EAM7, EBMXDC9	292	217
EAM10	346	271
EAM13, EBMXDC15, EBMXDCG15	440	365
EAM9M/MB	440	365
EAM16, EBMXDC18	454	379
EAM12M/MB	454	379
EAMSL66M/MB	454	379
EAMSL93M/MB	454	379


**Memshield 3 type B TPN Distribution Board, dimensional drawing**

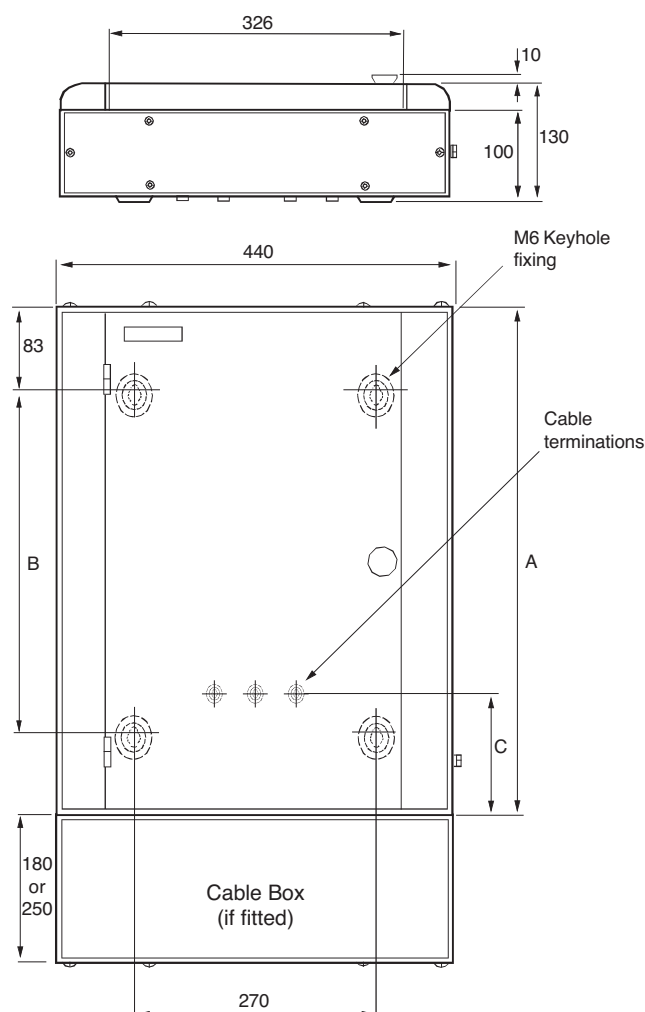

List No.	A (mm)	B (mm)	C (mm) 125A incomer	250A incomer	Lugs incomer
EBM41	429	245	144	—	150
EBM61	482	298	144	—	150
EBM81, EBMXDC30	564	380	173	—	179
EBM121, EBM121D, EBMXDC45	724	540	227	—	233
EBM161	830	540	227	—	233
EBM122	861	677	334	76	340
EBM182	1021	837	334	76	340
EBM242	1180	996	334	76	340
<b>250A high load boards<sup>1)</sup></b>					
EBM22H	817	633	—	237	500
EBM62H	1020	836	—	296	559
EBM82H	1055	871	—	277	540
EBM122H	1180	996	—	296	559
EBM182H	1342	1158	—	298	561
EBM242H	1501	1317	—	298	561


<sup>1)</sup> Cable box not required

**Split metered power and lighting board –  
200A TPN, dimensional drawing**

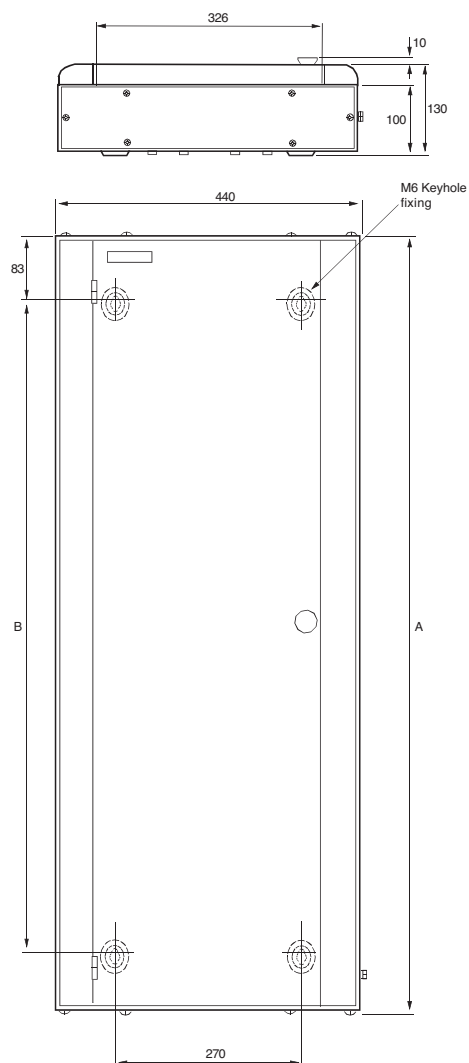

List No.	A (mm)	B (mm)
EBMSL642MPMB	1130	946
EBMSL862MPMB	1236	1052
EBMSL1082MPMB	1342	1158
EBMSL14102MPMB	1501	1317

**Memshield 3 type B AFDD TPN Distribution  
Board, dimensional drawing**


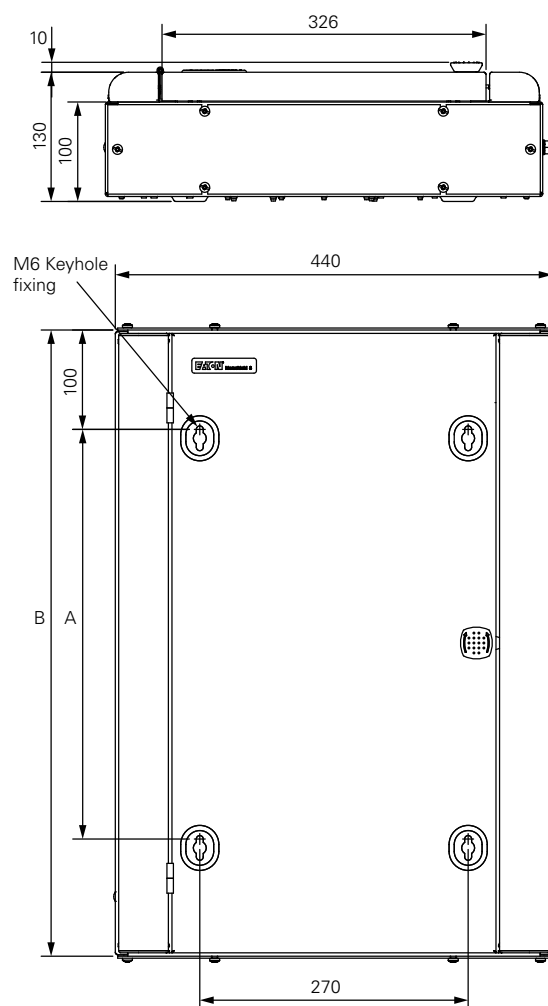


List No.	A (mm)	B (mm)
EBMAFDD141	630	412
EBMAFDD241	900	682
EBMAFDD361	1260	1042


# 10.1

## Technical data

Memshield 3 type A SPN pan assemblies

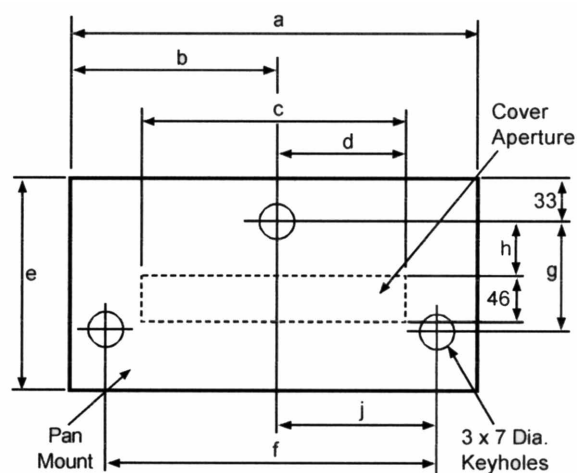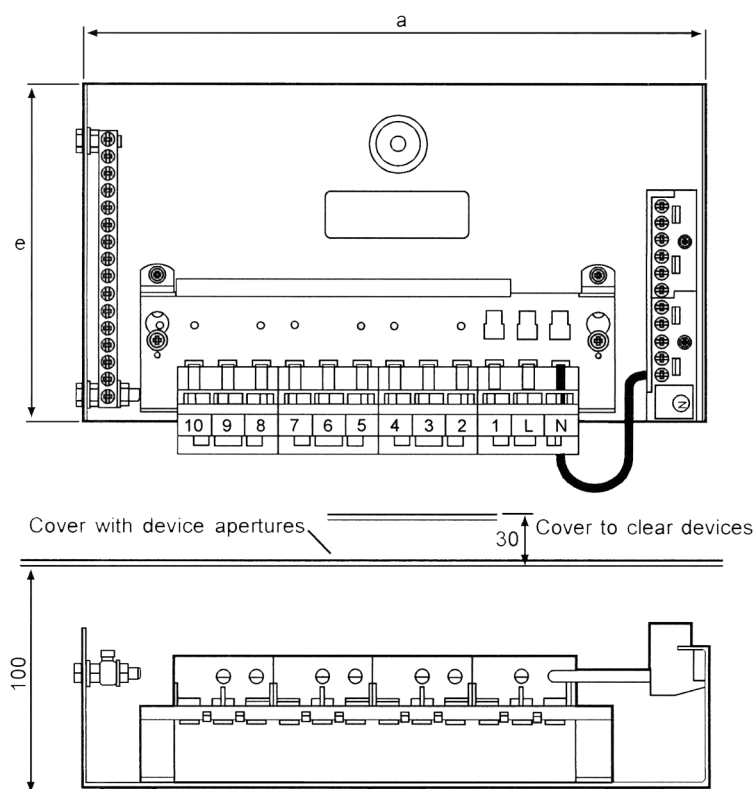


List No.	Dimensions (mm)									Minimum recommended enclosure size (mm)
	a	b	c	d	e	f	g	h	j	
EAMP4	190	105.5	107.7	48.8	180	160	96	70	77	238 (W) x 254 (L)
EAMP7	274	129.5	160.9	79	180	214	96	70	107	292 (W) x 254 (L)
EAMP10	328	164	214.1	127.5	180	266	96	70	127.5	346 (W) x 254 (L)
EAMP13	382	183.5	267.3	131.3	192	319	109	82	161	440 (W) x 260 (L)
EAMP16	435	226.5	320.5	141.5	198	372	105	79	171	495 (W) x 260 (L)

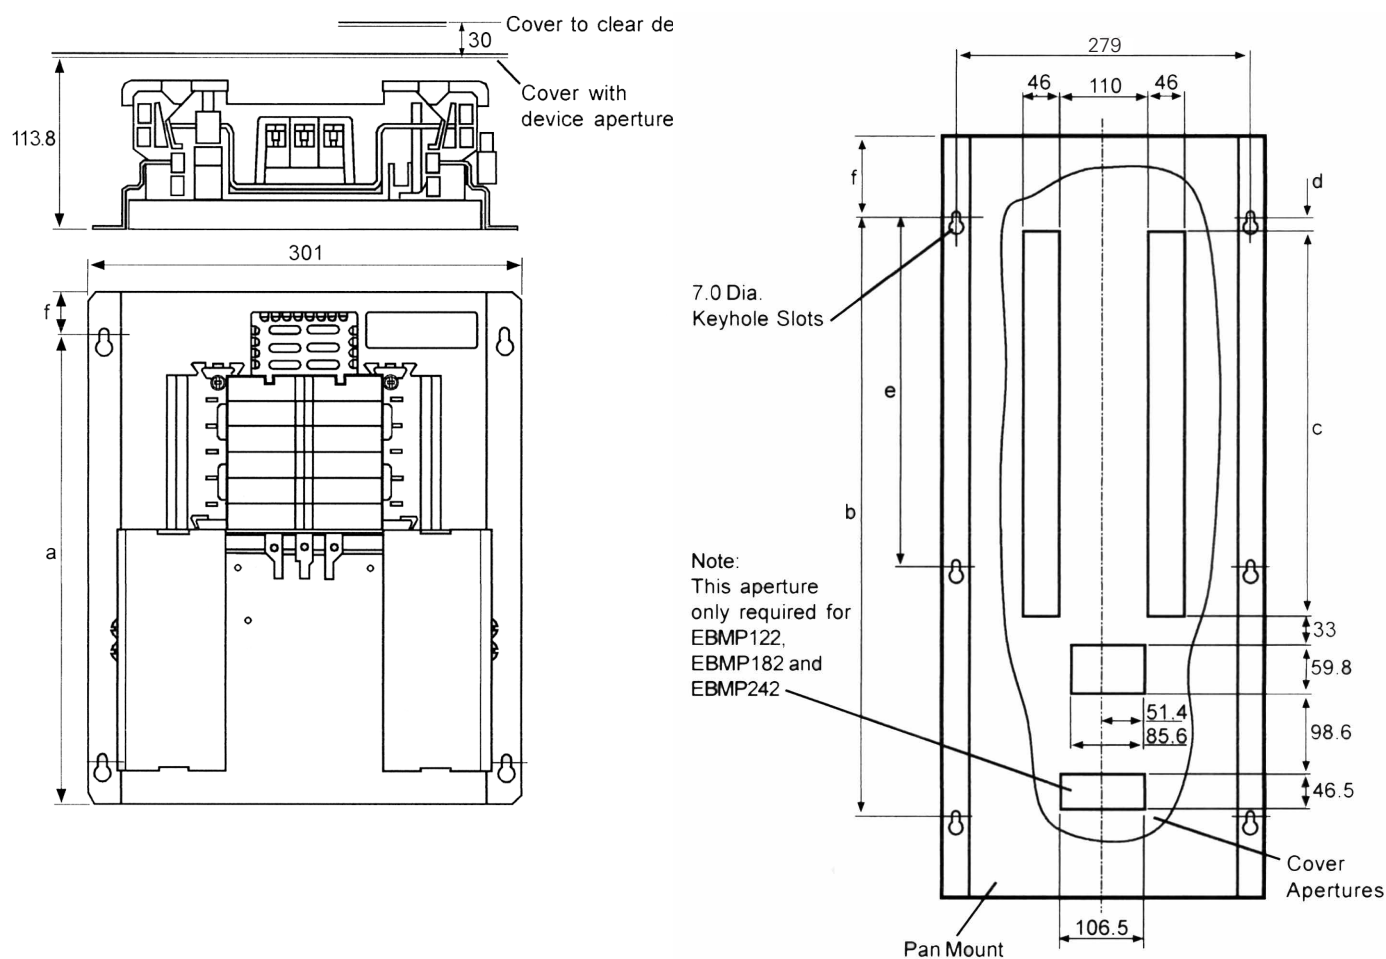



List No.	Dimensions (mm)						Minimum recommended enclosure size (mm)
	a	b	c	d	e	f	
EBMP41	333.6	303.3	107.5	35.7	—	21	440 (W) x 425 (L)
EBMP61	413.7	383.5	160.6	35.7	—	21	440 (W) x 478 (L)
EBMP81	511.5	481.2	213.7	53.2	—	21	440 (W) x 560 (L)
EBMP121	638.1	589.2	319.9	22.2	—	40	440 (W) x 720 (L)
EBMP122	750	710	319.9	16.7	336.5	40	440 (W) x 861 (L)
EBMP182	910	870	479.2	16.7	435	40	440 (W) x 1016 (L)
EBMP242	1070	1030	638.5	16.7	515	40	440 (W) x 1176 (L)

## Memshield 3, surge protection devices, dimensional drawings


EM3SSK1T2

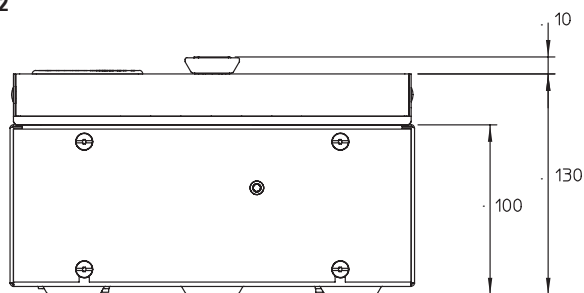

EM3SSK2/EM3SSK12

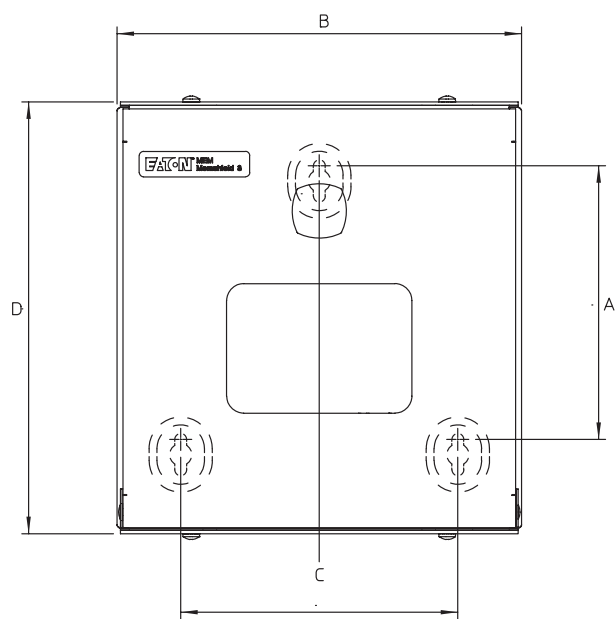
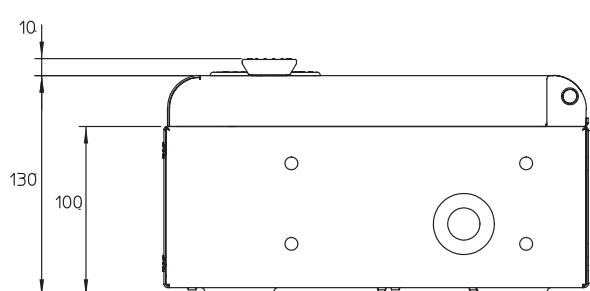


List No.	A (mm)	B (mm)	C (mm)	D (mm)
EM3SSK1T2	254	238	163	161

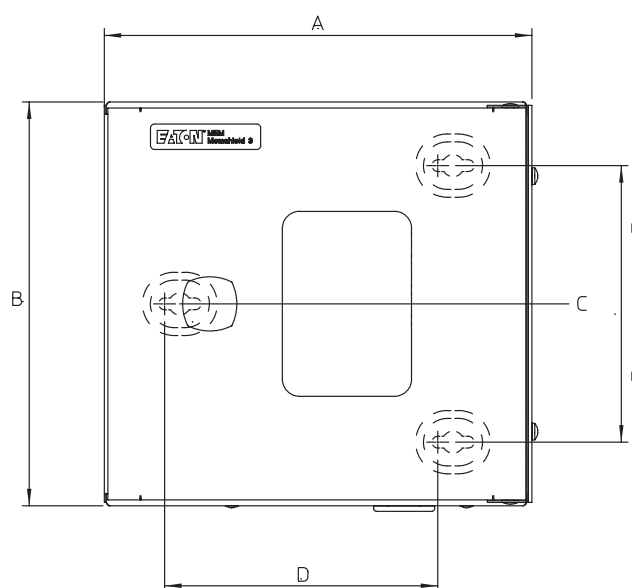

List No.	A (mm)	B (mm)	C (mm)	D (mm)
EM3SSK3T2	254	238	163	161
EM3SSK3T12	254	238	163	161


## Memshield 3, contactor incomer, dimensional drawings

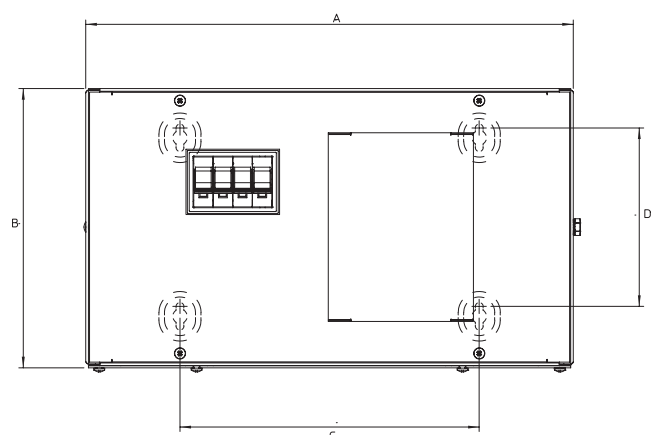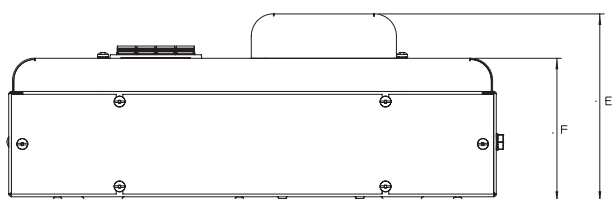


List No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
EBMCC1253	440	252	270	161	170	130
EBMCC2503	440	595	270	501	130	130

## Memshield 3, Meter pack assemblies, dimensional drawings

### EBMMPCD120

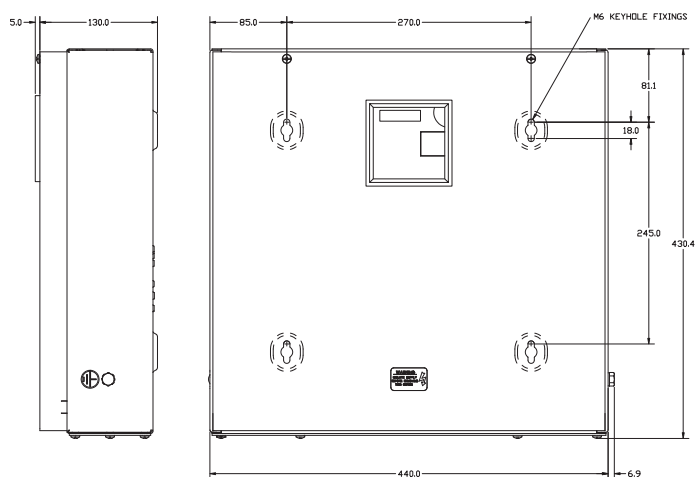


### EBMMPCT250/EBMMPCT250M/EBMMPCT250MID

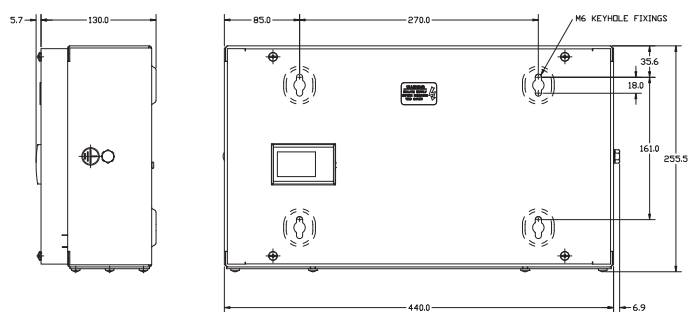




## Memshield 3, Meter pack assemblies, dimensional drawings (contd)


## EBMMPSL250/EBMMPSL250M / EBMMPSL250MID

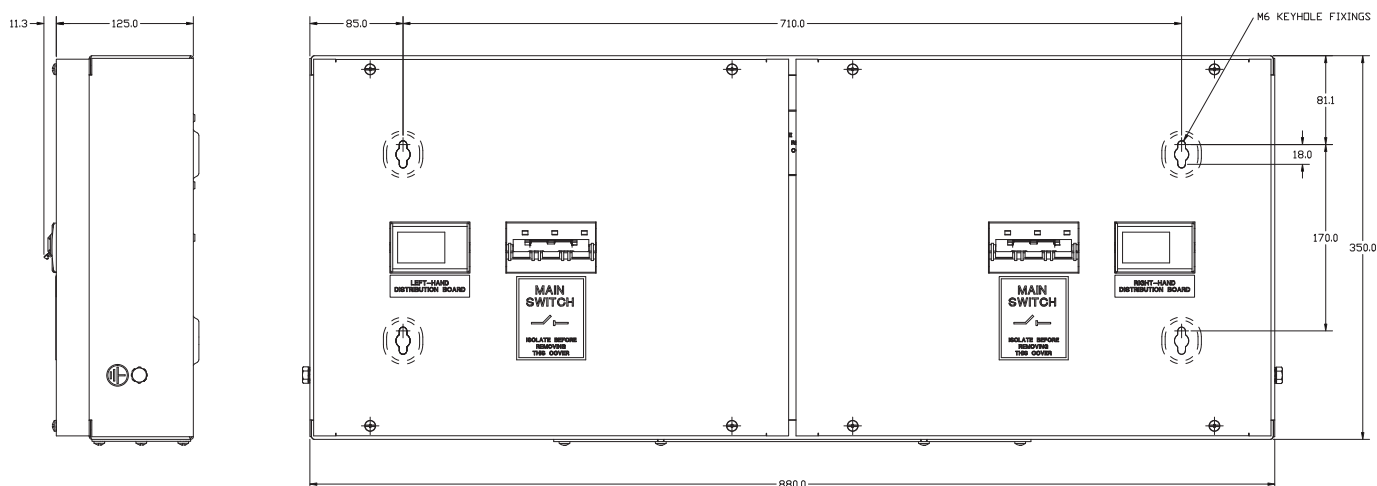

## EBMMPSL125/EBMMPSL125M / EPMMPSL125MID

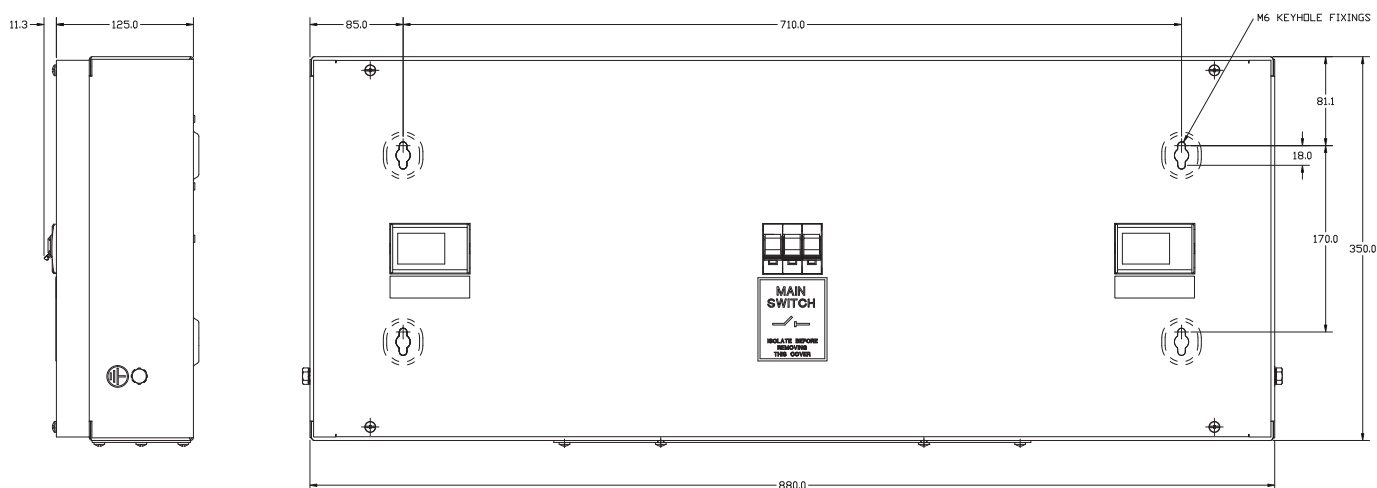

## Memshield 3, Multi Meter pack assemblies, dimensional drawings EBMMPSL250DMID/EBMMPSL250QM

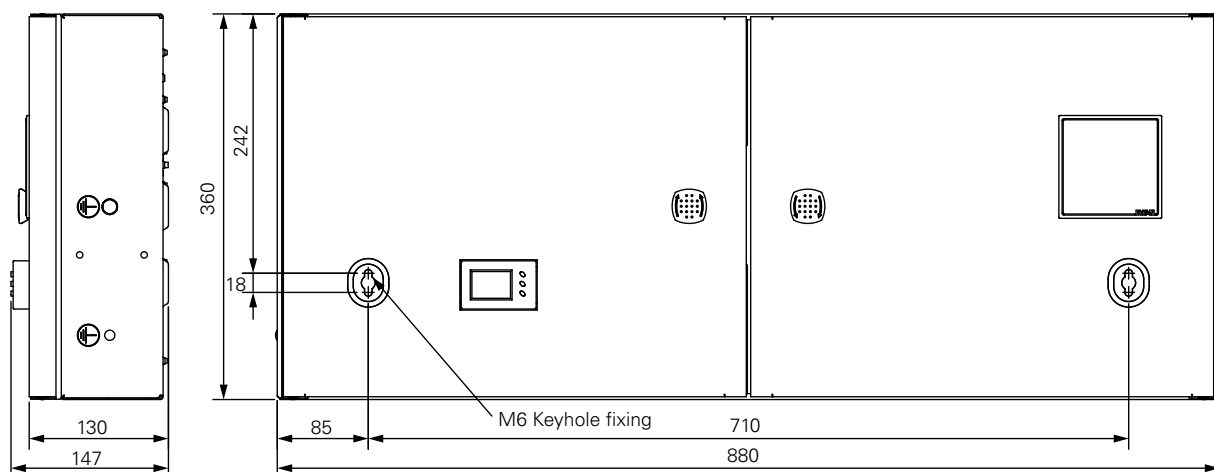

### 18mm miniature circuit breakers (MCBs), technical data

Eaton's range of 10/15kA high performance miniature circuit breakers (MCBs) are manufactured and tested to IEC EN 60898, and IEC EN 60947-2, meeting the latest UK, European and international standards, with ratings from 1A to 63A as standard.

DIN rail mountable and suitable for use with both pin and comb type busbar systems, Eaton's MCBs are suitable for use on 230/400 VAC systems and are calibrated for use at 40°C. These devices suite with the other modular devices including RCBOs, RCCBs and isolators, for use within Eaton Memshield 3 Distribution boards and a wide range of other applications.

The Eaton MCBs are fitted with box clamp terminals suitable for use with cables up to 25mm<sup>2</sup>, and have a unique box clamp barrier to prevent incorrect cable insertion.

Eaton miniature circuit breakers are available with B, C and D characteristic curve as standard. Type C MCBs are most commonly used in commercial and general applications where there are lighting or motor loads involving high switching surges that may cause unwanted operation of type B devices. Type D devices are more commonly used on general industrial applications with much higher inrush surges.

IEC/EN 60898 Type	Instantaneous Trip Current ( $\times I_n$ )	Typical Application	Eaton 10/15A MCB type
B	3 to 5	General distribution	EMBH
C	5 to 10	Commercial Light industrial	EMCH
D	10 to 20	General Industrial	EMDH

**Type B:** Suitable for general, domestic and commercial installations having little or no switching surges.

**Type C:** Suitable for general use in commercial or industrial applications where the greater use of fluorescent lighting and small motors can produce switching surges, which may cause nuisance tripping of type B breakers.

**Type D:** Suitable for general industrial applications where there are a lot of high inrush switching surges associated with equipment such as transformers, large motors, welding and X ray equipment.

### Earth fault loop impedances (Zs) to provide compliance with BS 7671

The wiring regulations BS 7671 makes specific reference to MCB types and the maximum earth loop impedance allowable to meet the required disconnection times.


It can be seen that it is much easier to achieve adequate disconnection times with type B devices than it is with types C and indeed type D devices.

Maximum earth fault loop impedance i.e. Zs ohms for final circuits fed from miniature circuit breakers MCBs or RCBOs with Uo of 230V, for instantaneous operation giving compliance with 0.4s disconnection time of Reg 411.3.2.2 and 5s disconnection time of 411.3.2.3


**Note:** A minimum Voltage factor Cmin = 0.95 has been introduced to take account of variations in supply voltage depending on time, place and transformer settings etc., in accordance with Electricity Safety, Quality and Continuity regulations 2002.

The effect of this is to reduce the previous BS7671 maximum earth loop impedance Zs values by 5%.

### Tripping characteristic type B, C & D

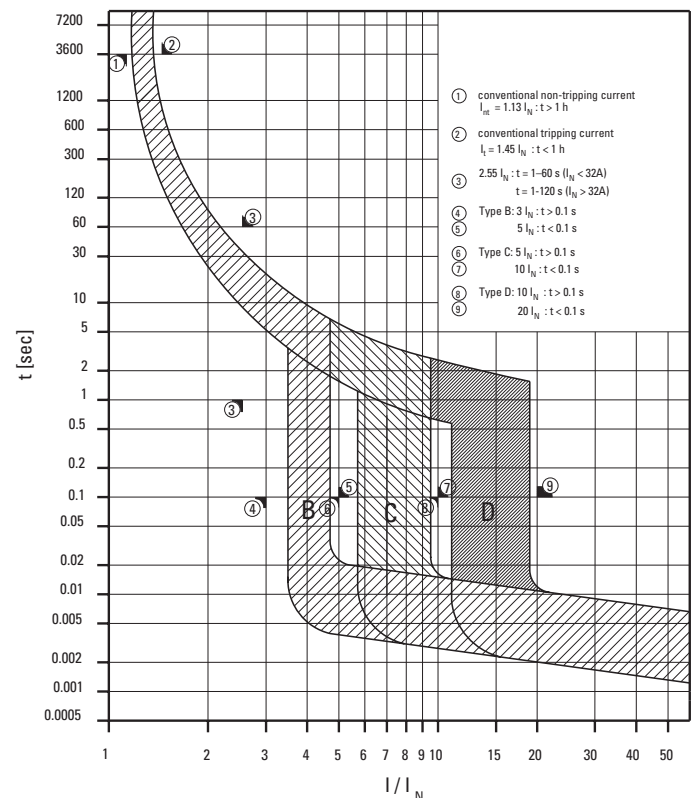

## 10/15kA MCBs dimensional drawings

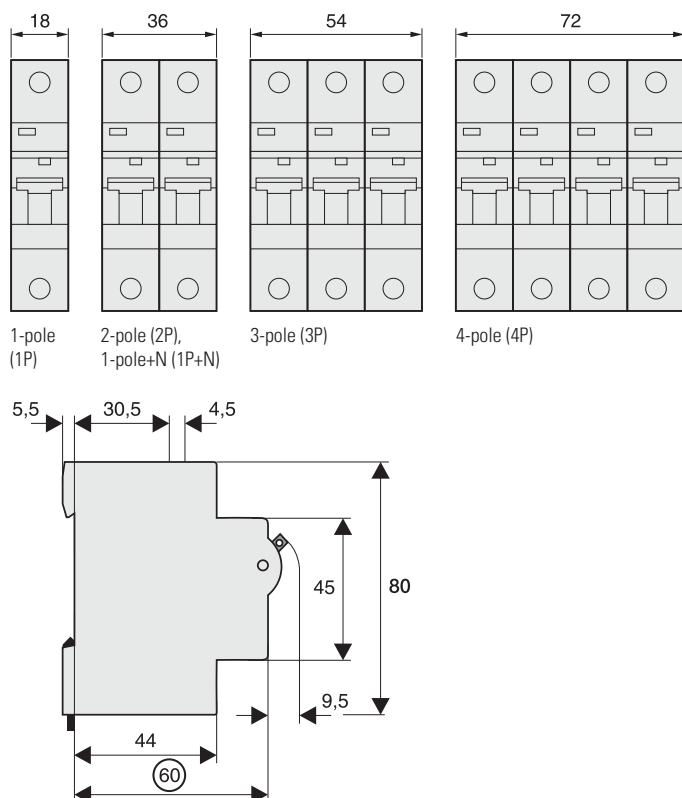

## 10/15kA MCBs technical data

Product standard	IEC EN 60898 & IEC EN 60947-2
No of poles	1p, 1p&N, 2p, 3p, 4p
<b>Mechanical specification</b>	
Device width (pole)	17.7mm
Terminal type	Box clamp
Terminal capacity	1–25mm <sup>2</sup>
Terminal Screw	M5 combination
Terminal torque	2.0Nm – 2.4Nm max
Mounting	DIN rail
Degree of protection	IP 20
Positive contact indication	Red/Green flag indicator
<b>Electrical specification</b>	
Rated voltage	230/240 V AC 48V DC (per pole)
Current ratings	1, 2, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50, 63 A
Rated impulse and withstand voltage	4kV (1.2/50) $\mu$ sec
Rated short circuit capacity	10kA to IEC EN 60898 and 15kA to IEC EN 60947-2
Selectivity class	3 to EN 60898
<b>Tripping characteristic</b>	
Instantaneous tripping current $I_{mt}$	Type B: $3 I_n < I_{mt} < 5 I_n$ Type C: $5 I_n < I_{mt} < 10 I_n$ Type D: $10 I_n < I_{mt} < 20 I_n$
Conventional non tripping current	$I_{nt} = 1.13 I_n$
Conventional tripping current	$I_t = 1.45 I_n$
Ref/Calibration temp	40 $\pm$ 0 C
Number of operating cycles elec	>4000
Number of operating cycles mech	>20000

## MCB Max Zs (Ohms) figures (Data in line with BS7671)

Range	$I_n$ (A)	Disconnection 0.4s	Disconnection 5s
Type B (EMBH Series)	1	43.70	43.70
	2	21.85	21.85
	4	10.93	10.93
	6	7.28	7.28
	8	5.46	5.46
	10	4.37	4.37
	13	3.36	3.36
	16	2.73	2.73
	20	2.19	2.19
	25	1.75	1.75
	32	1.37	1.37
	40	1.09	1.09
	50	0.87	0.87
	63	0.69	0.69
Type C (EMCH Series)	1	21.85	21.85
	2	10.93	10.93
	4	5.46	5.46
	6	3.64	3.64
	8	2.73	2.73
	10	2.19	2.19
	13	1.68	1.68
	16	1.37	1.37
	20	1.09	1.09
	25	0.87	0.87
	32	0.68	0.68
	40	0.55	0.55
	50	0.44	0.44
	63	0.35	0.35
Type D (EMDH Series)	1	10.93	21.85
	2	5.46	10.93
	4	2.73	5.46
	6	1.82	3.64
	8	1.37	2.73
	10	1.09	2.19
	13	0.84	1.68
	16	0.68	1.37
	20	0.55	1.09
	25	0.44	0.87
	32	0.34	0.68
	40	0.27	0.55
	50	0.22	0.44
	63	0.17	0.35

Note : Values take account of minimum voltage factor  $C_{min}$  - in accordance with BS7671 Amendment 3

## 27mm style miniature circuit breakers (for 250A distribution boards)


Eaton's 27mm style miniature circuit breakers (MCBs) are manufactured and tested to IEC EN 60947-2, meeting the latest UK, European and international standards, with ratings from 20A to 125A single and triple pole as standard.

Eaton's MCBs are suitable for use on 230/400 VAC systems and are calibrated for use at 40°C. and are available with B, C, and D characteristic curve, with breaking capacities up to 25kA.


### 15/25kA MCBs technical data

Product standard	IEC EN 60947-2
No of poles	1p, 3p
<b>Mechanical specification</b>	
Device width (pole)	27mm
Terminal type	Box clamp
Terminal capacity	2.5 - 50 mm <sup>2</sup>
Terminal Screw	Combination head
Terminal torque	2.0 - 3.4 Nm max
Mounting	DIN rail
Degree of protection	IP 20
Positive contact indication	Red/Green flag indicator
<b>Electrical specification</b>	
Rated voltage	230/400 V AC 60V DC (per pole)
Current ratings	63, 80, 100, 125 A
Rated impulse and withstand voltage	4kV (1.2/50) $\mu$ sec
Rated short circuit capacity	
Types B and C	20-63A - 25kA 80-100A - 20kA 125A - 15kA
Rated short circuit capacity	
Type D	20-63A - 25kA 80A - 20kA 100A - 15kA
Selectivity class	In accordance with class C
<b>Tripping characteristic</b>	
Instantaneous Tripping current $I_{mt}$	Type B: $3 I_n < I_{mt} < 5 I_n$ Type C: $5 I_n < I_{mt} < 10 I_n$ Type D: $10 I_n < I_{mt} < 20 I_n$
Conventional non tripping current	$I_{nt} = 1.13 I_n$
Conventional tripping current	$I_t = 1.45 I_n$
Ref/Calibration temp	40°C
Number of operating cycles elec	>20000

### Miniature circuit breakers – dimensional drawings

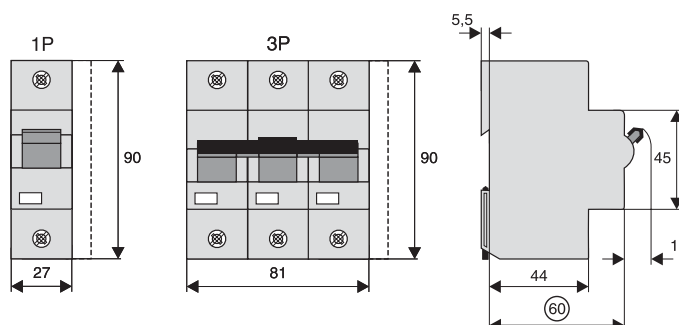

### Tripping characteristic type B, C & D

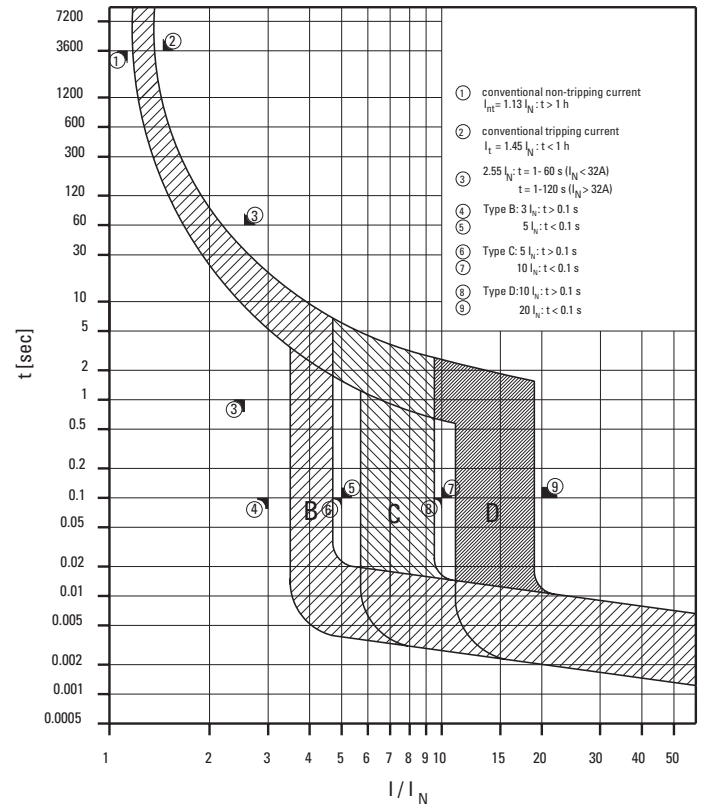

### Eaton Memshield-3 MCB Max Zs (Ohms) Data in line with BS7671

Range	$I_n$ (A)	Disconnection 0.4s	Disconnection 5s
Type B (EMBS Series)	20	2.19	2.19
	32	1.37	1.37
	40	1.09	1.09
	50	0.87	0.87
	63	0.69	0.69
	80	0.55	0.55
	100	0.44	0.44
	125	0.35	0.35
Type C (EMCS Series)	20	1.09	1.09
	32	0.68	0.68
	40	0.55	0.55
	50	0.44	0.44
	63	0.35	0.35
	80	0.27	0.27
	100	0.22	0.22
	125	0.17	0.17
Type D (EMDS Series)	20	0.55	1.09
	32	0.34	0.68
	40	0.27	0.55
	50	0.22	0.44
	63	0.17	0.35
	80	0.14	0.27
	100	0.11	0.22

Note : Values take account of minimum voltage factor  $C_{min}$  - in accordance with BS7671 Amendment 3

**Residual current circuit breakers (RCCBs) technical data**

Eaton's range of residual current circuit breakers without integral Overload protection (RCCBs), are manufactured to IEC EN/61008 and meet the latest European and International standards.

DIN rail mountable in 2 and 4 module widths these RCCBs provide protection solutions to a wide range of applications. With standard thermal ratings of 16A to 100A and trip sensitivities of 10mA, 30mA, 100mA and 300mA, these devices can be equipped with a range of modular accessories.

The Eaton RCCBs suite with the complete range of modular devices, and are for use within Eaton's Memshield 3 distribution boards and other applications.

These devices will accommodate cables up to 35mm<sup>2</sup>.

**Terminology**

**RCD** – Residual current device:- This is the generic term covering a range of devices that are able to detect residual currents sometimes also referred to as earth leakage current. The residual current is measured by detecting the difference between the current flowing in the live and neutral conductors of a circuit and where the residual current is above a predefined level the RCD will trip. RCDs are available in a range of trip sensitivities for different applications.

**RCCB** – Residual current circuit breaker is an RCD which will cause disconnection of the electrical supply should it detect a residual current passing through the device, above a specified tripping current limit e.g. 30mA. This device does not provide over current protection and is therefore also referred to as an RCCB without integral over-current protection.

**RCBO** – Residual current circuit breaker, with overload protection, is an RCCB which will cause disconnection of the electrical supply should it detect a residual current above a specified tripping current limit, combined with integral overload, over-current, and shortcircuit protection associated with a miniature circuit breaker.

The 17th Edition of the IEE wiring regulations BS7671 has placed much greater emphasis on the use of 30mA RCDs to provide "additional protection" in many areas covered by the regulations, such as circuits feeding socket outlets and for the protection of concealed wiring.

**Trip sensitivities**


**10mA** – Provides the highest degree of RCD protection in hazardous environments where supplementary protection against electric shock is required. This very high sensitivity should only be applied to final circuits where a high degree of risk exists.

**30mA** – Provides a high degree of protection against electric shock due to direct and indirect contact. A 30mA RCD will trip within 40ms when a fault current of 150mA is detected.

This type of RCD is required to satisfy the requirements for "additional protection" in accordance with BS7671 (IEE wiring regs.)

**100mA** – Provides a degree of protection against electric shock resulting from indirect contact, and is generally used to protect a group of circuits as well as providing overall protection against Fire risk.

**300mA** – Provides a lower level of RCD protection in the form of an overall protection against the risk of fire resulting from faults in electrical wiring etc.

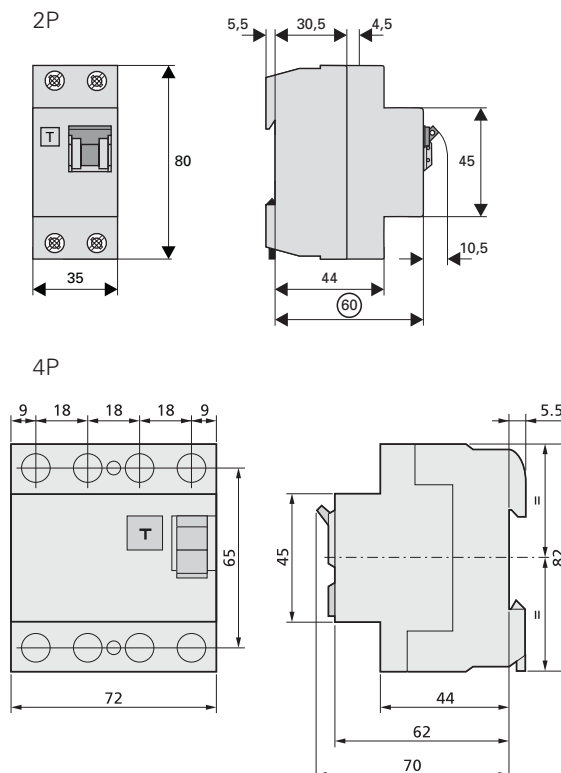**RCCB dimensions (mm)****RCCB technical data**

Specifications	2-pole RCCB	4-pole RCCB
Product standard	IEC EN 61008	IEC EN 61008
No of poles	2p	4p
<b>Mechanical specification</b>		
Device width	35 mm	70 mm
Terminal type	Box clamp	Box clamp
Terminal capacity	1.5–35mm <sup>2</sup>	35mm <sup>2</sup>
Terminal Screw	M5 combination	M5 combination
Terminal torque	2.4Nm max	2.4Nm max
Mounting	DIN rail	DIN rail
Degree of protection	IP 20	IP 20
Positive contact indication	Yes (toggle position)	Red/green flag
<b>Electrical specification</b>		
Rated voltage	230/400 V AC	230/400 V AC
Current ratings	16, 40, 63, 80, 100 A	16, 40, 63, 80, 100 A
Rated impulse and withstand voltage	4kV (1.2/50) u sec	4kV (1.2/50) u sec
Rated short circuit capacity	10kA (with back up)	10kA (with back up)
Sensitivity	AC	AC
<b>Tripping characteristic</b>		
Rated tripping currents	10, 30, 100, 300 mA	10, 30, 100, 300 mA
Tripping type	Instantaneous	Instantaneous
Number of operating cycles elec	>4000	>4000
Number of operating cycles mech	>20000	>20000

### Residual current circuit breakers – with overload protection (RCBOs) technical data

Eaton's range of residual current circuit breakers with integral overload protection (RCBOs), are manufactured to IEC EN 61009 and meet the latest European and International standards.

#### Trip Sensitivity

Provides a high degree of protection against electric shock due to direct contact. A 30mA RCD will trip within 40mS when a fault current of 150mA is detected.

This type of RCD is required to satisfy the requirements for "additional protection" in accordance with BS7671 (IET wiring regs.)



#### Single phase RCBO technical data

Specifications	
Product standard	IEC EN 61009
No of poles	1p & solid N
Mechanical specification	
Device width	17.7 mm
Terminal type	Lower-Box clamp      Upper-Box clamp
Terminal capacity	1–25mm <sup>2</sup> 2-16mm <sup>2</sup>
Terminal Screw	M5 combination      M4 combination
Terminal torque	2.4Nm max      1.5Nm max
Mounting	DIN rail
Degree of protection	IP 20
Positive contact indication	Yes (Red/Green flag)
Electrical specification	
Rated voltage	230/240 V AC
Current ratings	6, 10, 16, 20, 25, 32, 40, 45A
Rated impulse and withstand voltage	4kV (1.2/50) u sec
Rated short circuit capacity	10kA
Sensitivity	Type A
Tripping characteristic	
Instantaneous Tripping current I <sub>mt</sub>	Type B: 3 I <sub>n</sub> < I <sub>mt</sub> < 5 I <sub>n</sub> Type C: 5 I <sub>n</sub> < I <sub>mt</sub> < 10 I <sub>n</sub>
Conventional non tripping current	I <sub>nt</sub> = 1.13 I <sub>n</sub>
Conventional tripping current	I <sub>t</sub> = 1.45 I <sub>n</sub>
Ref/Calibration temp	40o C
Rated tripping currents	10, 30, 100mA
Tripping type	Instantaneous
Number of operating cycles elec	>400
Number of operating cycles mech	>20000

#### Three phase RCBO technical data

Electrical	
Design according to	IEC/EN 61009
Tripping	
line voltage-independent	instantaneous 250A (8/20μs)
	surge current-proof
Rated voltage U <sub>e</sub>	240/415V; 50Hz
Rated tripping current I <sub>Δn</sub>	0, 100, 300 mA
Rated non-tripping current I <sub>Δn</sub>	0.5 I <sub>Δn</sub>
Sensitivity	Type A (AC and pulsating DC)
Selectivity class	3
Rated breaking capacity	10 kA
Rated current	6 - 32 A
Rated peak withstand voltage U <sub>imp</sub>	4 kV (1.2/50μs)
Characteristic	B, C, D
Maximum back-up fuse (short circuit)	100 A gL (>10 kA)
Endurance electrical comp.	≥ 4,000 operating cycles
mechanical comp.	≥ 20,000 operating cycles

#### RCBOs dimensions (mm)

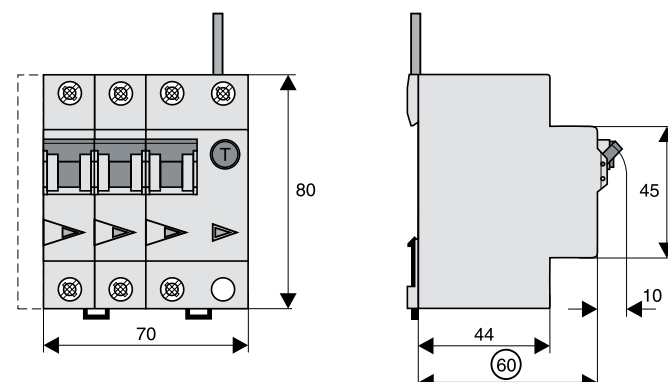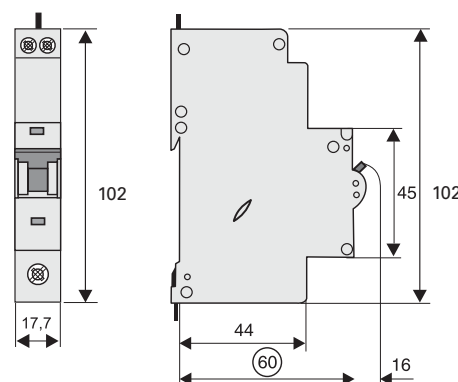


Mechanical	
Frame size	45 mm
Device height	80 mm
Device width	70 mm
Upper and lower terminals	open mouthed/lift terminals
Terminal capacity	1 - 25 mm <sup>2</sup>
Degree of protection	IP20
Operating temperature	-25°C to +40°C
Resistance to climatic conditions	acc. to IEC/EN 61009

### Electric Fire Protective Device, Arc Fault Protection AFDD<sup>+</sup>, 2-pole

Detects and quenches arc faults in final circuits

- Fully combined with residual current circuit breaker (RCCB) and miniature circuit breaker (MCB)
- Safely detects arcs in cable length up to 70 meter
- Variable installation of N either left or right
- Rated currents from 10 to 40 A
- Tripped indication: MCB, RCCB or AFDD
- LED indication for arc faults
- Permanent self-monitoring
- Overvoltage and overheat monitoring
- 3-position DIN rail clip, permits removal from existing busbar system
- 30 mA rated residual currents
- Tripping characteristics B, C
- Rated breaking capacity up to 10 kA

### Tripping Characteristic AFDD<sup>+</sup>, Characteristics B and C

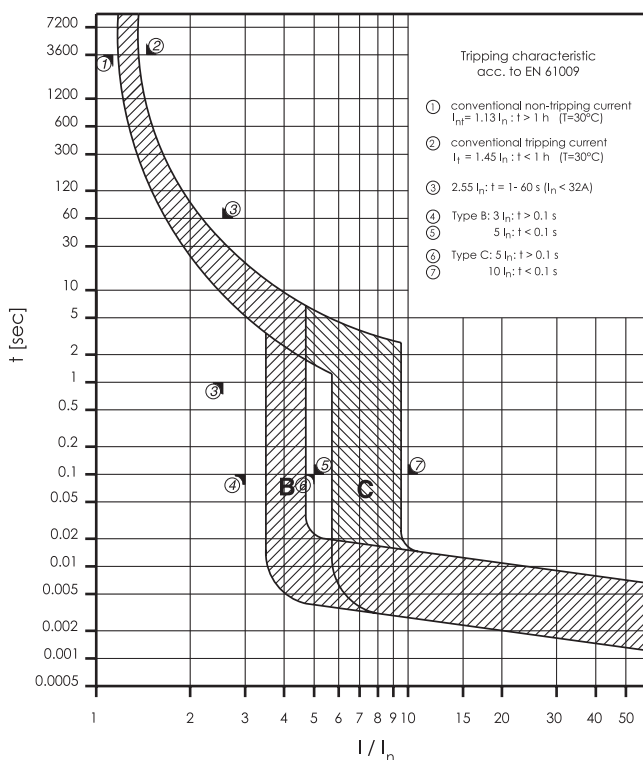

### Technical Data

#### Electrical

Design according to	IEC/EN 62606, IEC/EN 61009
Current test marks as printed onto the device	
Tripping	
Line-voltage-independent	instantaneous 250A
(8/20μs)	
Rated voltage $U_e$	surge-current-proof 240 V AC; 50 Hz
Operational voltage range	170-264 V
Rated tripping current $I_{\Delta n}$	30 mA
Rated non-tripping current $I_{\Delta no}$	$0.5 I_{\Delta n}$
Sensitivity	AC and pulsating DC
Selectivity class	3
Rated breaking capacity	
AFDD 10-25A	10 kA
AFDD 32-40A	6 kA
Rated current	10 - 40 A
Rated peak withstand voltage $U_{imp}$	4 kV (1.2/50μs)
Rated fault breaking capacity $I_{\Delta m}$	
EN 61009	3 kA
IEC 61009	10-16 A: 3 kA 20-40 A: 500 A

#### Arc fault tripping times after load current

(acc. to IEC/EN62606):

Arc current (A)	Tripping time (s)
2.5	<1
5	<0.5
10	<0.25
16	<0.15
32	<0.12
40	<0.12

#### Characteristic


Maximum back-up fuse (short circuit) 100 A gL (>10 kA)

Endurance	electrical comp. mechanical comp.
	≥ 4,000 switching operations ≥ 20,000 switching operations


#### Mechanical

Frame size	45 mm
Device height	80 mm
Device width	54 mm (3MU)
Mounting	3-position DIN rail clip, permits removal from existing busbar system
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGVV VS3, EN 50274
Terminal capacity	1 - 25 mm <sup>2</sup>
Busbar thickness	0.8 - 2 mm
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Tripping temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61009

### Connection diagram



### Dimensions (mm)





## Analogue time switches

	TSSD1C0	TSSD1N0	TSQW1C0	TSQD1C0	TSQD1N0
<b>General</b>					
Operating voltage	230V AC	230 V AC	110 - 230 V AC	110 - 230 V AC	230 - 240 V AC
Frequency	50 Hz	50 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Stand-by power	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W
Time control	Net	Net	Quartz	Quartz	Quartz
Accuracy	acc. Net	acc. Net	± 1 sec. / day	± 1 sec. / day	± 1 sec. / day
Power reserve	-	-	200 hrs / 100 hrs at 110 V	200 hrs/ 100 hrs at 110 V	±3 days
Battery type	-	-	NiMH	NiMH	NiMH
Degree of protection (EN 60529)	IP20	IP20	IP20	IP20	IP20
Ambient temperature	-20 °C...+55 °C	-20 °C...+50 °C	-20 °C...+55 °C	-20 °C...+55 °C	-10 °C...+50 °C
Protection class (EN 60730-1)	II	II	II	II	II
<b>Switching contact(s)</b>					
Type of switching contact	1 x CO	1 x NO	1 x CO	1 x CO	1 x NO
Switching capacity at 250 V~, cos = 1	16 A	16 A	16 A	16 A	16 A
Switching capacity at 250 V~, cos = 0,6	4A	4 A	4 A	4 A	4 A
<b>Programming features</b>					
Period of program	Day	Day	Week	Day	Day
Number of channels	1	1	1	1	1
Minimum cycle time	15 min.	15 min.	2 hrs	15 min.	15 min.
Programmable	every 15 min.	every 15 min.	every 2 hrs	every 15 min.	every 15 min.
Program steps	96	96	84	96	96
Manual / Hand / Permanent switching <sup>1)</sup>	On, Off, Auto	On, Off, Auto	On, Off, Auto	On, Off, Auto	On, Off, Auto
Switching status indication	x	x	x	x	x
<b>Dimensions and weight</b>					
Number of module width	3	1	3	3	1
Dimensions Width	52.5 mm	17.5 mm	52.5 mm	52.5 mm	17.5 mm
Height	90 mm	90 mm	90 mm	90 mm	90 mm
Depth	65.5 mm	65.5 mm	65.5 mm	65.5 mm	65.5 mm
Mounting	DIN-rail	DIN-rail	DIN-rail	DIN-rail	DIN-rail
<b>Terminals</b>					
Terminal screw size	M3.5	M3.5	M3.5	M3.5	M3.5

### <sup>1)</sup> Remark

ON = Permanent ON

OFF = Permanent OFF


Hands = ON or OFF. valid until next program cycle overrules

Auto = According program




**Analogue daily and weekly timers, dimensional drawings**


TSQD1CO, TSSD1CO, TSQW1CO

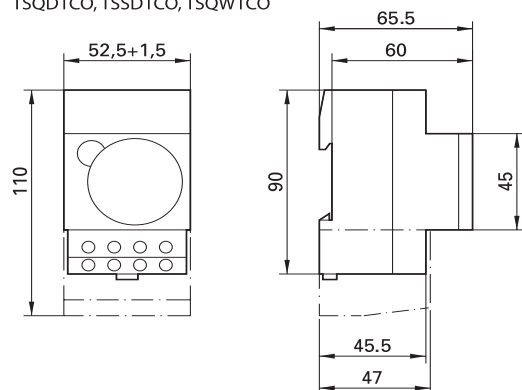


TSQD1NO, TSSD1NO

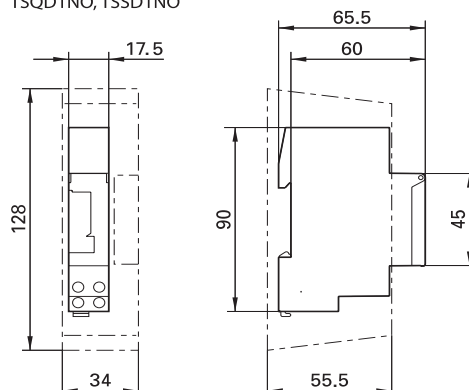**Analogue daily and weekly time switches, wiring diagrams**

TSQD1CO, TSSD1CO, TSQW1CO



TSQD1NO, TSSD1NO



## Digital timers - week programme

	TSDW1C0	TSDW1COMIN	TSDW2C0	TSDW1C0A	TSDW1C0DG
<b>General</b>					
Nominal operating voltage	220 - 240 V AC	240 V AC	220 - 240 V AC	230 - 240 V AC	230 - 240 V AC
Frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Stand-by power	0,8 W	0,4 W	0,8 W	0,8 W	1,4 W
Time base control <sup>1)</sup>	Quartz	Quartz	Quartz	Astro	Quartz or DCF / GPS
Accuracy	± 0,5 sec. / day	± 0,5 sec. / day	± 0,5 sec. / day	± 0,5 sec. / day	± 0,5 sec. / day
Power reserve	10 year	10 year	10 year	10 year	10 year
Type of battery	Lithium	Lithium (exchangeable)	Lithium	Lithium	Lithium
Protection class (acc. EN 60529)	IP20	IP20	IP20	IP20	IP20
Permissible ambient temperature	-30 °C...+55 °C	-25 °C...+55 °C	-30 °C...+55 °C	-30 °C...+55 °C	-30 °C...+55 °C
Protection class at proper installation (acc. EN 60730-1)	II	II	II	II	II
<b>Switching contact(s)</b>					
Type of switching contact	1 x CO	1 x CO	2 x CO	1 x CO	1 x CO
Switching capacity at 250 V~, cos φ = 1	16 A	16 A	16 A	16 A	16 A
Switching capacity bij 250 V~, cos φ = 0,6	10 A	6 A	10 A	10 A	10 A
Switching capacity for lighting					
- Incandescent lamp	2600 W	1000 W	2600 W	2600 W	2600 W
- Halogen lamp	2600 W	1000 W	2600 W	2600 W	2600 W
<b>Programming features</b>					
Period of programme	Week	Week	Week	Week	Week
Number of channels	1	1	2	1	1
Minimum switching capacity	10 mA	-	10 mA	10 mA	-
Minimum cycle time	1 min.	1 min.	1 min.	1 min.	1 sec.
Maximum programming steps in memory	56	56	56	56	84
Summer / wintertime automatic (or manual on/off)	Yes	Yes	Yes	Yes	Yes
Random programme	No	No	No	No	Yes (2)
Holiday programme	Yes	Yes	Yes	Yes	Yes
Cycle programme	No	No	No	No	Yes
Astro function	No	No	No	Yes	No
Pulse switching	No	No	No	No	Yes
Manual switching <sup>2)</sup>	On, Off, Auto	On, Off, Auto	On, Off, Auto	On, Off, Auto	On, Off, Auto
LCD backlighting	Yes	-	Yes	Yes	Yes
PIN code	Yes	Yes	Yes	Yes	Yes
<b>Dimensions and weight</b>					
Number of module width	2	1	2	2	2
Dimensions	Width	35.8 mm	17.5 mm	35.8 mm	35.8 mm
	Height	90.1 mm	90 mm	90.1 mm	90.1 mm
	Depth	69.2 mm	65.5 mm	69.2 mm	69.2 mm
Mounting		DIN-rail	DIN-rail	DIN-rail	DIN-rail
<b>Terminals</b>					
Terminal type	Spring	Screw	Spring	Spring	Spring

### 1) Remark:

Astro function: Automatic calculation of sunrise and sunset times

DCF / GPS: Time synchronization is possible by connecting external antenna (TSADCF of TSAGPSKIT).

### 2) Remark:


ON = Permanent ON

OFF = Permanent OFF


Auto = According Programme

#### Digital weekly time switches, dimensional drawings


TSDW1CO, TSDW2CO

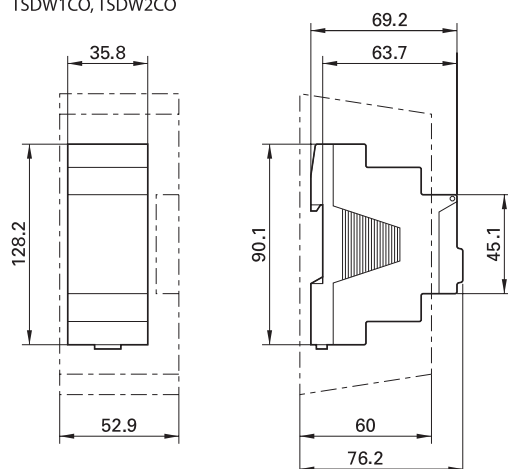


TSDW1COMIN

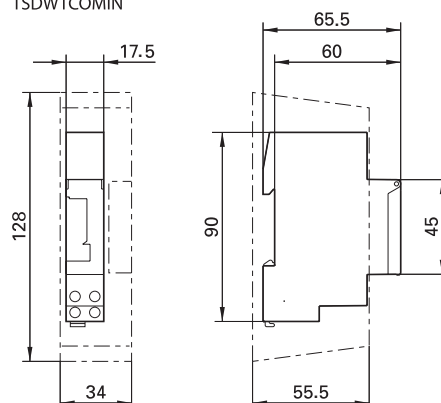

TSDW1COA

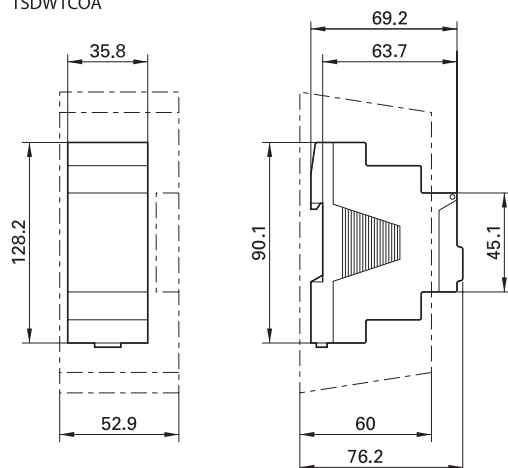


TSDW1CODG

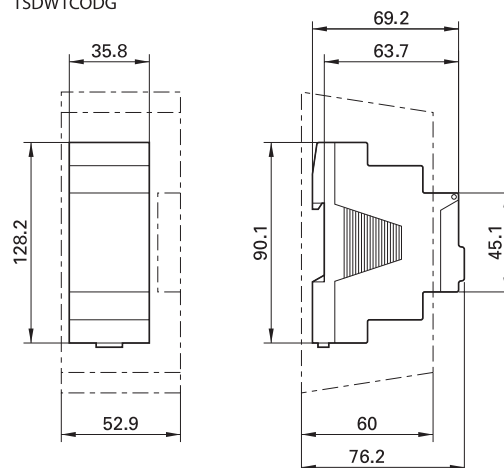


#### Digital weekly timers, wiring diagrams


TSDW1CO




TSDW2CO




TSDW1COMIN



TSDW1COA



TSDW1CODG




### Twilight switches and combination with timer


	SRSD1N0	SRSD1COW	SRCD1C0	SRSW1N0
<b>General</b>				
Nominal operating voltage	220 - 240 V AC	220 - 240 V AC	220 - 240 V AC	220 - 230 V AC
Frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Stand-by power	0,8 W	1,1 W	1,3 W	0,6 W
Photosensitivity	2 - 100 lux	2 - 2000 lux	2 - 2.000 lux	2 - 2.000 lux
Maximum cable length for sensor	25 mtr.	100 mtr.	100 mtr.	-
Maximum cable length for sensor	-25 °C...+50 °C	-30 °C...+55 °C	-30 °C...+55 °C	-35 °C...+55 °C
Protection class at proper installation - modular device	II	II	II	II
<b>Switching contact(s)</b>				
Type of switching contact	1 x NO	1 x CO	1 x CO	1 x NO
Contact type	Floating	Floating	Floating (not for SELV)	Floating 230 V
Switching capacity at 250 V~, cos = 1	16 A	16 A	16 A	16 A
Switching capacity at 250 V~, cos = 0,3	-	-	10 A	10 A
Maximum lamp load:				
- Incandescent lamp	2300 W	2300 W	2600 W	2300 W
- Energy saving lamp	9 x 7 W, 7 x 11 W, 7 x 15 W, 7 x 20W, 7 x 23 W	9 x 7 W, 7 x 11 W, 7 x 15 W, 7 x 20W 7 x 23 W	22 x 7 W, 18 x 11 W, 16 x 15 W, 16 x 20 W, 14 x 23 W	9 x 7 W, 7 x 11 W, 7 x 15 W, 7 x 20 W, 7 x 23 W
- Fluorescent lamp load - single fitting uncompensated (inductive)	2300 VA	2300 VA	2300 VA	2300VA
Switching delay off	20 sec.	0 - 20 min.	0 - 59 min.	2 - 100 sec.
Switching status indication (not delayed)	Yes	Yes	-	Yes
<b>Programming features</b>				
Period of programme	-	-	Week	-
Number of channels	-	-	1	-
Programming using software and memory	-	-	Yes	-
Summer / wintertime automatic (or manual on/off)	-	-	Yes	-
Random programme	-	-	No	-
Holiday programme	-	-	Yes	-
Cycle programme	-	-	No	-
LCD backlighting	-	-	Yes	-
<b>Dimensions and weight</b>				
Number of module width	1	2	3	-
Dimensions Width	17.5 mm	54 mm	72 mm	85 mm
Height	85.5 mm	86 mm	86 mm	118.4 mm
Depth	65.5 mm	65.5 mm	65.5 mm	49.4 mm
<b>Terminals</b>				
Terminal type	Screw	Spring	Spring (duo fix)	-

### Twilight switches and combinations with timer, dimensional drawings


SRSD1NO

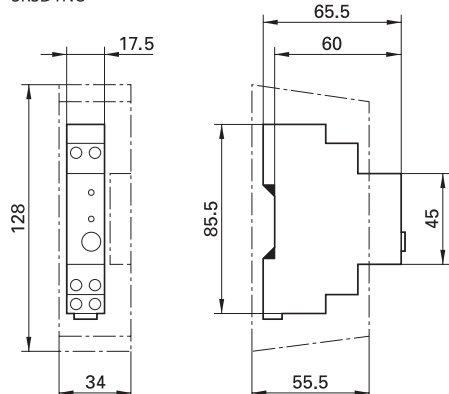


SRSD1COW

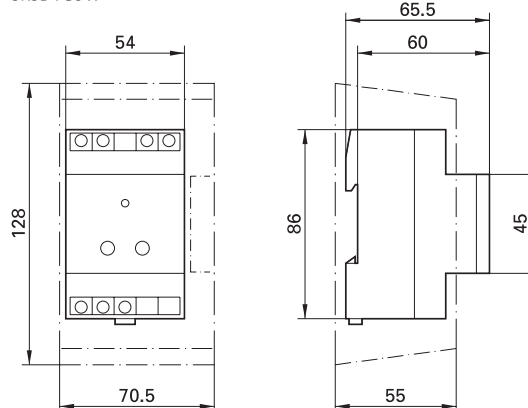

SRCD1CO

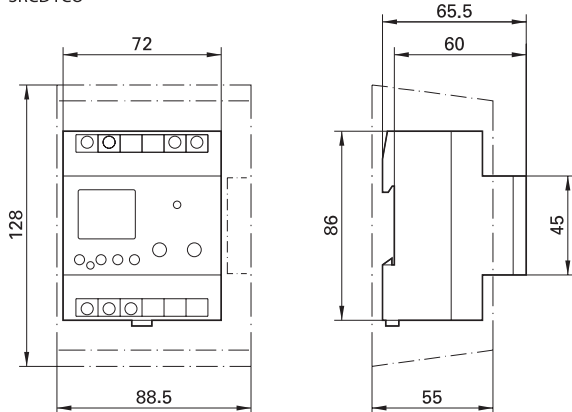


SRSW1NO

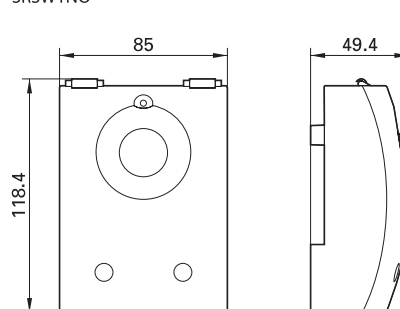


### Twilight switches and combinations with timer, wiring diagrams


SRSD1NO




SRSD1COW



SRCD1CO



SRSW1NO



## Contactors type CR

Products	Contactors				Aux. contact
Rating	20 A	25 A	40 A	63 A	6A
<b>General</b>					
Standards	IEC 60947-4-1, IEC 61095				IEC 60947-5-1
Nominal operating voltage 1-phase U <sub>e</sub> 1-ph.	230 V	230 V	230 V	230 V	230 V
Nominal operating voltage 3-phase U <sub>e</sub> 3-ph.	400 V	400 V	400 V	-	-
Overvoltage protection on coil	430 V (*5)	430 V (*5)	430 V	430 V	
Mechanical endurance (switching cycles)	3.000.000	3.000.000	3.000.000	3.000.000	3.000.000
Protection class (acc. DIN 40 050, IEC 529)	IP20	IP20	IP20	IP20	IP20
Permissible ambient temperature	-5...+55 °C	-5...+55 °C	-5...+55 °C	-5...+40 °C	-5...+55 °C
Storage temperature	-30...+80 °C	-30...+80 °C	-30...+80 °C	-30...+80 °C	-30...+80 °C
<b>Contact rating</b>					
Rated insulation voltage U <sub>i</sub>	440 V	440 V	500 V	500 V	500 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz'	50/60 Hz
Rated impulse withstand voltage U <sub>imp</sub>	4 kV	4 kV	4 kV	4 kV	4 kV
Rated thermal current I <sub>th</sub>	20 A	25 A	40 A	63 A	6 A
AC1/AC7a Rated operational current I <sub>e</sub>	20 A	25 A	40 A	63 A	—
AC1/AC7a Operational power rating at U <sub>e</sub> = 230 Vac P <sub>max</sub>	4 kW	9 kW	16 kW	24 kW	—
AC1/AC7a Operational power rating at U <sub>e</sub> = 400 Vac P <sub>max</sub>	16 kW	26 kW	40 kW	—	—
AC3/AC7b Operational power rating at U <sub>e</sub> = 230 Vac P <sub>max</sub>	1,3 kW (*1)	2,2 kW	5,5 kW	8,5 kW	—
AC3/AC7b Operational power rating at U <sub>e</sub> = 400 Vac P <sub>max</sub>	4 kW	11 kW	15 kW	-	—
DC1 Rated thermal current at U <sub>e</sub> = 24 Vdc I <sub>e</sub>	20 A	25 A	40 A	63 A	—
DC1 Rated thermal current at U <sub>e</sub> = 110 Vdc I <sub>e</sub>	1A	2A	4A	4A	—
DC1 Rated thermal current at U <sub>e</sub> = 220 Vdc I <sub>e</sub>	0,5 A	0,5 A	0,8 A	0,8 A	—
DC1 Rated thermal current at U <sub>e</sub> = 24 Vdc (2-poles in series) I <sub>e</sub>	20 A	25 A	40 A	63 A	—
DC1 Rated thermal current at U <sub>e</sub> = 110 Vdc (2-poles in series) I <sub>e</sub>	3 A	4 A	10 A	10 A	—
DC1 Rated thermal current at U <sub>e</sub> = 220 Vdc (2-poles in series) I <sub>e</sub>	1,5 A	1,5 A	6 A	6 A	—
DC1 Rated thermal current at U <sub>e</sub> = 24 Vdc (3-poles in series)	—	25 A	40 A	63 A	—
DC1 Rated thermal current at U <sub>e</sub> = 110 Vdc (3-poles in series)	—	6:00 AM	30 A	35 A	—
DC1 Rated thermal current at U <sub>e</sub> = 220 Vdc (3-poles in series)	—	2,5 A	20 A	30 A	—
<b>Electrical endurance</b>					
Maximum operating cycles at AC1/AC7a application	200.000 x	200.000 x	100.000 x	100.000 x	—
Maximum operating cycles at AC3/AC7b application	300.000 x	500.000 x	150.000 x	150.000 x	—
Maximum operating cycles at AC5a application	100.000 x	100.000 x	100.000 x	100.000 x	—
Maximum operating cycles at AC5b application	100.000 x (*2)	100.000 x (*2)	100.000 x (*3)	100.000 x (*4)	—
Maximum operating cycles per hour	600 x	600 x	600 x	600 x	600 x
Power dissipation per contact at I <sub>n</sub>	1,7 W	2,2 W	4 W	8 W	—
Maximum back-up fuse	25 A gL	35 A gL	63 A gL	80 A gL	—
Rating	20 A	25 A	40 A	63 A	6 A
<b>Operating coil (for combined ac/dc types only – CR...)</b>					
Coil inrush power (for all voltage ratings)	2,5 W	3 W	5 W	5 W	—
Coil consumption (for all voltage ratings)	2,5 W	3 W	5 W	5 W	—
Closing delay	15-25 ms	15-30 ms	15-20 ms	15-20 ms	—
Opening delay	35-45 ms	50-80 ms	35-45 ms	35-45 ms	—
<b>Operating coil (for ac types only – CR...A)</b>					
Coil inrush power (for all voltage ratings)	13 W/15 VA	17 W/27 VA			—
Coil consumption (for all voltage ratings)	2 W/5 VA	1 W/2,7 VA	—	—	—
Closing delay	15 ms	15-25 ms	—	—	—
Opening delay	10 ms	35-45 ms	—	—	—

## Contactors type CR (continued)

Products	Contactors				Aux. contact
Dimensions					
Width	18 mm	35 mm	54 mm	54 mm	9 mm
Height	85 mm	85 mm	85 mm	85 mm	85 mm
Depth	60 mm	60 mm	60 mm	60 mm	60 mm
Terminals for main & auxiliary contacts					
Terminal capacity – fine stranded wire	1...6 mm²	1...6 mm²	1...16 mm²	1...16 mm²	1...2,5 mm²
Terminal capacity – solid wire	1...10 mm²	1...10 mm²	1...25 mm²	1...25 mm²	1...2,5 mm²
Terminal screw size	M3,5	M3,5	M5	M5	M3
Terminal screw head type (Pozidrive)	PZ Size 1	PZ Size 1	PZ Size 2	PZ Size 2	PZ Size 1
Maximum torque	1,2 Nm	1,2 Nm	2,0 Nm	2,0 Nm	0,8 Nm
Terminals for operating coils					
Terminal capacity – fine stranded wire	1...2,5 mm²	1...2,5 mm²	1...2,5 mm²	1...2,5 mm²	
Terminal capacity – solid wire	1...2,5 mm²	1...2,5 mm²	1...2,5 mm²	1...2,5 mm²	
Terminal screw size	M3	M3	M3	M3	
Terminal screw head type (Pozidrive)	PZ Size 1	PZ Size 1	PZ Size 1	PZ Size 1	
Maximum torque	0,6 Nm	0,6 Nm	0,6 Nm	0,6 Nm	

Remarks:


\*1) Only applicable for normally open contact(s)

\*2) At 1,5 kW



\*3) At 3 kW

\*4) At 5 kW



\*5) For CR... types only (combined ac/dc types), NOT for CR... A types

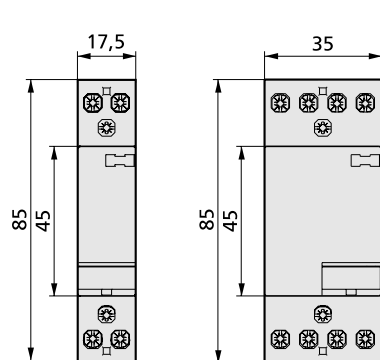



Contactors, type CR20, CR25

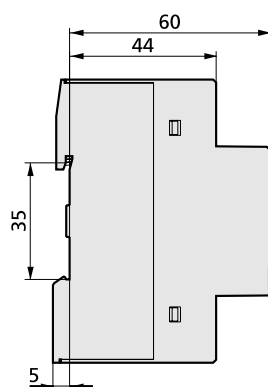

Contactors, type CR40, CR63

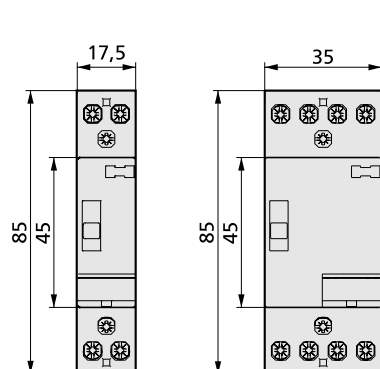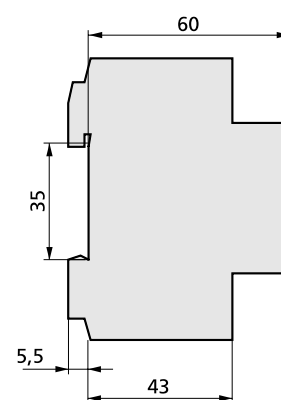


Day/night contactors, type CRM20, CRM25

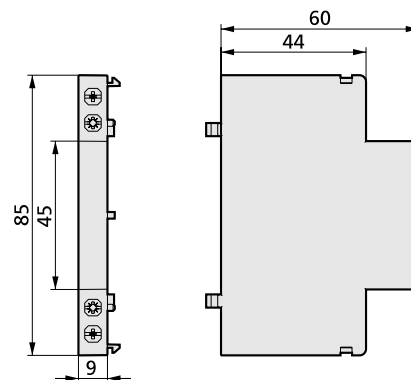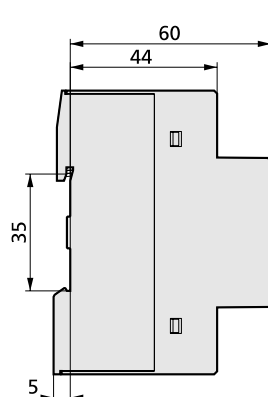


Auxiliary contact


# Earth leakage relays and CTs, dimensional drawings




PFR-W-20



PFR-W-30

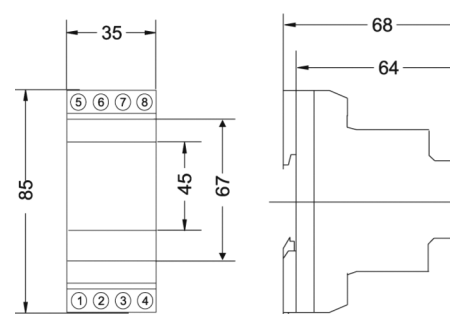

PFR-W-30



Type	A	B	C	D	E
PFR-W-35	100	79	26	48.5	35
PFR-W-70	130	110	32	66	70
PFR-W-105	170	146	38	94	105
PFR-W-140	220	196	48.5	123	140
PFR-W-210	299	284	69	161	210



# 10.2









## Technical data

NZM MCCBs, maximum Zs (Ohms) figures to achieve disconnection at 0.4s and 5s

MCCB type	Rating (A)	Disconnection 0.4s		Disconnection 5s	
		Minimum setting	Maximum setting	Minimum setting	Maximum setting
NZM1 range	16	-	1.366	-	1.485
	20	1.821	1.093	1.496	1.188
	32	1.138	0.683	0.936	0.742
	40	0.910	0.546	0.749	0.594
	50	0.729	0.437	0.599	0.475
	63	0.578	0.347	0.475	0.377
	80	0.455	0.274	0.374	0.297
	100	0.364	0.219	0.299	0.238
	125	0.292	0.175	0.239	0.190
	160	0.228	0.137	0.187	0.148
NZM2 range	125	0.292	0.175	0.239	0.190
	160	0.228	0.137	0.187	0.148
	200	0.182	0.109	0.150	0.119
	250	0.145	0.087	0.120	0.095
NZM2 range electronic version	100	1.900	0.199	1.900	0.199
	160	1.188	0.124	1.188	0.124
	250	0.760	0.079	0.760	0.079
NZM3 range	250	0.145	0.087	0.120	0.095
	320	0.114	0.068	0.093	0.074
	400	0.091	0.055	0.075	0.060
NZM3 range electronic version	400	0.475	0.050	0.475	0.050
NZMLW range	630	0.174	0.044	0.174	0.044
	800	0.137	0.034	0.137	0.034

Note : Values take account of minimum voltage factor Cmin - in accordance with BS7671 Amendment 3

Panelboard dimensional drawings

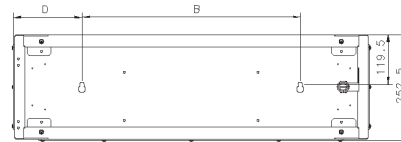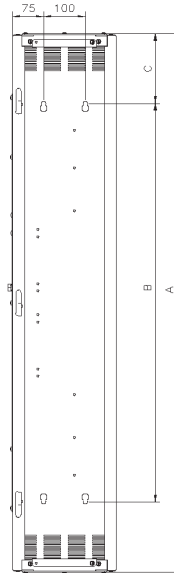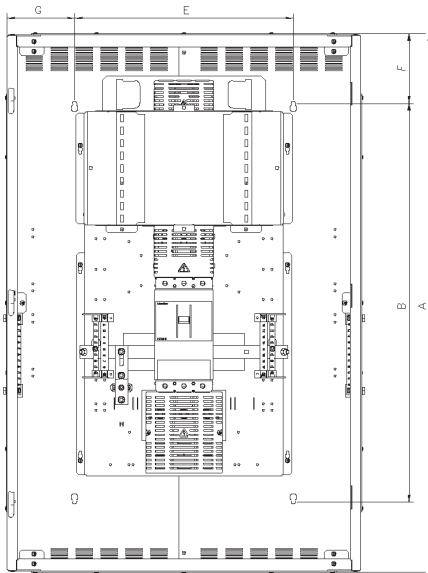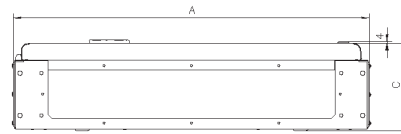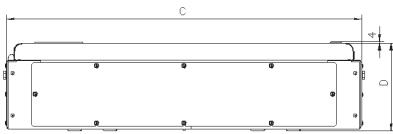

Filler boxes



Panelboards

Side extension boxes

Extension boxes

## Panelboard dimensions

Description	Eaton list number	Dimensions (mm)						
		A	B	C	D	E	F	G
Extension boxes	<b>EPBN1EX250</b>	705	525	185.5	90	—	—	—
	<b>EPBN2EX250</b>	855	525	210.5	165	—	—	—
	<b>EPBN3EX250</b>	980	625	210.5	177.5	—	—	—
Filler boxes	<b>EPBN1CX250</b>	185.5	—	—	—	—	—	—
	<b>EPBN2CX250</b>	210.5	—	—	—	—	—	—
Panelboards	<b>EPBN1425</b>	830	544	703	185.5	525	143	89
	<b>EPBN1625</b>	920	544	703	185.5	525	188	89
	<b>EPBN1825</b>	1010.5	837.5	703	185.5	525	86.5	89
	<b>EPBN11225</b>	1191.5	1002	703	185.5	525	94.75	89
	<b>EPBN1640</b>	1291.5	956.5	853	210.5	525	167.5	164
	<b>EPBN11240</b>	1563	1228	853	210.5	525	167.5	164
	<b>EPBN2640</b>	1291.5	956.5	853	210.5	525	167.5	164
	<b>EPBN21240</b>	1563	1228	853	210.5	525	167.5	164
	<b>EPBN21840</b>	1834.5	1499.5	853	210.5	525	167.5	164
	<b>EPBN2863</b>	1650	1315	978	210.5	625	167.5	176.5
	<b>EPBN21263</b>	1650	1315	978	210.5	625	167.5	176.5
	<b>EPBN21863</b>	1915.5	1580.5	978	210.5	625	167.5	176.5
	<b>EPBN3880</b>	1650	1315	978	210.5	625	167.5	176.5
	<b>EPBN31280</b>	1915.5	1580.5	978	210.5	625	167.5	176.5
Side cable box	<b>EPBN1425SXB</b>	830	544	143	185.5	—	—	—
	<b>EPBN1525SXB</b>	920	544	188	185.5	—	—	—
	<b>EPBN1825SXB</b>	1010.5	837.5	86.5	185.5	—	—	—
	<b>EPBN11225SXB</b>	1191.5	1002	94.75	185.5	—	—	—
	<b>EPBN2640SXB</b>	1291.5	856.5	167.5	210.5	—	—	—
	<b>EPBN21240SXB</b>	1563	1228	167.5	210.5	—	—	—
	<b>EPBN21840SXB</b>	1834.5	1499.5	167.5	210.5	—	—	—
	<b>EPBN21263SXB</b>	1650	1315	167.5	210.5	—	—	—
	<b>EPBN21863SXB</b>	1915.5	1580.5	167.5	210.5	—	—	—
Meter packs	<b>EPBN1EX250M</b>	705	525	185.5	90	—	—	—
	<b>EPBN2EX250M</b>	855	525	210.5	165	—	—	—
	<b>EPBN3EX250M</b>	980	625	210.5	177.5	—	—	—
Side meter box	<b>EPBN1425SXM</b>	830	544	143	185.5	—	—	—
	<b>EPBN1525SXM</b>	920	544	188	185.5	—	—	—
	<b>EPBN1825SXM</b>	1010.5	837.5	86.5	185.5	—	—	—
	<b>EPBN11225SXM</b>	1191.5	1002	94.75	185.5	—	—	—
	<b>EPBN2640SXM</b>	1291.5	856.5	167.5	210.5	—	—	—
	<b>EPBN21240SXM</b>	1563	1228	167.5	210.5	—	—	—
	<b>EPBN21840SXM</b>	1834.5	1499.5	167.5	210.5	—	—	—
	<b>EPBN21263SXM</b>	1650	1315	167.5	210.5	—	—	—
	<b>EPBN21863SXM</b>	1915.5	1580.5	167.5	210.5	—	—	—
Din enclosures	<b>EPBN1EXDIN</b>	705	525	185.5	90	—	—	—
	<b>EPBN2EXDIN</b>	855	525	210.5	165	—	—	—
	<b>EPBN3EXDIN</b>	980	625	210.5	177.5	—	—	—
Surge suppression box	<b>EPBN1SPD123</b>	185.5	—	—	—	—	—	—
	<b>EPBN1SPD1234</b>	210.5	—	—	—	—	—	—

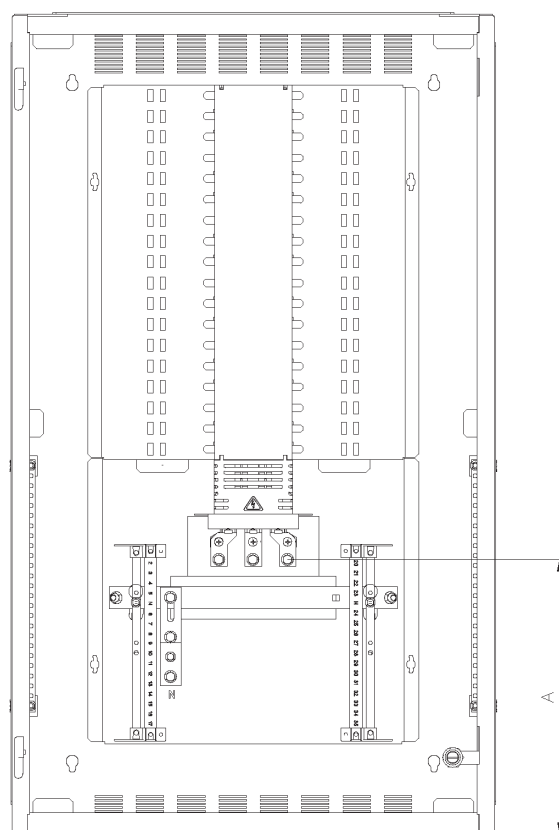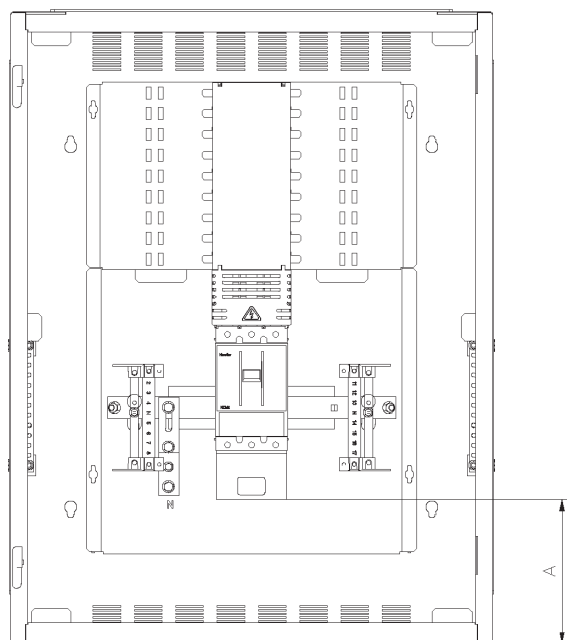

Rating (A)	Panelboard/incomer connection kit combination		Dimensions A (mm)
250	EPBN1425	EPBKN1253	210
	EPBN1625	EPBKN1253M	
	EPBN1825	EPBKN1254	
	EPBN11225	EPBKN1254M	
	EPBN1425		398
	EPBN1625	EPBKN125L	
	EPBN1825	EPBKN125LM	
	EPBN11225		
400	EPBN1640	EPBKN2403	380
	EPBN11240	EPBKN2403M	
	EPBN2640	EPBKN2404	
	EPBN21240	EPBKN2404M	
	EPBN21840		731
	EPBN1640		
	EPBN11240	EPBKN240L	
	EPBN2640	EPBKN240LM	
	EPBN21240		
	EPBN21840		
630	EPBN2863	EPBKN2633	705
	EPBN21263	EPBKN2633M	
	EPBN21863	EPBKN2634	
		EPBKN2634M	
	EPBN2863	EPBKN263L	775
	EPBN21263	EPBKN263LM	
	EPBN21863		
800	EPBN3880	EPBKN3803	454
	EPBN31280	EPBKN3803M	
		EPBKN3804	
		EPBKN3804M	

- 3 phase 3 or 4 wire system.
- Liquid crystal display with backlight. 4 lines, 4 digits per line to show electrical parameters. 5th line, 8 digits to show energy. Bar graph for current indication as percentage of CT rating.
- 96 x 96mm panel mount, 55mm rear panel.
- Modbus comms & pulse output.
- Fast installation plug-in cabling for current and voltage inputs. Feed-through voltage supply capability.
- Phase sequence detection and correction capability.
- Multifunction meter measuring parameters:
  - Voltage (P-P / P-N) (individual/average)
  - Current (I1, I2, I3) (individual/average)
  - Frequency
  - Power factor (individual/average)
  - Active, reactive, apparent power (individual/total)
  - Active, reactive, apparent energy (total)
- Display scrolling selectable for automatic or manual.

- Meter is self-powered from voltage supply. Auxiliary voltage supply not required.
- Front panel indicator when Pulse Output or Comms operates.

The range of meter is a class 1 multi-function, panel mounting meter to measure electrical parameters on LV supplies to The meter is a Class 1 multi-function, panel mounting meter to measure electrical parameters on LV supplies to and from TP&N distribution boards. It is ideal for applications such as:

- Energy monitoring.
- Power factor analysis.
- Supply capacity.
- Building regs part L2.
- Building performance.
- Environmental standards e.g. IS14001, EMAS, ECA.
- Climate change levy.
- Carbon trading.
- Carbon footprints.

The six dedicated buttons are labelled as V, I, VAF, PF, P, E. The parameters available by pressing each key are detailed below:

#### Measurements available via:


Button 1 (V)	Line to neutral voltage of three phase and average line to line voltage
	Line to line voltage of three phase and average line to line voltage
Button 2 (I)	Phase current of three phase and average phase current.
	Phase current of three phase and maximum phase current.
Button 3 (VAF)	Voltage, current, power factor of first phase and frequency
	Voltage, current, power factor of second phase and frequency
	Voltage, current, power factor of third phase and frequency
	Average value of voltage, current, power factor of three phase and frequency
Button 4 (PF)	Power factor of three phase and average power factor
Button 5 (P)	Active power of three phase and total active power
	Reactive power of three phase and total reactive power
	Apparent power of three phase and total apparent power
	Active, reactive, apparent power and power factor of first phase
	Active, reactive, apparent power and power factor of second phase
	Active, reactive, apparent power and power factor of third phase
	Total active, reactive, apparent power and average power factor of three phase
	Maximum active power demand, reactive power demand, apparent power demand
Button 6 (E)	Minimum active power demand, reactive power demand
	Active energy of three phase
	Apparent energy of three phase
	Reactive energy of three phase

#### Accuracy

Measurement	Accuracy
Voltage VL-N	± 0.5% of full scale
Voltage VL-L	± 0.5% of full scale
Current	± 0.5% of full scale
Frequency	± 0.1% For voltage >20V L-N For voltage >35V L-N
Active power	Class 1
Apparent power	Class 1
Reactive power	Class 1

Measurement	Accuracy
Power factor	± 0.01
Active energy	Class 1
Apparent energy	Class 1
Reactive energy	Class 1
MAX / MIN active power	Class 1
MAX / MIN reactive power	Class 1
MAX apparent power	Class 1


250A pan assembly dimensions EPBPN1425–EPBPN11225

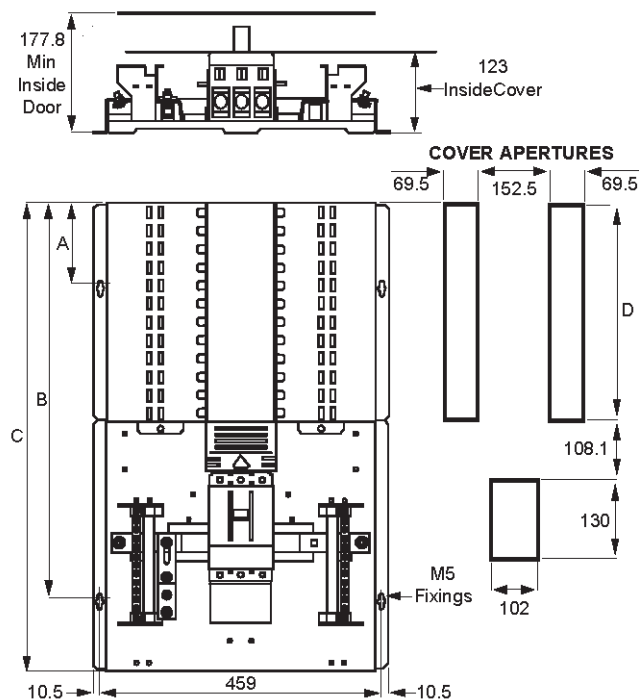

Eaton list  
number

Eaton list number	A	B	C	D
EPBPN1425	29.5	483	592.5	181.5
EPBPN1625	29.5	578.5	683	272
EPBPN1825	131	669	773.5	362.5
EPBPN11225	131	850	954.5	543.5

400A pan assembly dimensions EPBPN1640–EPBPN21840

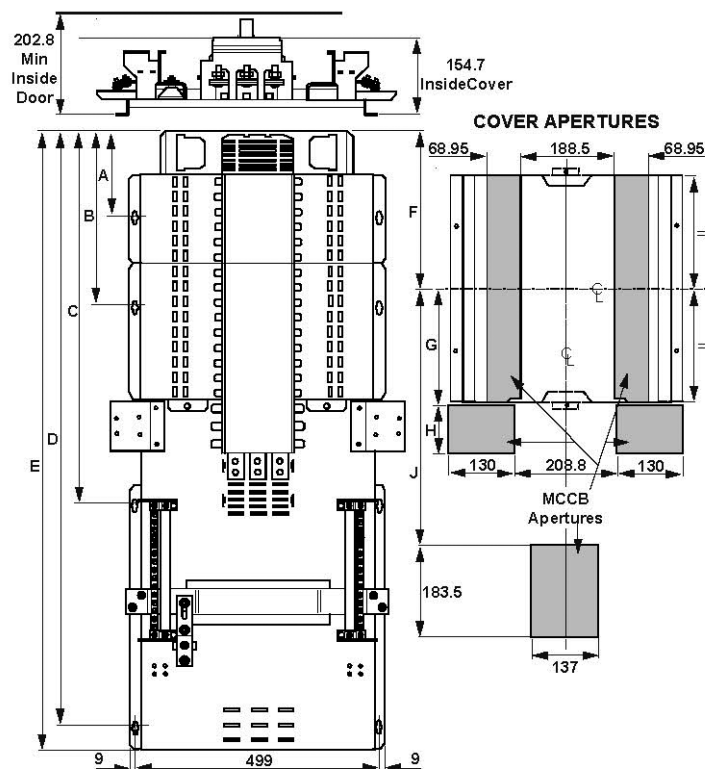


Eaton list  
number

Eaton list number	A	B	C	D	E	F	G	H	J
EPBPN1640	167	N/A	473.5	923	979.5	222.25	N/A	N/A	318.25
EPBPN11240	167	438.5	725.5	1175	1231.8	358	N/A	N/A	454
EPBPN2640	167	N/A	473.5	923	979.5	177	96.75	102	383
EPBPN21240	167	348	745	1194.5	1251	312.75	232.5	102	518.75
EPBPN21840	167	529	1016.5	1466	1522.5	448.25	368.25	102	654.5

# 10.2 Technical data





## MCCB pan assemblies, dimensions

### 630–800A pan assembly dimensions EPBPN2863, EPBPN21263, EPBPN21863, EPBPN3880, EPBPN31280

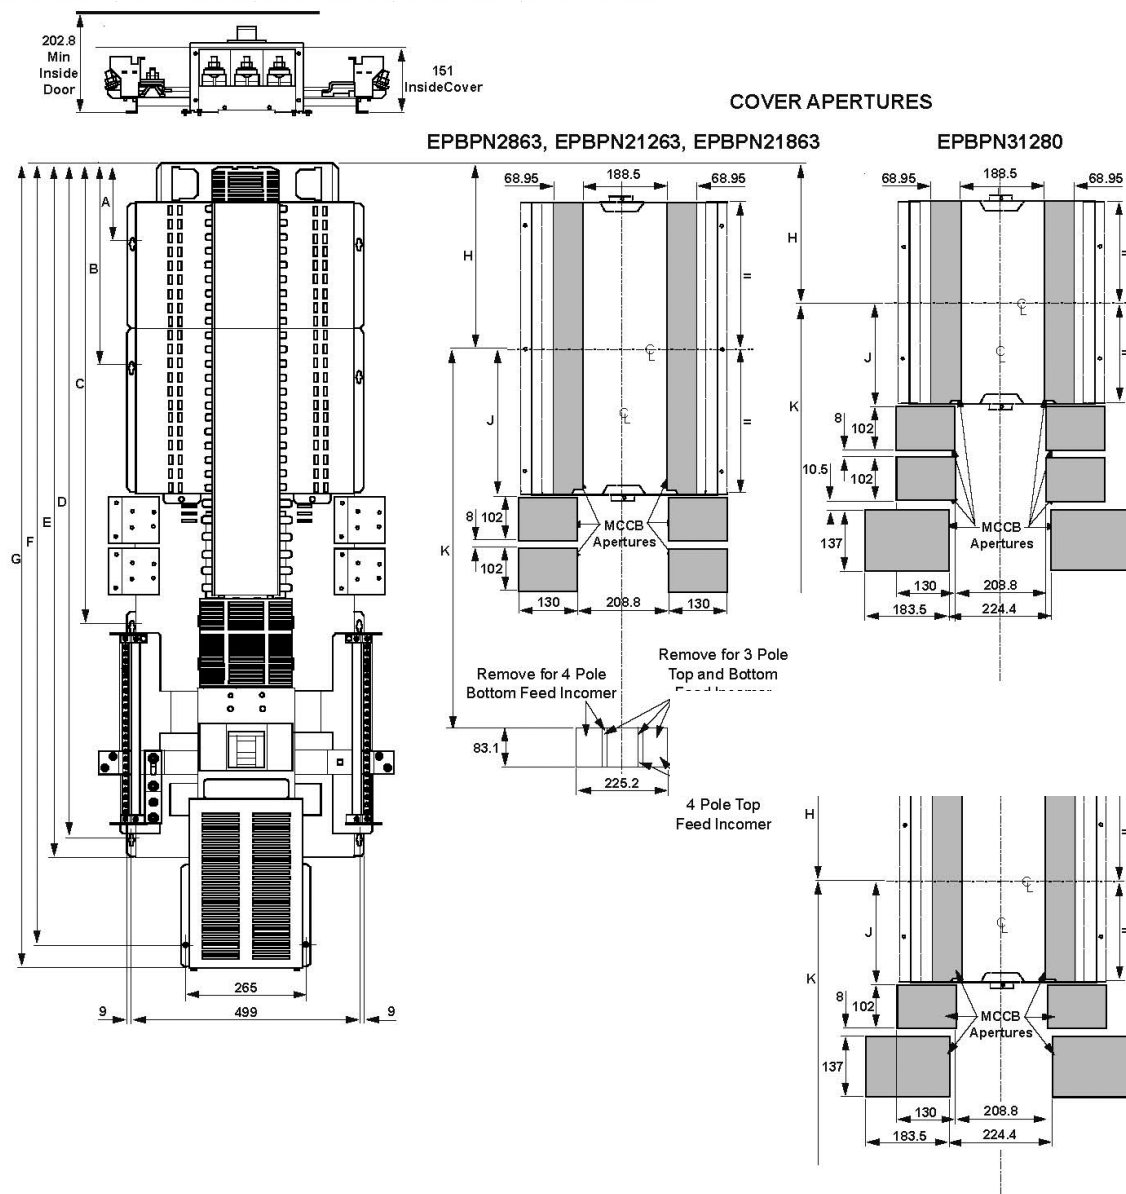



Eaton list number	A	B	C	D	E	F	G	H	J	K
EPBPN2863	167	N/A	543.5	996	1052.5	1240	1291	177	96.75	601.5
EPBPN21263	167	N/A	724.5	1177	1233.5	1421	1472	267.5	187.25	692
EPBPN21863	167	438.5	996	1448.5	1505	1692	1743	403.25	323	828
EPBPN3880	167	N/A	580.5	1033	1089.5	1277	1328	177	96.75	638.5
EPBPN31280	167	N/A	761.5	1214	1270.5	1458	1509	222.25	142	794.5

### Panelboard Dimensional Drawings

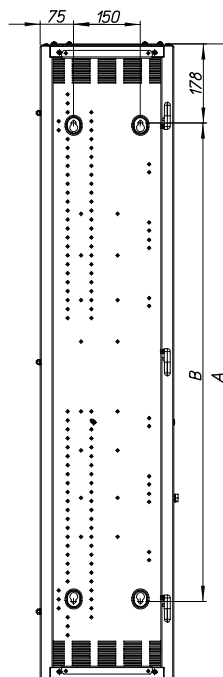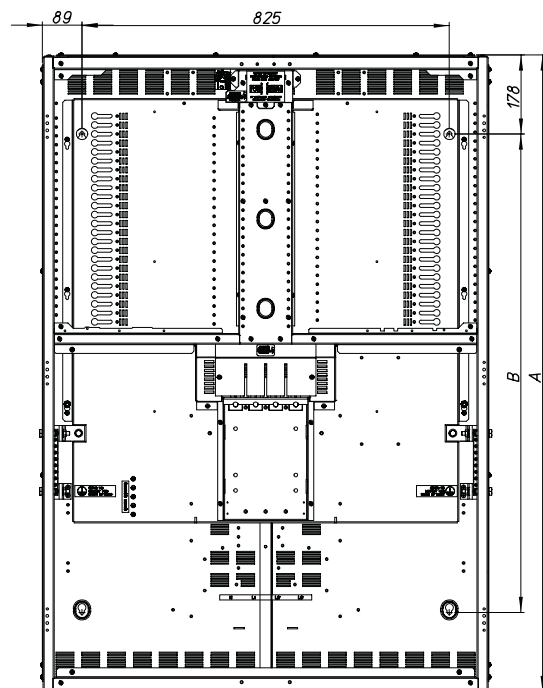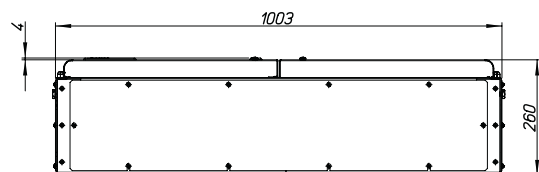

Panelboards

Side/ Meter Cableway

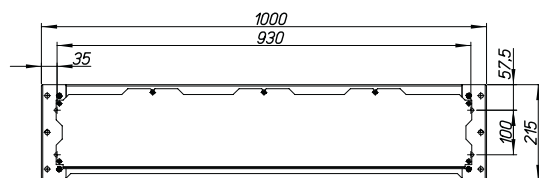

Panelboard Plinth

Corner Plinth

Description	Eaton List Number	A	B
Panelboards	EM4PB840	1430	1075
	EM4PB1440	1792	1437
	EM4PB1840	2033	1678
	EM4PB680	1430	1075
	EM4PB1280	1792	1437
	EM4PB1680	2033	1678
Cableways	EM4PB68SXB	1430	1075
	EM4PB1214SXB	1792	1437
	EM4PB1618SXB	2033	1678
Metered Cableways	EM4PB68SXM	1430	1075
	EM4PB1214SXM	1792	1437
	EM4PB1618SXM	2033	1678





# 10.2


## Technical data

Panelboard dimensional drawings (Memshield 4)


### Panelboard/Incomer Connection Kit Combination

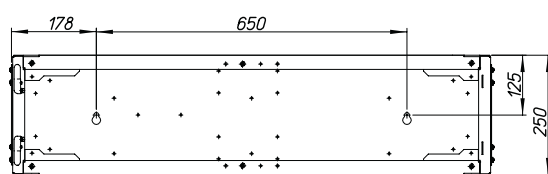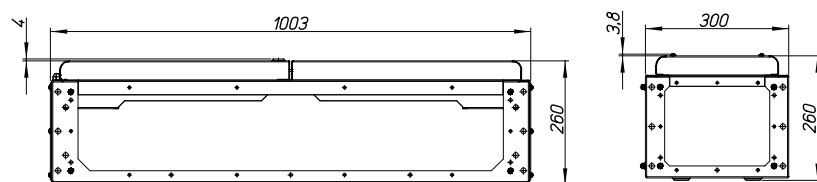


Extension/ Earth Leakage/ DIN Box




Corner Box

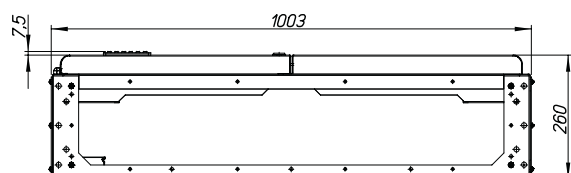

Incoming Meter Box

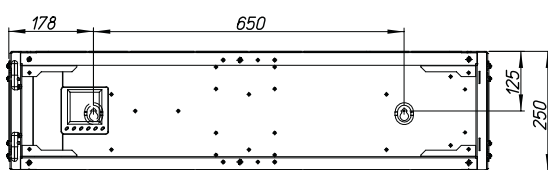


Panelboard MCCB Incomer

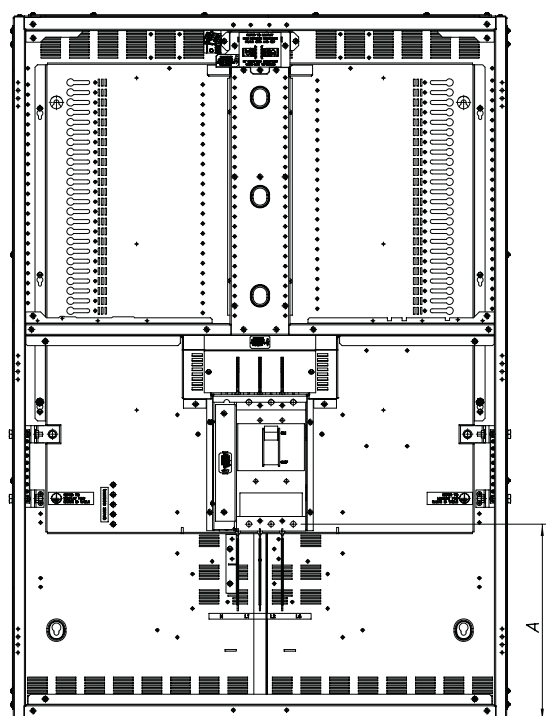

Panelboard Direct Lugs Incomer

Rating (A)	Panelboard/Incomer Connection Kit Combination		A
400A	EM4PB840	EM4PBK404	384
	EM4PB1440	EM4PBK404M	231
	EM4PB1840	EM4PBK404L	491
		EM4PBK404LM	491
800A	EM4PB680	EM4PBK804	351
	EM4PB1280	EM4PBK804M	230
	EM4PB1680	EM4PBK804L	625
		EM4PBK804LM	560

Pan Assemblies EM4PBP840, EM4PBP1440, EM4PBP18400

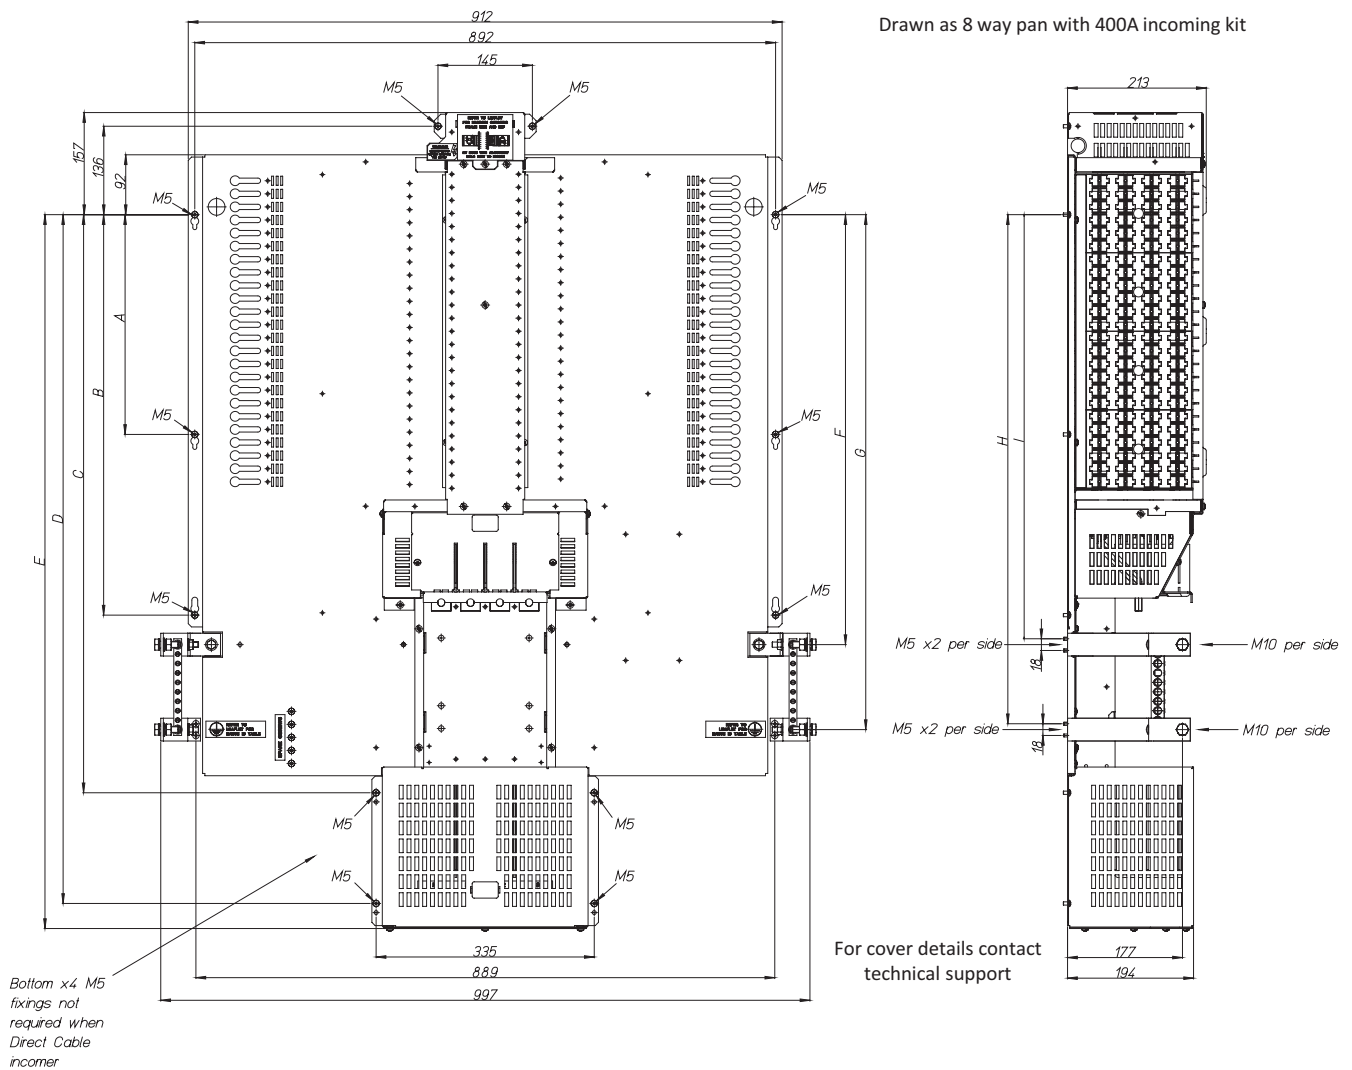

Pan	A	B	C	D	E	F	G	H	I
EM4PBP840 (8 Way)	337.5	615	888	1058	1096	660	791	651	782
EM4PBP1440 (14 Way)	478.5	977	1250	1420	1458	1022	1196	1013	1187
EM4PBP1840 (14 Way)	639	1218	1491	1661	1699	1263	1524	1254	1515


# 10.2

## Technical data

MCCB pan assemblies, dimensions (Memshield 4)

### Pan Assemblies EM4PBP680, EM4PBP1280, EM4PBP1680



Drawn as 12 way pan with 800A MCCB Incoming Kit

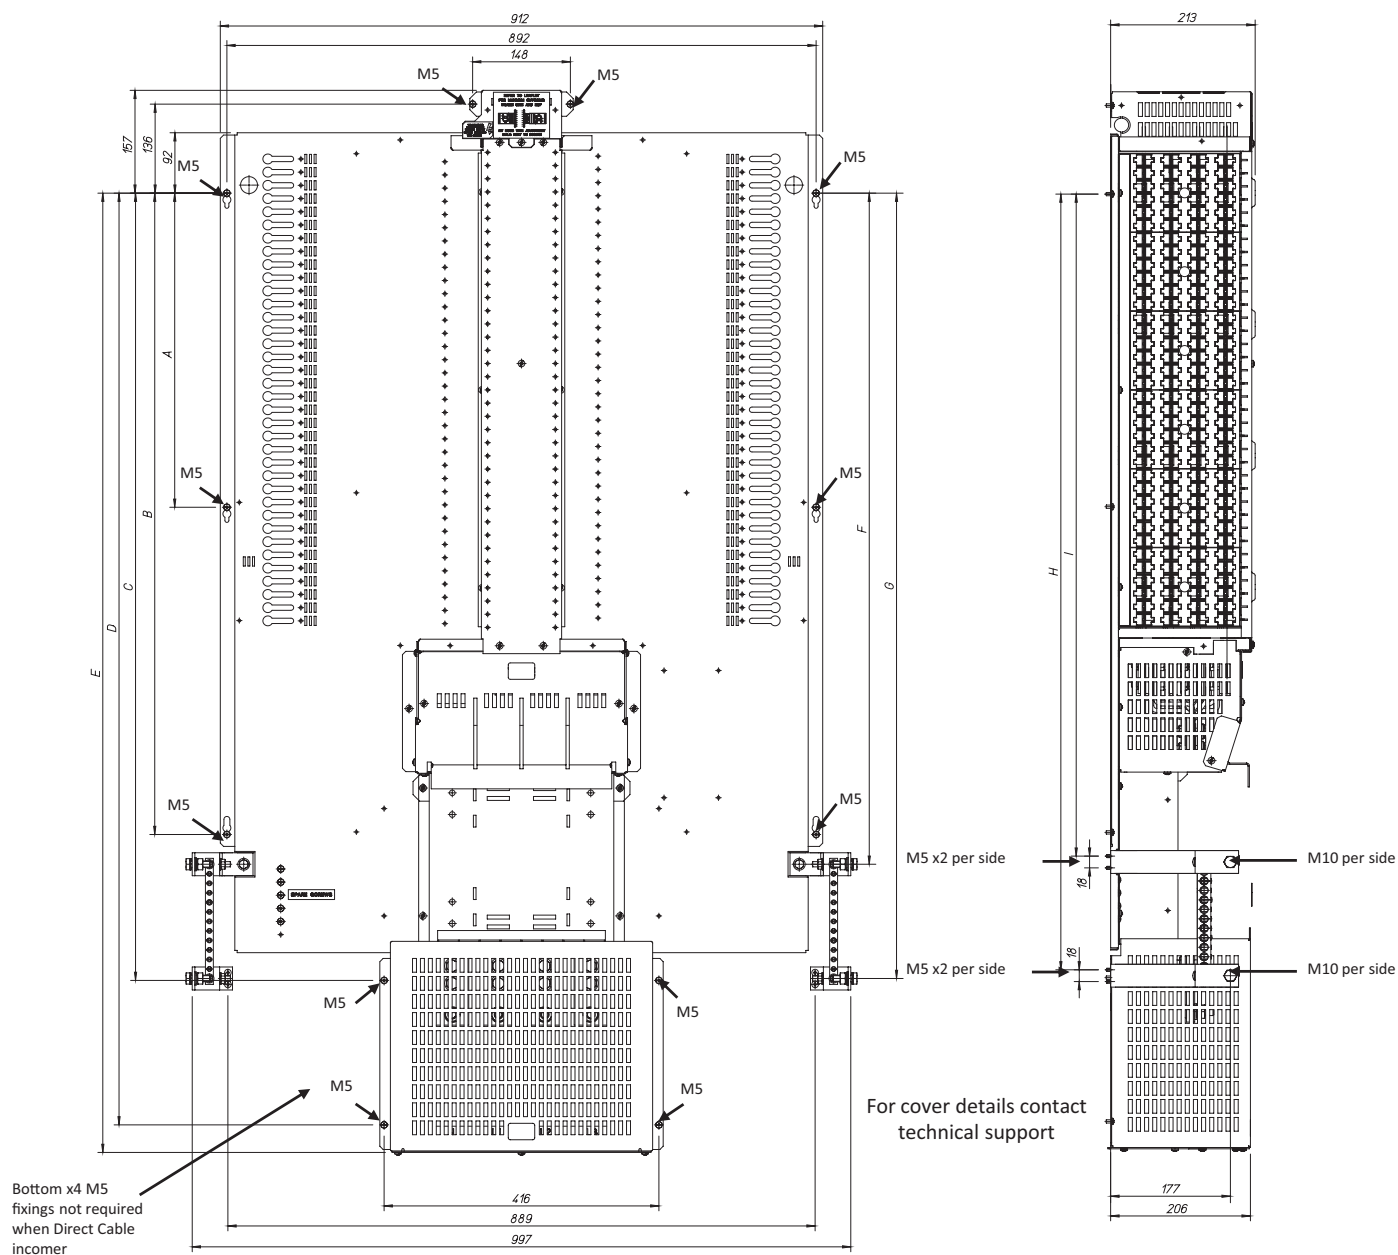

Pan	A	B	C	D	E	F	G	H	I
EM4PBP680 (6 Way)	337.5	615	837	1057	1099	660	791	651	782
EM4PBP1280 (12 Way)	478.5	977	1199	1419	1461	1022	1196	1013	1187
EM4PBP1680 (16 Way)	639	1218	1440	1660	1702	1263	1524	1254	1515

### Glasgow fuse-switch-disconnectors and switch-disconnectors dimensions

Nominal unit rating, In (A)	Poles	Dimensions, mm								
		A	B	C	D	E	F	H	J	R
63	SPSN, DP	289	199	180	283	203	127	7.9	43	36
	TPN, TPSN	289	275	180	283	203	203	7.9	43	36
100	SPSN, DP	327	199	180	283	241	127	7.9	43	35
	TPN, TPSN	327	275	180	283	241	203	7.9	43	35
160, 200	SPSN, DP	431	280	229	383	340	140	7	45	70
	TPN, TPSN	431	340	229	383	340	200	7	45	70
315, 400	TPN, TPSN	501	467	291	545	385	375	10	58	46
500, 630, 800	TPN, TPSN	596	680	381	715	440	550	14	78	65



Units have retractable handles. 'D' dimension indicates fully extended operating position.

### Rating to BS EN 60947-3 general performance characteristics


Nominal unit rating, Ie (A)	Utilisation category at Ue 415V to BS EN 60947-3		
	Switch-disconnector AC21A Ie	Fuse-switch-disconnector AC22A Ie	AC23A Ie
63	125A	63A	41A
100	125A	100A	41A
160	Use 200A	160A	160A
200	315A	200A	160A
315	Use 400A	315A	200A
400	400A	400A	200A
500	Use 630A	500A	385A
630	630A	630A	385A
800	800A	800A	500A

### Operational performance

- In accordance with BS EN 60947-3: "A" categories all ratings have been tested to values specified below:

Rated operational current, Ie (A)	Operating cycles		Total
	Without current	With current	
63–100	8,500	1,500	10,000
160–315	7,000	1,000	8,000
400–630	4,000	1,000	5,000
800	2,500	500	3,000

## Glasgow parallel cable connection & copper terminal plate




Parallel cable connection

A = **803GNC**

B = **6PCB**

C = **90CSB**

An **802GCC** (copper connection piece) is required in addition to switch enclosure for parallel cable connection.

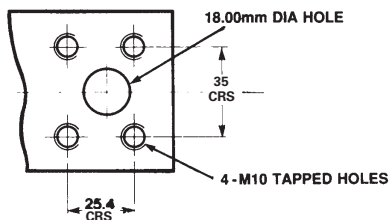


### Copper terminal plate

Each copper terminal plate has 1-M16 x 50mm bolt, nut and washers for single hole sockets. 4-M10 tapped holes are also provided for 4 hole sockets or solid copper.


## Cable extension boxes dimensions

Eaton list number	Dimensions, mm		
	A	B	C
<b>1PCB</b>	148	133	113
<b>2PCB</b>	148	209	113
<b>3PCB</b>	148	259	132
<b>4PCB</b>	302	347	184
<b>5PCB</b>	213	515	187
<b>6PCB</b>	213	515	327




## Spreader boxes dimensions

Eaton list number	Dimensions, mm					Fixing bolts	
	A	B	C	E	F	No.	Type
<b>Straight entry</b>							
<b>50 CSB</b>	83	232	170	67	171	4	M6
<b>60 CSB</b>	108	283	260	89	216	4	M8
<b>70 CSB</b>	133	384	322	114	318	4	M8
<b>90 CSB</b>	133	530	450	114	457	4	M10
<b>45° Angled entry</b>							
<b>50 CSBA</b>	83	232	250	67	171	4	M6
<b>60 CSBA</b>	108	283	310	89	216	4	M8
<b>70 CSBA</b>	133	384	390	114	318	4	M8

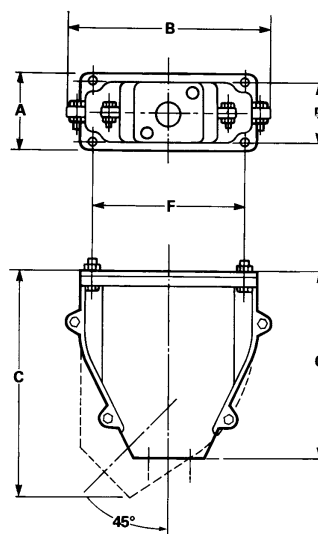

### Busbar chambers

Eaton's busbar chamber system is designed for wall-mounting installations. All units in the range share the same height and depth dimensions. Similarly the twin busbars are located in precisely the same positions throughout the range and vary in size only in their front-to-back dimensions according to rating. Detachable end plates enable all units to be extended by coupling to a second busbar chamber using extension sets.

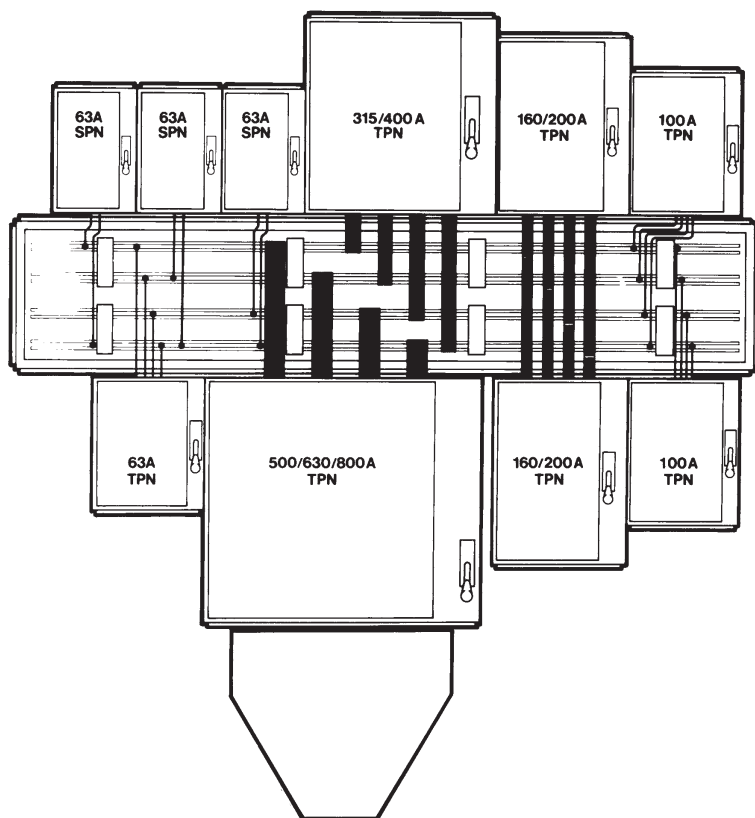

# 10.3


## Technical data

Enclosed switch & fusegear


### Busbar chamber – dimensions

Nominal length, mm	Dimensions, mm		C	D	E	F	G
	A	B					
550	562	364	222	280	474	—	4
900	912	364	222	280	824	—	4
1350	1362	364	222	280	1274	—	4
1800	1812	364	222	280	1724	862	6


Nominal length chamber 550mm





Nominal length chamber 1350mm

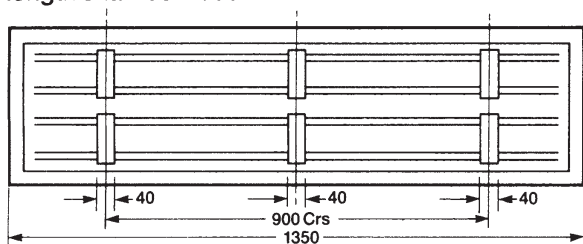

Nominal length chamber 900mm

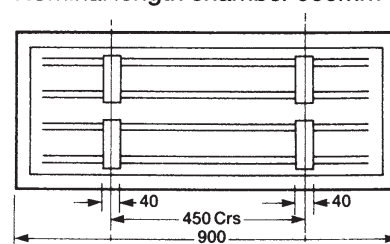

Nominal length chamber 1800mm

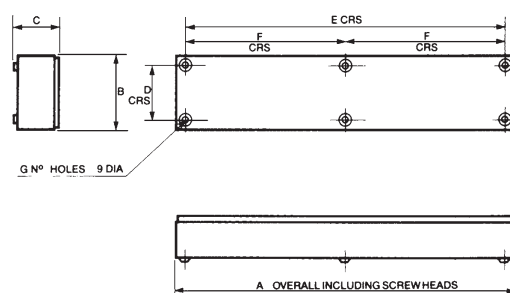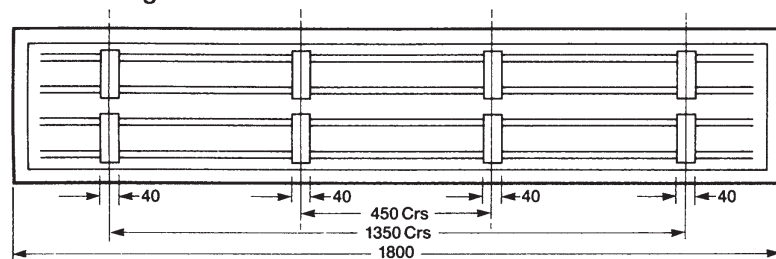




### Operational performance

- In accordance with BS EN 60947-3 all ratings have been tested to values specified below:

Description	Cycles
Operating cycles without current	8500
Operating cycles at rated current	1500
Total	10000

## Exel 2 dimensions

Current rating, A	Dimensions, mm									
	A	B	C	D	E	F	G	H	J	K
<b>Switch-disconnectors</b>										
20	159	193	92	127	112	114	—	5.6	38.5	34
32	173	245	101	137	116	114	114	6.4	38.5	34
63	230	310	129	173	152	168	168	6.7	58	54
100/125	329	367	167	210	241	221	221	6.7	58	54
<b>Switch-disconnector-fuses</b>										
20	219	193	92	127	171	114	—	5.6	38.5	34
32	267	245	101	137	209	114	114	6.4	38.5	34
63	351	310	129	173	273	168	168	6.7	58	54
100/125	503	367	167	210	416	221	221	6.7	58	54

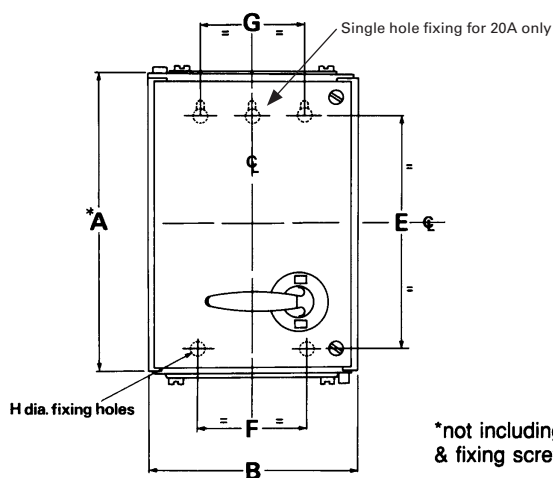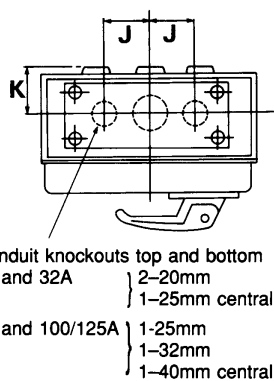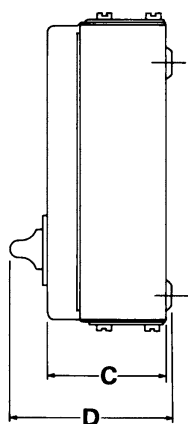

\*not including removable endplates & fixing screws.


## Performance values

Unit	Short time withstand current (r.m.s. amps for 1 second)	Short circuit making capacity (peak amps at 415v ac)	Rated fused short-circuit (prospective r.m.s. amps at 415v ac)
20A	640A	2.96 kA	80 kA
32A	960A	5.12 kA	80 kA
63A	2000A	6.62 kA	80 kA
100/125A	3750A	8.42 kA	80 kA




## Exel distribution fuseboards – diversity factors

No. of ways	Maximum rated operational current per way, I <sub>e</sub>				
	200A	100A	63A	32A	<20A
2	—	1	—	—	—
4	0.8	0.9	0.9	0.9	0.9
6	—	0.8	0.8	0.8	0.8
8	—	0.66	0.8	0.8	0.8
10	—	—	—	0.66	—
12	—	—	—	0.66	—
<b>Therefore, incomer rating =</b>					
2	—	—	126A	—	—
4	640A	360A	227A	115A	72A
6	—	480A	302A	154A	96A
8	—	528A	403A	205A	128A
10	—	—	—	211A	—
12	—	—	—	253A	—

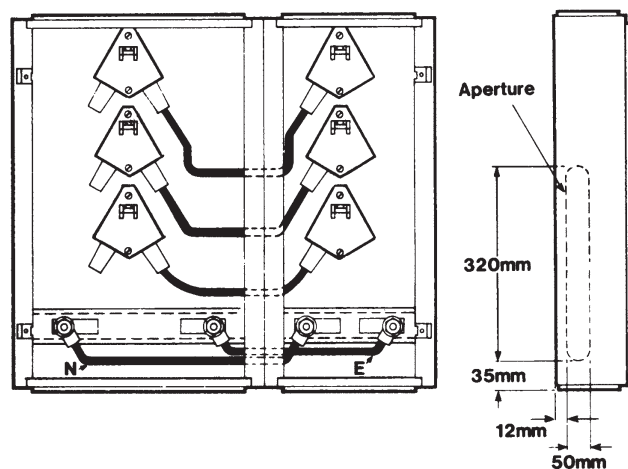

## Exel distribution fuseboards – enclosure dimensions IP4X (mm)

Nominal rating, I <sub>e</sub>	Poles	Number of ways	A	B	C	D crs	E crs	F dia.
20A	SPN	4	386	304	148	252	191	8
		6	386	304	148	252	191	8
		8	386	368	148	252	255	8
		12	386	448	148	252	335	8
	TPN	4	631	304	148	442	191	8
		6	631	304	148	442	191	8
		8	631	368	148	442	255	8
		12	631	448	148	442	335	8
32A	SPN	4	386	304	148	252	191	8
		6	386	304	148	252	191	8
		8	386	368	148	252	255	8
		12	386	496	148	252	383	8
	TPN	4	710	304	148	576	191	8
		6	710	304	148	576	191	8
		8	710	368	148	576	255	8
		10	710	448	148	576	335	8
63A	TPN	2	546	473	227	458	369	10
		4	972	330	227	884	226	10
		6	972	330	227	884	226	10
		8	972	473	227	884	369	10
100A	TPN	4	1066	330	227	978	226	10
		6	1066	549	227	978	445	10
		8	1066	549	227	978	445	10
200A	TPN	4	1560	529	270	1334	325	10

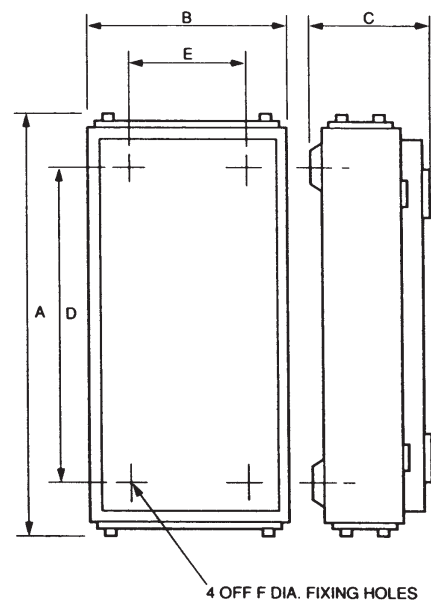

## Exel distribution fuseboards – earth bar terminal capacities

Description	Nominal rating of fuseboard, I <sub>e</sub>				
	20A	32A	63A	100A	200A
Main (stud)	M10	M10	M10	M10	M10
Outgoing, mm2	10	10	25	25	70


### Exel distribution fuseboards – main terminal stud sizes

Description	No. of ways	Nominal rating of fuseboard, le				
		20A	32A	63A	100A	200A
SPN	4	M10	M10	–	–	–
	6	M10	M10	–	–	–
	8	M10	M10	–	–	–
	12	M10	–	–	–	–
TPN	2	–	–	M12	–	–
	3	–	–	M12	–	–
	4	M10	M10	M12	M12	M16
	6	M10	M10	M12	M16	–
	8	M10	M10	M16	M16	–
	10	–	M10	–	–	–
	12	–	M10	–	–	–

<sup>1</sup>Tunnel terminal 35mm<sup>2</sup> max.

### 415V industrial fuselinks – offset bolted contacts, dimensions


Eaton list number	Dimension, mm							
	A max.	B max.	D max.	E	F	G nom.	H	J
<b>NITD</b>	34	14	54	11	0.8	44.5	4.8	–
<b>NITD(M)</b> (25–40A)	34	14	54	11	0.8	44.5	4.8	–
<b>NITD(M)</b> (50–63A)	36	17.5	55	11	1.2	44.5	4.8	–
<b>AAO</b>	35	14	85	9	1.2	73	5.5	8
<b>AAO(M)</b>	56	22	86	9	1.2	73	5.5	8
<b>BAO</b>	35	17.5	86	9	1.2	73	5.5	8
<b>BAO(M)</b>	56	22	88	13	1.2	73	5.5	10
<b>OS</b> (80–100A)	55	21	86	13	1.2	73	5.5	10
<b>OS(M)</b>	55	26	91	13	1.2	73	5.5	10
<b>ODD</b> (125–200A)	47	31	90	19	3.2	73	6.1	–
<b>CEO</b>	59	22	110	15	3.2	94	9	–
<b>CEO(M)</b> (125–160A)	58	26	109	15	3.2	94	9	11
<b>CEO(M)</b> (200A)	47	31	110	19	3.2	94	9	10
<b>DEO</b>	47	31	110	19	3.2	94	9	10
<b>DEO(M)</b>	47	31	110	19	3.2	94	9	10

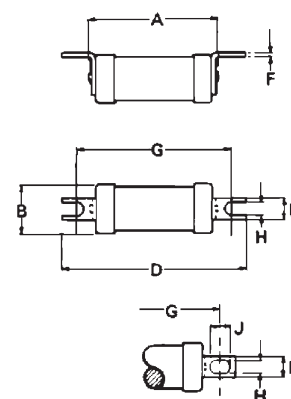

AAO, BAO, CEO, DEO & OS types



## 415V industrial fuselinks – centre bolted contacts, dimensions

Fuse link type	Dimensions, mm		D max.	E	F	G nom.	H	J	L
	A max.	B max.							
AC	57	22	114	13	1.6	97	7.1	10	–
AD	57	22	129	14	1.6	111	8.7	12	–
BC	57	22	114	13	1.6	97	7.1	10	–
BD	57	22	129	14	1.6	111	8.7	12	–
BC(M)	57	22	114	13	1.6	97	7.1	10	–
BD(M)	58	21	126	14	3.2	111	8.7	11	–
CD	59	22	127	14	3.2	111	8.7	11	–
CD(M) (125–160A)	58	26	126	14	3.2	111	8.7	11	–
CD(M)200	47	31	136	19	3.2	111	9	12.5	–
DD	47	31	136	19	3.2	111	9	12.5	–
DD(M)	47	31	136	19	3.2	111	9	12.5	–
ED	47	31	136	19	3.2	111	9	12.5	–
ED (315)	50	38	136	25	4.8	111	9	12.5	–
ED(M)	50	38	136	25	4.8	111	9	12.5	–
EFSS	47	59	158	19	3.2	133	10.5	12.5	–
EF (315)	50	38	209	25	4.8	133	10.5	12.5	25
ED	50	39	136	25	4.8	111	9	12.5	–
ED(M)	75	53	135	25	4.8	111	9	12.5	–
EF	50	40	209	25	4.8	133	10.5	12.5	25.4
FF	80	74	209	25	6.3	133	10.5	16	25.4
FG	80	74	261	38	6.3	165	10.5	16	32
GF	84	83	209	25	9.5	133	10.5	16	25.4
GG	80	83	261	38	6.3	165	10.5	16	32
GH	83	100	198	63.5	9.5	149	14.3	19	32

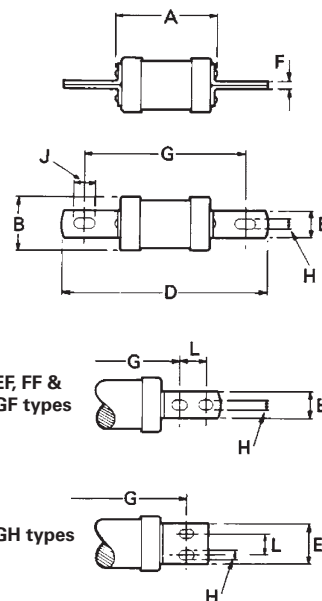

## Complete fuse units – dimensions

Nominal rating, In	Dimensions, mm											Hole dia. (mm min) insulated stud (types C and D)
	A	B	C	D	E	F	G	H	J	K	L	
20A	87	79	27	50	63	56	6	5.5	–	–	–	12
32A	109	101	31	62	60	78	6	5.5	12.7	6.4	–	12
32A clip-in	75	–	25	57.7	–	–	6	5.5	–	–	4.4	–
63A	118	110	35	72	71	79	8	5.5	12.7	6.4	–	14.5
63A clip-in	88.7	–	31.5	66.34	–	–	8	5.5	–	–	4.8	–
100A	154	154	54	108	80	117	10	6.5	19	22	–	18.5
<b>Compact range</b>												
32A	87	79	27	–	–	56	6	5.5	–	–	–	12
63A	109	101	31	–	–	78	6	5.5	12.7	6.4	–	12
100A	118	110	35	72	71	79	8	5.5	12.7	6.4	–	14.5
200A	154	154	54	108	80	117	10	6.5	19	22	–	18.5

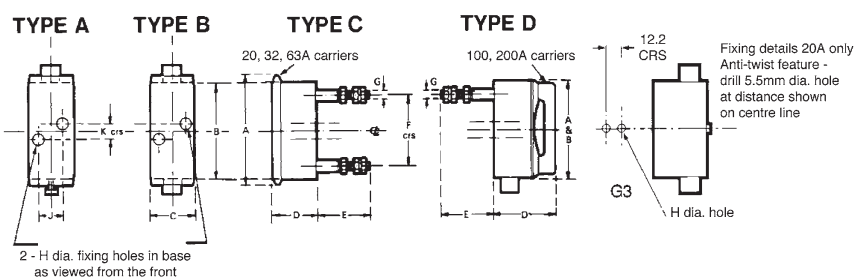


**Local switch-disconnectors - rotary isolators, 20–63A, IP65, 3–8 poles**

Nominal unit rating I <sub>e</sub> (A)	AC-23A Rating (kW)		AC-3 rating, motor load switch (kW)			400V star delta	Rated short-time withstand current I <sub>cs</sub> 1s (A)	Terminal capacity (flexible with ferules) (mm <sup>2</sup> )
	400V 3ph	230V 1ph	230V	230V star delta	400V			
20	6.5	3.5	3	4	4	4.5	320	1 x 0.75 - 1.5 2 x 0.75 - 1.5
25	13	7	5.5	5.5	7.5	7.5	640	1 x 1 - 4 2 x 1 - 4
32	13	7.5	6.5	11	12	18.5	650	1 x 0.75 - 4 2 x 0.75 - 4
(3 & 3+N pole)	30	18.5	15	15	30	30	1260	1 x 1.5 - 25 2 x 1.5 - 6
(6 & 8 pole)	22	15	15	22	22	37	1300	1 x 1.5 - 25 2 x 1.5 - 10

**Local switch-disconnectors - rotary isolators, 20–63A, IP65, 3–8 poles –dimensions**

Eaton List Number	A	B	C	D	E	F	G	H	I
207149	137	120	80	75	35	M20	-	-	-
207151	137	120	80	75	35	M20	-	-	-
207153	137	120	80	95	35	M20	-	-	-
207161	137	120	80	95	35	M20	-	-	-
226902	180	160	100	80	35	M25	-	M25	≤ 8
227860	180	160	100	80	35	M25	-	M25	≤ 8
207202	180	160	100	100	35	M25	-	M25	≤ 8
207210	180	160	100	100	35	M25	-	M25	≤ 8
207212	180	160	100	100	35	M25	-	M25	≤ 8
207348	240	-	160	95	44	M25 / M32	M20	-	-
207349	240	-	160	95	44	M25 / M32	M20	-	-
207350	240	-	160	95	44	M25 / M32	M20	-	-
207246	240	-	160	160	44	-	-	-	-
207248	240	-	160	160	44	-	-	-	-

Dimensions (mm)

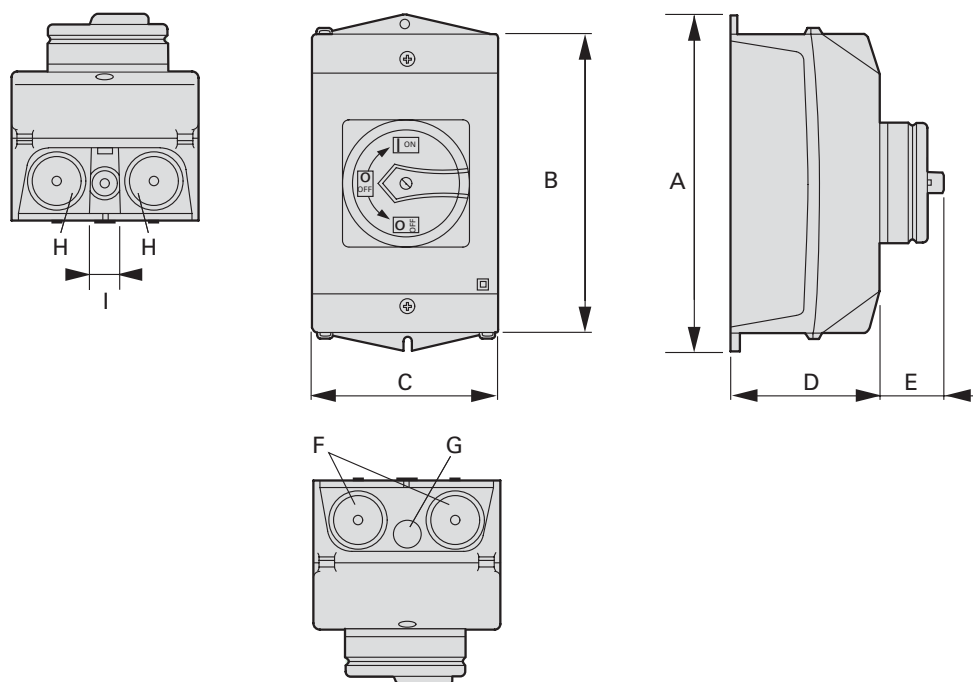


## Rotary change over isolators, 20–63A, IP65, 4 poles

Nominal unit rating I <sub>e</sub> (A)	AC-23A Rating (kW)			AC-3 rating, motor load switch (kW)			Rated short-time withstand current I <sub>cs</sub> 1s (A)	Terminal capacity (mm <sup>2</sup> )
	400V 3ph	230V 1ph	230V	230V star delta	400V	400V star delta		
20	6.5	3.5	3	4	4	5.5	320	1 x 1 - 2.5 2 x 1 - 2.5
32	13	7.5	6.5	11	12	18.5	650	1 x 1 - 6 2 x 1 - 6
63	22	15	15	22	22	37	1300	1 x 2.5 - 35 2 x 2.5 - 16

## Local switch-disconnectors - rotary isolators, 20–63A, IP65, 3–8 poles –dimensions

Nominal unit rating I <sub>e</sub> (A)	A	B	C	D	E	F	G	H	I
20	137	120	80	95	27	M20	-	-	-
32	180	160	100	100	35	M25	-	M25	≤ 8
63	240	-	160	160	29	M25 / M32	M20	-	-

Dimensions (mm)

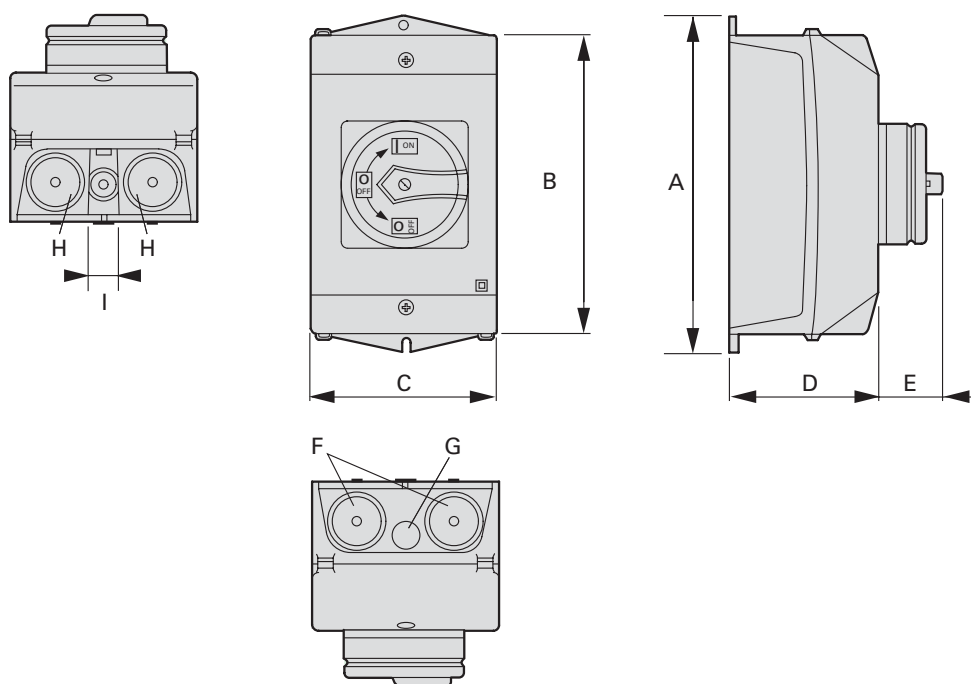

**AC motors, 3 phase full load current table, 1450rpm approx.**

Provided as a guide to the selection of suitable Eaton control gear

The tables are based on motors of approx, 1450 rpm of average efficiency and power factor. Motors of higher speed than 1450 rpm usually take a lower current than that shown in the table; while motors of lower speed usually take higher current. Wide variations from these figures can arise, especially on single phase motors and engineers should, whenever possible, determine the actual full load current (F.L.C.) from the motor rating plate in each case

Motor rating kW	Approx F.L.C. at line voltage				
	220V	240V	380V	400–415V	550V
0.07	–	–	–	–	–
0.1	0.7	0.6	0.4	0.4	0.3
0.12	1	0.9	0.5	0.5	0.3
0.18	1.3	1.2	0.8	0.7	0.4
0.25	1.6	1.5	0.9	0.9	0.6
0.37	2.5	2.3	1.4	1.3	0.8
0.56	3.1	2.8	1.8	1.6	1.1
0.75	3.5	3.2	2	1.8	1.4
1.1	5	4.5	2.8	2.6	1.9
1.5	6.4	5.8	3.7	3.4	2.6
2.2	9.5	8.7	5.5	5	3.5
3	12	11	7	6.5	4.7
3.7	15	13	8	8	6
4	16	14	9	8	6
5.5	20	19	12	11	8
7.5	27	25	16	15	11
9.3	34	32	20	18	14
10	37	34	22	20	15
11	41	37	23	22	16
15	64	50	31	28	21
18.5	67	62	39	36	26
22	74	70	43	39	30
30	99	91	57	52	41

**AC motors, 1 phase full load current table, 1450rpm approx.**


Motor rating (kW)	Approx F.L.C. at line voltage		
	110V	220V	230–240V
0.07	2.4	1.2	1.1
0.1	3.3	1.6	1.5
0.12	3.8	1.9	1.7
0.18	4.5	2.3	2.1
0.25	5.8	2.9	2.6
0.37	7.9	3.9	3.6
0.56	11	5.5	5
0.75	15	7.3	6.7
1.1	21	10	9
1.5	26	13	12
2.2	37	19	17
3	49	24	22
3.7	54	27	25
4	60	30	27
5.5	85	41	38
7.5	110	55	50

# 10.4

## Technical data


Enclosed motor, heating and lighting control

### 9kW DOL starter without switch disconnect, IP 65 moulded surface mounting enclosure, dimensional drawings

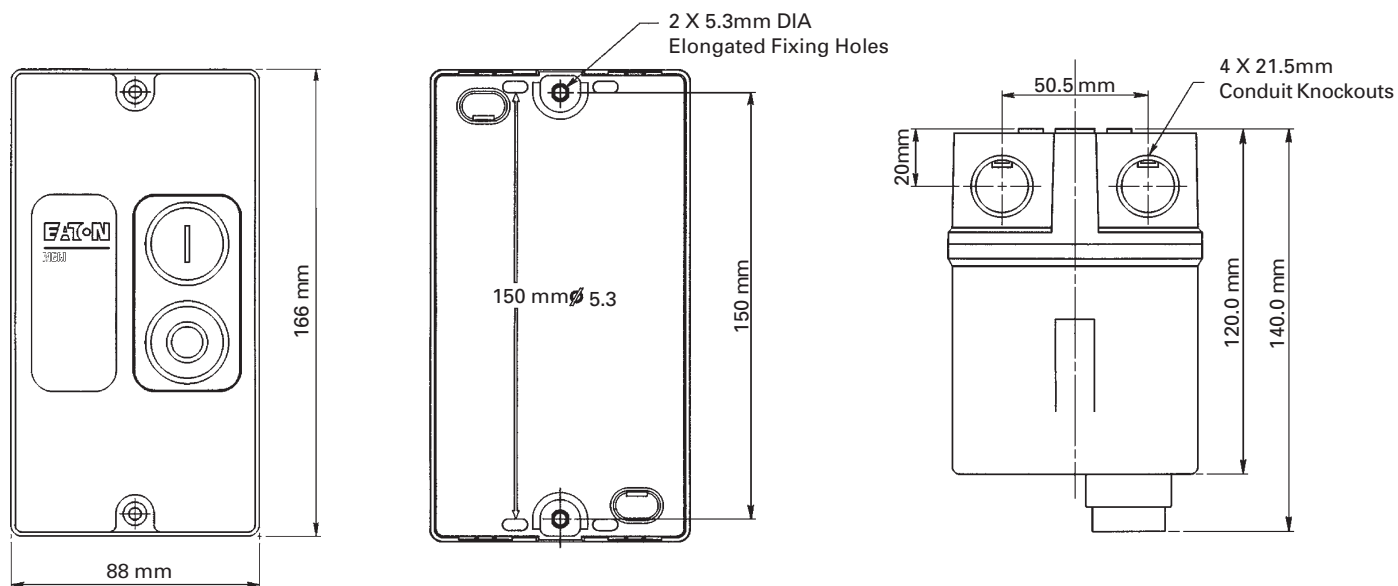


### 11kW DOL starter without switch disconnect, IP 54 metalclad surface mounting enclosure, dimensional drawings


- Dimensions in brackets refer to type **2528ADS(2X)** size enclosure

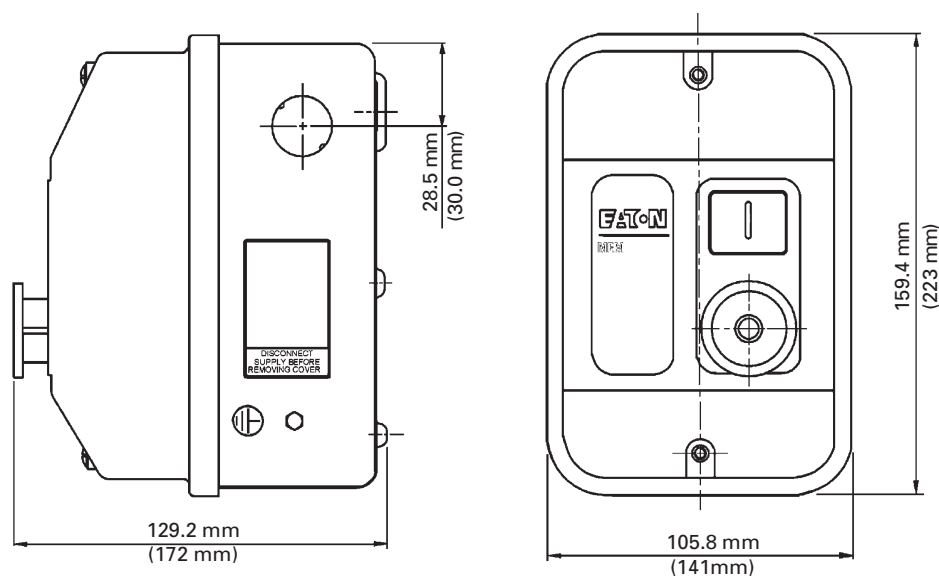



11kW DOL starter without switch disconnect, IP 54 metalclad surface mounting enclosure, dimensional drawings (contd)

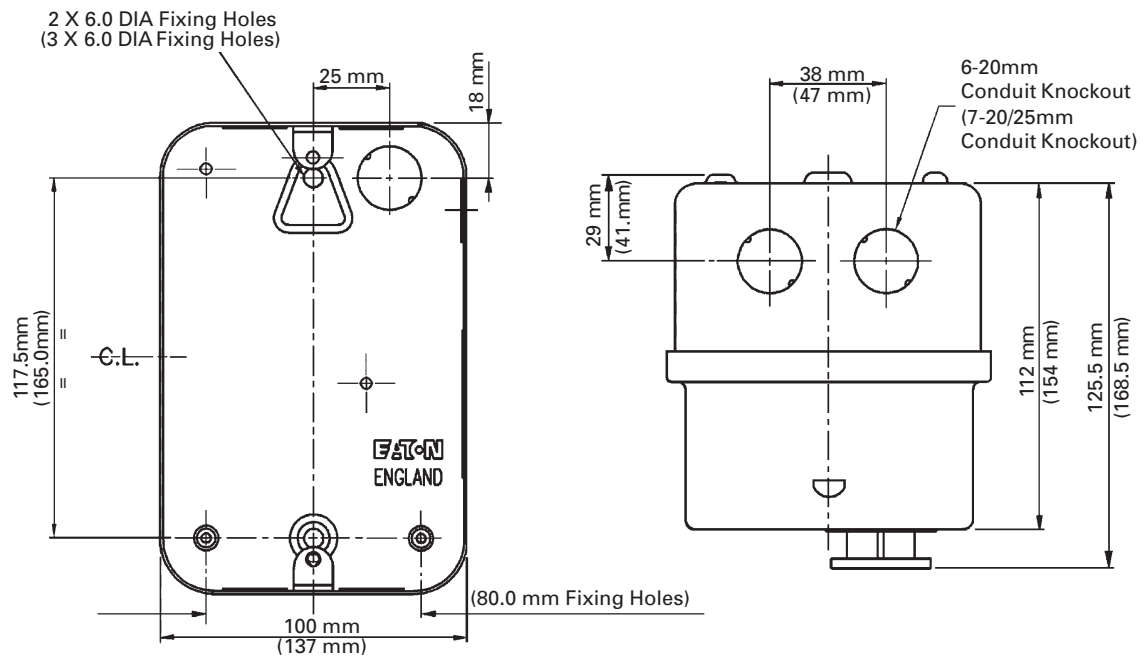

11kW DOL starter with switch disconnect, IP 54 metalclad surface mounting enclosure, dimensional drawings

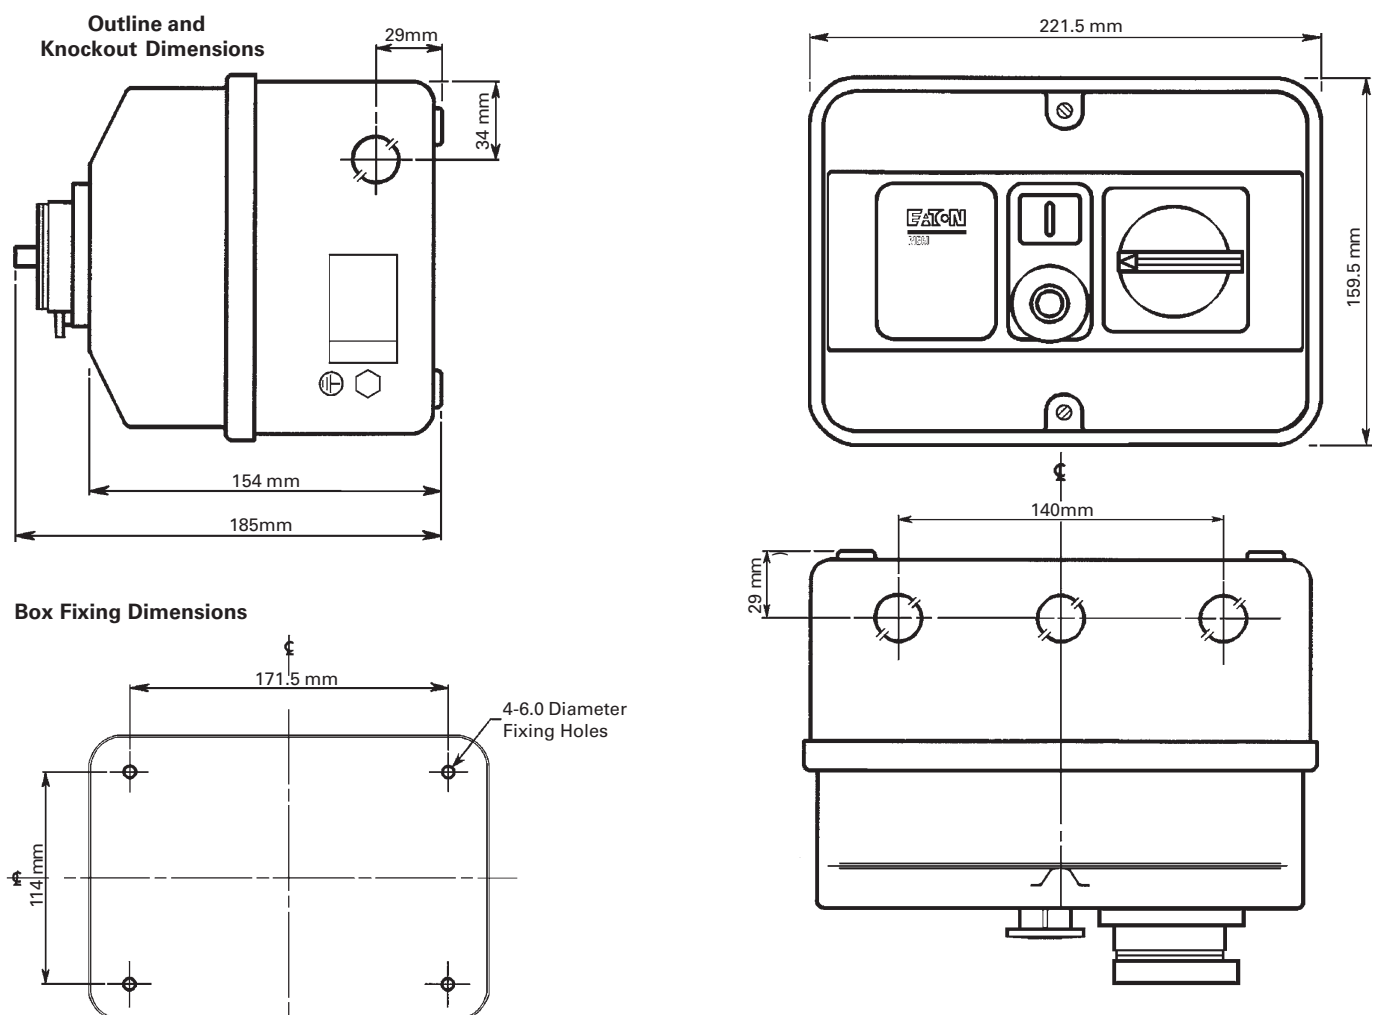

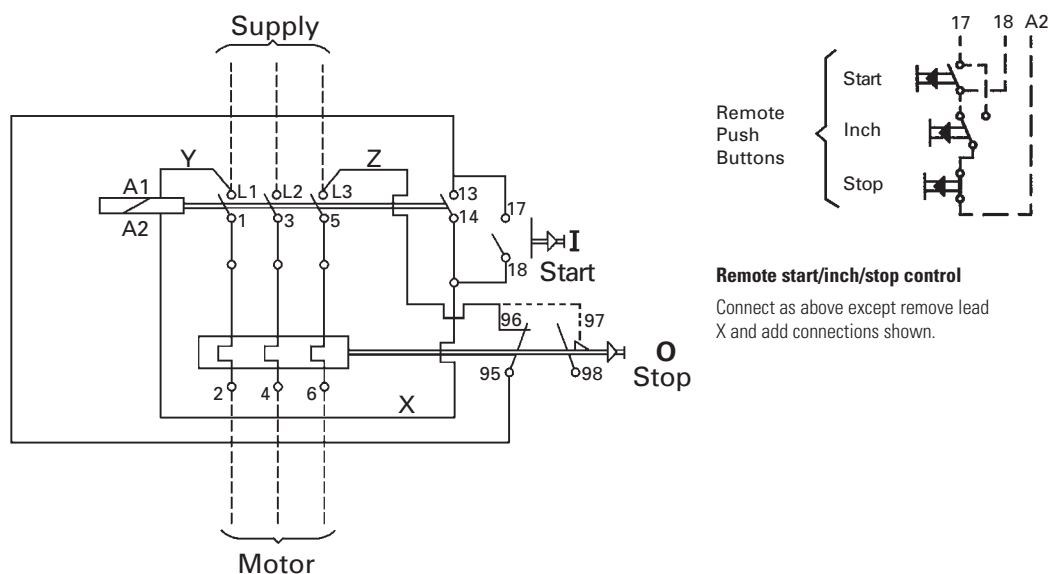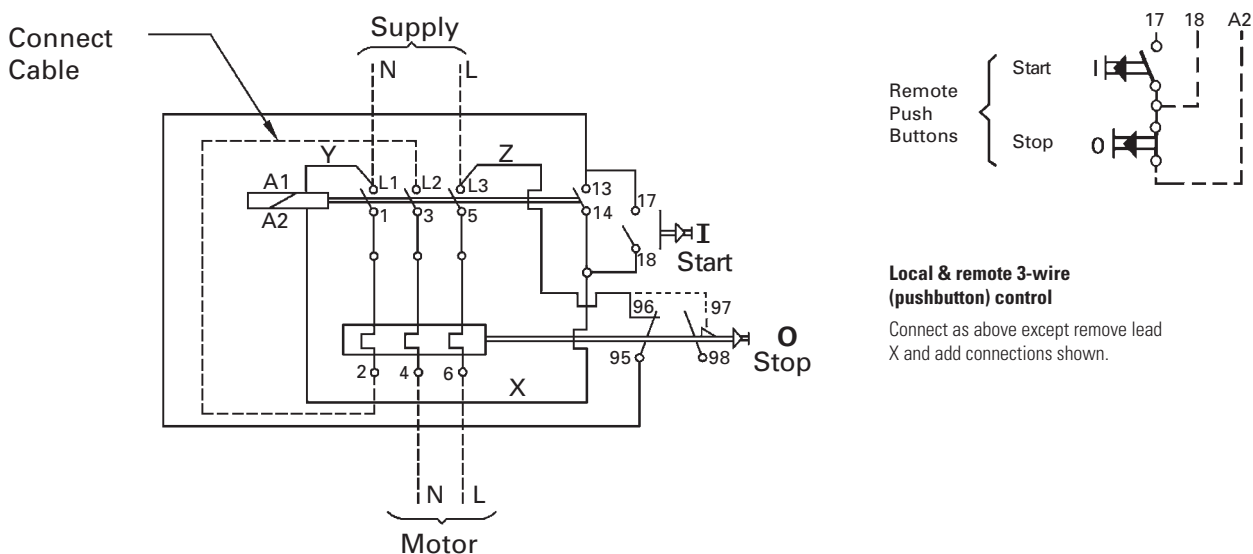

**11kW DOL starter without switch disconnect, moulded & metal surface mounting enclosure, wiring diagrams****A. Three phase motors-DOL starter. Local 3-wire (pushbutton) control.****B. Single phase motors-DOL starter. Local 3-wire (pushbutton) control.**

**Coil phase to neutral:** remove connector Y, connect Neutral to A1

**Separate coil supply:** remove connectors Y and Z, connect coil supply to A1 and 96.

**Coil voltage:** Ensure correct voltage coil is fitted for separate coil supply and phase to neutral applications.

**External interlock:** Remove connection Z and insert interlock between 5 and 96.

**Alarm circuit:** At trip an alarm signal voltage equal to the coil voltage is available between 98 and A1 when a link is added between 96 & 97. The switch is rated at 440VA, 500V maximum.

**Control circuit fuses (10A MAX).**

**Coil connected Phase to neutral (1 fuse):** remove connector Z and connect fuse between 5 and 96.

**Coil Connected Phase to Phase (2 fuses):** remove connector Z and connect fuse between 5 and 96. Remove connector Y and connect fuse between 1 and A1.

**Note:** the voltage rating of the fuse(s) must be suitable for the control circuit voltage.

**Short circuit protection:** Maximum sizes of fuses or MCB's to give short-circuit protection to this starter are tabulated on page 173.


**To reverse direction of rotation (3-Phase Motors):** Interchange any two supply lines 1, 3 or 5.



# 10.4 Technical data

## Enclosed motor, heating and lighting control

### 25kW Star Delta starter without switch disconnect, IP 54 metalclad surface mounting enclosure, wiring diagram

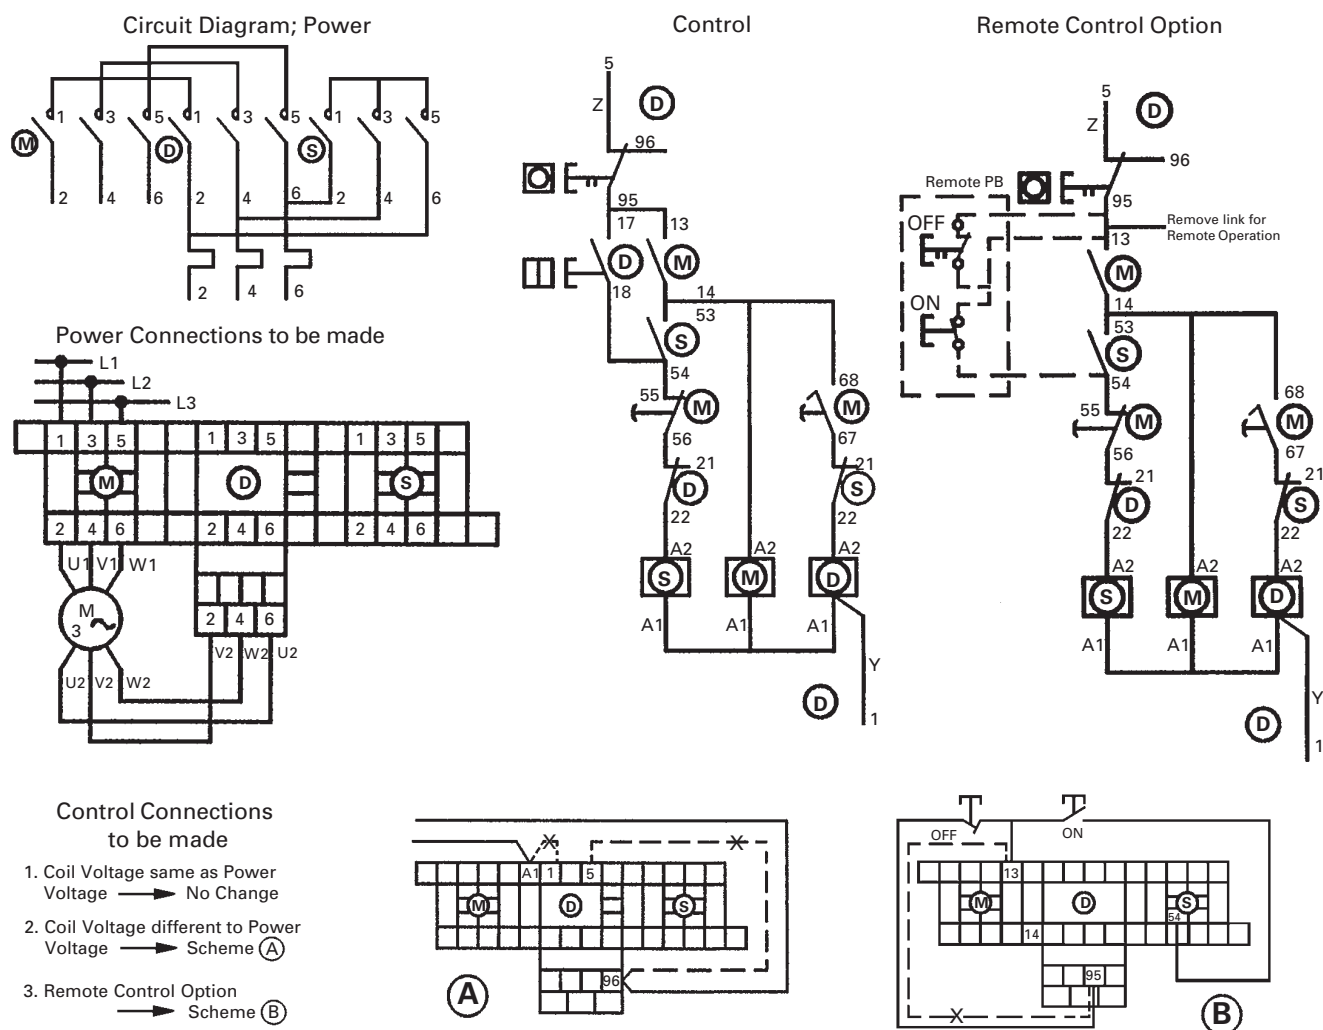


### Short circuit protection

Overload Relay list number	Motor FLC Ie (A)	SCPD Back-up protection MAX HRC fuse BS88:1 aM (A)	Back-up protection Max MCB Type C
<b>Direct on line</b>			
8TT87	0.63–1	4	EMCH306
8TT88	1–1.6	6	EMCH306
8TT89	1.6–2.5	10	EMCH306
8TT90	2.5–4	16	EMCH310
8TT91	4–6	16	EMCH310
8TT98	5.5–8.0	20	EMCH316
8TT92	7–10	25	EMCH320
8TT93	10–13	32	EMCH320
8TT94	13–18	40	EMCH332
8TT104	18–25	50	EMCH340
<b>Star Delta</b>			
8TT90SD	4.3–6.9	16	EMCH310
8TT91SD	6.9–10.4	16	EMCH310
8TT98SD	9.5–13.8	20	EMCH316
8TT92SD	12.1–17.3	25	EMCH320
8TT93SD	17.3–22.5	32	EMCH320
8TT94SD	22.5–31	40	EMCH332
8TT104SD	31–43	50	EMCH340

### Heating and lighting contactors

6-20mm  
Conduit Knockout  
(7-20/25mm  
Conduit Knockout)

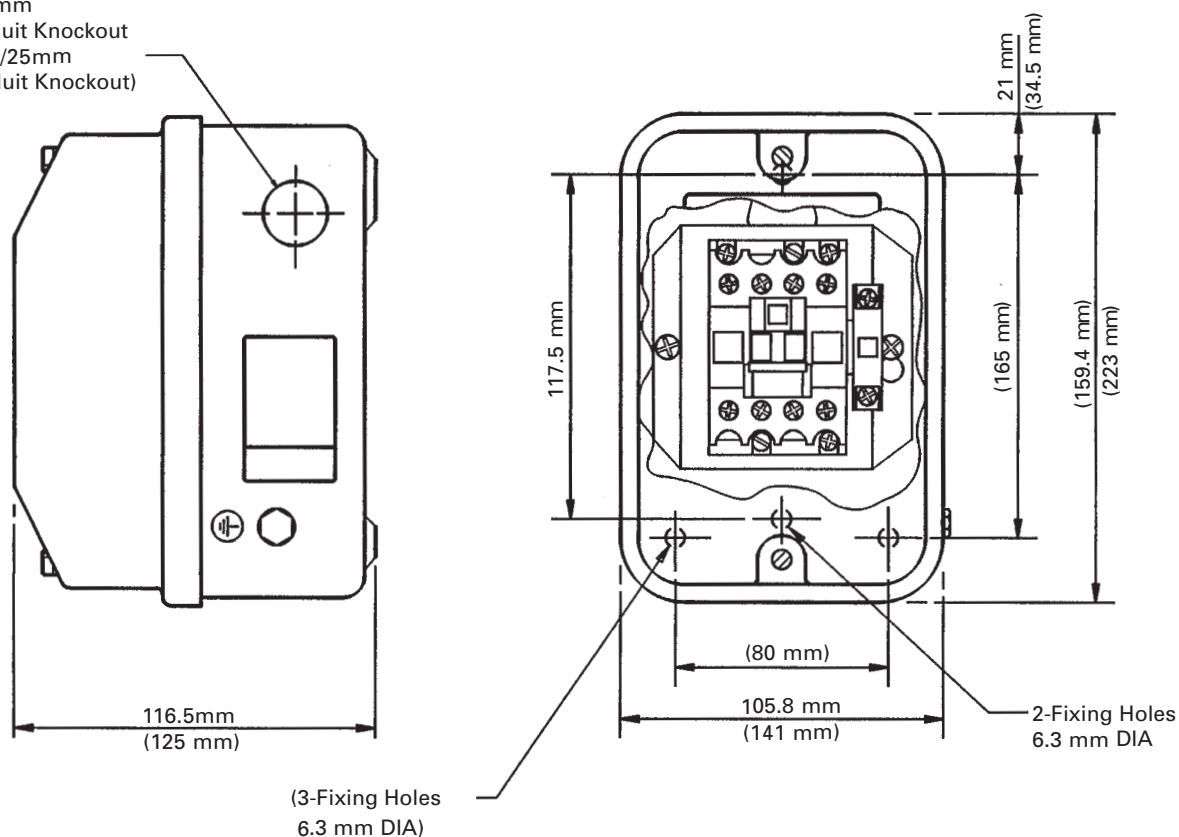

### Additional side mounting auxiliary contacts for DOL, DOL reversing, Star Delta starters and Autoline

- 1 NO, 1NC lth 10A Ui 600v

Description	Current rating (A)	Coil voltage	Starter list number	Maximum side mount auxiliaries	Eaton list number
DOL Starter	25	220–240	<b>28ADS2X</b>	2	<b>8TA8DN11</b>
DOL Starter	25	380–415	<b>48ADS2X</b>	2	<b>8TA8DN11</b>
Starter with disconnect	18	220–240	<b>28ADSA1X</b>	2	<b>8TA8DN11</b>
Starter with disconnect	18	380–415	<b>48ADSA1X</b>	2	<b>8TA8DN11</b>
Starter with disconnect	25	220–240	<b>28ADSA2X</b>	1	<b>8TA8DN11</b>
Starter with disconnect	25	380–415	<b>48ADSA2X</b>	1	<b>8TA8DN11</b>

# 10.4


## Technical data

Enclosed motor, heating and lighting control

### Tightening torques for Star Delta and DOL starters


Starter type (Nm)	Maximum starter	Relay tightening torque (Nm)		Contactor tightening torque		
		rating (kW)	Power	Aux	Power	Aux
DOL	9	1.85	1.2	1.7	1.2	
DOL	11	1.85	1.2	1.85	1.85	
DOL	15	2.5	1.2	2.5	1.2	

**8TT series, overload relay tripping characteristics**

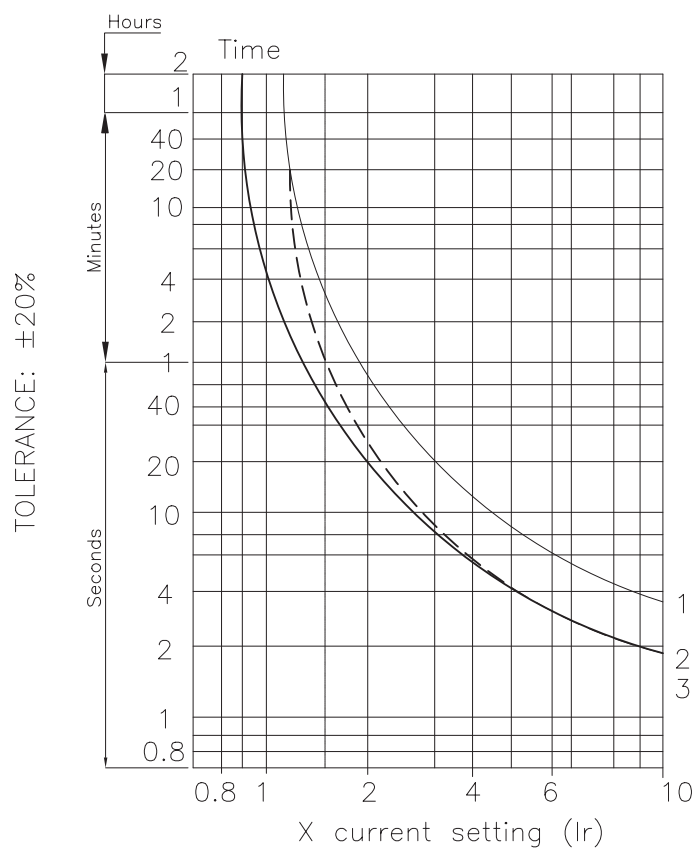


1. ——— Balanced operation, 3-phase, from cold state
2. - - - - - Balanced operation, 3-phase, after a long period at the set current (hot state)
3. ——— Operation following the loss of one phase (single phase tripping) from cold state


**Contactor utilisation category, AC1 ( $U_e < 440V$ ) electrical life curve**

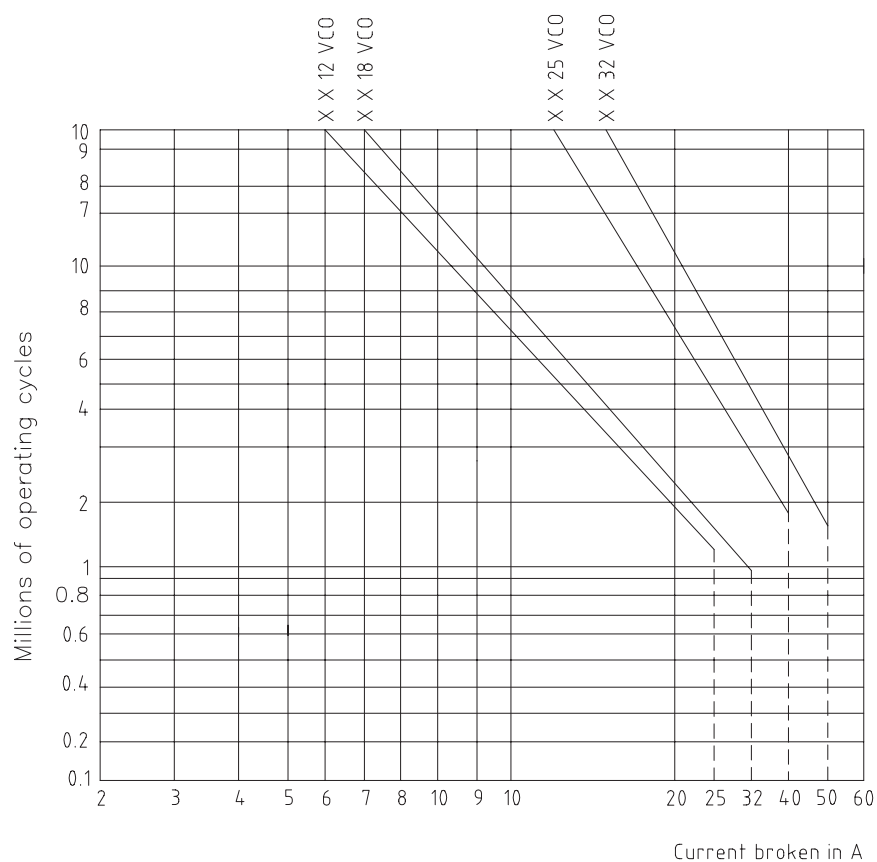

**Contactor utilisation category, AC2 ( $U_e < 440V$ ) electrical life curve**

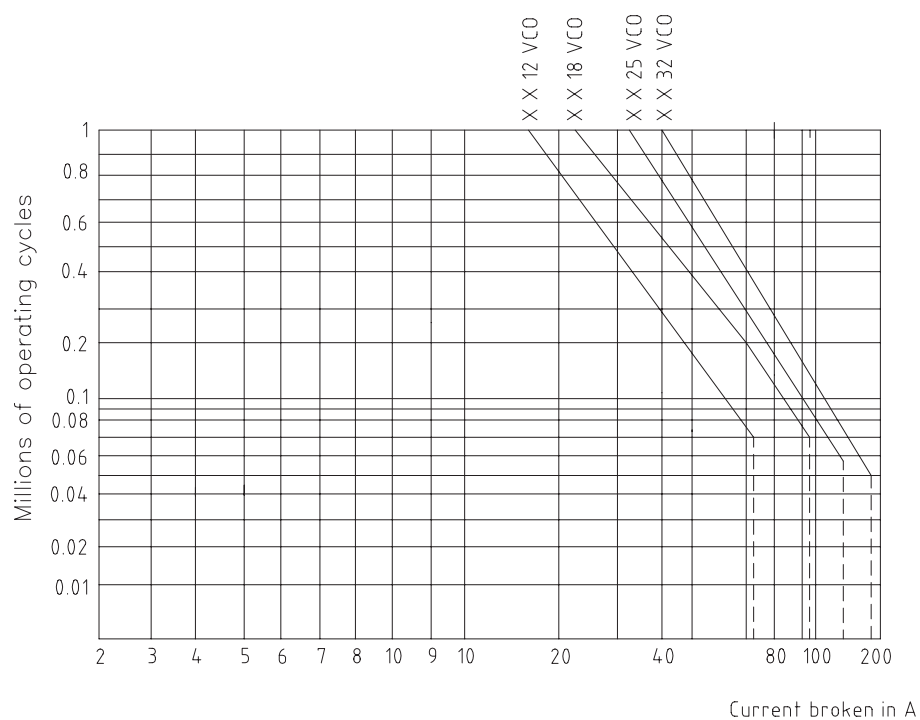

Contactor utilisation category, AC3 ( $U_e \leq 440V$ ) electrical life curve

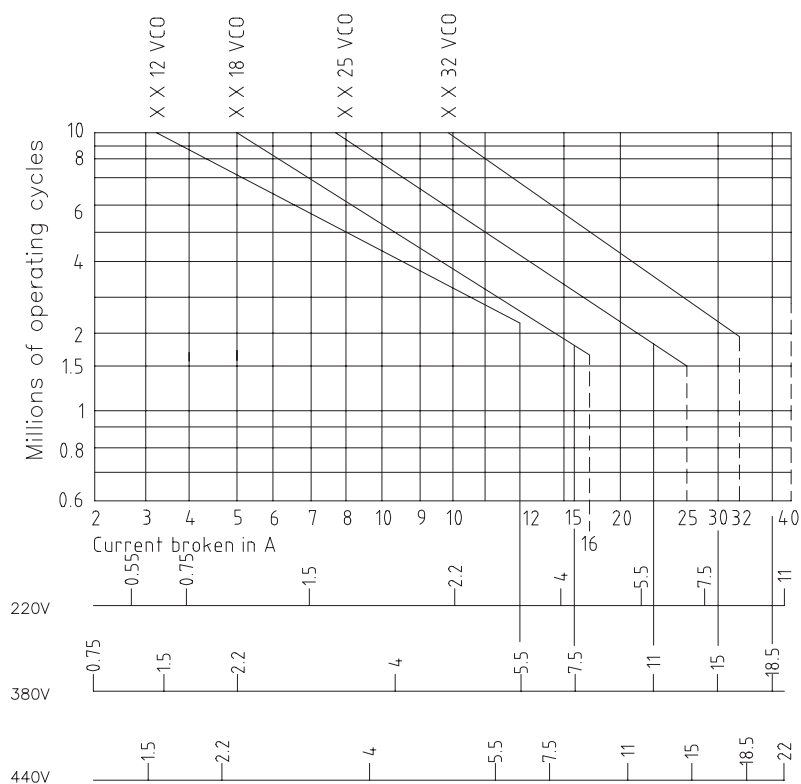



# 10.5 Technical data

## Degrees of protection – IP

The degrees of protection against ingress of foreign bodies and liquids are indicated by the first two characteristic numerals as detailed in tables 1 and 2. For switch and control gear the classification is recognised internationally and is described in detail in BS EN 60529.

### First number

Protection against solid foreign objects IP	Requirements	Meaning protection of persons against access to hazardous parts with:
0	No protection	non-protected
1	Full penetration of 50mm diameter sphere not allowed. Contact with hazardous parts not permitted	back of hand
2	Full penetration of 12.5mm diameter sphere not allowed The jointed test finger shall have adequate clearance from hazardous parts	finger
3	The access probe of 2.5mm diameter shall not penetrate	tool
4	The access probe of 1.0mm diameter shall not penetrate	wire
5	Limited ingress of dust permitted (no harmful deposit)	wire
6	Totally protected against ingress of dust	wire

### Second number

Protection against harmful ingress of water IP	Requirements	Meaning protection from water
0	No protection.	non-protected
1	Protected against vertically falling drops of water – limited ingress permitted	vertically dripping
2	Protected against vertically falling drops of water with enclosure tilted 15° from the vertical – limited ingress permitted	dripping up to 15° from the vertical
3	Protected against sprays to 60° from the vertical – limited ingress permitted	limited spraying
4	Protected against water splashed from all directions – limited ingress permitted	splashing from all directions
5	Protected against low pressure jets of water from all directions – limited ingress permitted	hosing jets from all directions
6	Protected against strong jets of water – limited ingress permitted	strong hosing jets from all directions.
7	Protected against the effects of immersion between 15cm and 1m	temporary immersion
8	Protected against long periods of immersion under pressure	continuous immersion

### Additional letter

(Optional) IP	Requirements	Meaning protection of persons against access to hazardous parts with:
A for use with 0	Penetration of 50mm diameter sphere up to guard face must not contact hazardous parts.	back of hand
B for use with 0 & 1	Test finger penetration to a maximum of 80mm must not contact hazardous parts.	finger
C for use with 1 & 2	Wire of 2.5mm diameter x 100mm long must not contact hazardous parts when spherical stop face is partially entered.	tool
D for use with 1, 2 & 3	Wire of 1.0mm diameter x 100mm long must not contact hazardous parts when spherical stop face is partially entered.	wire

Note: Limited penetration allowed with all four additional letters.

131669	36	187174	35	146 BBC	106
158053	36	187186	35	151GNC	102
158056	36	187210	35	153GNC	102
167375	54	187222	35	154GC	102
167376	55	187228	35	15KR85	117
167377	54	187234	35	15AXD2	108
167378	54	187240	35	15AXTN2	108
167379	52	207136	110	15KXDC2F	108
167380	53	207149	110, 169	15KXSC2F	108
167381	52	207151	110, 169	15KXTNC2F	108
167382	52	207153	110, 169	160MJ30-7	119
167383	52	207161	110, 169	160MJ31-7	119
167384	56	207191	110	1CLX	111
167385	56	207202	110, 169	1PCB	103, 162
167386	56	207210	110, 169	2 BBCL	107
167387	56	207212	110, 169	2 SCHF	120
167389	51	207230	110	200 FSCS	106
167390	51	207246	110, 169	200MJ30-7	119
167391	51	207248	110, 169	200MJ31-7	119
167392	51	207348	110, 169	20KR85	117
169584	35, 46	207349	110, 169	250MJ30-7	119
169585	35, 46	207350	110, 169	250MJ31-7	119
169586	35, 46	226902	110, 169	2004XTNC	111
169587	35, 46	227860	110, 169	200CMFB	120
169588	35, 46	259471	63, 67, 71, 75, 79	201GNC	102
169589	35, 46	259499	63, 67, 71, 75, 79	202GCEBSP	105
169590	35, 46	259744	63, 67, 71, 75, 79	203GNC	102
169591	35, 46	259763	63, 67, 71, 75, 79	203GNL	102
169592	35, 46	260199	63, 67, 71, 75, 79	204GC	102
169593	35, 46	260201	63, 67, 71, 75, 79	204XSNC	111
169594	35, 46	1 SCHF	120	204XTNC	111
169598	35, 46	100KR85	117	206XSNC	111
169599	35, 46	100LR85	117	206XTNC	111
169600	35, 46	100MJ30-7	119	208XSNC	111
169601	35, 46	100MJ31-7	119	208XTNC	111
169602	35, 46	1000MEB	109	20MFA	120
169603	35, 46	1000SJ11	116	20MFB	120
169604	35, 46	1004R	117	20MFC	120
169605	35, 46	1004RL	117	21 BBMS	107
169606	35, 46	1004XTNC	111	2100AXEBSP	109
169607	35, 46	1006XTNC	111	212XSNC	111
169608	35, 46	1008XTNC	111	230AXEBSP	109
169609	35, 46	100AXD2	108	230KXEBSP	109
169610	35, 46	100AXTN2	108	242 BBC	106
169611	35, 46	100CMFB	120	243 BBC	106
169612	35, 46	100CMFC	120	244 BBC	106
169613	35, 46	100KXDC2F	108	246 BBC	106
169614	35, 46	100KXSC2F	108	260AXEBSP	109
169618	35, 46	100KXTNC2F	108	260KXEBSP	109
169619	35, 46	100MBDEBSP	109	28ADS1X	124
169620	35, 46	100MFA	120	28ADS2X	124
169621	35, 46	100MFB	120	28ADSA1X	124
169636	35, 46	100MFC	120	28ADSA2X	124
169637	35, 46	100MFLK	111, 120	28ADSM1X	124
169638	35, 46	100SD5	114	2PCB	103, 162
169639	35, 46	100SD5M125	114	3 BBCL	107
169640	35, 46	100SD5M160	114	3 SCHF	120
169641	35, 46	100SD5M200	114	303GNC	102
169642	35, 46	100SF5	115	304GC	102
169643	35, 46	100SF5M125	115	304XSNC	111
169644	35, 46	100SF5M160	115	304XTNC	111
169645	35, 46	100SF5M200	115	306XSNC	111
169646	35, 46	100SO	114	306XTNC	111
169647	35, 46	100SOM125	114	308XSNC	111
169648	35, 46	100SOM160	114	308XTNC	111
169649	35, 46	101GNC	102	30AXD2	108
169650	35, 46	102GCEBSP	105	30AXTN2	108
169651	35, 46	103GNC	102	30KR85	117
169652	35, 46	103GNL	102	30LR85	117
169670	35, 46	104GC	102, 103	30KXDC2F	108
169671	35, 46	11 BBMS	107	30KXSC2F	108
187168	35	125AXTN2	108	30KXTNC2F	108
187180	35	125KXTNC2F	108	31 BBMS	107
187204	35	125MJ30-7	119	315MJ30-7	119
187219	35	125MJ31-7	119	315MJ31-7	119
187225	35	142 BBC	106	310XTNC	111
187231	35	143 BBC	106	312XSNC	111
187237	35	144 BBC	106	312XTNC	111

# Indices

## Eaton list number index

32CFF	121	63MFC	120	ASPD27	36, 47
32CFFW	121	63MFD	121	ASSNTSN110	47
32CMFB	120	630SJ31-6	119	ASSNTSN415	47
32MFA	120	63MJ30-8	119	ASUVRSC230	47
32MFB	120	63MJ31-8	119	BA035	114
32MFD	121	643 BBC	106	BA040	114
3PCB	103	644 BBC	106	BA050	114
355PJ30-7	119	646 BBC	106	BA063	114
355PJ31-7	119	64GC	102	BA063M100	114
4 BBCL	107	70 CSB	162	BA063M80	114
400 FSCS	106	70 CSBA	162	BC40	115
400PJ30-7	119	70CSBA	103	BC50	115
400PJ31-7	119	757 APL	104	BC63	115
40KR85	117	759 APL	104	BC63M100	115
450RJ31-7	119	800SJ28	119	BC63M80	115
45KR85	117	80KR85	117	BD40	115
402GCEBSP	105	80LR85	117	BD50	115
403GNC	102	80MJ30-7	119	BD63	115
403GNL	102	80MJ31-7	119	CD100	115
404GC	102	800 FSCS	106	CD100M125	115
405 APL	104	803GNC	102	CD100M160	115
406 APL	104	803GNL	102	CD100M200	115
41 BBMS	107	804GC	102	CD80	115
442 BBC	106	81 BBL	106	CEO100	114
443 BBC	106	82 BBSK	107	CEO100M125	114
444 BBC	106	843 BBC	106	CEO100M160	114
446 BBC	106	844 BBC	106	CEO100M200	114
48ADS1X	124	846 BBC	106	CEO32	114
48ADS2X	124	8TT104	125	CEO40	114
48ADSA1X	124	8TT104SD	125	CEO50	114
48ADSA2X	124	8TT87	125	CEO63	114
48ADSM1X	124	8TT88	125	CEO80	114
4PCB	103, 162	8TT89	125	CR2002230	57
5 BBCL	107	8TT90	125	CR2002230A	57
50 CSB	162	8TT90SD	125	CR2011230	57
50 CSBA	162	8TT91	125	CR2011230A	57
503GNC	102	8TT91SD	125	CR2020230	57
505 APL	104	8TT92	125	CR2020230A	57
506 APL	104	8TT92SD	125	CR2504230	57
507 APL	104	8TT93	125	CR2504230A	57
509 APL	104	8TT93SD	125	CR2522230	57
50CSBA	103	8TT94	125	CR2522230A	57
500RJ31-7	119	8TT94SD	125	CR2530230	57
50KR85	117	8TT98	125	CR2530230A	57
560SJ31-7	119	8TT98SD	125	CR2540230	57
51 BBMS	107	90 CSB	162	CR2540230A	57
5PCB	103	90CSBA	103	CR4002230	57
6 BBCL	107	9LD	111	CR4020230	57
6 SCHF	120	AA010	114	CR4030230	57
60 CSB	162	AA016	114	CR4040230	57
60 CSBA	162	AA02	114	CR6320230	58
600MEB	109	AA020	114	CR6340230	58
602XTNC	111	AA025	114	CRA611	58
603GNC	102	AA032	114	CRA620	58
603GNL	102	AA032M40	114	CRM2020230A	58
604GC	102	AA032M50	114	CRM2540230A	58
604XTNC	111	AA032M63	114	CV1109SP	109
606XTNC	111	AA04	114	DD125	114, 115
608XTNC	111	AA06	114	DD160	114, 115
60AXD2	108	AC10	115	DD200	114, 115
60AXTN2	108	AC16	115	DD200M250	115
60CSBA	103	AC2	115	DD200M315	115
60KXDC2F	108	AC20	115	DE0125	115
60KXSC2F	108	AC25	115	DE0160	115
60KXTNC2F	108	AC32	115	DE0200	115
60KR85	117	AC4	115	DE0200M250	115
60LR85	117	AC6	115	DE0200M315	115
61 BBMS	107	AD10	115	ED250	115
61GNC	102	AD16	115	ED315	115
637 APL	104	AD2	115	ED315M400	115
639 APL	104	AD20	115	ED355	116
63CFF	121	AD25	115	ED400	116
63CFFW	121	AD32	115	EF355	116
63CMFB	120	AD4	115	EF400	116
63GNC	102	AD6	115	EF5250	115
63GNL	102	ASALMSN	47	EF315	115
63MFA	120	ASAUXSN	47	ESD16	117
63MFB	120	ASPD	30, 36, 47	ESD20	117

ESD25.....	117	EBM62H.....	31	EMBH106.....	29, 33, 42
ESD32.....	117	EBM81.....	31	EMBH106N.....	42
ESD40.....	117	EBM82H.....	31	EMBH106R100C.....	45
ESD50.....	117	EBMAFDD141.....	32	EMBH106R10C.....	45
ESD63.....	117	EBMAFDD241.....	32	EMBH106R30C.....	29, 34, 45
EAM10.....	28	EBMAFDD361.....	32	EMBH108.....	29, 33, 42
EAM1002H.....	44	EMS1253N.....	32	EMBH108N.....	42
EAM1002L.....	44	EMS1253.....	32	EMBH110.....	29, 33, 42
EAM1002M.....	44	EBMAFDDN.....	32	EMBH110N.....	42
EAM1004H.....	44	EBMAFDDSP.....	32	EMBH110R100C.....	45
EAM1004L.....	44	EBMAFDDSS.....	32	EMBH110R10C.....	45
EAM1004LT.....	44	EBMAFDDSS20.....	32	EMBH110R30C.....	29, 34, 45
EAM1004M.....	44	EBMAFDDSPDT2.....	32	EMBH113.....	29, 33, 42
EAM12M.....	28	EBMAFDDSPDT12.....	32	EMBH113N.....	42
EAM12MB.....	28	EBMMPSL250DMID.....	33	EMBH116.....	29, 33, 42
EAM13.....	28	EBMMPSL250QM.....	33	EMBH116N.....	42
EAM16.....	28	EBMMPSLS50.....	33	EMBH116R100C.....	45
EAM162H.....	44	EBMMPSLSPDT2.....	33	EMBH116R10C.....	45
EAM162V.....	44	EBMMPSLSPDT12.....	33	EMBH116R30C.....	29, 34, 45
EAM252H.....	44	EBMBT2503.....	31, 32, 38, 39	EMBH120.....	29, 33, 42
EAM252L.....	44	EBMCC1253.....	31	EMBH120N.....	42
EAM252M.....	44	EBMGP4.....	36	EMBH120R100C.....	45
EAM4.....	28	EBMMB160.....	32, 39	EMBH120R10C.....	45
EAM402H.....	44	EBMMB200.....	32, 39	EMBH120R30C.....	29, 34, 45
EAM402L.....	44	EBMMB250.....	32, 39	EMBH125.....	29, 33, 42
EAM402M.....	44	EBMMPCT250.....	32	EMBH125N.....	42
EAM404H.....	44	EBMMPCT250M.....	32	EMBH132.....	29, 33, 42
EAM404L.....	44	EBMMPCT250MID.....	32	EMBH132N.....	42
EAM404M.....	44	EBMMPDC120.....	32	EMBH132R100C.....	45
EAM632H.....	44	EBMMPSL125.....	32	EMBH132R10C.....	45
EAM632M.....	44	EBMMPSL125M.....	32	EMBH132R30C.....	29, 34, 45
EAM634H.....	44	EBMMPSL250.....	32	EMBH140.....	29, 33, 42
EAM634L.....	44	EBMMPSL125MID.....	32	EMBH140N.....	42
EAM634M.....	44	EBMMPSL250MID.....	32	EMBH140R30C.....	29, 34, 45
EAM7.....	28	EBMMPSL250M.....	32	EMBH145R30C.....	29, 34, 45
EAM802H.....	44	EBMNE8.....	36	EMBH150.....	29, 33, 42
EAM802L.....	44	EBMP121.....	38	EMBH150N.....	42
EAM802M.....	44	EBMP122.....	38	EMBH163.....	29, 33, 42
EAM804H.....	44	EBMP182.....	38	EMBH163N.....	42
EAM804L.....	44	EBMP242.....	38	EMBH201.....	42
EAM804M.....	44	EBMP41.....	38	EMBH202.....	42
EAM9M.....	28	EBMP61.....	38	EMBH204.....	42
EAM9MB.....	28	EBMP81.....	38	EMBH206.....	42
EAMBT1002.....	28, 38	EBMR100.....	31, 38	EMBH208.....	42
EAMCK.....	30	EBMR30.....	31, 38	EMBH210.....	42
EAME11.....	30	EBMR300.....	31, 38	EMBH213.....	42
EAME5.....	30	EBMR300T.....	31, 38	EMBH216.....	42
EAMMP65.....	28	EBMS1251N.....	31, 38	EMBH220.....	42
EAMP10.....	38	EBMS1253.....	31, 38	EMBH225.....	42
EAMP13.....	38	EBMS1253N.....	31, 38	EMBH232.....	42
EAMP16.....	38	EBMS25.....	32, 39	EMBH240.....	42
EAMP4.....	38	EBMS2503.....	32, 39	EMBH250.....	42
EAMP7.....	38	EBMSL1082MPMB.....	32	EMBH263.....	42
EAMS100HE.....	28, 38	EBMSL14102MPMB.....	32	EMBH301.....	33, 43
EAMS100LE.....	28, 38	EBMSL642MPMB.....	32	EMBH302.....	33, 43
EAMS100ME.....	28, 38	EBMSL862MPMB.....	32	EMBH304.....	33, 43
EAMS1251N.....	28, 38	EBMTK.....	36	EMBH306.....	33, 43
EAMSL66M.....	28	EBMXDC15.....	37	EMBH308.....	33, 43
EAMSL66MB.....	28	EBMXDC18.....	37	EMBH310.....	33, 43
EAMSL93M.....	28	EBMXDC30.....	37	EMBH313.....	33, 43
EAMSL93MB.....	28	EBMXDC45.....	37	EMBH316.....	33, 43
EBK105SP.....	105	EBMXDC6.....	37	EMBH320.....	33, 43
EBK110SP.....	105	EBMXDC9.....	37	EMBH325.....	33, 43
EBK113SP.....	105	EBMXDCG15.....	37	EMBH332.....	33, 43
EBLB1.....	36	EBMXE15.....	37	EMBH340.....	33, 43
EBLB2.....	36	EBMXPC1.....	36	EMBH350.....	33, 43
EBM121.....	31	EBMXPC2.....	36	EMBH363.....	33, 43
EBM121D.....	31	EM3SSK1T2.....	28	EMBH401.....	43
EBM122.....	31	EM3SSK3T12.....	32	EMBH402.....	43
EBM122H.....	31	EM3SSK3T2.....	32	EMBH404.....	43
EBM161.....	31	EM96BP.....	65, 69, 73, 77, 81, 99	EMBH406.....	43
EBM182.....	31	EMABP.....	30, 36, 37	EMBH408.....	43
EBM182H.....	31	EMBH101.....	29, 33, 42	EMBH410.....	43
EBM22H.....	31	EMBH101N.....	42	EMBH413.....	43
EBM242.....	31	EMBH102.....	29, 33, 42	EMBH416.....	43
EBM242H.....	31	EMBH102N.....	42	EMBH420.....	43
EBM41.....	31	EMBH104.....	29, 33, 42	EMBH425.....	43
EBM61.....	31	EMBH104N.....	42	EMBH432.....	43

# Indices

## Eaton list number index

EMBH440	43	EMCH240	42	EMDH206	42
EMBH450	43	EMCH250	42	EMDH208	42
EMBH463	43	EMCH263	42	EMDH210	42
EMBP	30, 36	EMCH301	33, 43	EMDH213	42
EMBPH	36	EMCH302	33, 43	EMDH216	42
EMBS1100	33, 43	EMCH304	33, 43	EMDH220	42
EMBS1125	33, 43	EMCH306	33, 43	EMDH225	42
EMBS120	33, 43	EMCH308	33, 43	EMDH232	42
EMBS132	33, 43	EMCH310	33, 43	EMDH240	42
EMBS140	33, 43	EMCH313	33, 43	EMDH250	42
EMBS150	33, 43	EMCH316	33, 43	EMDH263	42
EMBS163	33, 43	EMCH320	33, 43	EMDH301	33, 43
EMBS180	33, 43	EMCH325	33, 43	EMDH302	33, 43
EMBS3100	34, 43	EMCH332	33, 43	EMDH304	33, 43
EMBS3125	34, 43	EMCH340	33, 43	EMDH306	33, 43
EMBS320	34, 43	EMCH350	33, 43	EMDH308	33, 43
EMBS332	34, 43	EMCH363	33, 43	EMDH310	33, 43
EMBS340	34, 43	EMCH401	43	EMDH313	33, 43
EMBS350	34, 43	EMCH402	43	EMDH316	33, 43
EMBS363	34, 43	EMCH404	43	EMDH320	33, 43
EMBS380	34, 43	EMCH406	43	EMDH325	33, 43
EMCH101	29, 33, 42	EMCH408	43	EMDH332	33, 43
EMCH101N	42	EMCH410	43	EMDH340	33, 43
EMCH102	29, 33, 42	EMCH413	43	EMDH350	33, 43
EMCH102N	42	EMCH416	43	EMDH363	33, 43
EMCH104	29, 33, 42	EMCH420	43	EMDH401	43
EMCH104N	42	EMCH425	43	EMDH402	43
EMCH106	29, 33, 42	EMCH432	43	EMDH404	43
EMCH106N	42	EMCH440	43	EMDH406	43
EMCH106R100C	45	EMCH450	43	EMDH408	43
EMCH106R10C	45	EMCH463	43	EMDH410	43
EMCH106R30C	29, 34, 45	EMCS1100	33, 43	EMDH413	43
EMCH108	29, 33, 42	EMCS1125	33, 43	EMDH416	43
EMCH108N	42	EMCS120	33, 43	EMDH420	43
EMCH110	29, 33, 42	EMCS132	33, 43	EMDH425	43
EMCH110N	42	EMCS140	33, 43	EMDH432	43
EMCH110R100C	45	EMCS150	33, 43	EMDH440	43
EMCH110R10C	45	EMCS163	33, 43	EMDH450	43
EMCH110R30C	29, 34, 45	EMCS180	33, 43	EMDH463	43
EMCH113	29, 33, 42	EMCS3100	34, 43	EMDL	30, 36, 37
EMCH113N	42	EMCS3125	34, 43	EMDS1100	33, 43
EMCH116	29, 33, 42	EMCS320	34, 43	EMDS120	33, 43
EMCH116N	42	EMCS332	34, 43	EMDS132	33, 43
EMCH116R100C	45	EMCS340	34, 43	EMDS140	33, 43
EMCH116R10C	45	EMCS350	34, 43	EMDS150	33, 43
EMCH116R30C	29, 34, 45	EMCS363	34, 43	EMDS163	33, 43
EMCH120	29, 33, 42	EMCS380	34, 43	EMDS180	33, 43
EMCH120N	42	EMDH101	29, 33, 42	EMDS3100	34, 43
EMCH120R100C	45	EMDH101N	42	EMDS320	34, 43
EMCH120R10C	45	EMDH102	29, 33, 42	EMDS332	34, 43
EMCH120R30C	29, 34, 45	EMDH102N	42	EMDS340	34, 43
EMCH125	29, 33, 42	EMDH104	29, 33, 42	EMDS350	34, 43
EMCH125N	42	EMDH104N	42	EMDS363	34, 43
EMCH125R30C	29, 34, 45	EMDH106	29, 33, 42	EMDS380	34, 43
EMCH132	29, 33, 42	EMDH106N	42	EMGP142	36
EMCH132N	42	EMDH108	29, 33, 42	EMPL	30, 36, 37
EMCH132R100C	45	EMDH108N	42	EM4PB840	90, 157, 158
EMCH132R10C	45	EMDH110	29, 33, 42	EM4PB1440	90, 157, 158
EMCH132R30C	29, 34, 45	EMDH110N	42	EM4PB1840	90, 157, 158
EMCH140	29, 33, 42	EMDH113	29, 33, 42	EM4PB680	94, 157, 158
EMCH140N	42	EMDH113N	42	EM4PB1280	94, 157, 158
EMCH140R30C	29, 34, 45	EMDH116	29, 33, 42	EM4PB1680	94, 157, 158
EMCH145R30C	29, 34, 45	EMDH116N	42	EM4PB68SXB	98, 157
EMCH150	29, 33, 42	EMDH120	29, 33, 42	EM4PB1214SXB	98, 157
EMCH150N	42	EMDH120N	42	EM4PB1618SXB	98, 157
EMCH163	29, 33, 42	EMDH125	29, 33, 42	EM4PB68SXM	99, 157
EMCH163N	42	EMDH125N	42	EM4PB1214SXM	99, 157
EMCH201	42	EMDH132	29, 33, 42	EM4PB1618SXM	99, 157
EMCH202	42	EMDH132N	42	EM4PB250EX	98
EMCH204	42	EMDH140	29, 33, 42	EM4PB250EXM	99
EMCH206	42	EMDH140N	42	EM4PB300CX	98
EMCH208	42	EMDH150	29, 33, 42	EM4PBK404	91, 158
EMCH210	42	EMDH150N	42	EM4PBK404M	91, 158
EMCH213	42	EMDH163	29, 33, 42	EM4PBK404L	91, 158
EMCH216	42	EMDH163N	42	EM4PBK404LM	91, 158
EMCH220	42	EMDH201	42	EM4PBNK40	91
EMCH225	42	EMDH202	42	EM4PBK804	95, 158
EMCH232	42	EMDH204	42	EM4PBK804M	95, 158

EM4PBK804L.....	95, 158	EPBKN263LM.....	74	ETM2211SP.....	112
EM4PBK804LM.....	95, 158	EPBKN3803.....	78	ETM2212SP.....	112
EM4PBNK80.....	95	EPBKN3803M.....	78	ETM2223SP.....	112
EM4PBP840.....	99, 159	EPBKN3804.....	78	ETM2224SP.....	112
EM4PBP1440.....	99, 159	EPBKN3804M.....	78	ETM2225SP.....	112
EM4PBP1840.....	99, 159	EPBKTFSLW.....	74, 78	ETM2226SP.....	112
EM4PBP680.....	99, 160	EPBKTFSN2.....	63	FF450.....	116
EM4PBP1280.....	99, 160	EPBKTFSN3.....	67	FF500.....	116
EM4PBP1680.....	99, 160	EPBMETER1.....	64, 65, 68, 69, 72, 73, 76, 77, 80, 81, 99	FF560.....	116
EM4PBCK.....	92, 97	EPBN11225.....	62, 152	FF630.....	116
EM4PB40CKINC.....	92	EPBN11225SXB.....	63, 152	FG450.....	116
EM4PB80CKINC.....	97	EPBN11225SXM.....	65, 152	FG500.....	116
EM4PBCKN122.....	92, 97	EPBN11240.....	66, 152	FG630.....	116
EM4PBCKN142.....	92, 97	EPBN1425.....	62, 152	GF710.....	116
EM4PBCKN242.....	92, 97	EPBN1425SXB.....	63, 152	GF800.....	116
EM4PBCKN342.....	97	EPBN1425SXM.....	65, 152	GG710.....	116
EM4PBCKN126.....	92, 97	EPBN1625.....	62, 152	GG800.....	116
EM4PBCKN146.....	92, 97	EPBN1625SXB.....	63	GH1000.....	116
EM4PBCKN246.....	92, 97	EPBN1625SXM.....	65	GH1250.....	116
EM4PBCKN346.....	97	EPBN1640.....	66, 152	NITD10.....	114
EM4PBCKUW.....	92, 97	EPBN1825.....	62, 152	NITD16.....	114
EM4PBCKN1N.....	92, 97	EPBN1825SXB.....	63, 152	NITD2.....	114
EM4PBCKN2N.....	92, 97	EPBN1825SXM.....	65, 152	NITD20.....	114
EM4PBCKN3N.....	97	EPBN1BP1.....	63, 67, 71, 75, 79	NITD20M25.....	114
EM4PBCKN12BK.....	92, 97	EPBN1CX250.....	64, 152	NITD20M32.....	114
EM4PBCKN14BK.....	92, 97	EPBN1EX250.....	64, 152	NITD25.....	114
EM4PBCKN24BK.....	92, 97	EPBN1EX250M.....	64, 152	NITD32.....	114
EM4PBCKN34BK.....	97	EPBN1EXDIN.....	64, 152	NITD32M40.....	114
EM4PBFAN1L1N.....	91, 95	EPBN1SPD123.....	65, 69, 73, 77, 81, 86, 152	NITD32M50.....	114
EM4PBFAN1L2N.....	91, 95	EPBN1SPD1234.....	65, 69, 73, 77, 81, 86, 152	NITD32M63.....	114
EM4PBFAN1L3N.....	91, 95	EPBN1SUPM.....	64, 65	NITD4.....	114
EM4PBFAN14.....	91, 95	EPBN21240.....	70, 152	NITD6.....	114
EM4PBFAN24.....	91, 95	EPBN21240SXB.....	67, 72, 152	NSD10.....	116
EM4PBFAN34.....	95	EPBN21240SXM.....	69, 73, 152	NSD16.....	116
EM4PBGMMN1N.....	91, 96	EPBN21263.....	74, 152	NSD2.....	116
EM4PBGMMN2N.....	91, 95	EPBN21263SXB.....	75, 80, 152	NSD20.....	116
EM4PBGMMN3N.....	95	EPBN21263SXM.....	77, 81, 152	NSD20M25.....	116
EM4PBGMBP.....	92, 96	EPBN21840.....	70, 152	NSD20M32.....	116
EM4PBSPD34.....	98	EPBN21840SXB.....	72, 152	NSD25.....	116
EM4PBSPD1234.....	98	EPBN21840SXM.....	73, 152	NSD32.....	116
EM4PB100PL.....	98	EPBN21863.....	74, 152	NSD32M40.....	116
EM4PB100PLCX.....	98	EPBN21863SXB.....	75, 80, 152	NSD32M50.....	116
EM4PBLE.....	98	EPBN21863SXM.....	77, 81, 152	NSD32M63.....	116
EM4PBVT.....	99	EPBN2640.....	70, 152	NSD4.....	116
EM4PBCTMT160.....	99	EPBN2640SXB.....	67, 72, 152	NSD6.....	116
EM4PBCTMT250.....	99	EPBN2640SXM.....	69, 73, 152	N2-250-KCO.....	62
EM4PBCTMT400.....	99	EPBN2863.....	74, 152	N2-4-250-KCO.....	62
EM4PB250EXDIN.....	98	EPBN28P3.....	71, 75, 79	N3-400.....	66, 70, 90
EM4PBKEL404.....	98	EPBN2CX250.....	68, 72, 76, 80, 152	N3-4-400.....	66, 70, 90
EM4PBKEL804.....	98	EPBN2EX250.....	68, 72, 152	NLW-4-800.....	78, 94
EM4PBLSC.....	98	EPBN2EX250M.....	68, 72, 152	NLW-630.....	74, 94
EMC3P-P2P1.....	82, 84	EPBN2EXDIN.....	68, 72, 152	NLW-800.....	78, 94
EPBCTMT160.....	65, 69, 73, 77, 81	EPBN31280.....	78, 152	NZM1-1-XKSA.....	63, 67, 71, 75, 79
EPBCTMT250.....	69, 73, 77, 81	EPBN3880.....	78, 152	NZM1-XKSA.....	63, 67, 71, 75, 79
EPBCTMT3P.....	65, 69, 73, 77, 81, 99	EPBN3BP3.....	79	NZM1-1-XIPK.....	92, 96
EPBCTMT400.....	81	EPBN3EX250.....	76, 80, 152	NZM1-XIPK.....	92, 96
EPBCTMT400.....	81	EPBN3EX250M.....	76, 80, 152	NZM1-4-XIPK.....	92, 96
EPBDLK1.....	63, 67, 71	EPBN3EXDIN.....	76, 80, 152	NZM2-XIPK.....	92, 96
EPBKEL250.....	65	EPBN3LKKT.....	65, 69, 73, 77, 81, 99	NZM2-4-XIPK.....	92, 96
EPBKEL400.....	69, 73	EPBN3LKRJ45.....	65, 69, 73, 77, 81, 99	NZM2-XKSA.....	71, 75, 79
EPBKEL800.....	77, 81	EPBN3SUPM.....	68, 69, 72, 73, 76, 77, 80, 81	NZM3-XIPK.....	96
EPBKN1253.....	63	EPBPN11225.....	87	NZM3-4-XIPK.....	96
EPBKN1253M.....	63	EPBPN11240.....	87, 155	NZMB1-1-AF100.....	63, 67, 71, 75, 79, 91, 96
EPBKN1254.....	63	EPBPN1425.....	87, 155	NZMB1-1-AF125.....	63, 67, 71, 75, 79, 91, 96
EPBKN1254M.....	63	EPBPN1625.....	87, 155	NZMB1-1-AF16.....	63, 67, 71, 75, 79, 91, 96
EPBKN125L.....	63	EPBPN1640.....	87, 155	NZMB1-1-AF20.....	63, 67, 71, 75, 79, 91, 96
EPBKN125LM.....	63	EPBPN1825.....	87, 155	NZMB1-1-AF32.....	63, 67, 71, 75, 79, 91, 96
EPBKN2403.....	67, 71	EPBPN21240.....	87, 155	NZMB1-1-AF40.....	63, 67, 71, 75, 79, 91, 96
EPBKN2403M.....	67, 71	EPBPN21263.....	87, 156	NZMB1-1-AF50.....	63, 67, 71, 75, 79, 91, 96
EPBKN2404.....	67, 71	EPBPN21840.....	87, 155	NZMB1-1-AF63.....	63, 67, 71, 75, 79, 91, 96
EPBKN2404M.....	67, 71	EPBPN21863.....	87, 156	NZMB1-1-AF80.....	63, 67, 71, 75, 79, 91, 96
EPBKN240L.....	67, 71	EPBPN2640.....	87, 155	NZMB1-A100.....	63, 67, 71, 75, 79
EPBKN240LM.....	67, 71	EPBPN2863.....	87, 156	NZMB1-A125.....	63, 67, 71, 75, 79
EPBKN2633.....	74	EPBPN31280.....	87, 156	NZMB1-A160.....	63, 67, 71, 75, 79
EPBKN2633M.....	74	EPBPN3880.....	87, 156	NZMB1-A20.....	63, 67, 71, 75, 79
EPBKN2634.....	74	EPBSXBCTMT.....	65, 69, 73, 77, 81	NZMB1-A32.....	63, 67, 71, 75, 79
EPBKN2634M.....	74	ETM2209SP.....	112	NZMB1-A40.....	63, 67, 71, 75, 79
EPBKN263L.....	74	ETM2210SP.....	112	NZMB1-A50.....	63, 67, 71, 75, 79

# Indices

## Eaton list number index

NZMB1-A63 .....	63, 67, 71, 75, 79	NZMN2-A160KCO .....	62	PFR-003 .....	59
NZMB1-A80 .....	63, 67, 71, 75, 79	NZMN2-A200-BT .....	71, 75, 79, 91, 95	PFR-03 .....	59
NZMC1-A100 .....	71, 75, 79	NZMN2-VE100-BT .....	71, 75, 79	PFR-5 .....	59
NZMC1-A125 .....	63, 67, 71, 75, 79	NZMN2-VE160-BT .....	71, 75, 79	PFR-W-105 .....	59
NZMC1-A160 .....	71, 75, 79	NZMN2-VE250-BT .....	71, 75, 79	PFR-W-140 .....	59
NZMC1-A20 .....	71, 75, 79	NZMN2-A200KCO .....	62	PFR-W-20 .....	59
NZMC1-A32 .....	71, 75, 79	NZMN2-A250-BT .....	71, 75, 79, 91, 95	PFR-W-210 .....	59
NZMC1-A40 .....	71, 75, 79	NZMN2-A250KCO .....	62	PFR-W-30 .....	59
NZMC1-A50 .....	71, 75, 79	NZMN3-4-A250 .....	66, 70, 90, 95	PFR-W-35 .....	59
NZMC1-A63 .....	71, 75, 79	NZMN3-4-A320 .....	66, 70, 90, 95	PFR-W-70 .....	59
NZMC1-A80 .....	71, 75, 79	NZMN3-4-A400 .....	66, 70, 90, 95	SSD10 .....	118
NZMC2-4-A160-KCO .....	62	NZMN3-A250 .....	66, 70, 79, 90, 95	SSD16 .....	118
NZMC2-4-A200-KCO .....	62	NZMN3-VE400-BT .....	79	SSD2 .....	118
NZMC2-4-A250-KCO .....	62	NZMN3-A320 .....	66, 70, 90, 95	SSD20 .....	118
NZMC2-A125-BT .....	71, 75, 79	NZMN3-A400 .....	66, 70, 90, 95	SSD25 .....	118
NZMC2-A160-BT .....	71, 75, 79	OBK103SP .....	105	SSD32 .....	118
NZMC2-A160-KCO .....	62	OLV725SP .....	109	SSD4 .....	118
NZMC2-A200-BT .....	71, 75, 79	OLV726SP .....	109	SSD6 .....	118
NZMC2-A200-KCO .....	62	OLV727SP .....	109	STD10 .....	118
NZMC2-A250-BT .....	71, 75, 79	OLV728SP .....	109	STD16 .....	118
NZMC2-A250-KCO .....	62	ODD125 .....	114	STD2 .....	118
NZMLW-4-A630 .....	74	ODD160 .....	114	STD20 .....	118
NZMLW-4-A800 .....	78	ODD200 .....	114	STD32 .....	118
NZMLW-A630 .....	74	OSD100 .....	114	STD4 .....	118
NZMLW-A800 .....	78	OSD100M125 .....	114	STD6 .....	118
NZMN2-4-A160-KCO .....	62	OSD100M160 .....	114	#SH265SP .....	109
NZMN2-4-A200-KCO .....	62	OSD80 .....	114	#SH754SP .....	109
NZMN2-4-A250-KCO .....	62	PD1 .....	30, 36, 37, 105, 111	SNT4LP11K .....	75, 79
NZMN2-A125-BT .....	71, 75, 79, 91, 95	PD2 .....	30, 36, 47	TR-G3/8 .....	59
NZMN2-A160-BT .....	71, 75, 79, 91, 95	PD4 .....	109	UVH4LP11K .....	75, 79

[illegible]



[illegible]

[illegible]

At Eaton, we're energised by the challenge of powering a world that demands more. With over 100 years experience in electrical power management, we have the expertise to see beyond today. From groundbreaking products to turnkey design and engineering services, critical industries around the globe count on Eaton.

We power businesses with reliable, efficient and safe electrical power management solutions. Combined with our personal service, support and bold thinking, we are answering tomorrow's needs today. Follow the charge with Eaton.

Visit **[eaton.com/PDDUK](https://eaton.com/PDDUK)**

**Eaton Electric Limited**

252 Bath Road  
Slough  
Berkshire SL1 4DX  
United Kingdom  
Customer Support Centre  
Tel: +44 (0)8700 545 333  
Fax: +44 (0)8700 540 333  
email: [ukcommorders@eaton.com](mailto:ukcommorders@eaton.com)

© 2020 Eaton  
All Rights Reserved  
Printed in UK  
Publication No. CA014013EN  
Article number 195167-MK  
EAN Code 9010238060326  
September 2020



*Powering Business Worldwide*

[www.eaton.uk.com/electrical](https://www.eaton.uk.com/electrical)