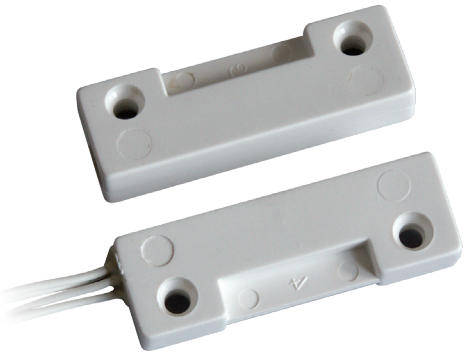



EN50131-2-6 GR2 CL III

- Complies with EN50131-2-6
- Surface mounting
- Suitable for aluminium, wood and PVC doors and windows
- Wire connection
- With anti-tampering wire loop
- Good quality/price level

Series 403

Housing material	Thermoplastic, white
Operation	Reed contact with NC output with near magnet or changeover reed contact
Type of connection	Wires (2 for contact - 3 for changeover contact + 2 for anti-tampering)
Operating temperature	-25°C to +50°C
Protection rating	IP 65
Standard equipment	Anti-tampering wires

Dimensions

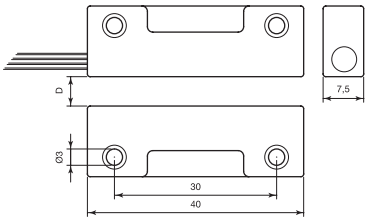

Series 403

Thermoplastic magnetic contact

Thermoplastic magnetic contact for surface mounting with good quality/price ratio.
Suitable to be mounted on aluminium, wood and PVC doors and windows, and in general, on all non-ferromagnetic material (iron frames will significantly reduce operating distance).

The reed section contains a tightly sealed reed with polyurethane resin and anti-tampering loop to reduce any risk of intrusion.

Connection uses 4 wires (2 wires for NC contact with near magnet and 2 wires for anti-tampering) or 5 wires with changeover reed (3 wires for reed bulb contacts + 2 wires for anti-tampering). It is fixed to the frame using screws.

Order codes

Code	D max (no iron)	Connection type	Max voltage	Max current	Max power	N° wires	Cable length	Safety grade	Environmental class	Package weight	Notes
403-TF	15 mm	NC*	42.4 Vpeak - 60 V DC	1 A	10 W	4	0.3 m	2	III	0.14 Kg	
403-TF-4	15 mm	NC*	42.4 Vpeak - 60 V DC	1 A	10 W	4	4.0 m	2	III	0.92 Kg	sheathed cable
403-STF	9 mm	changeover	42.4 Vpeak - 60 V DC	300 mA	3 W	5	0.3 m	2	III	0.15 Kg	

"Safety grade" and "Environmental Class" as per European Standard EN 50131-1
D max: maximum installation distance. For other operating distances, see the instructions sheet at www.coopercsa.it
* With near magnet