



modello:  
model: **COB LED**

codice:  
code: **0107**

design: **UT EgoLuce**

anno - year: **2016**

tipologia:  
typology: **COB LED**

materiali:  
materials: **alluminio  
aluminium**

luce:  
light: **LED diretta  
LED direct**

sorgente luminosa:  
light source:

| LED code | optic degree    |                  | lm     | LED color |
|----------|-----------------|------------------|--------|-----------|
| 0107/XW  | /24 /40 /60 /ST | 6,1W 17,3V 350mA | 896lm  | 2700K     |
| 0107/WW  | /24 /40 /60 /ST | 6,1W 17,3V 350mA | 939lm  | 3000K     |
| 0107/W   | /24 /40 /60 /ST | 6,1W 17,3V 350mA | 975lm  | 4000K     |
| 0107/CW  | /24 /40 /60 /ST | 6,1W 17,3V 350mA | 1066lm | 5000K     |


grado IP - IP grade: **20**

peso netto - net weight: **0,30 Kg**

marcatatura:  
marking: **CE**

simboli costruttivi:  
symbols: **III**

## Dimensioni - Dimensions

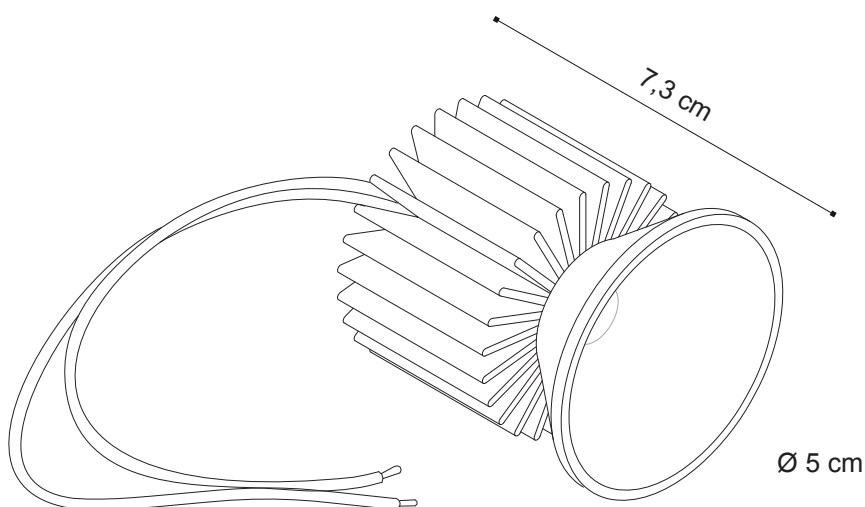

EGOLUCE s.r.l, via I.Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: [info@egoluce.com](mailto:info@egoluce.com) - <http://www.egoluce.com>

## LED DRIVERS in corrente continua. LED DRIVERS constant current.

### 0125

#### LED driver

IN: 100 - 240V  
OUT: 350 mA  
1 COB LED - art.0107



6 x 3,5 x 2 cm




4 cm. SELV KEMA KEUR

### 0128

#### LED driver

IN: 100 - 240V  
OUT: 350 mA  
1-2 COB LED - art.0107



11,6 x 3,4 x 2 cm




4 cm. SELV CLASS 2

### 0136/15

#### LED driver

IN: 100 - 240V  
OUT: 350 mA  
1-2 COB LED - art.0107



15,8 x 2,2 x 2 cm




3,2 cm. SELV


### 0169/50

#### Multipower LED driver

IN: 220 - 240V  
OUT: 350mA  
1-3 COB LED - art.0107



13 x 7,5 x 3 cm




## DRIVERS DIMMERABILI in corrente continua. DIMMABLE LED DRIVERS constant current.

### 0129 Dimmer Led

#### Multipower dimmable driver

IN: 110 - 240V  
OUT: 350 mA, 1-2 COB LED (art.0107)



10,5 x 7 x 2,2 cm




7,2 cm. SELV PUSH 1...10 V

### 0129/DALI Dimmer Led

#### Multipower dimmable driver

IN: 110 - 240V  
OUT: 350 mA, 1-2 COB LED (art.0107)



10,5 x 7 x 2,2 cm




7,2 cm. SELV DALI

### 0141/DALI

#### LED driver

IN: 110 - 240V  
OUT: 350 mA, 1-2 COB LED (art.0107)



11,1 x 5,2 x 2,5 cm




5,5 cm. DALI

### 0141/DIM

#### LED driver

IN: 110 - 240V  
OUT: 350 mA, 1-2 COB LED (art.0107)



Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm



5,5 cm.

PUSH

1...10 V




CULUS

### 0145 Dimmer Led Maxi

#### Multipower dimmable driver

IN: 110 - 240V  
OUT: 350 mA, 1-3 COB LED (art.0107)



12,3 x 8 x 2,2 cm



8,4 cm.

PUSH

1...10 V




CULUS

### 0145/DALI Dimmer Led Maxi

#### Multipower dimmable driver

IN: 110 - 240V  
OUT: 350 mA, 1-3 COB LED (art.0107)



12,3 x 8 x 2,2 cm



8,4 cm.

DALI

PUSH

1...10 V



CULUS

### 0133

Cavo di sincronizzazione per dimmer Led  
Synchronization cable for dimmer Led  
(art. 0129 - art. 0129DALI - art. 0145 - art. 0145DALI)




Lunghezza: 150cm.

### 0726/DIM

#### LED dimmer

TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
IN: 220 - 240V  
OUT: 24V - 20W  
350 mA, 1-2 COB LED (art.0107)



16,5 x 4,5 x 3,5 cm

PUSH

IGBT-TRIAC



SELV




5,6 cm.

### 0733/DIM

#### LED dimmer

Alimentatori elettronici dimmerabili (IGBT-TRIAC) in corrente continua  
Direct current dimmable (TRAILING EDGE-LEADING EDGE) electronic drivers

IN: 220 - 240V  
OUT: 350 mA, 1 COB LED (art.0107)



8,7 x 3,8 x 2,1 cm

IGBT-TRIAC



SELV




4,2 cm.

## IP LED DRIVERS in corrente continua. IP LED DRIVERS constant current.

### 0031/IP

#### LED driver

IN: 220 - 240V  
OUT: 350 mA  
1-2 COB LED - art.0107



3,9 x 8 x 2 cm



4,2 cm.

IP67 SELV



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, i disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l. via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com