



modello:
model:

COB LED

codice:
code:

0108

design:

UT Egoluce

anno - year:

2016

tipologia:

COB LED

tipology:

materiali:

alluminio

materials:

aluminium

luce:

LED diretta

light:

LED direct

sorgente luminosa:
light source:

LED code	optic degree		lm	LED color
0108/XW	/24 /40 /60 /ST	8,9W 17,8V 500mA	1244lm	2700K
0108/WW	/24 /40 /60 /ST	8,9W 17,8V 500mA	1303lm	3000K
0108/W	/24 /40 /60 /ST	8,9W 17,8V 500mA	1353lm	4000K
0108/CW	/24 /40 /60 /ST	8,9W 17,8V 500mA	1480lm	5000K

grado IP - IP grade:

20

peso netto - net weight:

0,50 Kg


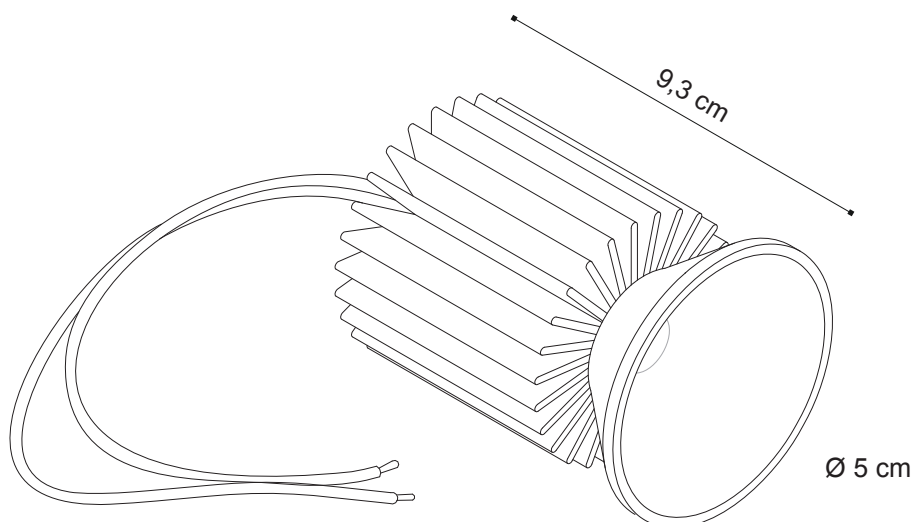
marcatura:
marking:



simboli costruttivi:
symbols:



Dimensioni - Dimensions




La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi i, disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l, via I.Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - <http://www.egoluce.com>

drivers


2/2

LED DRIVERS in corrente continua.
LED DRIVERS constant current.**0127****LED driver**
IN: 100 - 240V
1 COB LED (art. 0108)


11,6 x 3,4 x 2 cm




SELV CLASS 2

0147/COB**LED driver**
IN: 220 - 240V
OUT: 500 mA
1-2 COB LED (art. 0108)


12,5 x 3,8 x 2,4 cm

**0149/COB****LED driver**
IN: 220 - 240V
OUT: 500 mA
1 COB LED (art. 0108)


7,6 x 3,9 x 2,2 cm

**0169/50****Multipower LED driver**IN: 220 - 240V
OUT: 500mA
1-3 COB LED (art. 0108)


13 x 7,5 x 3 cm

**DRIVERS DIMMERABILI** in corrente continua.
DIMMABLE LED DRIVERS constant current.**0129 Dimmer Led****Multipower dimmable driver**IN: 110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)

10,5 x 7 x 2,2 cm

**0129/DALI Dimmer Led****Multipower dimmable driver** IN:
110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)


10,5 x 7 x 2,2 cm

**0141/DALI****LED driver**IN: 110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)


11,1 x 5,2 x 2,5 cm

**0141/DIM****LED driver**IN: 110 - 240V
OUT: 500 mA



1-2 COB LED (art. 0108)

**Versione PUSH non sincronizzabile - PUSH version not synchronizable**

11,1 x 5,2 x 2,5 cm

**0145 Dimmer Led Maxi****Multipower dimmable driver**IN: 110 - 240V
OUT: 500 mA
1-3 COB LED (art. 0108)

12,3 x 8 x 2,2 cm

**0145/DALI Dimmer Led Maxi****Multipower dimmable driver**IN: 110 - 240V
OUT: 500 mA
1-3 COB LED (art. 0108)

12,3 x 8 x 2,2 cm

**0133**

Cavo di sincronizzazione per dimmer Led


Sincronization cable for dimmer Led
(art. 0129 - art. 0129DALI - art. 0145 - art. 0145DALI)

Lunghezza: 150cm.


0726/DIM**LED dimmer**TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)IN: 220 - 240V
OUT: 24V - 20W

500 mA,


1-2 COB LED (art. 0108)



16,5 x 4,5 x 3,5 cm

**0734/DIM****LED dimmer**Alimentatori elettronici dimmerabili (IGBT-TRIAC) in corrente continua
Direct current dimmable (TRAILING EDGE-LEADING EDGE) electronic driversIN: 220 - 240V
OUT: 500 mA,
1 COB LED (art. 0108)

8,7 x 3,8 x 2,1 cm

**IP LED DRIVERS** in corrente continua.
IP LED DRIVERS constant current.**0143/IP****LED driver**IN: 220 - 240V
OUT: 500 mA
1 COB LED (art. 0108)

8,2 x 3,9 x 2 cm



IP 65



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, i disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l. via I. Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com