
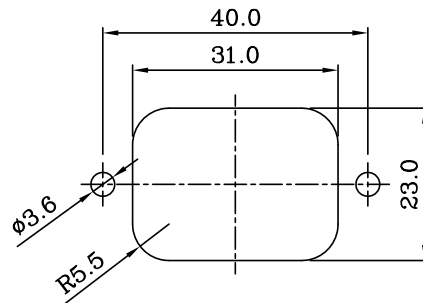
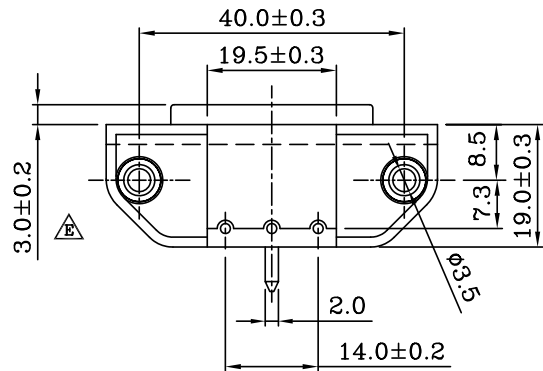
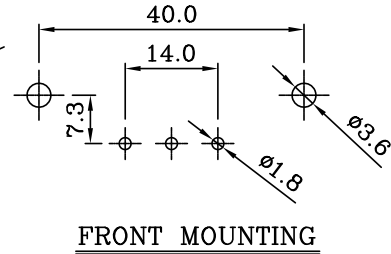
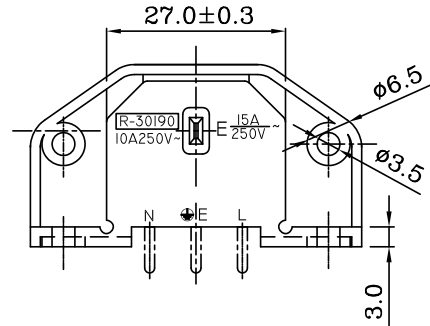
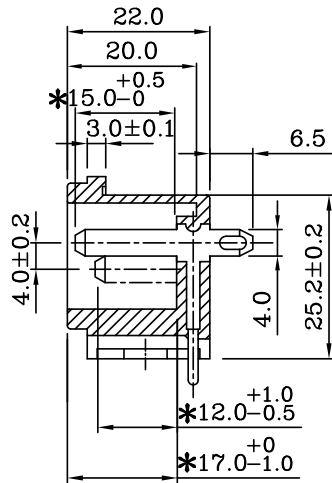


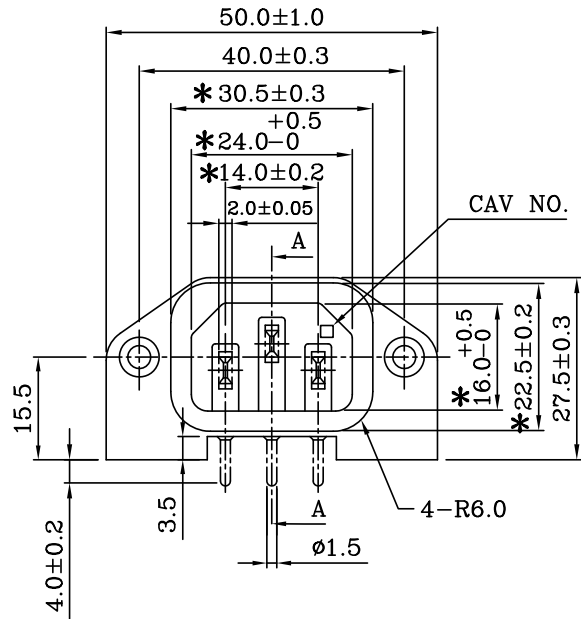

- SPECIFICATION:
1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
 2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
 3. Body Material: Black Glass-Fiber Thermoplastic . UL 94V-0~2

Rating:AC 15A 250V	
Mark	Safety Regulation
RU	UL
cRU	CUL
Rating:AC 10A 250V	
Mark	Safety Regulation
VD	VDE
CCC	CCC
ENEC	ENEC

		UNIT	UNIT	Q'TY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.		REV
		mm		1	1:1					
	DRAWN BY		APPROVED BY			ID NO	20050703Q	INTERIM NO.		E
						DESCRIPTION		NEW NO.		

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY Tel. +39 02.25117310 Fax +39 02.25117610
sito internet: www.elcart.com e-mail: tecnico@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.
La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.