



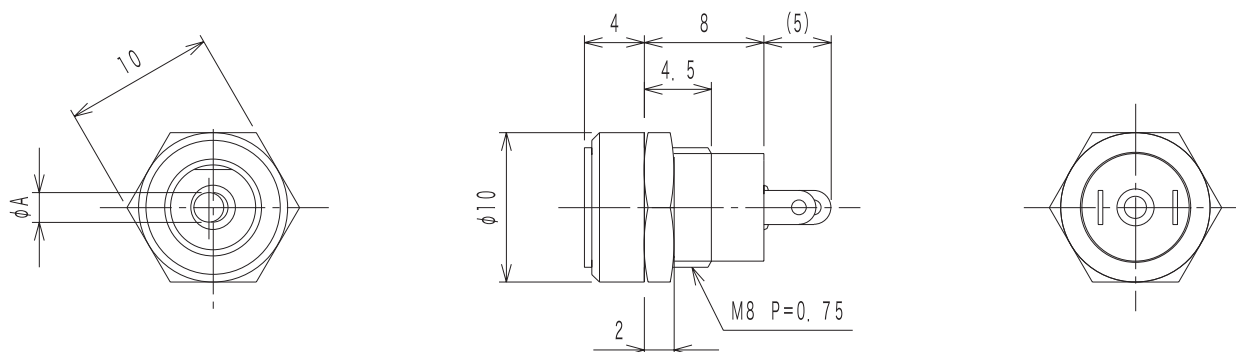


SPECIFICATION

- Rating: **04/02528** =DC12V 0.5A
04/02529 =DC12V 1A
- Insulation resistance:
DC500V/100MΩMIN.
- Withstand voltage:
AC500V 1minute.
- Contact resistance:
30mΩMAX
- This product is corresponding to RoHS.

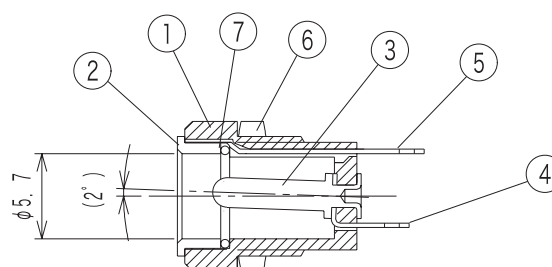

CIRCUIT



	A	MATE PLUG
04/02528	φ2.0	φ5.5 X φ2.1
04/02529	φ2.35	φ5.5 X φ2.5

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	CONTACT	PBW	1	Ni		±0.3	2/1	06/7/4	K. S	N. I		M. K
6	NUT	STEEL	1	Ni								
5	TERMINAL B	BSR t=0.3	1	Ni		MODEL		QTY	PART NAME			
4	TERMINAL A	BSR t=0.3	1	Ni								
3	PIN	BSBM	1	Ni		MATERIAL				DRAW. NO		
2	RING	BSBM	1	Ni								
1	BODY	PA	1			FINISH						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE							



Made in Japan

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
 Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: info@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
 The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to thr performances and the usa of the product.
 La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.