


SPECIFICATION

DIELECTRIC STRENGTH: 500V AC FOR ONE MINUTE.

CONTACT RESISTANCE: 50mΩ MAX

INSULATION RESISTANCE: 100MΩ MIN. AT 500VDC.

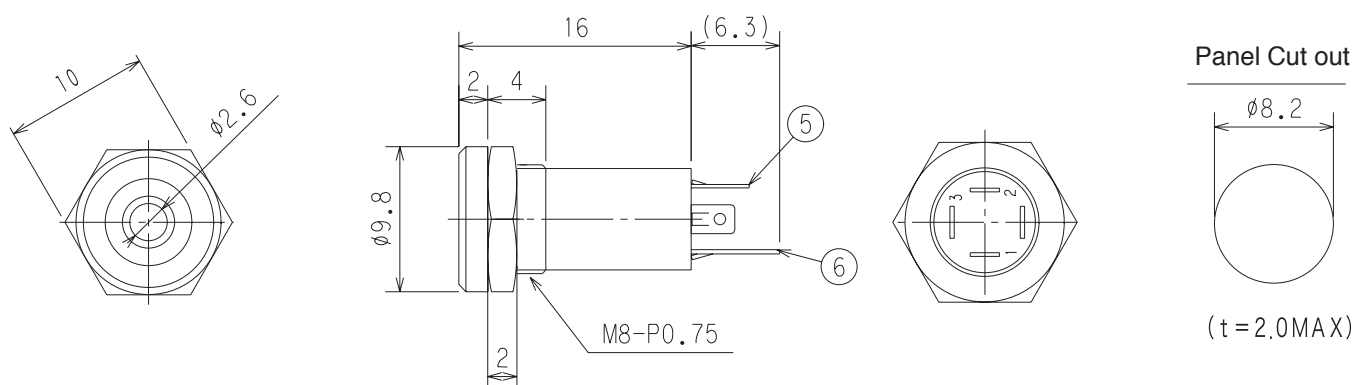

8	HEX NUT	STEEL	1	Ni		TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
7	INSULATION TUBE	PVC	1			±0.3	2/1	14/12/15	K. S	N. I		M. K
6	CONTACT D	BRASS t=0.3	1	Ni		MODEL		QTY				
5	CONTACT C	PBS t=0.25	1	Ni		MATERIAL				DRAW. NO		
4	CONTACT B	PBS t=0.25	1	Au								
3	CONTACT A	PBS t=0.25	1	Ni								
2	SLEEVE	BRASS	1	Ni								
1	HOUSING	PA	1			FINISH						
LET	PARTNAME	MATERIAL	QTY	FINISH	NOTE							



Made in Japan

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
 Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: info@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
 The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to thr performances and the usa of the product.
 La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.