


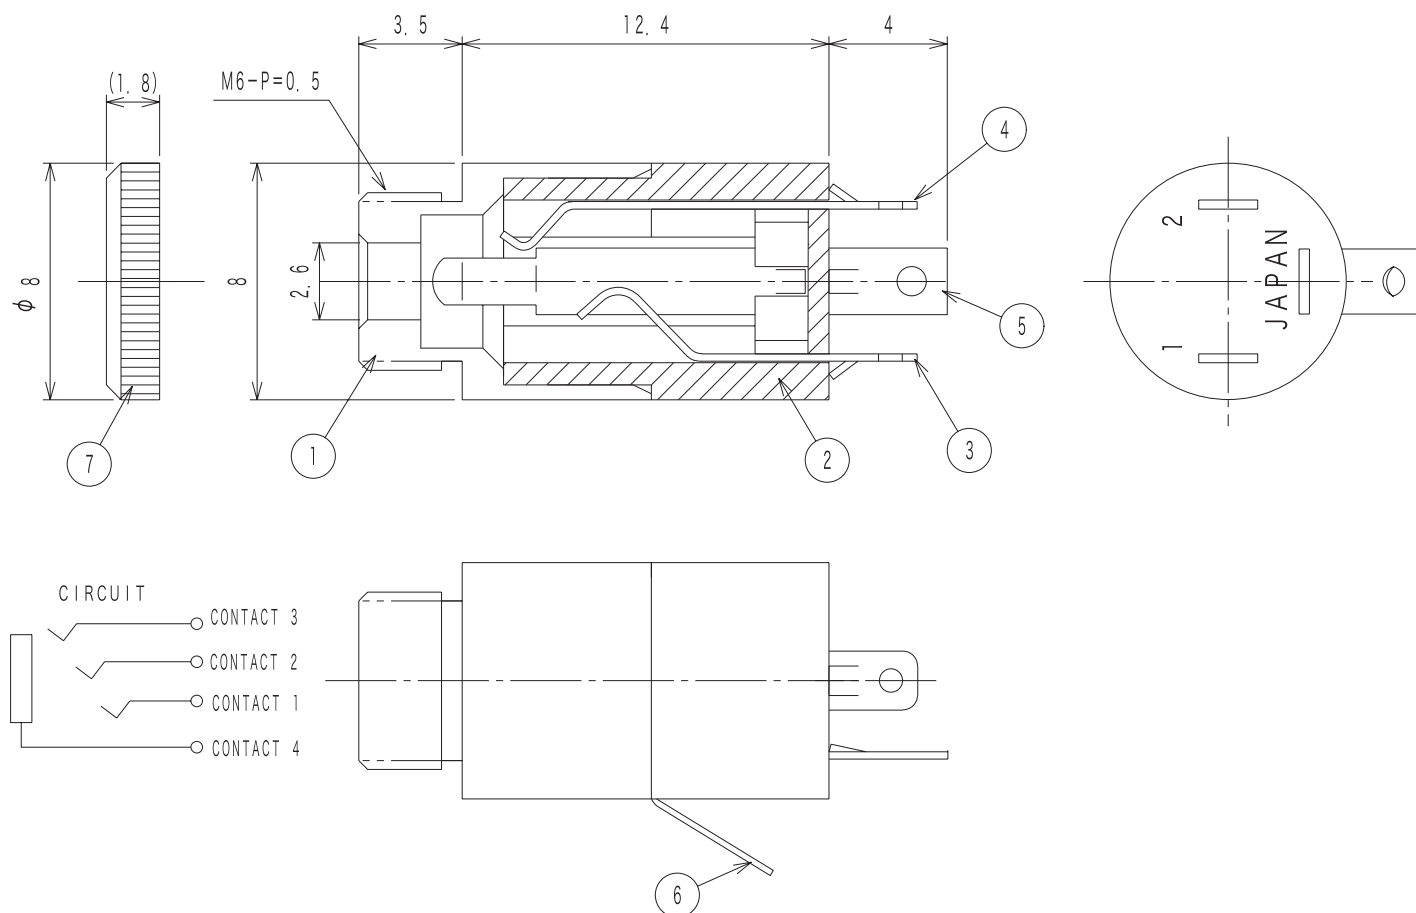

SPECIFICATION

DIELECTRIC STRENGTH: 500V AC FOR 1MINUTE

INSULATION RESISTANCE: 100MΩ MIN/500VDC

CONTACT RESISTANCE: 50mΩ MAX.

						TOLERANCE	SCALE	DATE		DESIG	DRAW	INSPE	APRO
7	NUT	BSBM	1	Ni		±0.3	4/1	02/05/08	K. S	N. I			
6	CONTACT 4	BSR t=0.2	1	Ni									
5	CONTACT 3	PBS t=0.25	1	Ni		MODEL		QTY	PARTNAME	ø2.5 4-CON JACK			
4	CONTACT 2	PBS t=0.25	1	Au									
3	CONTACT 1	PBS t=0.25	1	Ni		MATERIAL				DRAW. NO			
2	BODY	PBT-G30%	1										
1	METAL	BSBM	1	Ni		FINISH							
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE								



Made in Japan

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
 Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: info@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
 The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to thr performances and the usa of the product.
 La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.