


Miniature Rocker and Lever handle Switch

RLS-102-A2T


(Specification)

1. (Rating):6A 125V AC; 3A 250V AC
2. (Contact R):20m Ω max
3. (Insulation R):500V DC 1000M Ω min
4. (Dielectric Strength):1 Minute 1500V AC
5. (Operating Temperature):-25 $^{\circ}$ C~+85 $^{\circ}$ C
6. (Electrical Life):10, 000 Cycles

(Outline Drawing)

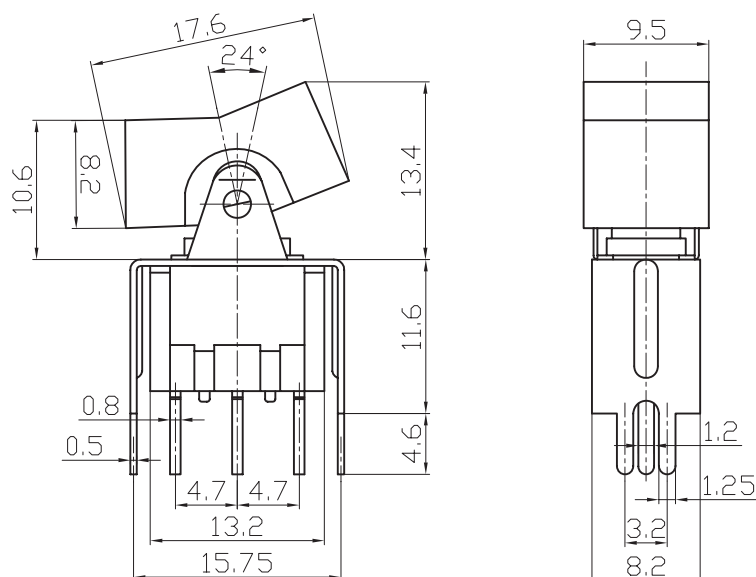

(Mounting)



(Circuitry)

