



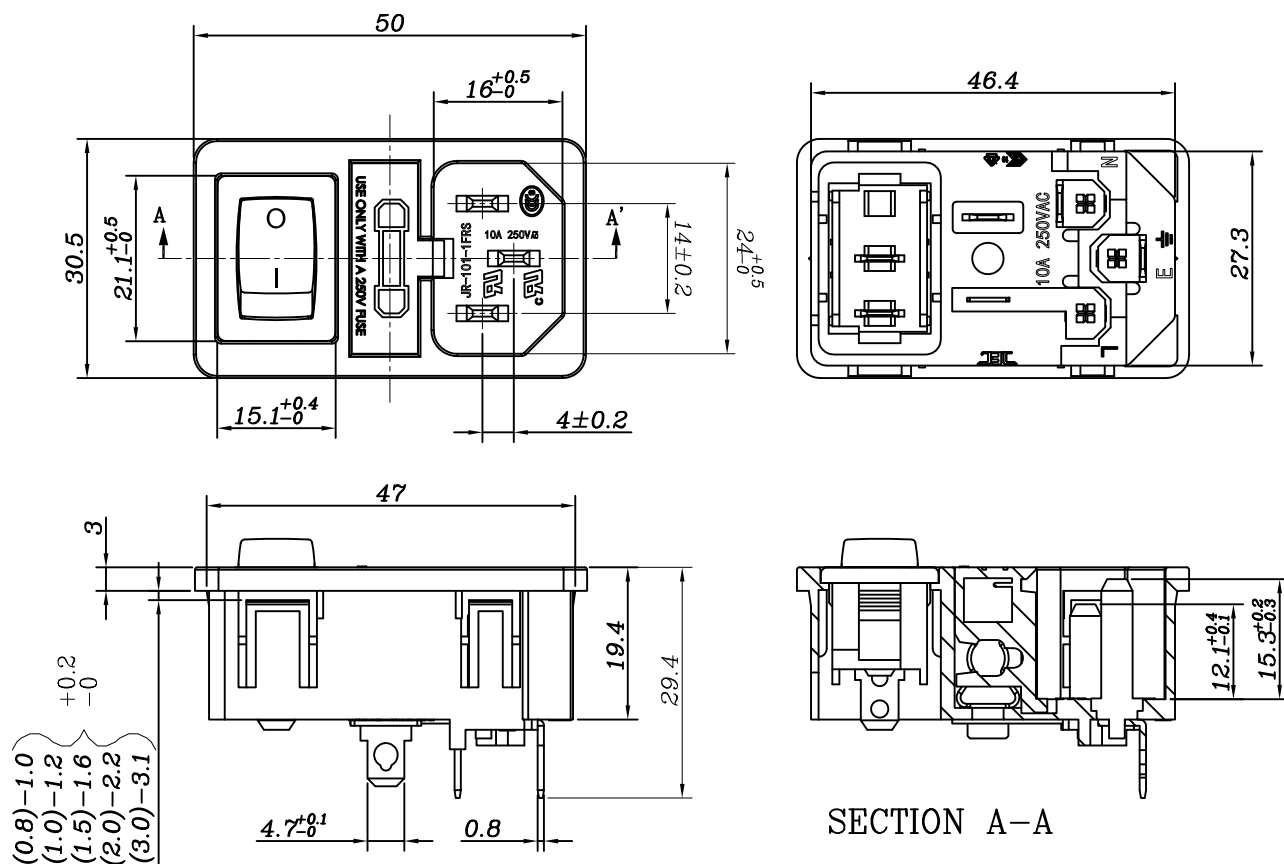


SPECIFICATIONS

1. **RATING** : 10A 250VAC
2. **WITHSTAND VOLTAGE** : AC 2000V 1 Min.
3. **INSULATION RESISTANCE** : MORE THAN 100M
(at DC 500V)
4. **OPERATING TEMPERATURE** : -25° C TO +85° C (MAX)
5. **SOLDERING 280°C FOR 3 Sec .**

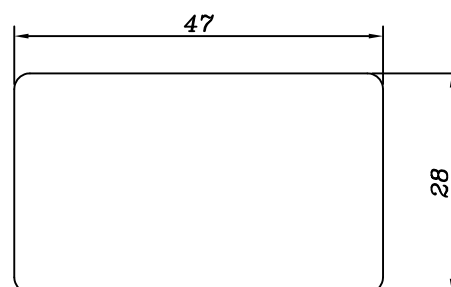

PANEL CUT-OUT

6.SAFETY					C		  		
8	Connector				1	Bsp1-1/2H	t=0.8	Ni-Plated	
7	Fuse Holder				1	Bsp1-1/2H	t=0.8	Sn-Plated	
6	Fuse Holder(Short)				1	Bsp1-1/2H	t=0.5	Ni-Plated	
5	Connection Terminal				2	Bsp1-1/2H	t=0.8	Sn-Plated	
4	Fuse cover				1	Nylon #66	94V-2		
3	Conter Terminal				1	Bsp1-1/2H	t=2.0	Ni-Plated	
2	Edge Terminal				2	Bsp1-1/2H	t=2.0	Ni-Plated	
1	Body				1	Nylon #66	94V-2		
									
						A101-000		1 : 1	mm