


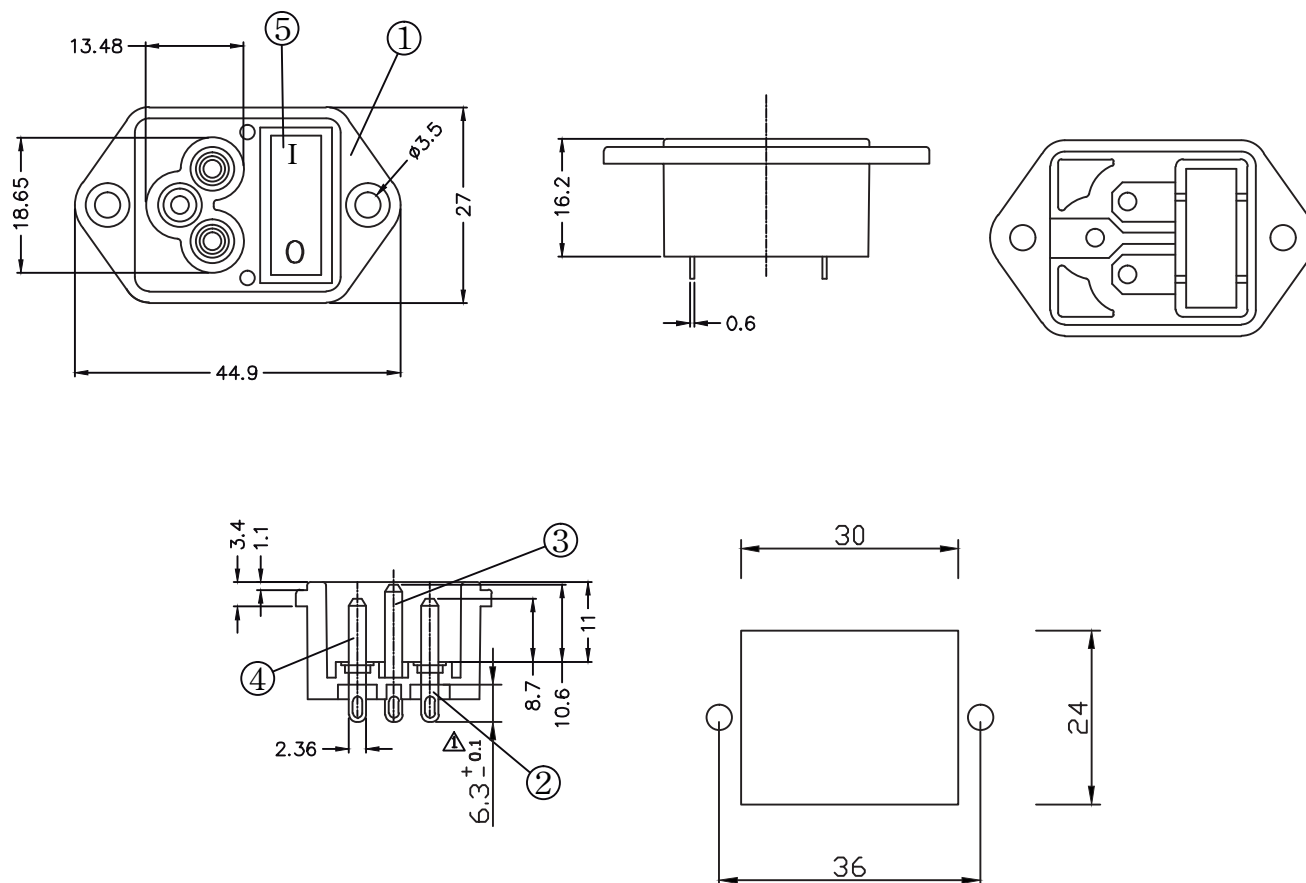

SPECIFICATIONS

1. **RATING** : 2.5A 250VAC
2. **INSULATION RESISTANCE** DC 500V 100MΩ Min .
3. **Dielectric Strength:** AC200V 1Minute.
4. **OPERATING TEMPERATURE** : -25° C TO +85° C (MAX)

5. SOLDERING

6. **Forces Necessary to and to Withdraw The Connector:** 1Kg~5Kg

7. **SAFETY** :     

5	SWITCH	1				
4	Mandrel	2	Bsp1-1/2H	ø2.35	Tin-Plated	Q201-02A
3	Mandrel	1	Bsp1-1/2H	ø3.15	Tin-Plated	Q307-03A
2	Terminal	3	Bsp1-1/2H	t=0.6	Sn-Plated	Q307-02E
1	BODY	1	Nylon#66	94V-2		Q307-01D