

cudy

cudy

Distributed by  ELCART

ART. 42/98532-00

4G LTE CAT 6 Wi-Fi Router

Model: LT700




4G LTE-A
Cat.6

Compatible with 802.11ac/a/b/g/n
AC1200

 WHOLE HOME
MESH

[Datasheet](#)

Lightning-fast 4G LTE Cat.6 Connectivity

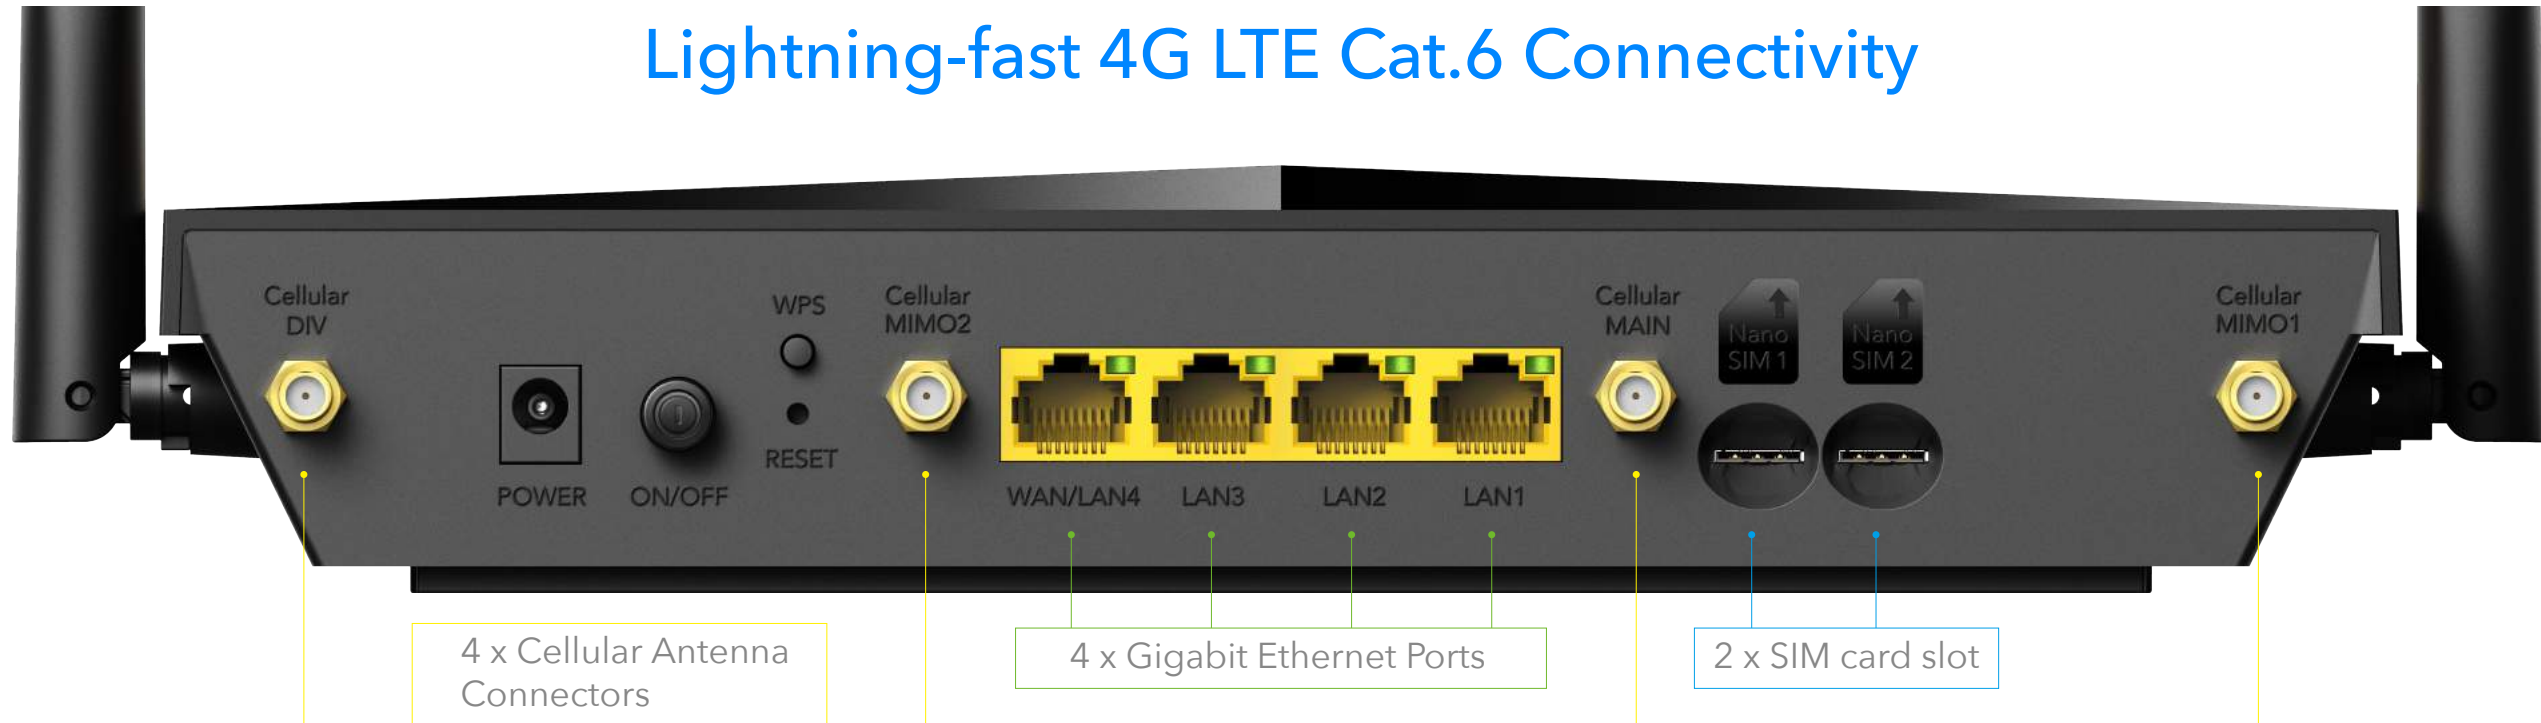

Cat.6

Lightning-fast 4G LTE Cat.6 Connectivity

AC1200

High speed Dual Band WiFi

WAN Internet
4G Backup



VPN

Built-in VPN Server and Client

Future-Proof Remote Management with


TR-069





Redundant SIM Slots

Dual SIM slots provide redundancy and keep the device always online. Both SIM slots can be filled, you can choose whether to use SIM card 1 or SIM card 2, or auto select by Cudy.

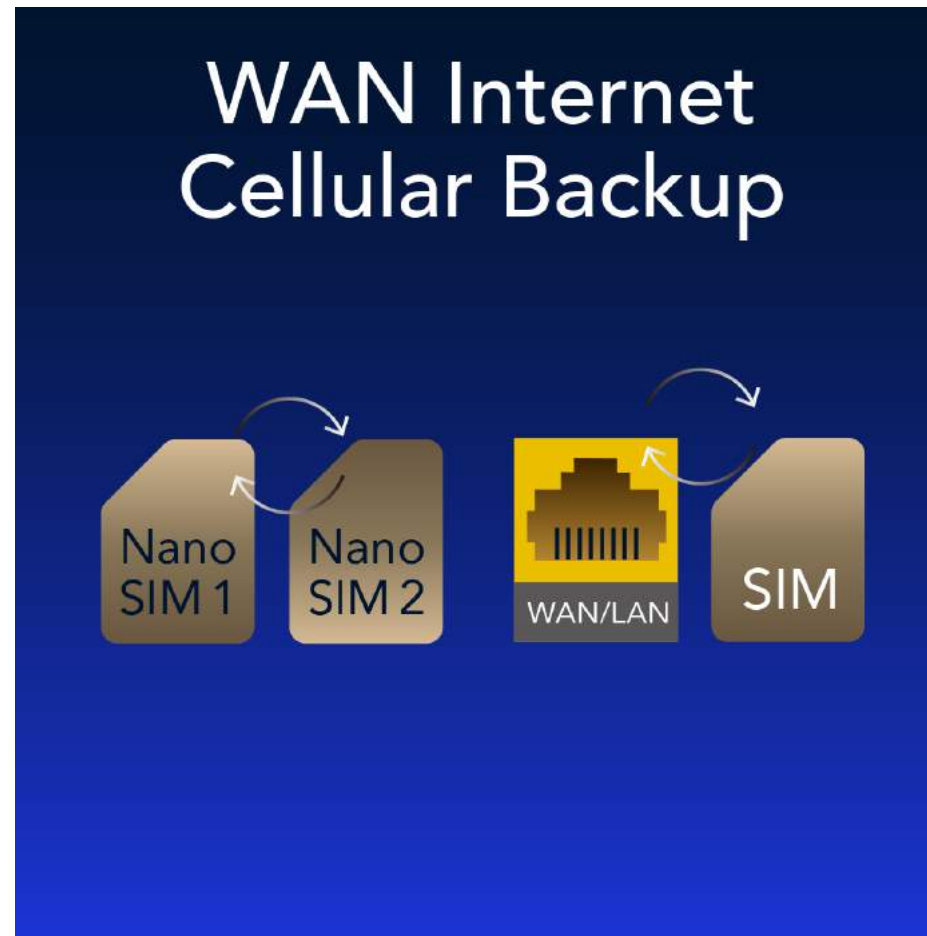

WAN Internet, Cellular Backup

Set WAN/LAN port as WAN to enable Cudy use the landline internet from WAN, and 4G connection works as a backup to provide a sustained and reliable internet connection for you.



External SMA Antenna connector

Combined with 4 detachable SMA Antenna interface to connect outdoor cellular antennas for better and stable signal.

Band Lock

Band Select




LTE Bands

- ☐ B1
- ☐ B3
- ☐ B5
- ☐ B7
- ☐ B8
- ☐ B20
- ☐ B28
- ☐ B32
- ☐ B38
- ☐ B40
- ☐ B41

Band Lock

4G band lock make it possible to lock the 4G working frequency to one or several bands to keep the stability of operation.


TTL Settings

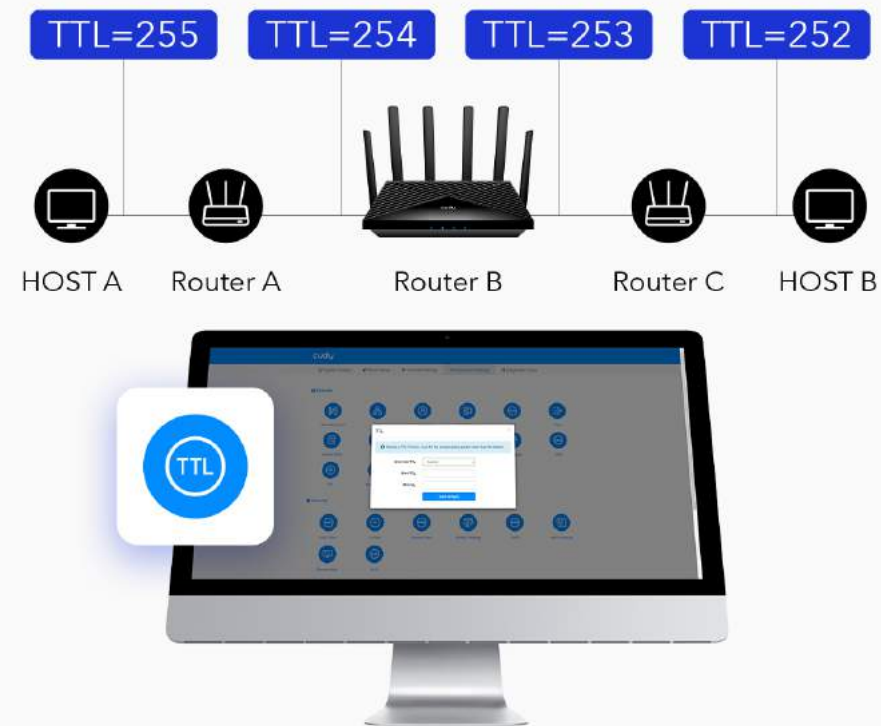

TTL Settings

Support manual set TTL values to meet ISP's requirement (such as Verizon, Visible). Support set IPv4 TTL and IPv6 HL Values.

DNS over TLS

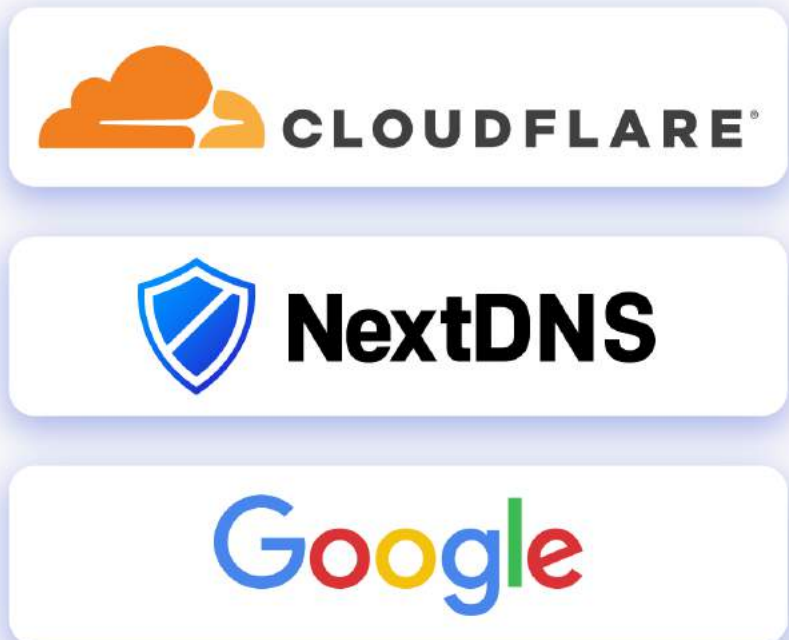

DNS over TLS

Support DNS Encryption with CloudFlare or NextDNS or Google, protects your privacy, prevents eavesdropping and manipulation of DNS data via man-in-the-middle attacks.



Specifications

- 4G LTE Cat.6 Modem Inside
- AC1200 Dual Band Wi-Fi
- 4 * Gigabit Ethernet Ports (WAN Failover)
- 4 * Detachable Cellular Antennas
- Dual Nano SIM Card Slots
- Built-in VPN Server and Client

Hardware

CPU	Mediatek Dual Core 880MHz
4G	EG060K-EA
DRAM	128MB (1Gbit) DDR3
Flash	16MB (128Mbit)
4 x GbE RJ45	1 GbE WAN/LAN + 3 GbE LAN
SIM card slot	2 x SIM Slots (Nano)
Button	1 x WPS Button
	1 x Reset Button
Antennas	2 x Fixed WiFi Antennas
	4 x Detachable Cellular Antennas
LED	LED indicators (Power, WiFi, Internet, Signal)



Distributed by ELCART

Data Speed

Wi-Fi	2.4GHz (802.11n/g/b, MIMO 300Mbps)
	5GHz (802.11ac/n/a, MIMO 867Mbps)
4G Module	FDD: Max 300Mbps (DL)/50Mbps (UL)
	TDD: Max 226Mbps (DL)/48Mbps (UL)
	Max 42 Mbps (DL)/11.5 Mbps (UL)
	Max 384Kbps (DL)/Max 384Kbps (UL)

Mobile Frequency Band

LTE Category	Cat 6
LTE Bands	LTE-FDD:B1/B3/B5/B7/B8/B20/B28/B32
	LTE-TDD: B38/B40/B41;
	Up to 2 × CA: B1+B1/B3/B5/B7/B8/B20/B28; B3+B3/B5/B7/B8/
	B20/B28; B7+B5/B7/B8/B20/B28; B20+B32;
	B38+B38; B40+B40; B41+B41
WCDMA Bands	B1/B3/B5/B8



Software

DHCP	Server, Client List, Address Reservation
NAT	Port Forwarding, Port Triggering, UPnP, DMZ
Firewall	Mac Filter, IP Filter, Domain Filter
Management	Parental Control, Guest Network, Access Control, Local Management, Remote Management, Wake on LAN
DDNS	Compatible with 15 more DDNS providers
VPN Sever & Client	PPTP/L2TP/OpenVPN/WireGuard/IPSec/Zerotier
DNS over TLS	Cloudflare/NextDNS/Google
Schedule	Schedule Reboot /Wi-Fi Schedule
Internet Protocol version	IPv4/IPv6
IPv6	Relay Dynamic(SLAAC/DHCPv6) Static (Fixed IP) Passthrough MAP-E (Dual-stack) DS-Lite (Dual-stack)
Quality of Service (QoS)	Support
IPTV / VLAN configuration	Support
TTL configuration	Support
Band Selection	Support
CWMP Protocol	TR069 / TR098 / TR111 / TR181

Datasheet 4G LTE CAT 6 Wi-Fi Router | LT700

Distribuito da:

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: tecnico@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.

The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.

La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.



Distributed by ELCART

Other

Physical	Product Dimension: 252.5x161x48.2mm (LxWxH) Package Dimension: 408x238x58mm (LxWxH)
Power	AC Power Adapter: Input: 90~260V Output: 12V, 1.5A DC input (12V-1.5A) Barrel Plug
Environmental	Operation Temperature: 0° C to +45° C Storage Temperature: -40° C to +70° C Relative Humidity: 5% to 95% Non-Cond
SMS	Send Message Receive Message USSD
Package Contents	4G LTE WiFi Router Power Adapter RJ45 Ethernet Cable Quick Installation Guide
System Requirements	Microsoft Windows 98SE/NT/2000/XP/Vista ™/7/8/8.1/10/11, MAC OS,NetWare, UNIX or Linux Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser Subscription with an internet service provider (for internet access)



Informazione agli utenti ex art. 26 D.Lgs. 49/2014

Il simbolo riportato sull'apparecchiatura (Allegato IX D.Lgs. 49/2014) indica che il rifiuto deve essere oggetto di “raccolta separata” e che è stato immesso sul mercato, in Italia, dopo il 31/12/2010. Pertanto, l'utente dovrà conferire (o far conferire) il rifiuto ai centri di raccolta differenziata predisposti dalle amministrazioni locali, oppure consegnarlo al rivenditore contro acquisto di una nuova apparecchiatura di tipo equivalente. L'utente ha dunque un ruolo attivo: la raccolta differenziata del rifiuto e le successive operazioni di trattamento, recupero e smaltimento favoriscono la produzione di apparecchiature con materiali riciclati e limitano gli effetti negativi sull'ambiente e sulla salute eventualmente causati da una gestione impropria del rifiuto. Nel caso di RAEE di piccolissime dimensioni (<25 cm), l'utente ha diritto al conferimento gratuito, senza obbligo di contestuale acquisto, ai distributori al dettaglio la cui superficie di vendita specializzata eccede i 400 mq.



Made in China