




SPECIFICATION

1. RATING: DC18V 2A
2. WITHSTANDING VOLTAGE : 500V AC FOR 1MINUTE
3. INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC
4. CONTACT RESISTANCE: 30mΩ MAX

						TOLERANCE	SCALE	DATE		DESIGN	DRAW	INSPE	APPRO
7	CAP	PE	1			±0.3	2/1	94/5/20		H. H	N. I		
6	TERMINAL B	STELL	1	Cu-Ni		MODEL		QTY	PART NAME				
5	TERMINAL A	STELL	1	Cu-Ni									
4	INSULATOR B	PF	1			MATERIAL				DRAW. NO			
3	CONTACT B	BRASS	1	Ni									
2	CONTACT A	BRASS	1	Ni									
1	INSULATOR A	POM	1			FINISH							
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE								

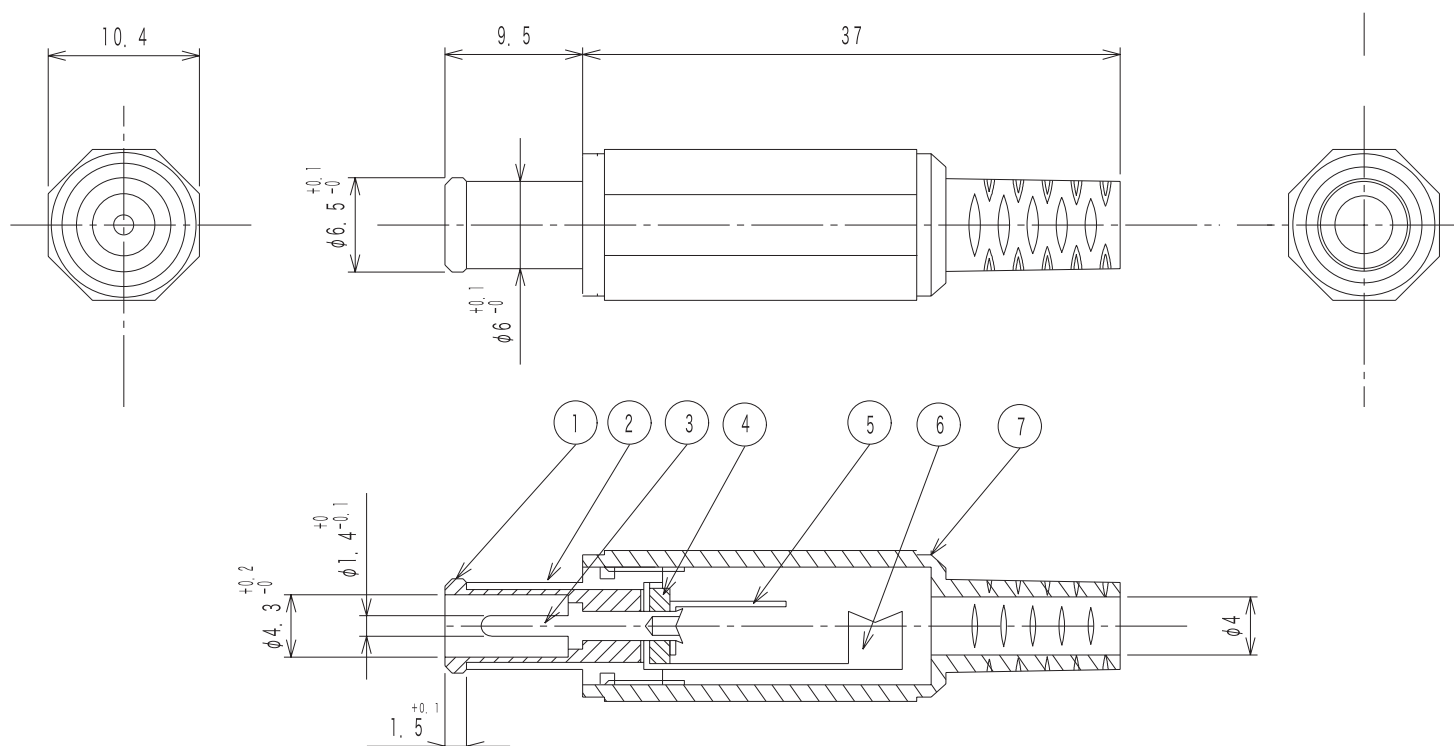

Made in Japan

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: info@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
The divulgation of data contained in this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.
 La divulgación de los datos contenidos en esta ficha son un servicio únicamente informativo y no constituyen ningún vínculo de parte de Elcart respecto a las prestaciones y uso del producto.