

1. Contact rating: 6A - 28 VDC


3. Insulation R: 1000 M Ω Min

5. Operating temperature: -25°C~85°C

2. Contact R: 20m Ω Max

4. Dielectric strength: AC1500V, 1 minute


6. Electrical life: 10,000 Cycles

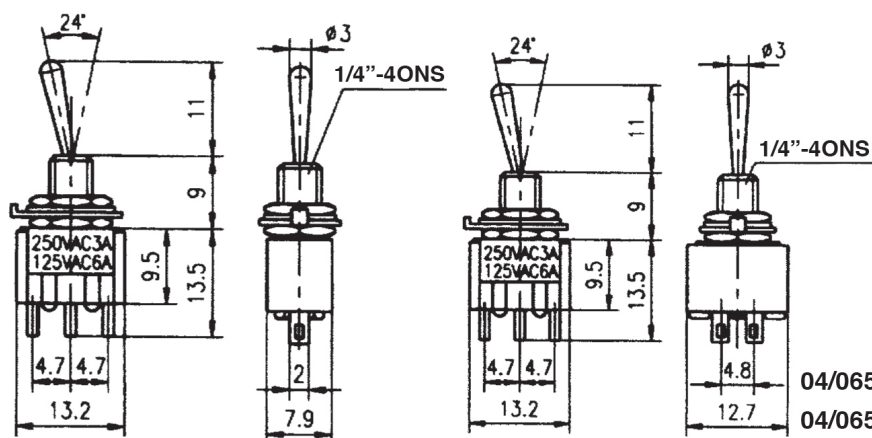


Circuitry trait			Type	Terminals
ON	—	OFF	DPST	4P
ON	—	ON	DPDT	6P
ON	—	(ON)	DPDT	6P
ON	OFF	ON	DPDT	6P
ON	OFF	(ON)	DPDT	6P
(ON)	OFF	(ON)	DPDT	6P

Handle options


Standard (A)

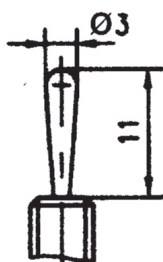


Short (C)

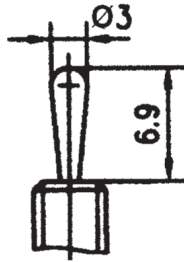


Toggle cap (D)



Plastic Flat (E)




Metal Flat (F)




Terminal options


Solder terminal (1)

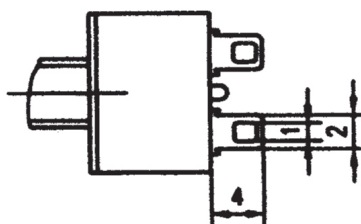

PC terminal (2)

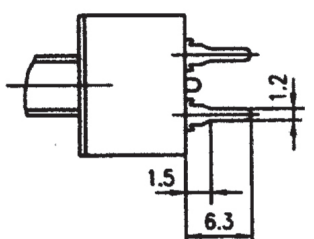


PC-H terminal (3)

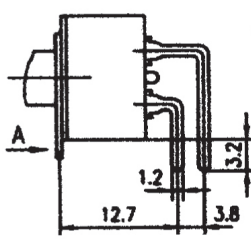

A



PC-V terminal (4)

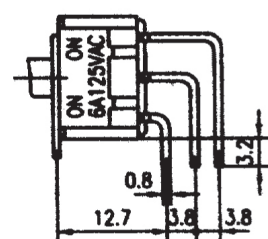


A




04/06597-00÷04/06598-00

ON - OFF - (ON)

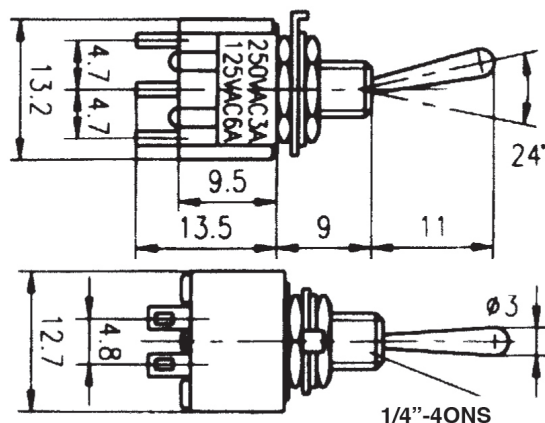

Affix Annex

Nameplate



ON	—	OFF
ON	—	ON
ON	OFF	ON