

Rating:

VM1 1A 125VAC

VM3 3A 125VAC

VM5 A 250VAC

VM10 A 250VAC

Insulation Resistance: >100M Ω DC500V

Withstand Voltage: AC 1,000V 1minute

Contacts Resistance: $<30\text{m } \Omega$

Soldering Temperature: 255°C max. 5 sec

Mechanical Life: 5,000,000 cycles



Electrical Life: 200,000 cycles

Ambient Temper. Used: -25° to +80°C





Ambient Humidity Used: <85%RH

Operating Force: on request





VM - Series Micro Switches

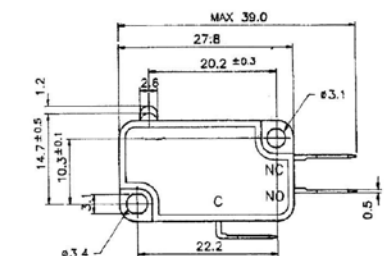





4/7420 VM5-00N (110 Gr.)

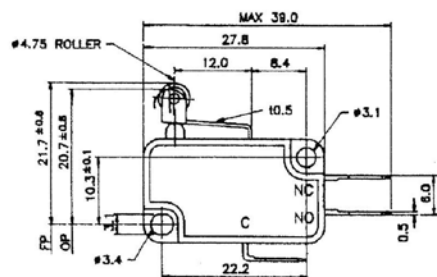





4/7421 VM5-05 (80 Gr.)

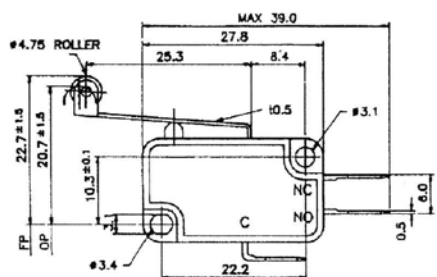

4/7422 VM5-06 (80 Gr.)

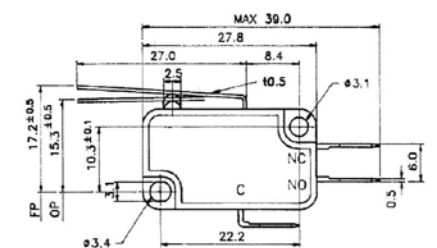

4/7424 VM5-02 (70 Gr.)

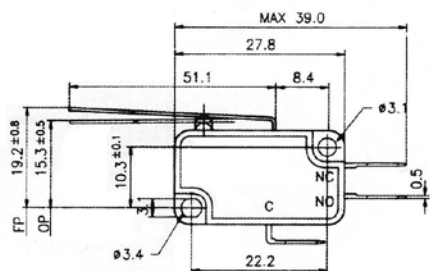

4/7425 VM5-03N (40 Gr.)

