


PICTURE:



SPECIFICATIONS

Item	Value
Rated Voltage	3V
Operating Voltage	3 ~ 7V
Operating Current (Max)	50mA
Min Sound Output at 10cm	85 dB
Oscillation Frequency	2400 HZ
Coil Resistance	16±3 Ω
Operating Temperature	-30 ~ +75 °C
Storage Temperature	-40 ~ +85 °C
Weight (MAX)	1.8 g
Housing Material	PBT

MECHANICAL DRAWING (Tolerance: ±0.5mm Except Specified)

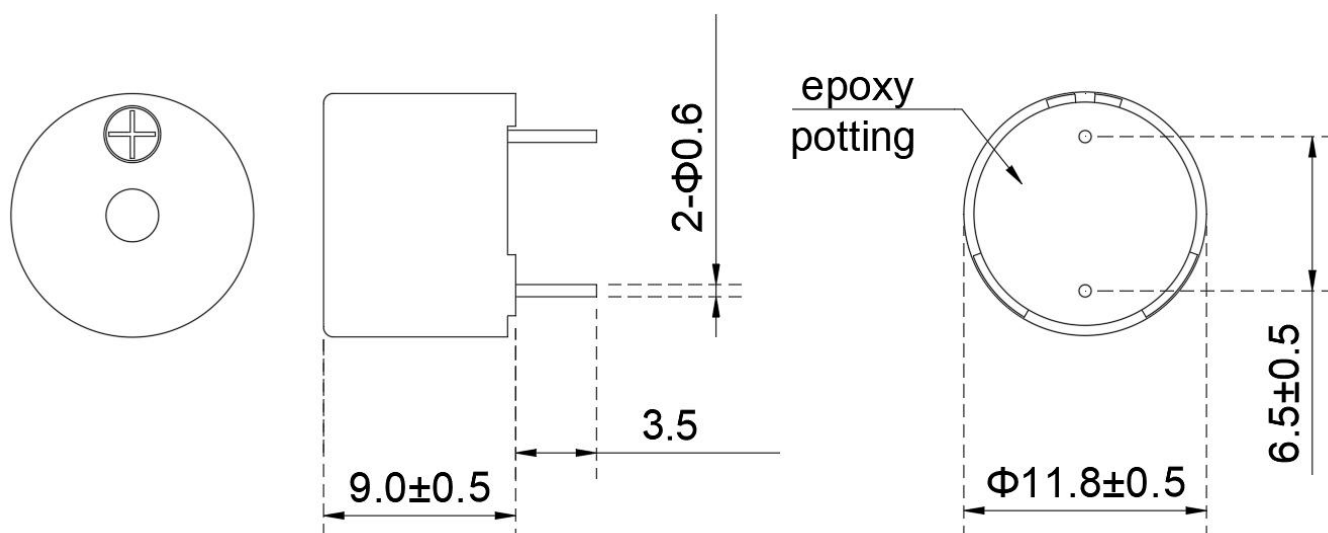

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
 Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: tecnico@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
 The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.
 La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.