


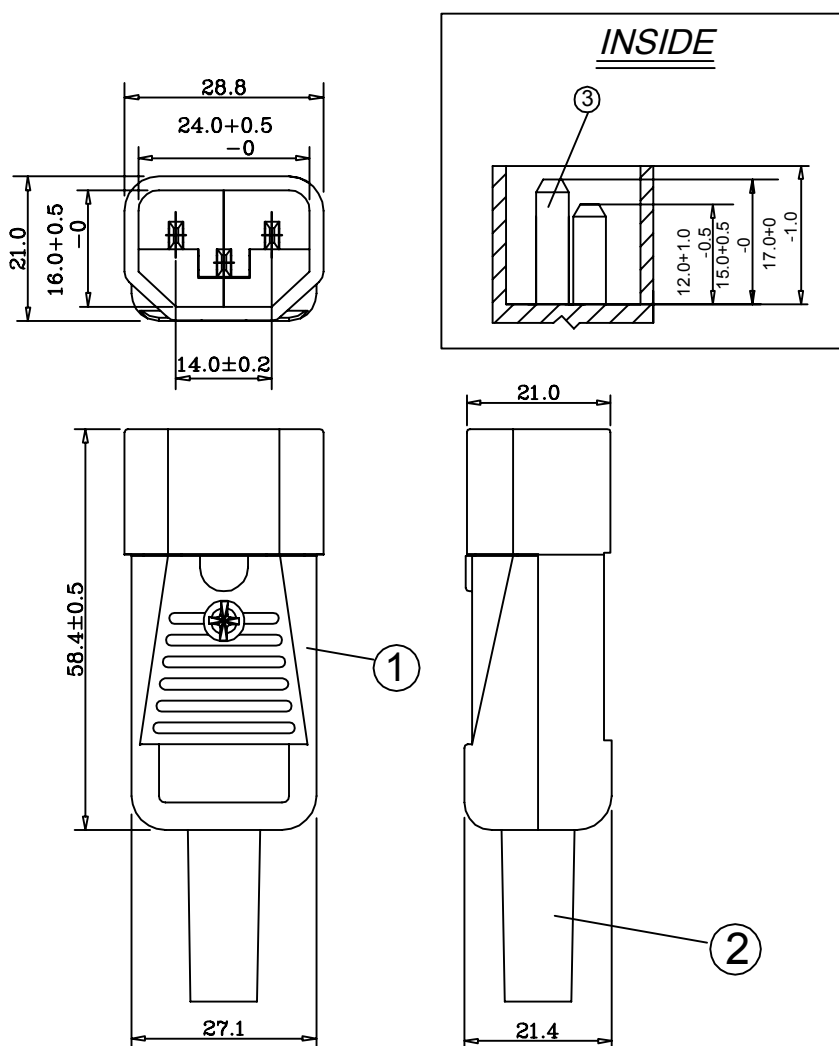

SPECIFICATIONS

1. Rating: 10A/15A 250VAC

2. Dielectric Strength: AC 2000V 1 Minute

3. Insulation Resistance: MORE THAN 100M Ω at DC 500V

4. Certification: UL, CE, CCC



5. This device is intended to be wired with Type SJT, NO.18/3C TO NO.14/3C AWG Flexible cord

1	BODY	1	NYLON#66	94V-2		Q2233-01A/01B
2	CORD	1	PVC	94V-0		Q2231-01H
3	TERMINAL	3	Bsp1-1/2H	T=2.0	Ni-PLATED	Q2233-01C/01D
4	PLATE	1	NYLON#66	94V-2		Q2231-01G
5	SCREW	6				