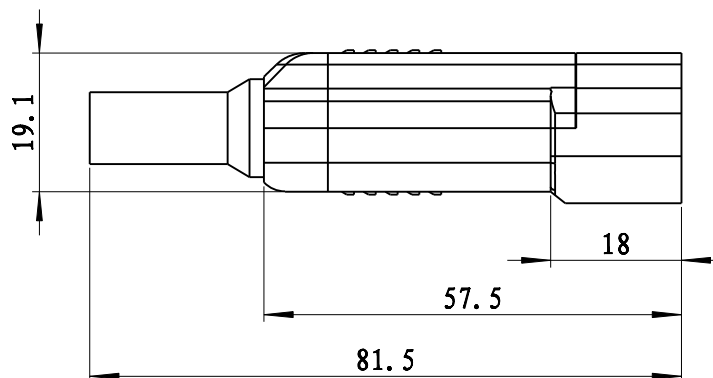
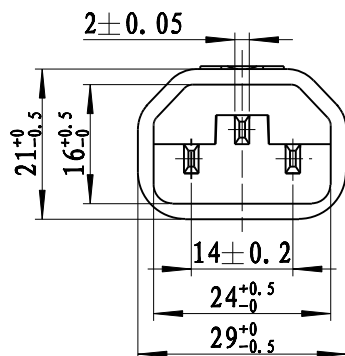
**Rating:**

15A 250V AC T105 UL cUL

10A 250V AC TUV 3C KC CE

Insert And Extract Force: 1.36kgf ~ 6.8kgf

Operating Life: >5000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

Terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: >100 Ω M 500VDC

Body Material: NYLON66 94V-0

REV.	DATE	REVISION DESCRIPTION	ISSUE	COMMON TOLERANCE :	
				UP TO 5	±0.20
				ABOVE 5 TO 30	±0.30
				ABOVE 30	±0.50
				ANGULAR	±5°