




SPECIFICATIONS

- 1.Rating: 10A/15A 250VAC
2.Dielectric Strength: AC 2000V 1 Minute
3.Insulation Resistance: MORE THAN 100M Ω at DC 500V
4.Certification: UL, CCC

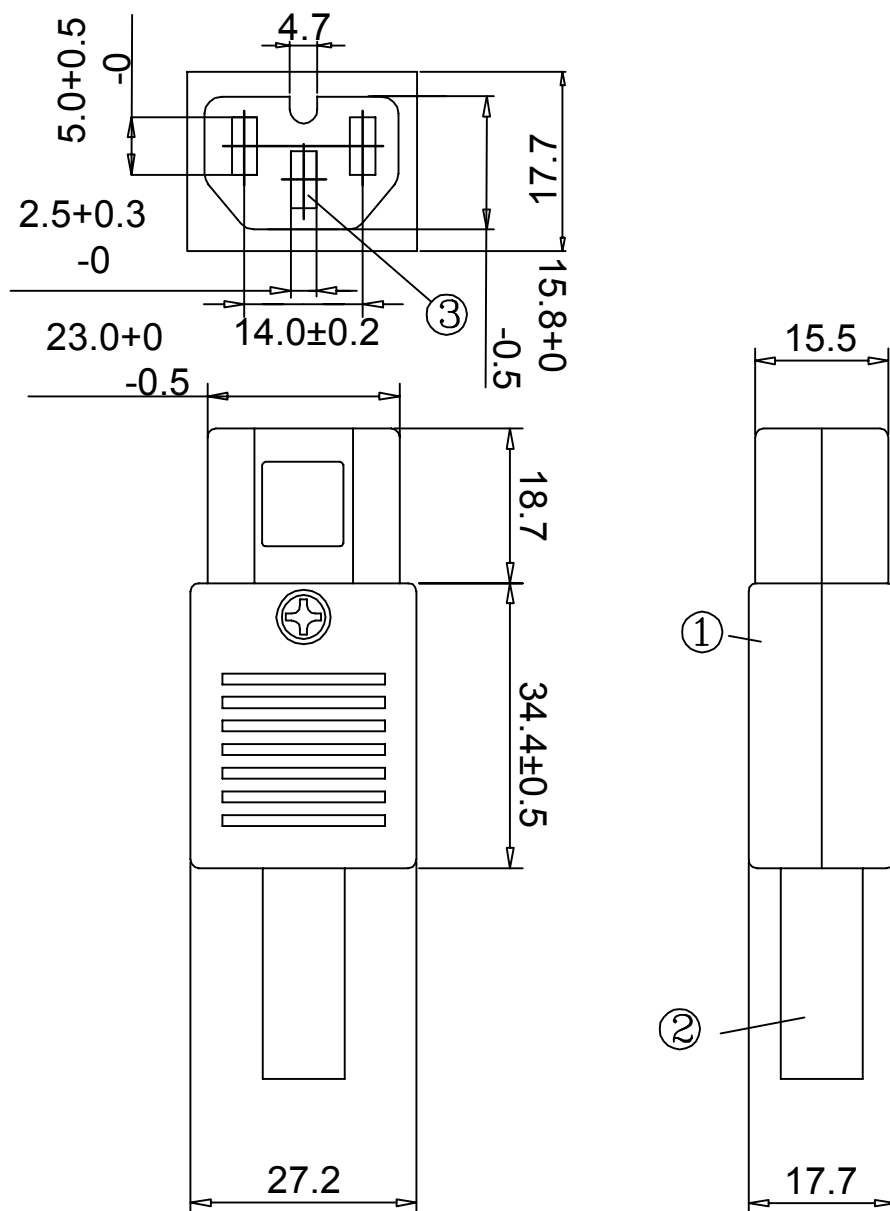

5. This device is intended to be wired with Type SJT, NO.18/3C TO NO.14/3C AWG Flexible cord

1	BODY	1	NYLON#66	94V-2		Q2231-01A/04B
2	CORD	1	PVC	94V-0		Q2231-01H
3	TERMINAL	3	Bsp1-1/2H	t=0.8	Ni-PLATED	Q2231-01C/01D
4	PLATE	1	NYLON#66	94V-2		Q2231-01C
5	SCREW	6				

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
Tel. +39 02.25117310 - www.elcart.com - tecnico@elcart.it - industria@elcart.it - sicurezza.prodotti@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.
 La divulgación de los datos contenidos en esta ficha son un servicio únicamente informativo y no constituyen ningún vínculo de parte de Elcart respecto a las prestaciones y uso del producto.