




SPECIFICATIONS

1. Rating: 10A/15A 250VAC
2. Dielectric Strength: AC 2000V 1 Minute
3. Insulation Resistance: MORE THAN 100M Ω at DC 500V
4. Certification: UL, CCC

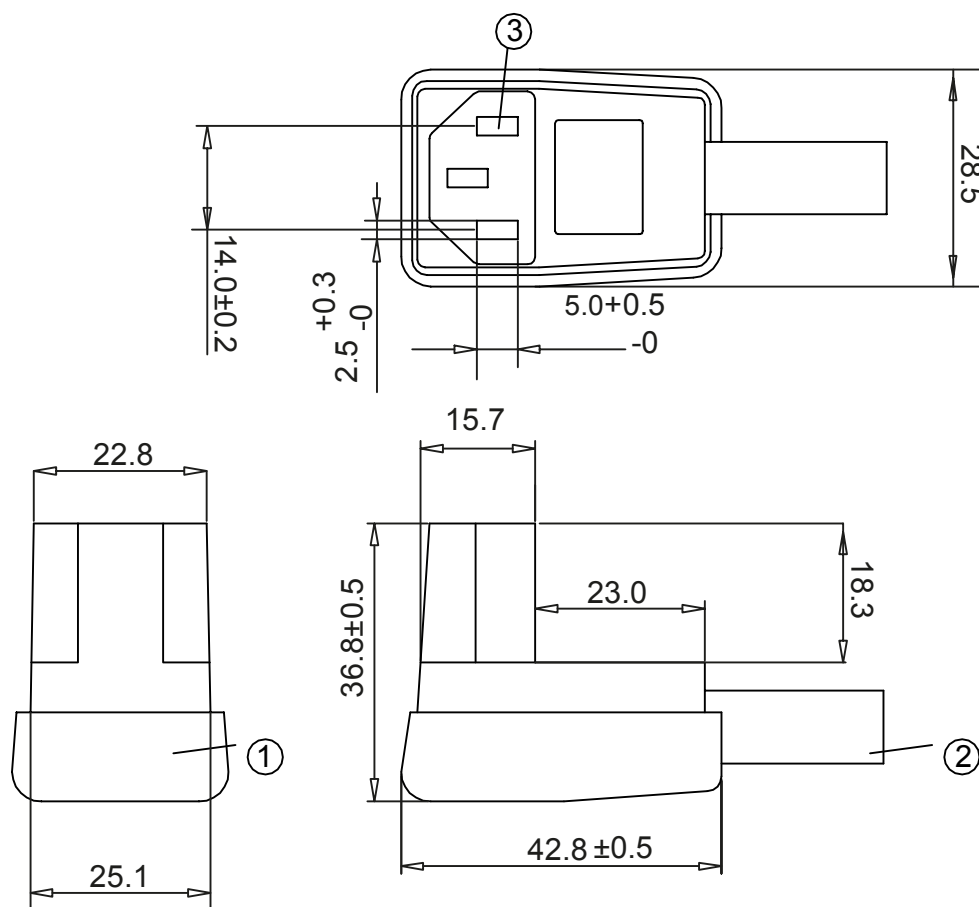

5. This device is intended to be wired with Type SJT, NO.18/3C TO NO.14/3C AWG Flexible cord

1	BODY	1	NYLON#66	94V-2		Q2231-03A/03B
2	CORD	1	PVC	94V-0		Q2231-01H
3	TERMINAL	3	Bsp1-1/2H	t=0.8	Ni-PLATED	Q2231-03C/03D
4	PLATE	1	NYLON#66	94V-2		Q2231-01G
5	SCREW	6				