
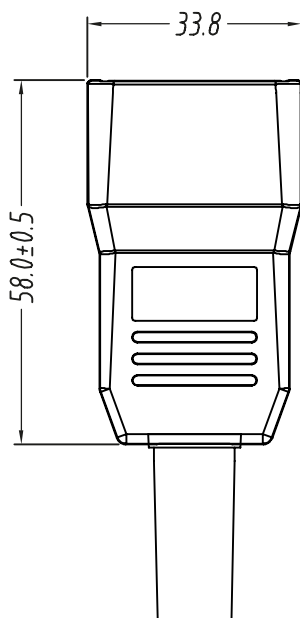
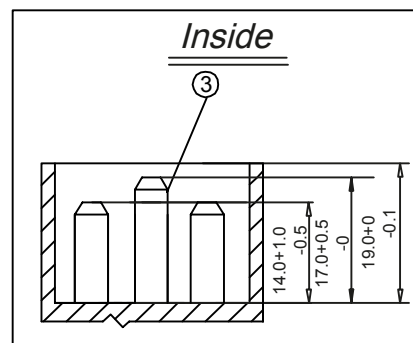


SPECIFICATIONS

1. Rating: 16/20A 250VAC
2. Dielectric Strength: AC 2000V 1 Minute
3. Insulation Resistance: MORE THAN 100M Ω at DC 500V
4. Certification: UL, ENEC

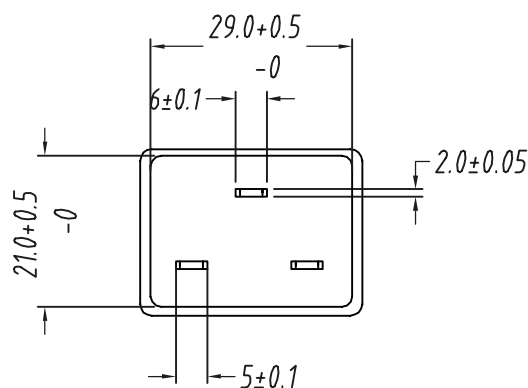

5. This device is intended to be wired with Type SJT, N0.14/3C TO N0.12/3C AWG Flexible cord

1	BODY	1	NYLON#66	94V-2		Q2263-01A/01B
2	CORD	1	PVC	94V-0		Q2261-01H
3	TERMINAL	3	Bsp1-1/2H	T=2.0	Ni-PLATED	Q2263-01C/01D
4	PLATE	1	NYLON#66	94V-2		Q2231-01G
5	SCREW	6				