




SPECIFICATIONS

1. Rating: 10A 250VAC / 15A 250VAC
2. Dielectric Strength: AC 2000V 1 Minute
3. Insulation Resistance: MORE THAN 100M Ω at DC 500V
4. Certification: UL , VDE , ENEC , CCC

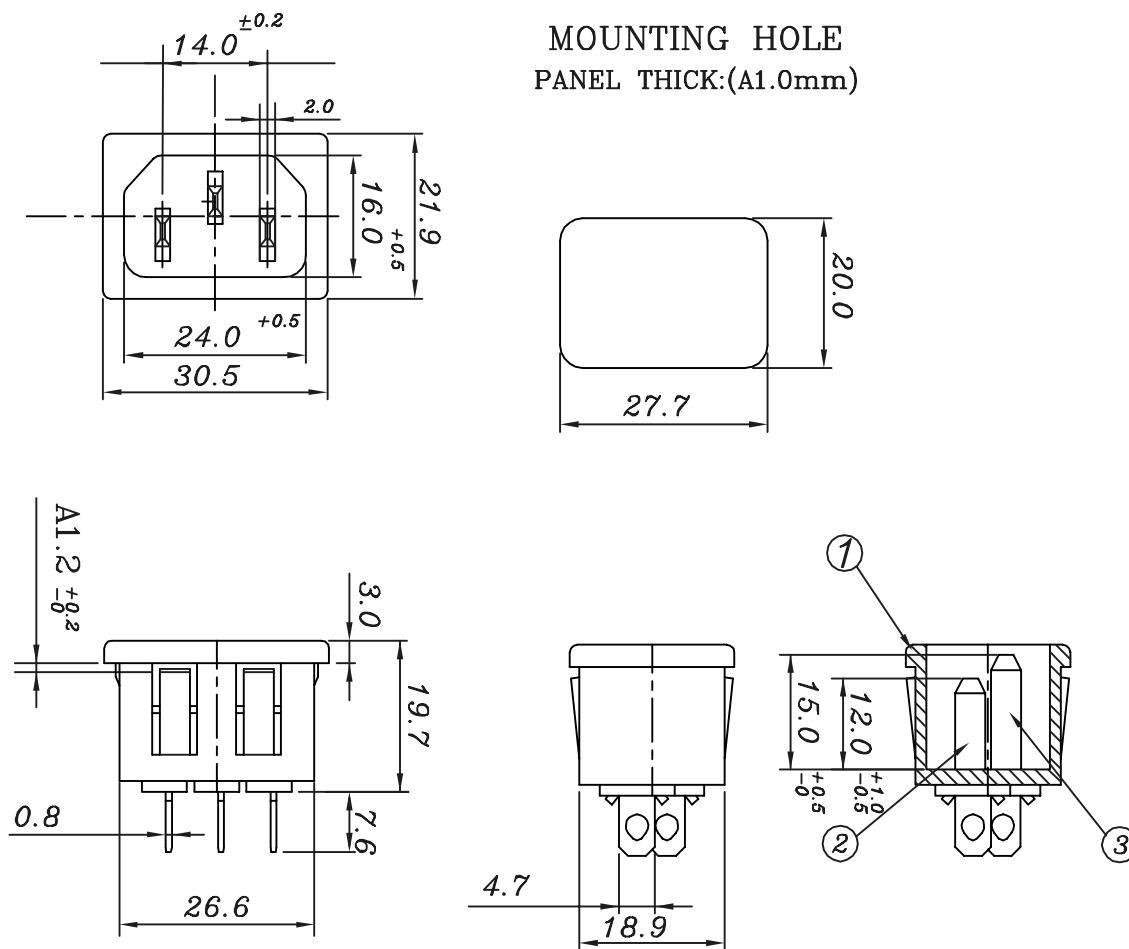

1	BODY	1	NYLON #66	94V-2		Q101-0C01
2	CONTACT	2	Bsp1-1/2H	T=2.0	Sn-PLATED	Q101-0A02
3	GROUND CONTACT	1	Bsp1-1/2H	T=2.0	Sn-PLATED	Q101-0A03