

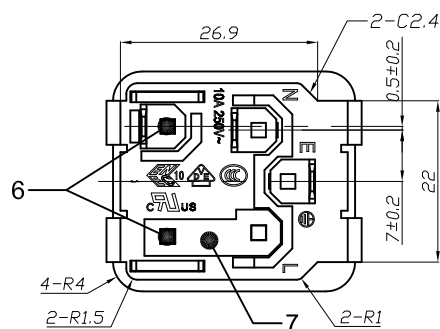
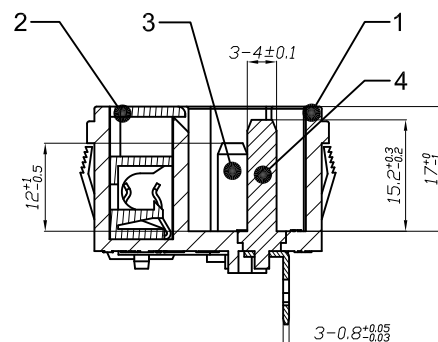

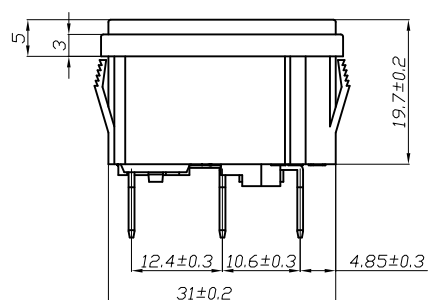
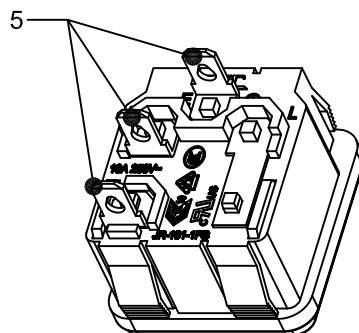


1	Body	1	PA	
2	Fuse cover	1	PA	
3	Pin	2	Brass alloy/Ni-Plated	
4	Ground Pin	1	Brass alloy/Ni-Plated	
5	Terminal	3	Brass alloy/Tin-Plated	
6	Fuse holder	2	Brass alloy/Ni-Plated	
7	Connector	1	Brass alloy/Ni-Plated	

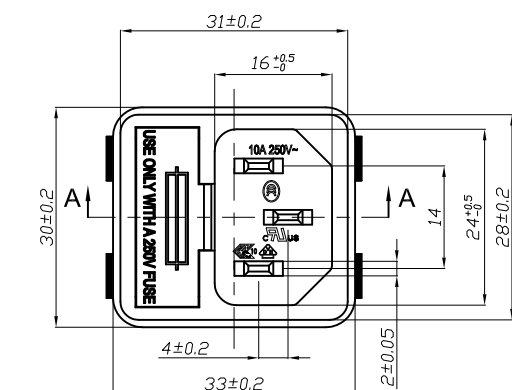

PANEL CUT-OUT

SPECIFICATION

1. RATING: 10A 250VAC
2. INSULATION RESISTANCE: $\geq 100\text{M}\Omega$ (DC500V/1MIN)
3. DIELECTRIC STRENGTH: 2000V /0.5mA /1MIN
4. OPERATING TEMPERATURE: -25°C TO +85°C (MAX)
5. DIP SOLDERING: 265°C, 3S

