


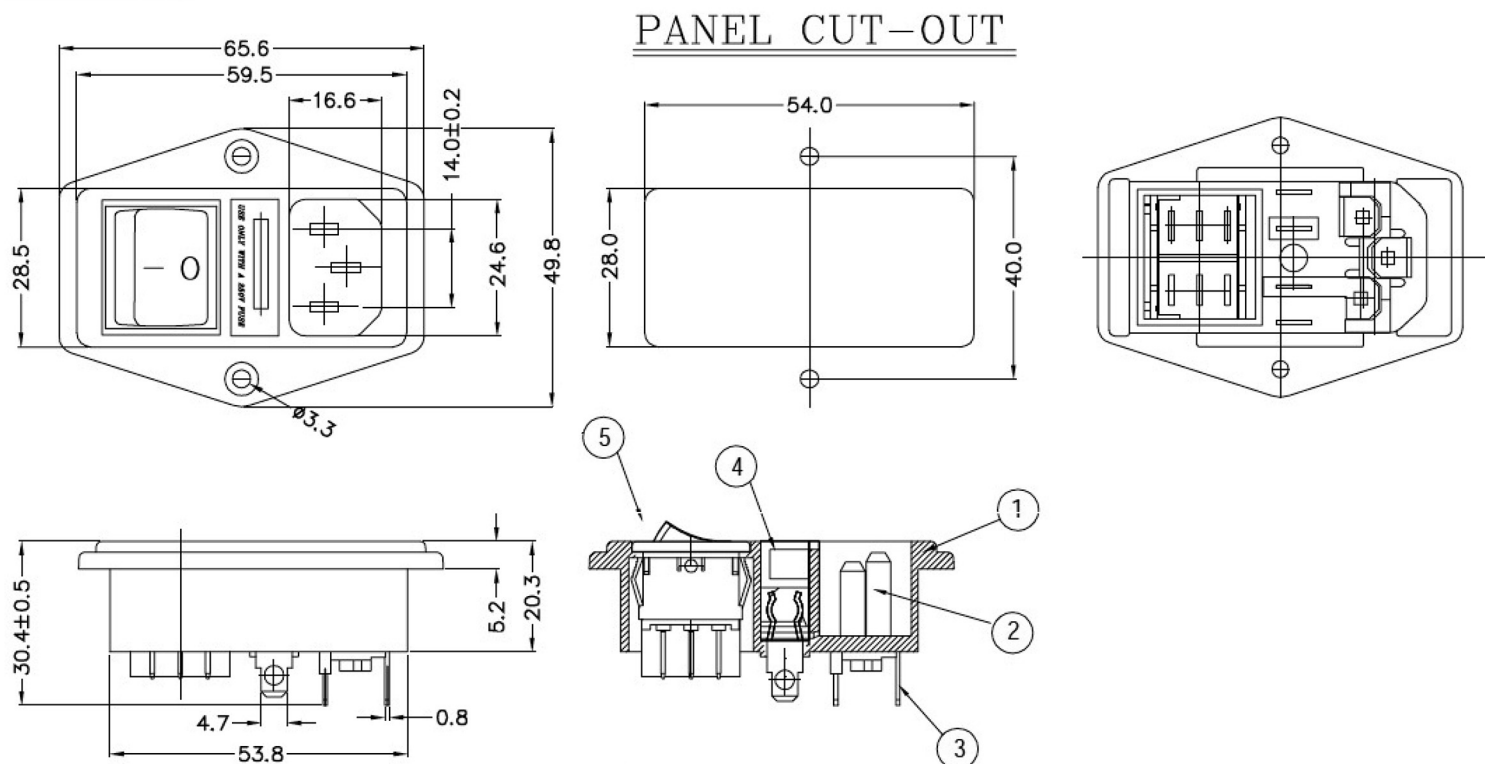

1	BODY	1	NYLON #66	94V-2		Q101-BD01
2	CONTACT	2+1	Bsp1-1/2H	T=2.0	Ni-PLATED	OC02b/OC03b
3	TERMINAL	2+1	Bsp1-1/2H	T=0.8	Sn-PLATED	AD02/AD06
4	FUSE HOLDER	1	NYLON #66	94V-2		Q101-OH2
5	SWITCH					

SPECIFICATIONS

1. Rating: 10A 250VAC

2. Dielectric Strength: AC 2000V 1 Minute

3. Insulation Resistance: MORE THAN 100M Ω at DC 500V

4. Certification: UL , VDE , ENEC , CCC

