

EXTRACELL^{plus} ELB+35-12



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, Special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any positions.

Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Feature

- Absorbent Glass Mat(AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

SPECIFICATION

Nominal voltage	12V
Number of cell	6
Length(mm/inch)	195/7.68
Width(mm/inch)	130/5.12
Height(mm/inch)	155/6.10
Total Height(mm/inch)	168/6.61
Approx. Weight(kg/lbs)	10.0/22.0

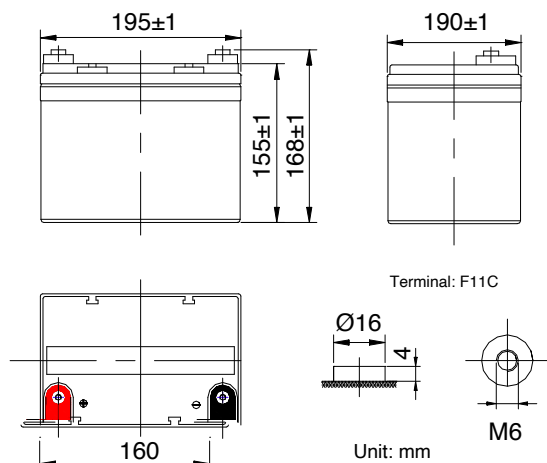

Performance Characteristics

Capacity 77°F(25°C)	20 hour rate (1.74A, 10.8V)	34.8Ah
	10 hour rate (3.3A, 10.8V)	33Ah
	5 hour rate (5.66A, 10.5V)	28.3Ah
	1 hour rate (19.6A, 9.6V)	19.6Ah
Resistance Internal resistance	Full charged Battery 77°F(25°C): 7.5mΩ	
Capacity affected by Temperature (10 hour rate)	104° F(40°C)	102%
	77° F(25°C)	100%
	32° F(10°C)	85%
	5° F(-15°C)	65%
Self-Discharge 68°F(20°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12 month storage	60%
Max. discharge current 77°F(25°C): 330A(5S)		
Charge (Constant Voltage)	Float: 13.6~13.8 V/77° F(25°C)	
	Cycle: 14.4~14.7 V/77°F(25°C) Max. Current: 8.3A	

Discharge Constant Current (Amperes at 77° F 25 °C)

End Point Volts/cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60v	78.9	61.3	36.2	19.6	8.6	5.99	3.42	1.82
1.65V	74.9	58.2	34.4	18.9	8.4	5.88	3.4	1.81
1.70v	70.4	54.7	32.3	18	8.2	5.79	3.37	1.79
1.75V	65.5	50.9	30.7	17.1	8.1	5.66	3.34	1.77
1.80v	60.3	46.8	28.2	16.2	8	5.58	3.3	1.74

Discharge Constant Power (watts at 77° F 25 °C)

End Point Volts/cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	142	111	68	37.4	16.6	11.7	6.73	3.59
1.65V	136	106	64.9	36.3	16.2	11.5	6.69	3.57
1.70V	130	101	61.6	34.8	15.9	11.3	6.63	3.55
1.75V	121	94.7	58.9	33.1	15.8	11.1	6.57	3.53
1.80V	111	87.5	54.4	31.5	15.6	11	6.53	3.49

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

Disclaimer: the above parameters are test data of sample battery for reference only

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
Tel. +39 02.25117310 - www.elcart.com - tecnico@elcart.it - industria@elcart.it - sicurezza.prodotti@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.
La divulgación de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vínculo de parte de Elcart respecto a las prestaciones y uso del producto.

EXTRACELL^{plus} ELB+35-12

