


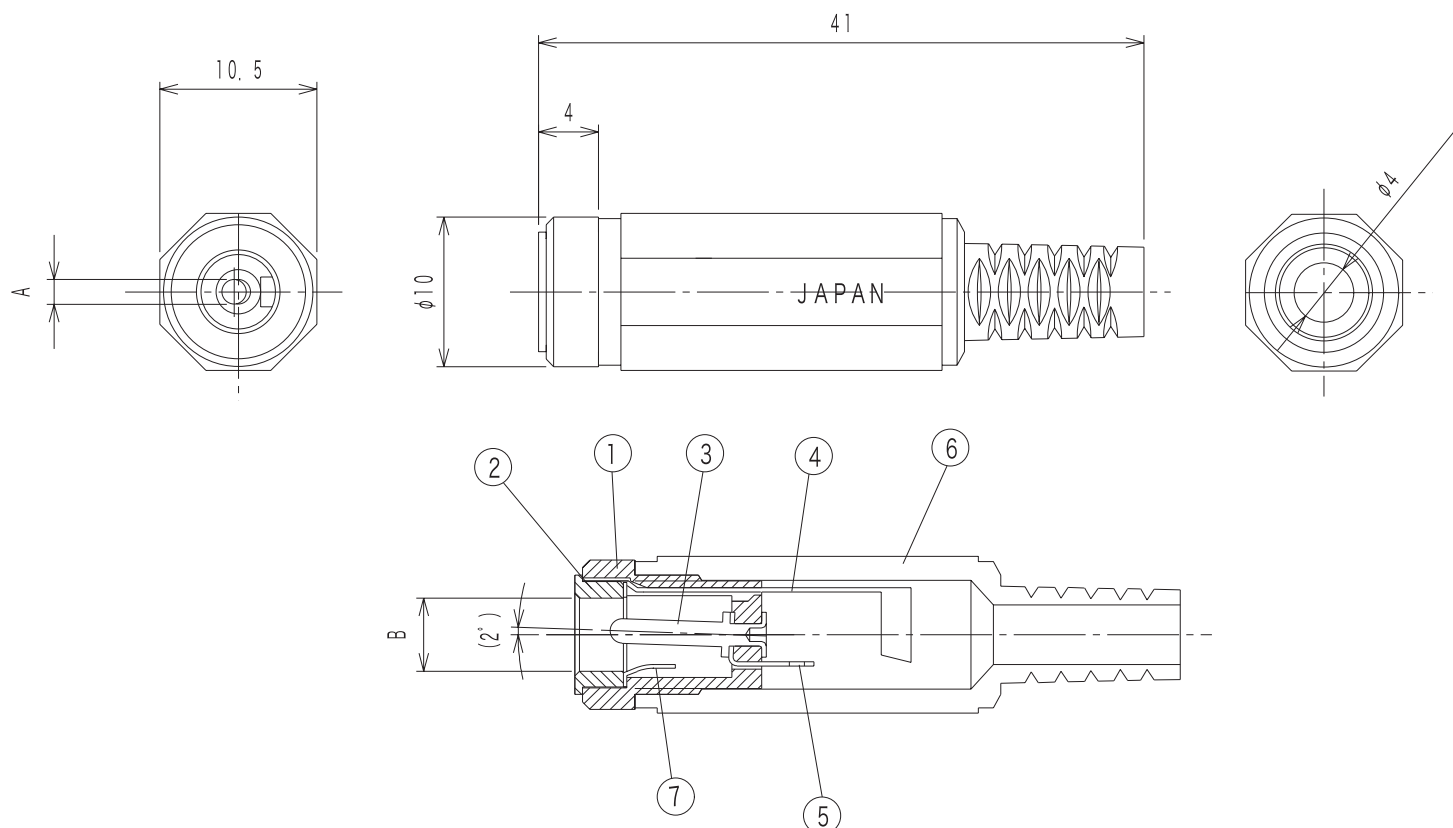

	A	B
04/02544	φ 2.5	φ 0.65
04/02555	φ 4.2	φ 1.65
04/02557	φ 4.9	φ 1.65

SPECIFICATION
1. RATING: 04/02544 = DC 3.15V 2A 04/02555 = DC 6.3V 2A 04/02557 = DC 10.5V 2A
2. INSULATION RESISTANCE: 100MΩMIN/500VDC.
3. BREAKDOWN VOLTAGE: 500VAC FOR 1MINUTE.

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	CONTACT	PBS-EH t=0.25	1	Ni		±0.3	2/1	10/4/6	M. K	N. I		
6	CAP	PE	1									
5	TERMINAL B	BSR t=0.3	1	Ni		MODEL		QTY	PART NAME			
4	TERMINAL A	BSR t=0.3	1	Ni								
3	PIN	BSBM	1	Ni		MATERIAL				DRAW. NO		
2	METAL	BSBM	1	Ni								
1	BODY	PA	1			FINISH						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE							