


Miniature Rocker and Lever handle Switch

RLS-103-A1


(Specification)

1. (Rating): 6A 125V AC; 3A 250V AC
2. (Contact R): 20mΩ max
3. (Insulation R): 500V DC 1000MΩ min
4. (Dielectric Strength): 1 Minute 1500V AC
5. (Operating Temperature): -25°C ~ +85°C
6. (Electrical Life): 10, 000 Cycles

(Outline Drawing)

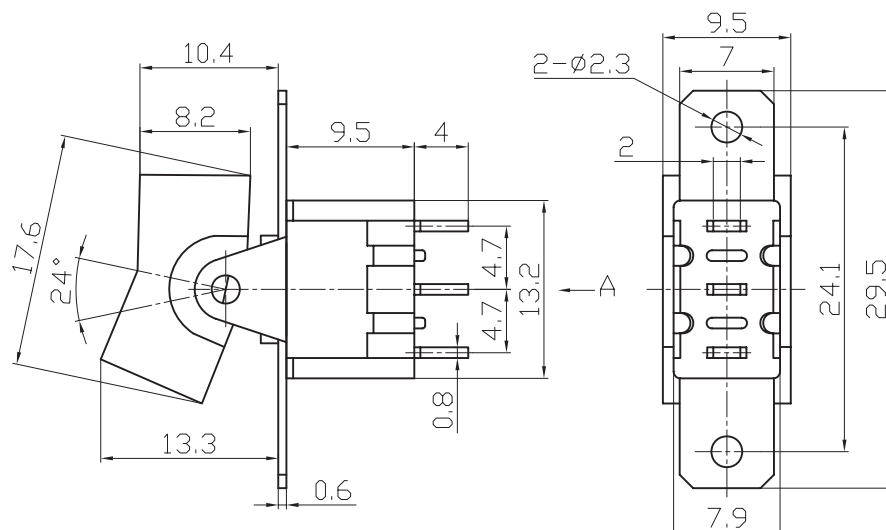

(Mounting)

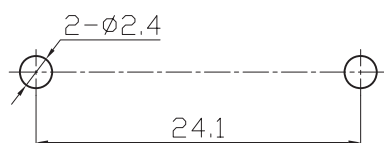

(Circuitry)

