

GOMITO 45°, APERTURA SUPERIORE, F10: GUIDA CAVI 12 APERTA

CATALOG NUMBER

F44LE45A



Lay-in Hinged-Cover 45-Degree Elbows are used for continuous wireway runs with 45-degree turns. Because sections of lay-in wireway can be mounted with covers oriented in any direction, three different 45-degree elbows are available. Proper selection allows the user to maintain the same access and thereby preserve the lay-in feature for right-angle installations.

INDUSTRY STANDARDS

Certified by Canadian Standards Association.

FEATURES

Lay-in Hinged-Cover 45-Degree Elbows are used for continuous wireway runs with 45-degree turns

Because sections of lay-in wireway can be mounted with covers oriented in any direction, three different 45-degree elbows are available

Proper selection allows the user to maintain the same access and thereby preserve the lay-in feature for right-angle installations

PRODUCT ATTRIBUTES

Type: Elbow

Height (H): 102 mm

Width (W): 102 mm

Material: Mild Steel

Finish: Galvanized; Powder Coated

Color: Gray

Color Code: ANSI 61

Thickness (T): 1.9 mm


Sealing Plate Type: Flat

Sealing Plate Quantity: 1

ADDITIONAL PRODUCT DETAILS

Ciascuna piastra di tenuta include anche una guarnizione e un set di viti per unire le sezioni.

DIAGRAMS

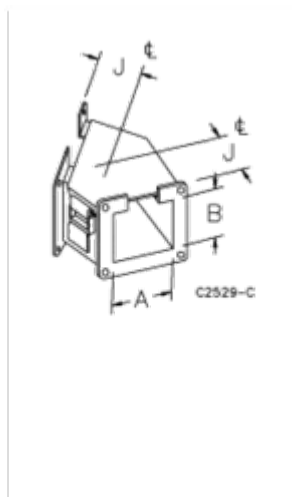

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.



nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF

TRACER