

C-CRIMP PER MESSA A TERRA IN RAME, PRINCIPALE 35 MM², MATRICI 25-10 MM² A TREFOLI

CATALOG NUMBER

ULT-6-MM



The nVent ERICO Permaground Compression Connector, C-Crimps are part of the nVent ERICO Permaground Compression Grounding Connectors line. These C-Crimps are designed to join two grounding conductors together in a grounding system using a compression tool. Made from high-strength conductive copper, they ensure a low resistance connection that eliminates corrosion, resulting in a long-lasting connection. With range-taking abilities, the C-Crimps are compatible with various conductors. To prevent oxidation, the inner surface of the C-Crimps is prefilled with an oxide inhibitor that forms an airtight seal around the conductors once the connection is completed. This makes the C-Crimp connector suitable for a wide range of applications. Additionally, the C-Crimp is marked with both metric and imperial conductor sizes and can be installed in all weather conditions.

FEATURES

The C-Crimp's design makes it compatible with a wide range of conductors

Dies are interchangeable with tools from nVent ILSCO TaskMaster and other manufacturers

The C-Crimp connector is versatile, suitable for various job site applications and conductor configurations

Quick and easy installation, with repeatable connections made in minutes

The applied oxide inhibitor, containing flecks of copper, provides improved pull-out strength and reduces operating temperatures for copper terminations

Gli stampi dell'installazione lasciano un rilievo sul collegamento finito per un'ispezione positiva.

Tested in accordance with UL 467 and CSA certification

CARATTERISTICHE DEL PRODOTTO

Material: Rame

Conductor Type: A trefoli

Main/Run Conductor Range: 35 - 35 mm²

Tap Conductor Range: 25 - 10 mm²

Connection Type: Da conduttore a conduttore

Number of Crimps: 2

Length (L): 25,1 mm


Width (W): 15,6 mm

Height (H): 21,1 mm

Unit Weight: 0,039 kg

Direct Burial: Sì.

DIAGRAMS

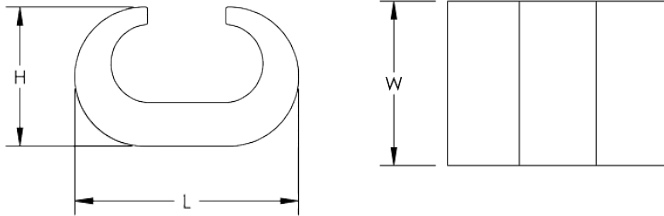

AVVERTENZA

AVVERTENZA: i prodotti nVent devono essere installati e usati solo secondo le indicazioni riportate nei fogli delle istruzioni del prodotto nVent e nei materiali di formazione. I fogli di istruzioni sono disponibili sul sito www.nvent.com e presso il vostro rappresentante locale dell'assistenza clienti di nVent. Un'installazione scorretta, l'uso improprio, l'applicazione errata o altre inosservanze delle istruzioni e delle avvertenze di nVent possono causare un malfunzionamento del prodotto, danni alle proprietà, lesioni corporee gravi e morte e/o l'annullamento della garanzia.

America del Nord

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**
TRACER

© 2025 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.