




Maximum flexibility of use

for a wide range of connectors thanks to **cable inputs on three sides**

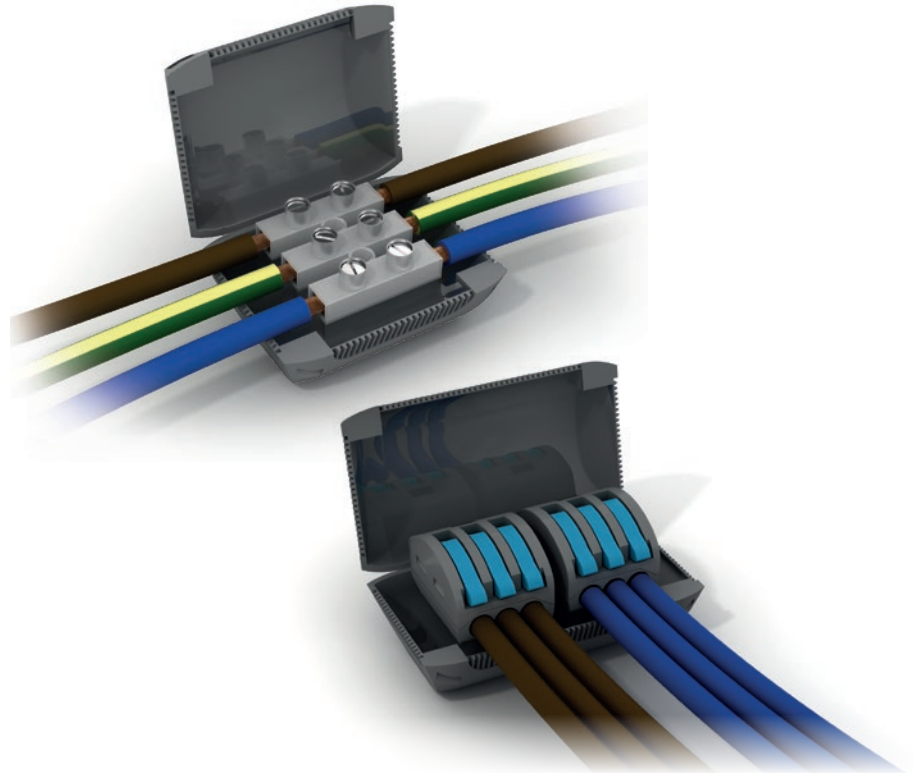

APPLICATIONS

- Insulation and protection, even in the presence of water, of electrical connections, audio/video, telecommunications, home automation and similar

KEY FEATURES

- **Maximum flexibility of use: cable inputs on 3 sides**
- Can be used with multiple types of: electrical connectors (lever connectors, TBOX®, terminal blocks, ledstrip connectors), audio/video (BNC, type F, video surveillance system connectors, balun, balanced audio cables) home automation
- **Flexible and breakable walls:** adaptable to cables and ensure the gel leakage only where necessary to ensure the sealing of the connection
- Ready to install
- Compact design
- **Reliability of gel technology**

FEATURES

- Rigid plastic polymer shell with snap closure, pre-filled with silicone gel
- **3 sizes** for use with a wide range of connectors
- Clear blister packaging with Eurohole

Degree of protection (EN 60529)
IPX8

Operating temperature range
-20 °C / +90 °C



CE Marking



Degree of protection



Re-enterable



Unlimited shelf life






Directive EU 2015/863 (RoHS 3) Compliant



Non-toxic



Eco-friendly

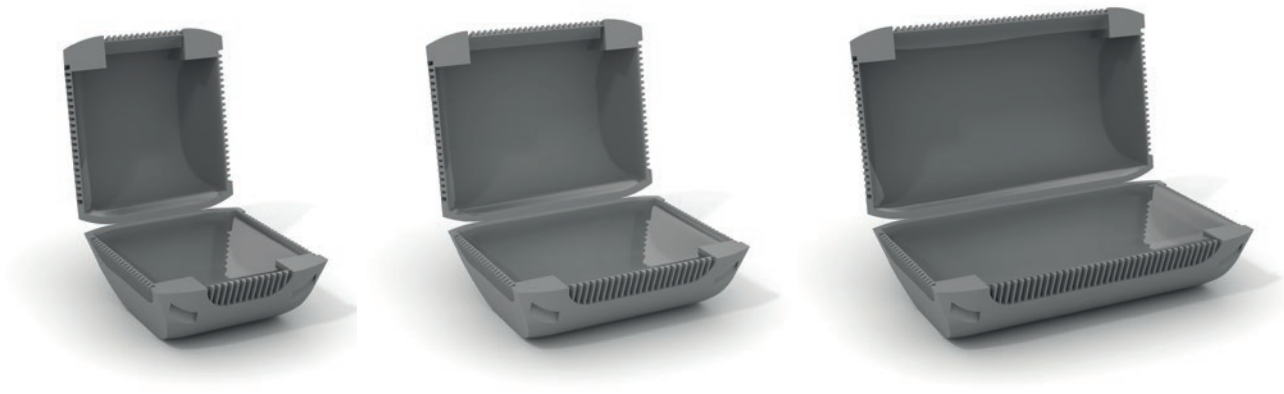

watch
video

ref.	item	dimensions L x W x H (mm)	pkg. (pcs)	min. / mult. ord. q.ty (pcs)	recommended compatible connectors				
					compact lever 4 mm ²	compact lever 6 mm ²	SpringBox®	TBOX®	terminal strip
MBX01	MiniBox 1	36,2 x 32,8 x 22	1	12	1 x	1 x	1 x	2 x	-
					1 x	-	1 x		
MBX02	MiniBox 2	42,6 x 32,8 x 22	1	12	2 x	1 x	2 x	3 x	1 x
					1 x	1 x	1 x		
					1 x	-	1 x		
MBX03	MiniBox 3	56,9 x 32,8 x 22	1	12	3 x	2 x	3 x	4 x	1 x
					2 x	1 x	2 x		
					1 x	1 x	1 x	3 x	