


ISO FIL® 626
ensures excellent electrical
insulation and protection
from moisture in
all installation conditions

APPLICATIONS

- Sealing and reconstruction of all electrical insulation padding

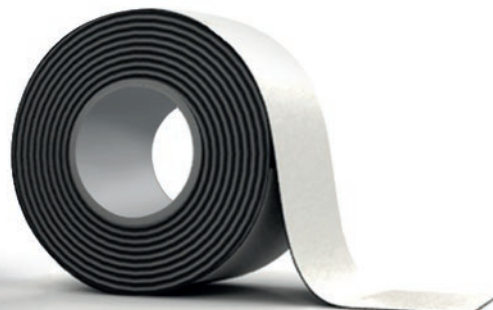

KEY FEATURES

- Excellent electrical and mechanical properties
- High stability in all installation condition
- Resistant to water and ozone
- Supplied in plastic protective case

ref.	item	width x length (mm x m)	thickness (mm)	colour	min. / mult. ord. qty (pcs)
NA4626	ISO FIL 626	38 x 1.5	3.2	BLACK 	5

Tensile strength
> 3.5×10^4 Pa

Elongation
> 500%

Water absorption
< 1%

Operating temperature
-40 °C / +70 °C

Volume resistivity
> 10^{14} Ω cm