



2GRE15 133x49R

Q10-21 p

DATA SHEET

release. j - Revision 06-2019



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	73	0,32	2,0	240	2015	57	R	-20°C / +70°C
230	60	89	0,39	2,0	240	1980	56	R	-20°C / +70°C
230	50				141 CFM				-4°F / 158°F
230	60				141 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

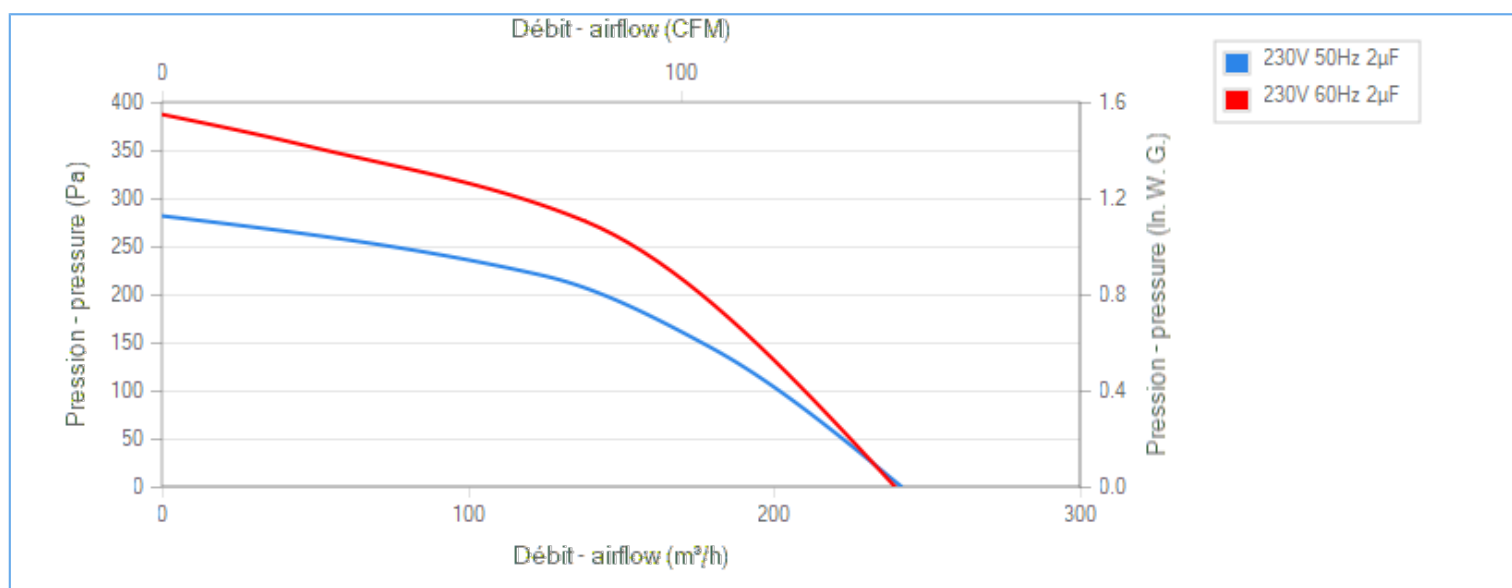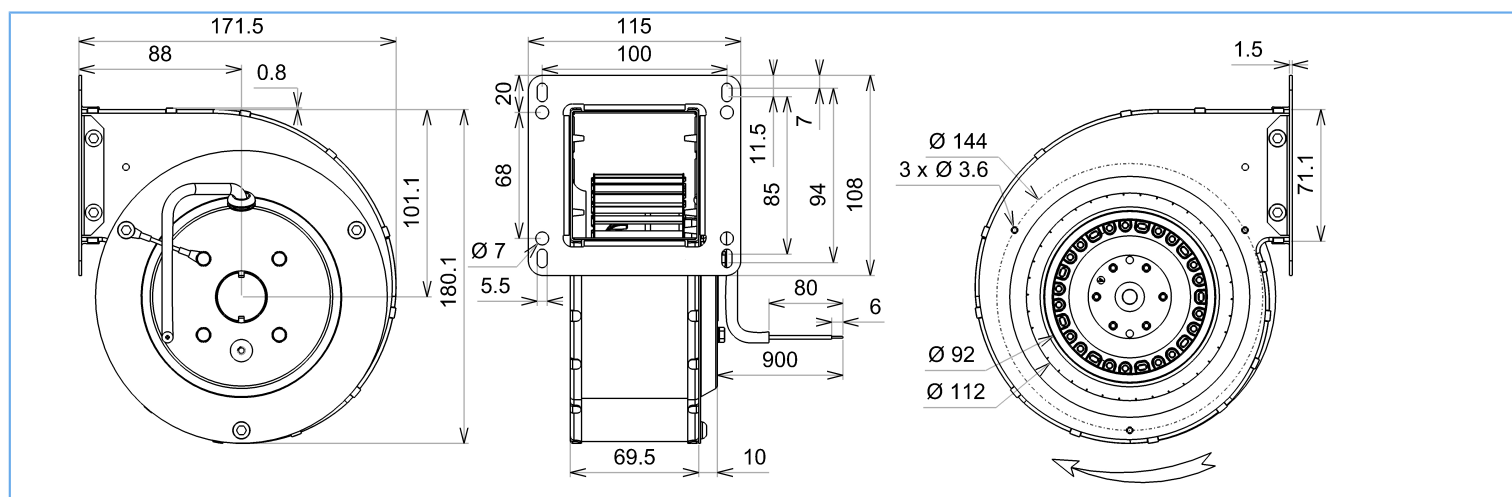

Description

- .Weight : 2,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .Galvanized steel impeller
- .Scroll housing : black paint

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2GRE15 133x49R

Q10-21 p

DATA SHEET

release. j - Revision 06-2019

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,056	kW ⁽¹⁾
Airflow	125	m ³ /h ⁽¹⁾
Pressure	219	Pa ⁽¹⁾
Rotation speed	2545	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19008
19008
21236

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS915CN

