



2GRE A3 108x52R

E37-A0

DATA SHEET

release. d - Revision 11-2014

Replace D25-A4



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	40	0,18	1,5	185	2215	54	R	-20°C / +70°C
230	60	49	0,22	1,5	180	2255	55	R	-20°C / +70°C
230	50	108 CFM							-4°F / 158°F
230	60	105 CFM							-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA


ErP 2015

NA

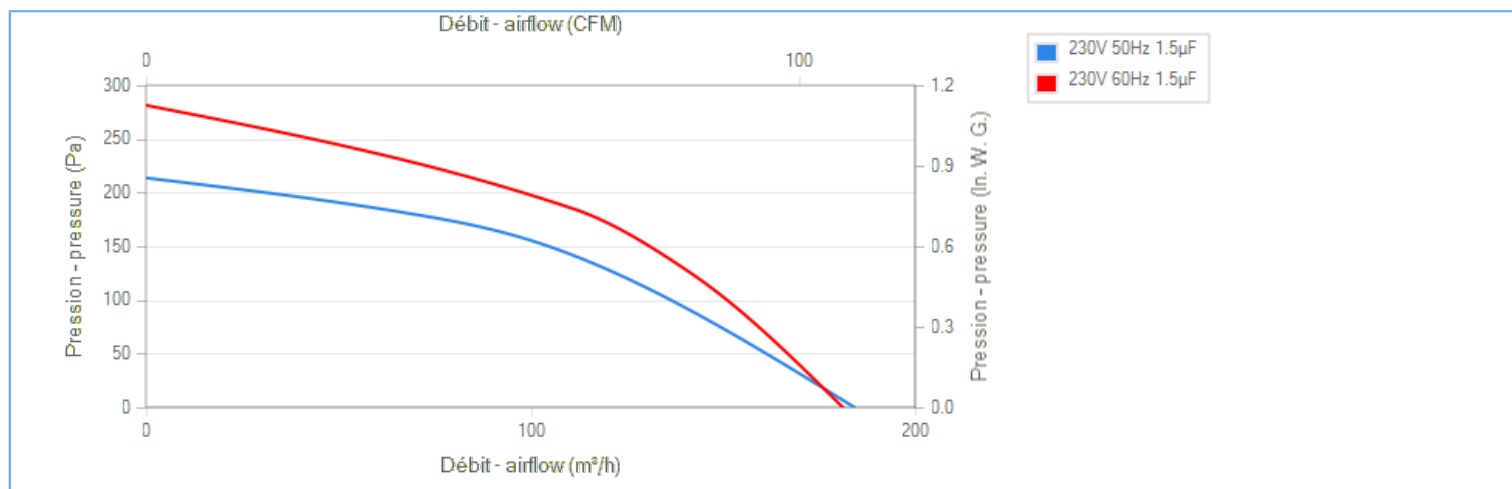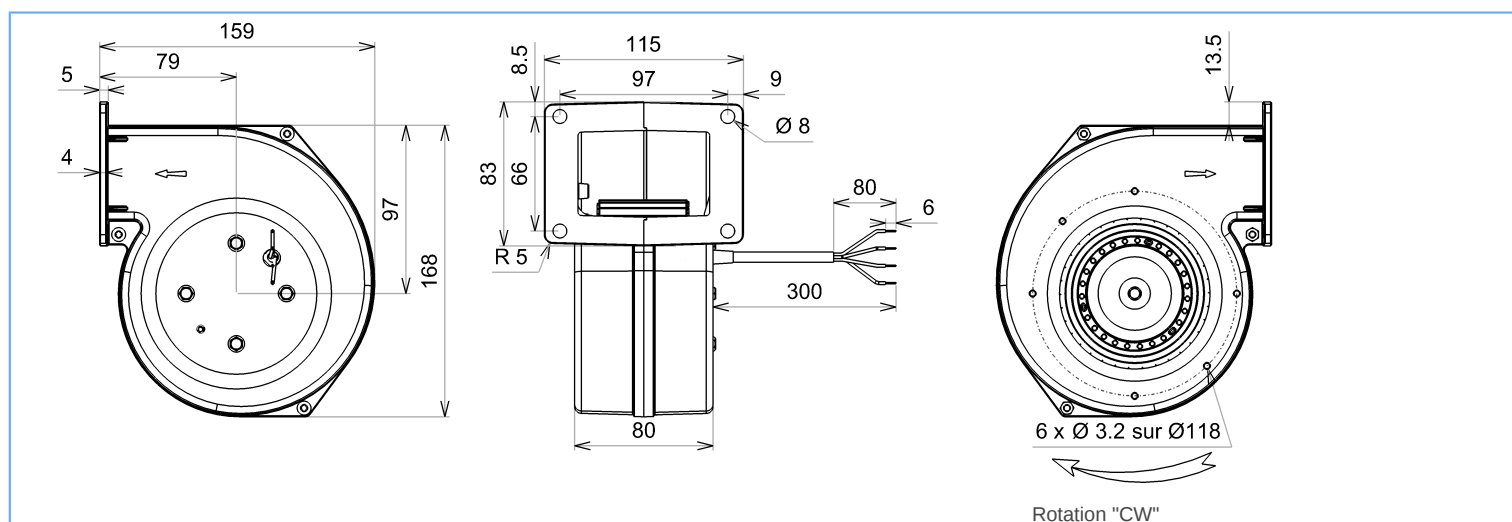

Description

- .Weight : 1,6 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Galvanized steel impeller
- .Rotor : black paint
- .PA6/6 UL94 V-0 plastic scroll housing

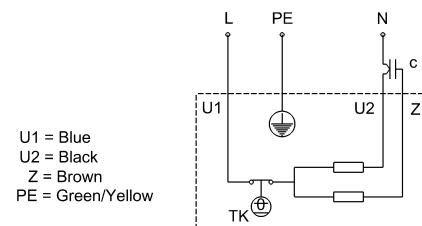



2GRE A3 108x52R

E37-A0

Replace D25-A4

DATA SHEET

release. d - Revision 11-2014

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,035	kW ⁽¹⁾
Airflow	103	m³/h ⁽¹⁾
Pressure	152	Pa ⁽¹⁾
Rotation speed	2553	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19005
19005
21367

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS73CN

