



2RRE25 225x40R


H06-16 p



## DATA SHEET

release. g - Revision 05-2018

| Voltage | Frequency | Input Power | Input Current | Capacitor | Airflow | Rotation speed | Acoustic level | Direction rotation | Admissible Temperature |
|---------|-----------|-------------|---------------|-----------|---------|----------------|----------------|--------------------|------------------------|
| V       | Hz        | W           | A             | μF        | m³/h    | RPM            | dBA            |                    | Min/Max                |
| 230     | 50        | 84          | 0,4           | 2,5       | 970     | 2665           |                | R                  | -20°C / +70°C          |
| 230     | 60        | 112         | 0,49          | 2,5       | 1085    | 2975           |                | R                  | -20°C / +70°C          |
| 230     | 50        |             |               |           | 570 CFM |                |                |                    | -4°F / 158°F           |
| 230     | 60        |             |               |           | 638 CFM |                |                |                    | -4°F / 158°F           |



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

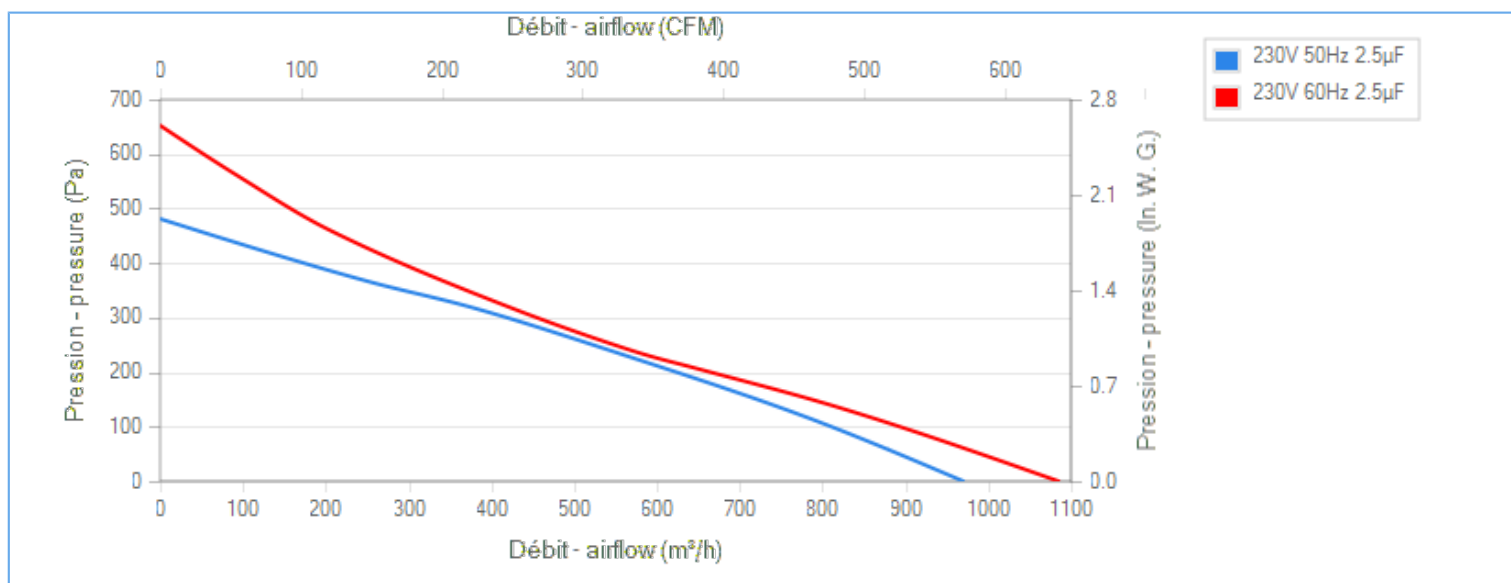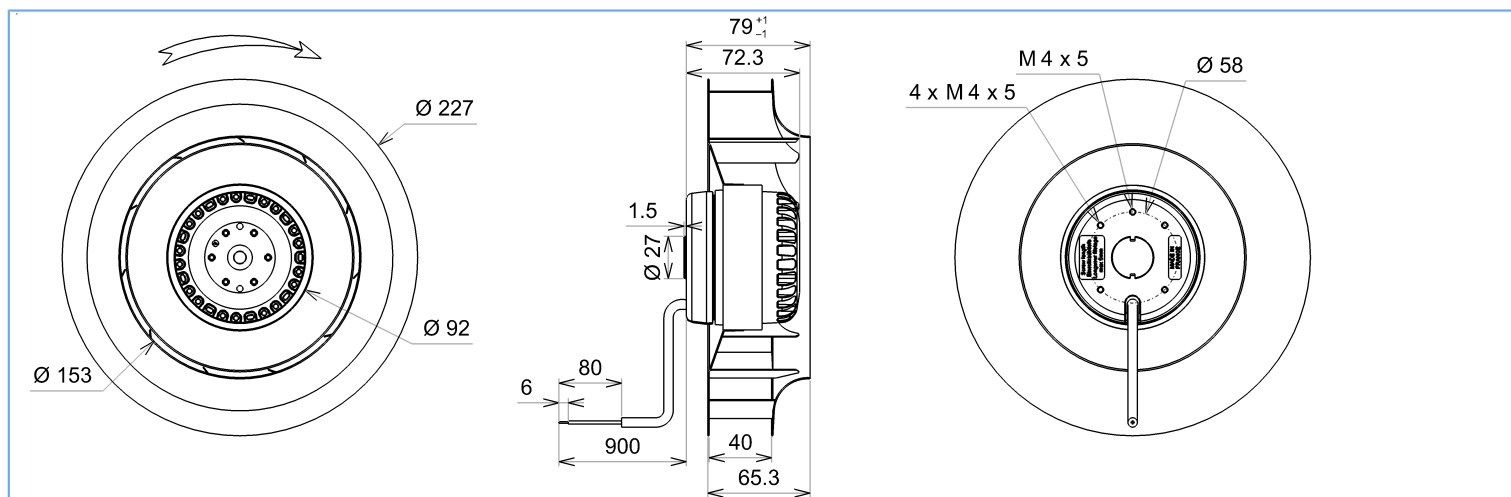

## Description

- .Weight : 2,3 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .Galvanized steel impeller

U1 = Blue  
U2 = Black  
Z = Brown  
PE = Green/Yellow





2RRE25 225x40R

H06-16 p

## DATA SHEET

release. g - Revision 05-2018

Data in accordance  
to ErP directive

|                                 |       |                                  |
|---------------------------------|-------|----------------------------------|
| Voltage                         | 230   | V                                |
| Frequency                       | 50    | Hz                               |
| Power                           | 0,112 | kW <sup>(1)</sup>                |
| Airflow                         | 572   | m <sup>3</sup> /h <sup>(1)</sup> |
| Pressure                        | 225   | Pa <sup>(1)</sup>                |
| Rotation speed                  | 2437  | RPM <sup>(1)</sup>               |
| (1) at optimal efficiency point |       |                                  |

ErP directive (EU 2009/125/EC) not applicable :  
Power at optimum energy efficiency point

## Accessories

19011  
19011  
21194  
16133

## Measurement setup

16133 Ouie OJ150 Galva

## Documents

Manuel d'utilisation  
[www.ecofit.com/site/normes](http://www.ecofit.com/site/normes)

Operating and recycling manual  
[www.ecofit.com/anglais/normes](http://www.ecofit.com/anglais/normes)

