



2RREA3 133x42R

D04-A4

DATA SHEET

release. d - Revision 10-2015



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	23	0,11	1,0	315	2695	55		-20°C / +70°C
230	60	28	0,13	1,0	365	3125	57		-20°C / +70°C
230	50				185 CFM				-4°F / 158°F
230	60				214 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

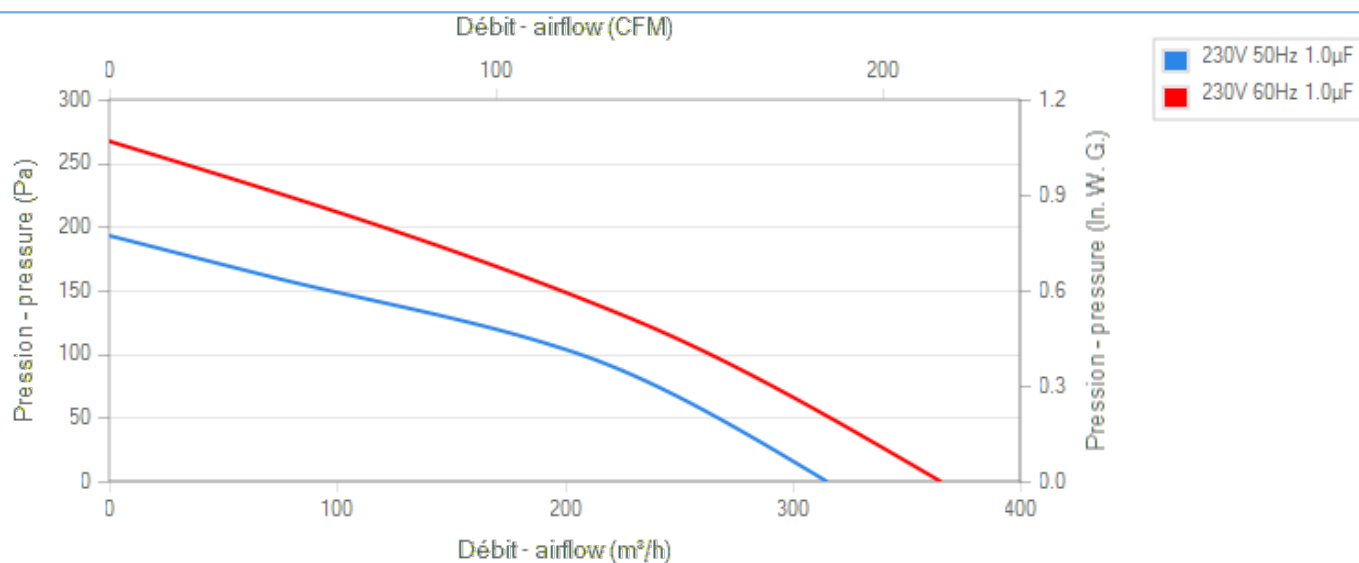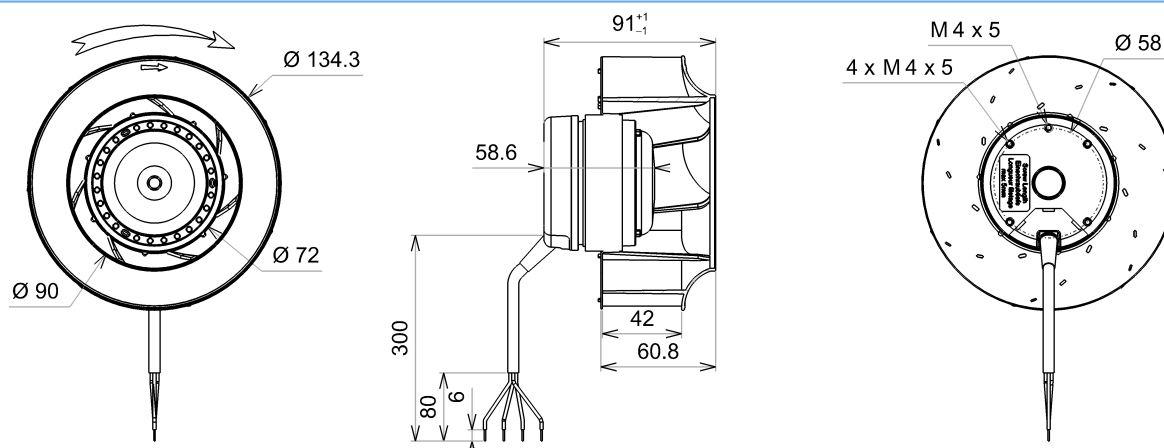

Description

- .Weight : 1,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .PP plastic impeller

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2RREA3 133x42R

D04-A4

DATA SHEET

release. d - Revision 10-2015



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,024	kW ⁽¹⁾
Airflow	205	m ³ /h ⁽¹⁾
Pressure	100,8	Pa ⁽¹⁾
Rotation speed	2634	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19040
19040
21367
16203

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

