



2RREA3 180x35R

D04-A6

DATA SHEET

release. d - Revision 08-2014

Replace A04-A7 p



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	39	0,18	1,5	490	2440	58	R	-20°C / +70°C
230	60	48	0,21	1,5	540	2675	60	R	-20°C / +70°C
230	50				288 CFM				-4°F / 158°F
230	60				317 CFM				-4°F / 158°F

dBA : free blowing

NA : not applicable

ErP 2013




NA

ErP 2015


NA



Rotation "CW"

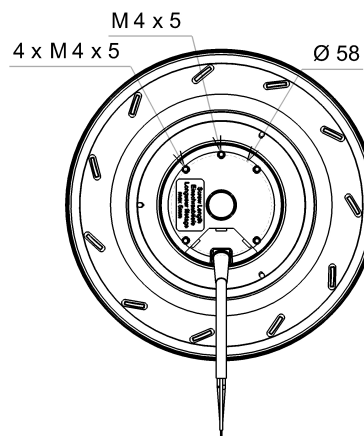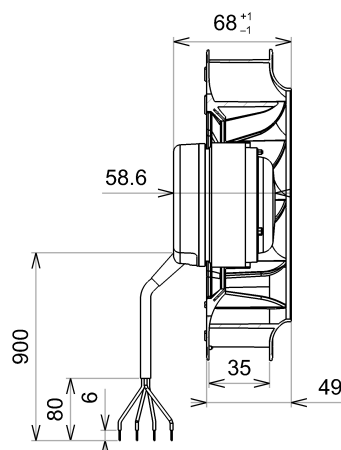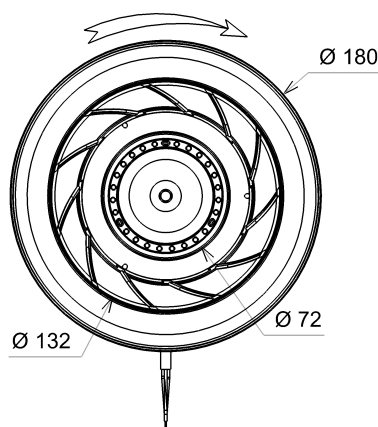


Débit - airflow (CFM)

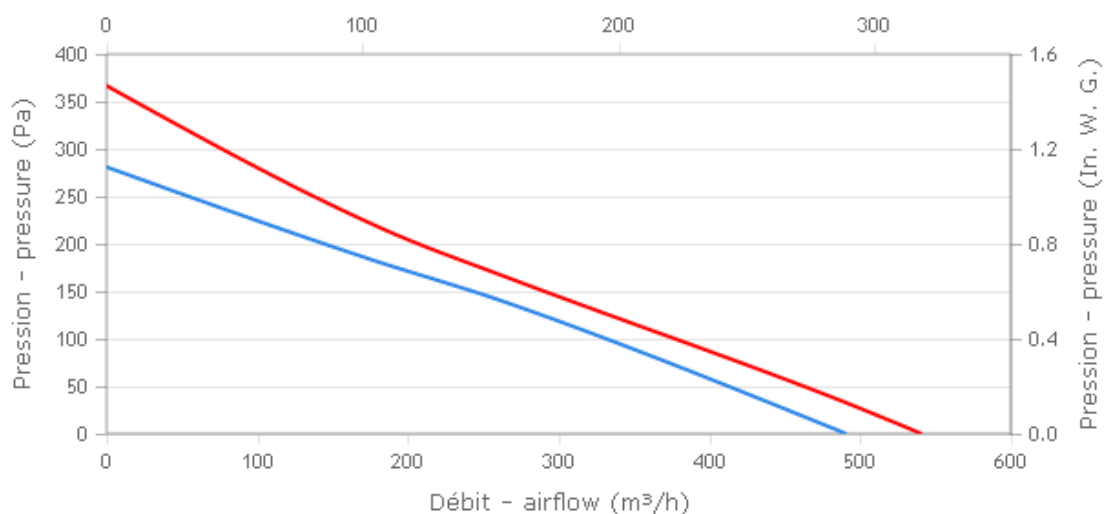

Description

- .Weight : 1,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .PA 6/6 UL 94 V-0 plastic impeller

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2RREA3 180x35R

D04-A6

Replace A04-A7 p

DATA SHEET

release. d - Revision 08-2014



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,041	kW ⁽¹⁾
Airflow	265	m ³ /h ⁽¹⁾
Pressure	138,4	Pa ⁽¹⁾
Rotation speed	2320	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19005
19005
21181
16043

Measurement setup

16043 OUIE OG 128 GALVA

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS73CN

