



2TRE20 140x59R

Z10-08 p

Replace N05-49 p

DATA SHEET

release. f - Revision 07-2016



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	119	0,52	2,5	415	1590	57	R	-20°C / +70°C
230	60	134	0,59	2,5	370	1475	54	R	-20°C / +60°C
230	50				244 CFM				-4°F / 158°F
230	60				217 CFM				-4°F / 140°F

dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015

NA

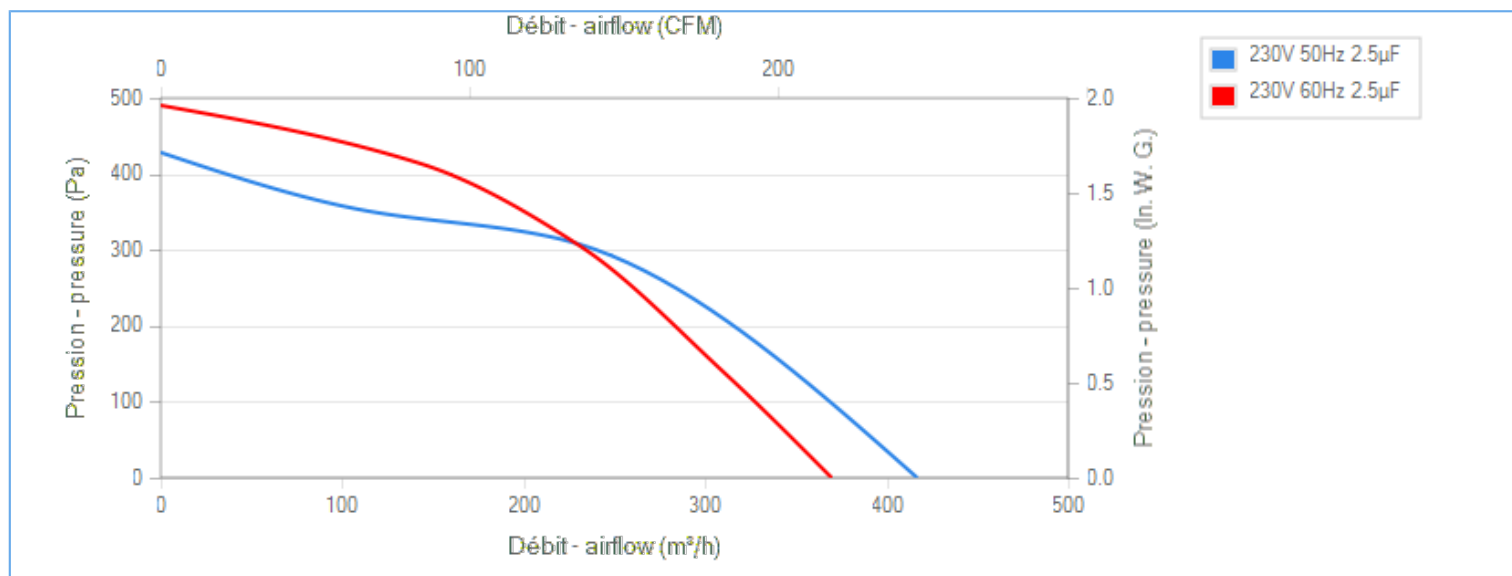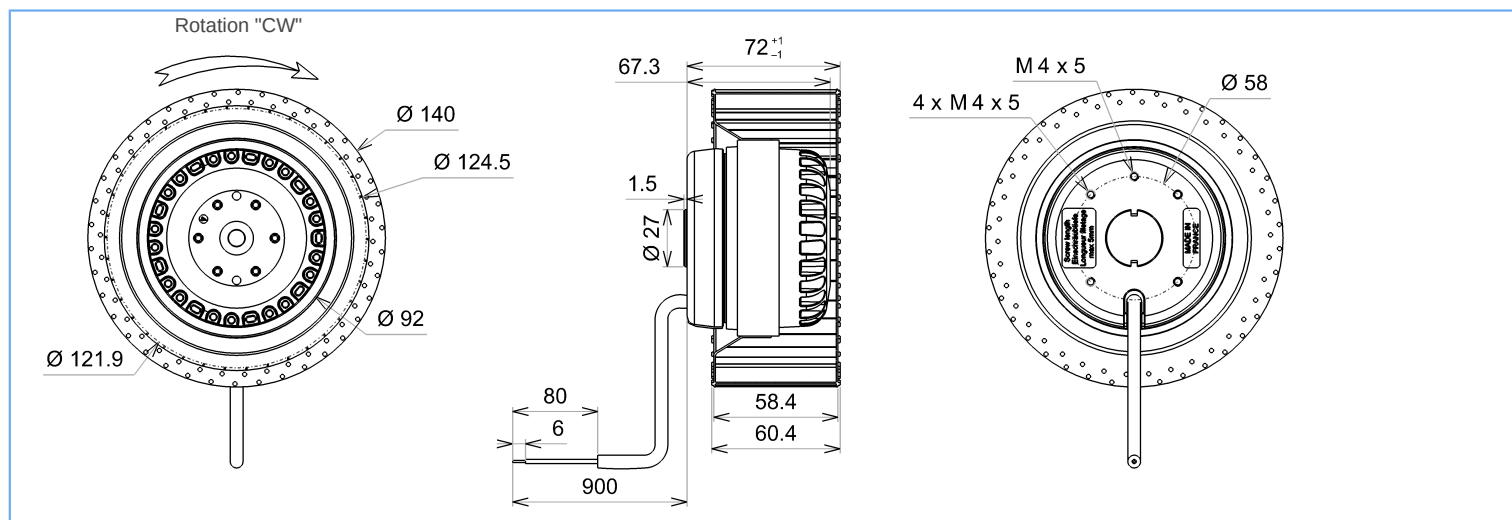


Tested with ECOFIT housing

Description

- .Weight : 1,5 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Galvanized steel impeller
- .Rotor : black paint

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2TRE20 140x59R

Z10-08 p

Replace N05-49 p

DATA SHEET

release. f - Revision 07-2016



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,095	kW ⁽¹⁾
Airflow	221	m³/h ⁽¹⁾
Pressure	314	Pa ⁽¹⁾
Rotation speed	2418	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19011
19011
21325
16043

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS920CN

