



2TRE35 160x62R

N05-55 p

DATA SHEET

release. i - Revision 05-2016



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	151	0,66	3,5	455	1430	60	R	-20°C / +70°C
230	60	162	0,71	3,5	425	1335	57	R	-20°C / +50°C
230	50				267 CFM				-4°F / 158°F
230	60				250 CFM				-4°F / 122°F

dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

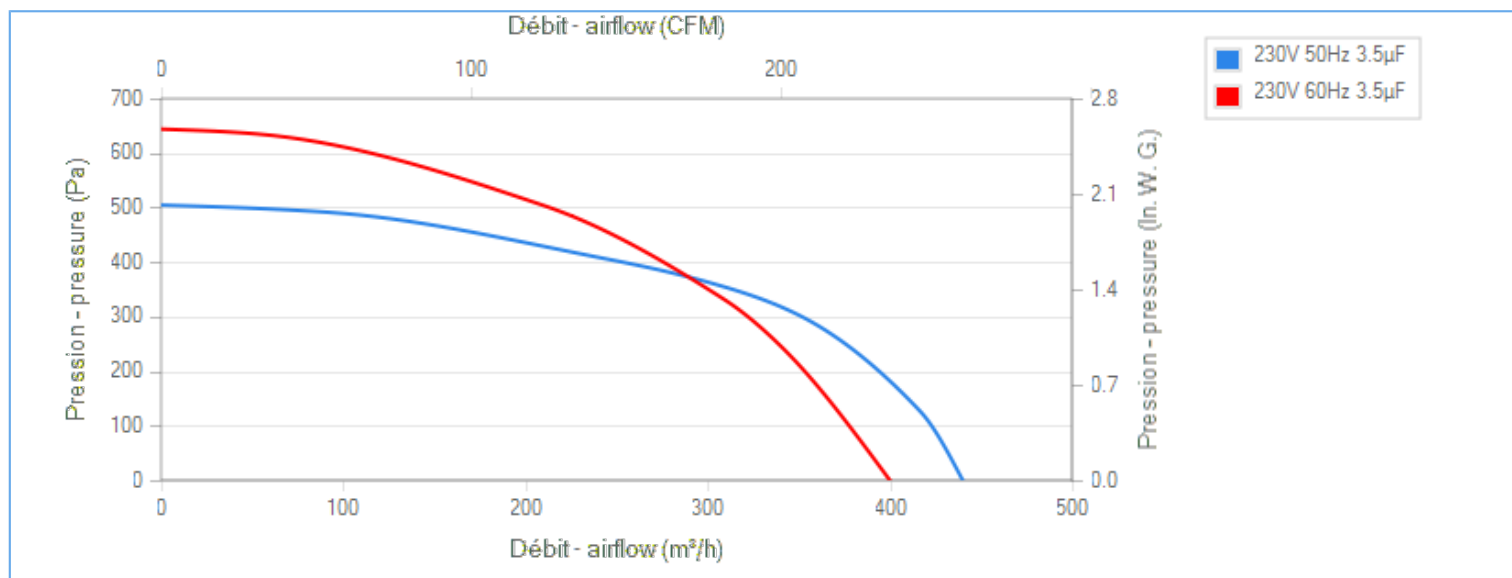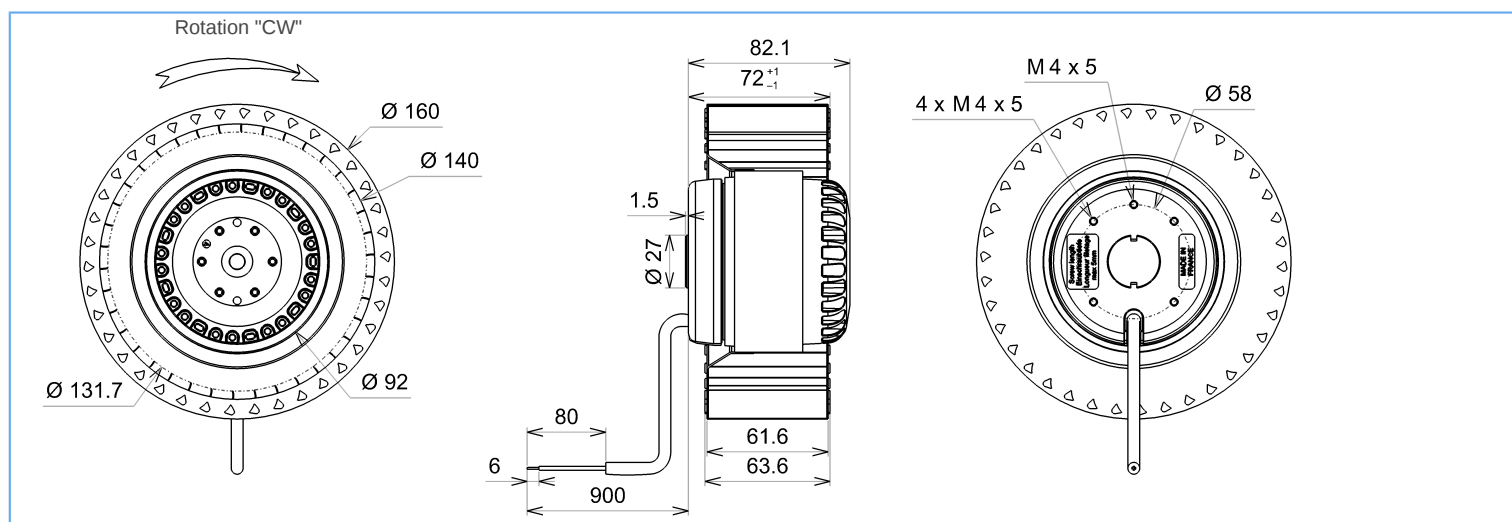

Tested with ECOFIT housing

Description

- .Weight : 2,5 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Galvanized steel impeller
- .Rotor : black paint

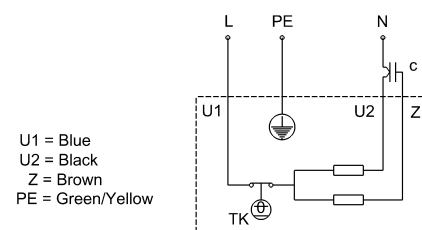



2TRE35 160x62R

N05-55 p

DATA SHEET

release. i - Revision 05-2016

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,101	kW ⁽¹⁾
Airflow	245,2	m ³ /h ⁽¹⁾
Pressure	405,2	Pa ⁽¹⁾
Rotation speed	2481	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19049

19049

21325

16154

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

