



2TREA3 120x62R

D25-A1

DATA SHEET

release. b - Revision 06-2014

Replace N05-46 p



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	58	0,27	2,0	260	1715	55	R	-20°C / +70°C
230	60	67	0,32	2,0	250	1635	54	R	-20°C / +70°C
230	50				153 CFM				-4°F / 158°F
230	60				147 CFM				-4°F / 158°F

dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

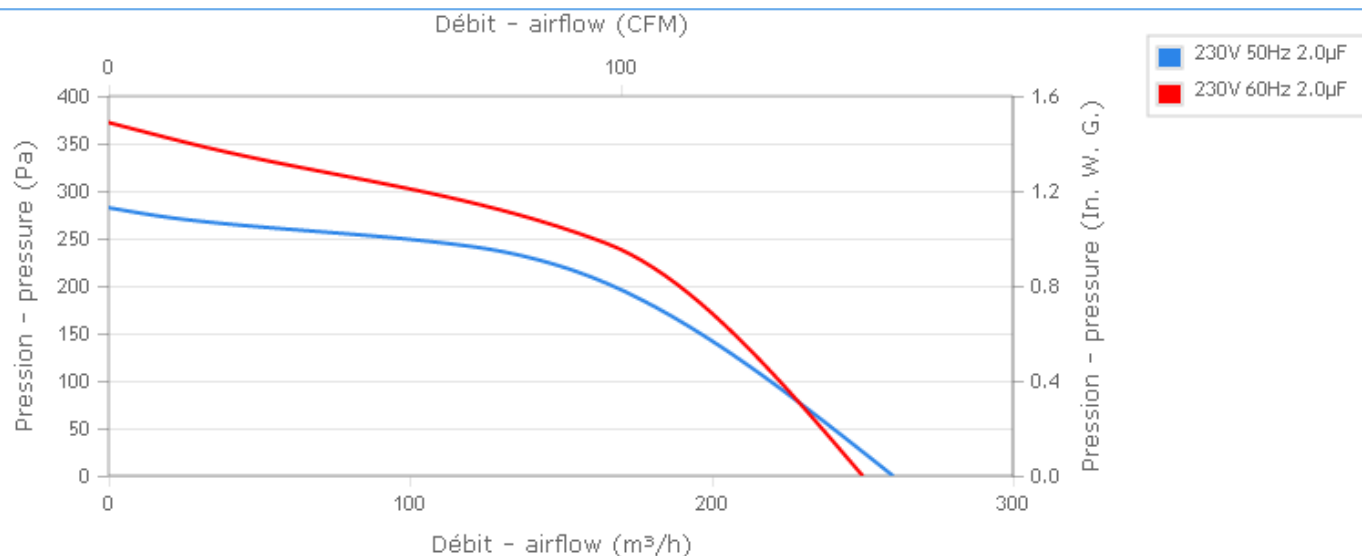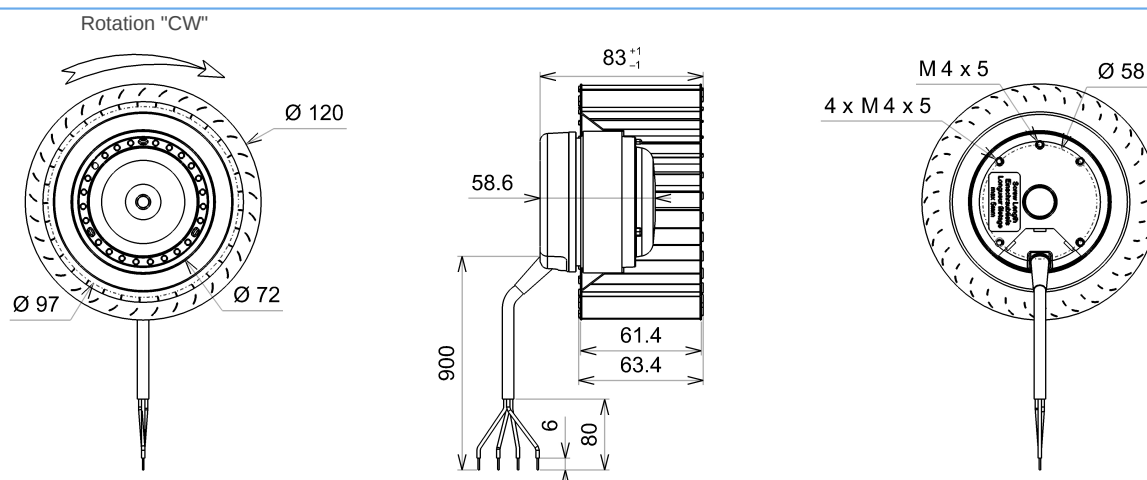

Tested with ECOFIT housing

Description

- .Weight : 1,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Galvanized steel impeller
- .Rotor : black paint

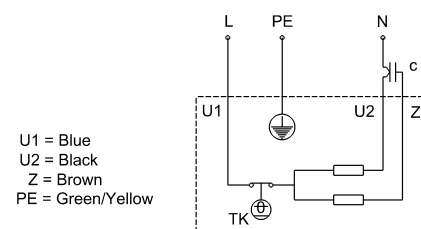



2TREA3 120x62R

D25-A1

Replace N05-46 p

DATA SHEET

release. b - Revision 06-2014



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,049	kW ⁽¹⁾
Airflow	155	m ³ /h ⁽¹⁾
Pressure	215,3	Pa ⁽¹⁾
Rotation speed	2394	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19008
19008
21236
16104

Measurement setup

16104 OUIE OS96 TOLE XC

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS73CN

